



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-OM-CSU-LN-WHD-WM_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN from UL #13131414.06 and #13257153.08

[TESTLAB]

[ISSUE DATE] 11-FEB-2021

[MANUFAC] WILLIAMS INDOOR

[MORE] H E Williams Inc. - Carthage, MO

[LUMCAT] 4CRDI-L12-835U-L12-835D-xxx-DIM1-UNV-OM-CSU-LN-WHD-WM

[MORE]

[LUMINAIRE] White formed aluminum housing, medium distrib anodized aluminum reflector trim w/clear cover glass up,

[MORE] narrow distrib white painted flush prismatic lens trim down

[LAMP] Two white LEDs (one up/one down)

[_SEARCH_SOURCE TYPE] LED

[_SEARCH_APPLICATION] INDOOR, DIRECT, INDIRECT

[_SEARCH_MOUNTING] WALL

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	2308
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	81
Total Luminaire Watts	28.5
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.21 ft (Diameter)
Luminous Width (90-270)	0.21 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	61470	61470	61470
55	47408	47408	47408
65	37181	37181	37181
75	27892	27892	27892
85	15218	15218	15218

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-OM-CSU-LN-WHD-WM_.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>	<u>202.5</u>
0.0	4492.644	4492.644	4492.644	4492.644	4492.644	4492.644	4492.644	4492.644	4492.644	4492.644
2.5	4327.414	4327.414	4327.414	4327.414	4327.414	4327.414	4327.414	4327.414	4327.414	4327.414
5.0	3880.890	3880.890	3880.890	3880.890	3880.890	3880.890	3880.890	3880.890	3880.890	3880.890
7.5	3224.000	3224.000	3224.000	3224.000	3224.000	3224.000	3224.000	3224.000	3224.000	3224.000
10.0	2485.704	2485.704	2485.704	2485.704	2485.704	2485.704	2485.704	2485.704	2485.704	2485.704
12.5	1801.410	1801.410	1801.410	1801.410	1801.410	1801.410	1801.410	1801.410	1801.410	1801.410
15.0	1263.808	1263.808	1263.808	1263.808	1263.808	1263.808	1263.808	1263.808	1263.808	1263.808
17.5	900.302	900.302	900.302	900.302	900.302	900.302	900.302	900.302	900.302	900.302
20.0	678.813	678.813	678.813	678.813	678.813	678.813	678.813	678.813	678.813	678.813
22.5	541.793	541.793	541.793	541.793	541.793	541.793	541.793	541.793	541.793	541.793
25.0	440.882	440.882	440.882	440.882	440.882	440.882	440.882	440.882	440.882	440.882
27.5	358.186	358.186	358.186	358.186	358.186	358.186	358.186	358.186	358.186	358.186
30.0	295.721	295.721	295.721	295.721	295.721	295.721	295.721	295.721	295.721	295.721
32.5	252.520	252.520	252.520	252.520	252.520	252.520	252.520	252.520	252.520	252.520
35.0	221.731	221.731	221.731	221.731	221.731	221.731	221.731	221.731	221.731	221.731
37.5	197.631	197.631	197.631	197.631	197.631	197.631	197.631	197.631	197.631	197.631
40.0	175.950	175.950	175.950	175.950	175.950	175.950	175.950	175.950	175.950	175.950
42.5	155.558	155.558	155.558	155.558	155.558	155.558	155.558	155.558	155.558	155.558
45.0	137.342	137.342	137.342	137.342	137.342	137.342	137.342	137.342	137.342	137.342
47.5	121.545	121.545	121.545	121.545	121.545	121.545	121.545	121.545	121.545	121.545
50.0	107.843	107.843	107.843	107.843	107.843	107.843	107.843	107.843	107.843	107.843
52.5	96.236	96.236	96.236	96.236	96.236	96.236	96.236	96.236	96.236	96.236
55.0	85.920	85.920	85.920	85.920	85.920	85.920	85.920	85.920	85.920	85.920
57.5	76.167	76.167	76.167	76.167	76.167	76.167	76.167	76.167	76.167	76.167
60.0	66.898	66.898	66.898	66.898	66.898	66.898	66.898	66.898	66.898	66.898
62.5	58.032	58.032	58.032	58.032	58.032	58.032	58.032	58.032	58.032	58.032
65.0	49.650	49.650	49.650	49.650	49.650	49.650	49.650	49.650	49.650	49.650
67.5	41.993	41.993	41.993	41.993	41.993	41.993	41.993	41.993	41.993	41.993
70.0	34.980	34.980	34.980	34.980	34.980	34.980	34.980	34.980	34.980	34.980
72.5	28.613	28.613	28.613	28.613	28.613	28.613	28.613	28.613	28.613	28.613
75.0	22.810	22.810	22.810	22.810	22.810	22.810	22.810	22.810	22.810	22.810
77.5	17.490	17.490	17.490	17.490	17.490	17.490	17.490	17.490	17.490	17.490
80.0	12.654	12.654	12.654	12.654	12.654	12.654	12.654	12.654	12.654	12.654
82.5	8.221	8.221	8.221	8.221	8.221	8.221	8.221	8.221	8.221	8.221
85.0	4.191	4.191	4.191	4.191	4.191	4.191	4.191	4.191	4.191	4.191
87.5	0.806	0.806	0.806	0.806	0.806	0.806	0.806	0.806	0.806	0.806
90.0	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
92.5	0.042	0.042	0.042	0.042	0.042	0.042	0.042	0.042	0.042	0.042
95.0	0.042	0.042	0.042	0.042	0.042	0.042	0.042	0.042	0.042	0.042
97.5	0.084	0.084	0.084	0.084	0.084	0.084	0.084	0.084	0.084	0.084
100.0	0.125	0.125	0.125	0.125	0.125	0.125	0.125	0.125	0.125	0.125
102.5	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167	0.167
105.0	0.251	0.251	0.251	0.251	0.251	0.251	0.251	0.251	0.251	0.251
107.5	0.376	0.376	0.376	0.376	0.376	0.376	0.376	0.376	0.376	0.376
110.0	0.502	0.502	0.502	0.502	0.502	0.502	0.502	0.502	0.502	0.502
112.5	0.669	0.669	0.669	0.669	0.669	0.669	0.669	0.669	0.669	0.669
115.0	0.920	0.920	0.920	0.920	0.920	0.920	0.920	0.920	0.920	0.920
117.5	1.296	1.296	1.296	1.296	1.296	1.296	1.296	1.296	1.296	1.296
120.0	1.756	1.756	1.756	1.756	1.756	1.756	1.756	1.756	1.756	1.756
122.5	2.508	2.508	2.508	2.508	2.508	2.508	2.508	2.508	2.508	2.508
125.0	3.762	3.762	3.762	3.762	3.762	3.762	3.762	3.762	3.762	3.762
127.5	5.518	5.518	5.518	5.518	5.518	5.518	5.518	5.518	5.518	5.518
130.0	8.235	8.235	8.235	8.235	8.235	8.235	8.235	8.235	8.235	8.235
132.5	11.411	11.411	11.411	11.411	11.411	11.411	11.411	11.411	11.411	11.411

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-OM-CSU-LN-WHD-WM_.IES

CANDELA TABULATION - (Cont.)

135.0	15.424	15.424	15.424	15.424	15.424	15.424	15.424	15.424	15.424	15.424
137.5	19.939	19.939	19.939	19.939	19.939	19.939	19.939	19.939	19.939	19.939
140.0	25.707	25.707	25.707	25.707	25.707	25.707	25.707	25.707	25.707	25.707
142.5	34.485	34.485	34.485	34.485	34.485	34.485	34.485	34.485	34.485	34.485
145.0	51.665	51.665	51.665	51.665	51.665	51.665	51.665	51.665	51.665	51.665
147.5	105.545	105.545	105.545	105.545	105.545	105.545	105.545	105.545	105.545	105.545
150.0	233.077	233.077	233.077	233.077	233.077	233.077	233.077	233.077	233.077	233.077
152.5	442.662	442.662	442.662	442.662	442.662	442.662	442.662	442.662	442.662	442.662
155.0	700.150	700.150	700.150	700.150	700.150	700.150	700.150	700.150	700.150	700.150
157.5	944.680	944.680	944.680	944.680	944.680	944.680	944.680	944.680	944.680	944.680
160.0	1157.024	1157.024	1157.024	1157.024	1157.024	1157.024	1157.024	1157.024	1157.024	1157.024
162.5	1349.304	1349.304	1349.304	1349.304	1349.304	1349.304	1349.304	1349.304	1349.304	1349.304
165.0	1542.420	1542.420	1542.420	1542.420	1542.420	1542.420	1542.420	1542.420	1542.420	1542.420
167.5	1745.986	1745.986	1745.986	1745.986	1745.986	1745.986	1745.986	1745.986	1745.986	1745.986
170.0	1952.478	1952.478	1952.478	1952.478	1952.478	1952.478	1952.478	1952.478	1952.478	1952.478
172.5	2120.932	2120.932	2120.932	2120.932	2120.932	2120.932	2120.932	2120.932	2120.932	2120.932
175.0	2220.834	2220.834	2220.834	2220.834	2220.834	2220.834	2220.834	2220.834	2220.834	2220.834
177.5	2255.110	2255.110	2255.110	2255.110	2255.110	2255.110	2255.110	2255.110	2255.110	2255.110
180.0	2259.000	2259.000	2259.000	2259.000	2259.000	2259.000	2259.000	2259.000	2259.000	2259.000

Vert. Horizontal Angles

	<u>225.0</u>	<u>247.5</u>	<u>270.0</u>	<u>292.5</u>	<u>315.0</u>	<u>337.5</u>	<u>360.0</u>
0.0	4492.644	4492.644	4492.644	4492.644	4492.644	4492.644	4492.644
2.5	4327.414	4327.414	4327.414	4327.414	4327.414	4327.414	4327.414
5.0	3880.890	3880.890	3880.890	3880.890	3880.890	3880.890	3880.890
7.5	3224.000	3224.000	3224.000	3224.000	3224.000	3224.000	3224.000
10.0	2485.704	2485.704	2485.704	2485.704	2485.704	2485.704	2485.704
12.5	1801.410	1801.410	1801.410	1801.410	1801.410	1801.410	1801.410
15.0	1263.808	1263.808	1263.808	1263.808	1263.808	1263.808	1263.808
17.5	900.302	900.302	900.302	900.302	900.302	900.302	900.302
20.0	678.813	678.813	678.813	678.813	678.813	678.813	678.813
22.5	541.793	541.793	541.793	541.793	541.793	541.793	541.793
25.0	440.882	440.882	440.882	440.882	440.882	440.882	440.882
27.5	358.186	358.186	358.186	358.186	358.186	358.186	358.186
30.0	295.721	295.721	295.721	295.721	295.721	295.721	295.721
32.5	252.520	252.520	252.520	252.520	252.520	252.520	252.520
35.0	221.731	221.731	221.731	221.731	221.731	221.731	221.731
37.5	197.631	197.631	197.631	197.631	197.631	197.631	197.631
40.0	175.950	175.950	175.950	175.950	175.950	175.950	175.950
42.5	155.558	155.558	155.558	155.558	155.558	155.558	155.558
45.0	137.342	137.342	137.342	137.342	137.342	137.342	137.342
47.5	121.545	121.545	121.545	121.545	121.545	121.545	121.545
50.0	107.843	107.843	107.843	107.843	107.843	107.843	107.843
52.5	96.236	96.236	96.236	96.236	96.236	96.236	96.236
55.0	85.920	85.920	85.920	85.920	85.920	85.920	85.920
57.5	76.167	76.167	76.167	76.167	76.167	76.167	76.167
60.0	66.898	66.898	66.898	66.898	66.898	66.898	66.898
62.5	58.032	58.032	58.032	58.032	58.032	58.032	58.032
65.0	49.650	49.650	49.650	49.650	49.650	49.650	49.650
67.5	41.993	41.993	41.993	41.993	41.993	41.993	41.993
70.0	34.980	34.980	34.980	34.980	34.980	34.980	34.980
72.5	28.613	28.613	28.613	28.613	28.613	28.613	28.613
75.0	22.810	22.810	22.810	22.810	22.810	22.810	22.810
77.5	17.490	17.490	17.490	17.490	17.490	17.490	17.490
80.0	12.654	12.654	12.654	12.654	12.654	12.654	12.654

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-OM-CSU-LN-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

82.5	8.221	8.221	8.221	8.221	8.221	8.221	8.221
85.0	4.191	4.191	4.191	4.191	4.191	4.191	4.191
87.5	0.806	0.806	0.806	0.806	0.806	0.806	0.806
90.0	0.000	0.000	0.000	0.000	0.000	0.000	0.000
92.5	0.042	0.042	0.042	0.042	0.042	0.042	0.042
95.0	0.042	0.042	0.042	0.042	0.042	0.042	0.042
97.5	0.084	0.084	0.084	0.084	0.084	0.084	0.084
100.0	0.125	0.125	0.125	0.125	0.125	0.125	0.125
102.5	0.167	0.167	0.167	0.167	0.167	0.167	0.167
105.0	0.251	0.251	0.251	0.251	0.251	0.251	0.251
107.5	0.376	0.376	0.376	0.376	0.376	0.376	0.376
110.0	0.502	0.502	0.502	0.502	0.502	0.502	0.502
112.5	0.669	0.669	0.669	0.669	0.669	0.669	0.669
115.0	0.920	0.920	0.920	0.920	0.920	0.920	0.920
117.5	1.296	1.296	1.296	1.296	1.296	1.296	1.296
120.0	1.756	1.756	1.756	1.756	1.756	1.756	1.756
122.5	2.508	2.508	2.508	2.508	2.508	2.508	2.508
125.0	3.762	3.762	3.762	3.762	3.762	3.762	3.762
127.5	5.518	5.518	5.518	5.518	5.518	5.518	5.518
130.0	8.235	8.235	8.235	8.235	8.235	8.235	8.235
132.5	11.411	11.411	11.411	11.411	11.411	11.411	11.411
135.0	15.424	15.424	15.424	15.424	15.424	15.424	15.424
137.5	19.939	19.939	19.939	19.939	19.939	19.939	19.939
140.0	25.707	25.707	25.707	25.707	25.707	25.707	25.707
142.5	34.485	34.485	34.485	34.485	34.485	34.485	34.485
145.0	51.665	51.665	51.665	51.665	51.665	51.665	51.665
147.5	105.545	105.545	105.545	105.545	105.545	105.545	105.545
150.0	233.077	233.077	233.077	233.077	233.077	233.077	233.077
152.5	442.662	442.662	442.662	442.662	442.662	442.662	442.662
155.0	700.150	700.150	700.150	700.150	700.150	700.150	700.150
157.5	944.680	944.680	944.680	944.680	944.680	944.680	944.680
160.0	1157.024	1157.024	1157.024	1157.024	1157.024	1157.024	1157.024
162.5	1349.304	1349.304	1349.304	1349.304	1349.304	1349.304	1349.304
165.0	1542.420	1542.420	1542.420	1542.420	1542.420	1542.420	1542.420
167.5	1745.986	1745.986	1745.986	1745.986	1745.986	1745.986	1745.986
170.0	1952.478	1952.478	1952.478	1952.478	1952.478	1952.478	1952.478
172.5	2120.932	2120.932	2120.932	2120.932	2120.932	2120.932	2120.932
175.0	2220.834	2220.834	2220.834	2220.834	2220.834	2220.834	2220.834
177.5	2255.110	2255.110	2255.110	2255.110	2255.110	2255.110	2255.110
180.0	2259.000	2259.000	2259.000	2259.000	2259.000	2259.000	2259.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-OM-CSU-LN-WHD-WM_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	692.11	N.A.	30.00
0-30	898.55	N.A.	38.90
0-40	1039.68	N.A.	45.00
0-60	1223.87	N.A.	53.00
0-80	1297.89	N.A.	56.20
0-90	1303.2	N.A.	56.50
10-90	978.17	N.A.	42.40
20-40	347.57	N.A.	15.10
20-50	454.57	N.A.	19.70
40-70	233.76	N.A.	10.10
60-80	74.02	N.A.	3.20
70-80	24.44	N.A.	1.10
80-90	5.31	N.A.	0.20
90-110	0.35	N.A.	0.00
90-120	1.34	N.A.	0.10
90-130	5.05	N.A.	0.20
90-150	65.41	N.A.	2.80
90-180	1005.16	N.A.	43.50
110-180	1004.81	N.A.	43.50
0-180	2308.36	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	325.03
10-20	367.08
20-30	206.44
30-40	141.14
40-50	106.99
50-60	77.19
60-70	49.58
70-80	24.44
80-90	5.31
90-100	0.06
100-110	0.29
110-120	0.99
120-130	3.71
130-140	12.16
140-150	48.20
150-160	309.04
160-170	427.37
170-180	203.35

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-OM-CSU-LN-WHD-WM_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56
1	102	98	95	92	95	92	89	87	80	78	76	69	67	66	58	58	57	52
2	95	89	84	80	88	83	79	76	73	70	68	64	62	60	55	53	52	48
3	89	81	75	71	83	76	71	67	68	64	61	59	57	54	52	50	48	45
4	83	74	68	63	78	70	65	61	63	59	55	56	53	50	49	47	45	42
5	78	69	62	57	73	65	60	55	59	54	51	52	49	46	46	44	42	40
6	74	64	57	53	69	61	55	51	55	50	47	49	46	43	44	42	40	37
7	70	60	53	49	66	57	51	47	52	47	44	47	43	41	42	40	38	36
8	66	56	50	45	62	54	48	44	49	44	41	45	41	39	40	38	36	34
9	63	53	47	43	59	51	45	41	46	42	39	43	39	37	39	36	34	33
10	60	50	44	40	57	48	43	39	44	40	37	41	37	35	37	35	33	31

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-OM-CSU-LN-WHD-WM_.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	18.0	18.7	18.9	19.7	20.8	18.0	18.7	18.9	19.7	20.8
	3H	19.2	19.9	20.2	20.8	22.0	19.2	19.9	20.2	20.8	22.0
	4H	19.6	20.3	20.6	21.2	22.4	19.6	20.3	20.6	21.2	22.4
	6H	19.9	20.5	20.8	21.4	22.6	19.9	20.5	20.8	21.4	22.6
	8H	19.9	20.5	20.9	21.4	22.7	19.9	20.5	20.9	21.4	22.7
	12H	19.9	20.5	20.9	21.4	22.7	19.9	20.5	20.9	21.4	22.7

UGR Viewed Endwise


4H	2H	18.3	19.0	19.3	19.9	21.1	18.3	19.0	19.3	19.9	21.1
	3H	19.8	20.3	20.7	21.3	22.5	19.8	20.3	20.7	21.3	22.5
	4H	20.3	20.8	21.3	21.7	23.0	20.3	20.8	21.3	21.7	23.0
	6H	20.6	21.1	21.6	22.0	23.3	20.6	21.1	21.6	22.0	23.3
	8H	20.7	21.1	21.7	22.1	23.4	20.7	21.1	21.7	22.1	23.4
	12H	20.8	21.1	21.8	22.1	23.4	20.8	21.1	21.8	22.1	23.4
8H	4H	20.4	20.8	21.4	21.8	23.0	20.4	20.8	21.4	21.8	23.0
	6H	20.9	21.2	21.9	22.2	23.5	20.9	21.2	21.9	22.2	23.5
	8H	21.0	21.3	22.0	22.3	23.6	21.0	21.3	22.0	22.3	23.6
	12H	21.1	21.3	22.1	22.3	23.7	21.1	21.3	22.1	22.3	23.7
12H	4H	20.4	20.7	21.4	21.7	23.0	20.4	20.7	21.4	21.7	23.0
	6H	20.9	21.2	21.9	22.2	23.5	20.9	21.2	21.9	22.2	23.5
	8H	21.0	21.3	22.1	22.3	23.6	21.0	21.3	22.1	22.3	23.6

Maximum UGR = 23.7

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CRDI-L12-835U-L12-835D-XXX-DIM1-UNV-OM-CSU-LN-WHD-WM_.IES

POLAR GRAPH

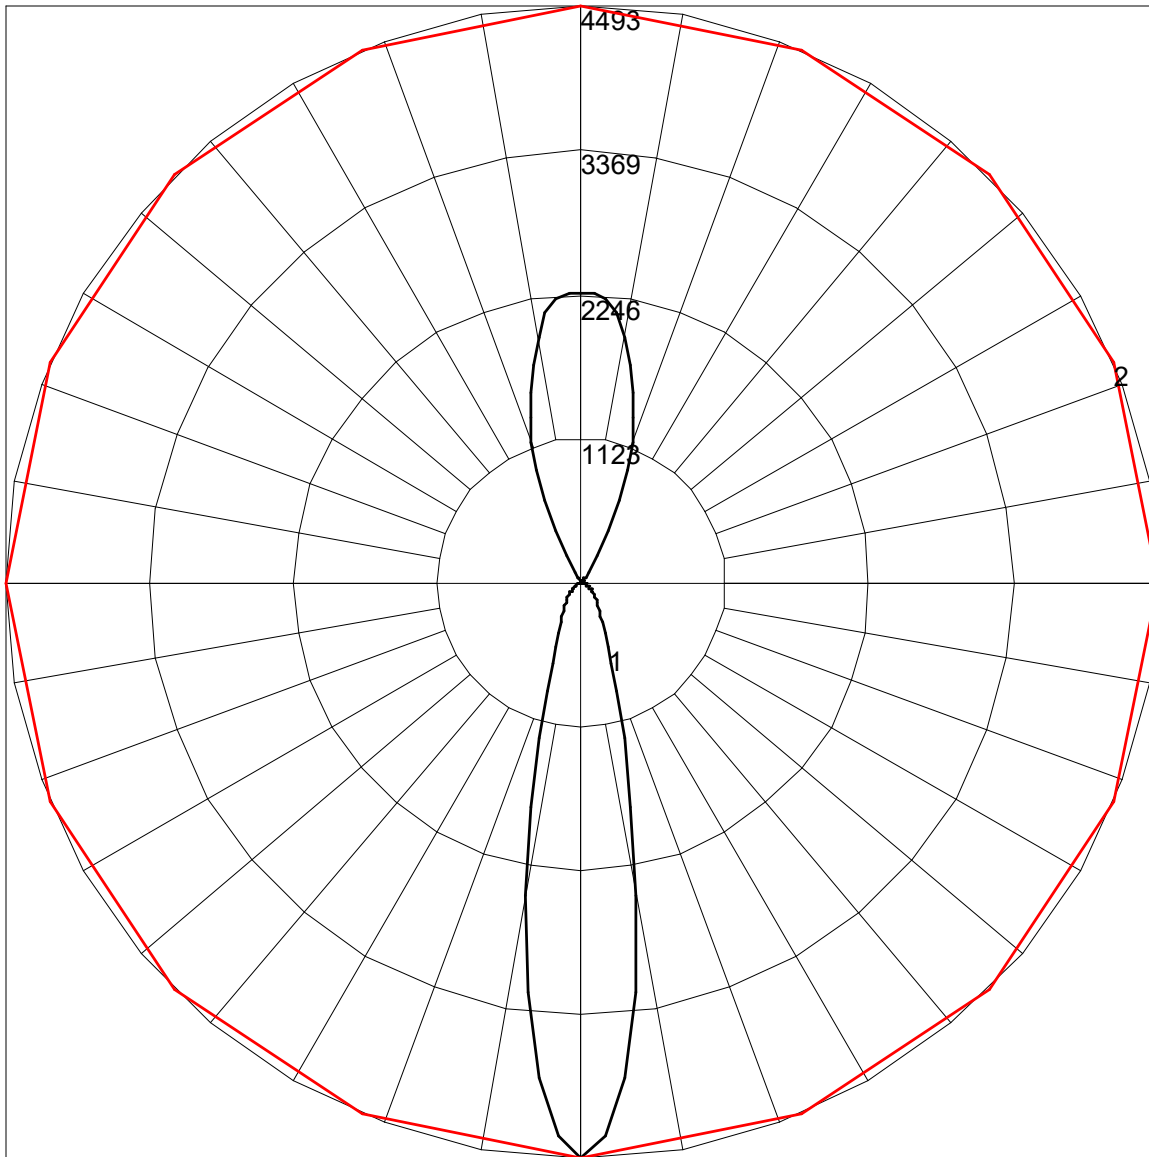

Maximum Candela = 4492.644 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (90 - 270)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)