



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
 [TEST] 13131414.11
 [TESTLAB] UL Verification Services Inc.
 [ISSUEDATE] 01/25/2021
 [MANUFAC] WILLIAMS INDOOR
 [OTHER] H.E. WILLIAMS, INC. - CARTHAGE, MO. 64836
 [LUMCAT] 4CR-L25-835-xxx-DIM-UNV-ON-OF-SG-xx
 [LUMINAIRE] Aluminum housing and reflector, no lens enclosure
 [LAMP] One white LED
 [_SEARCH_SOURCETYPE] LED
 [_SEARCH_APPLICATION] Indoor, Downlight
 [_SEARCH_MOUNTING] Pendant, Surface, Suspended, Wall

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1754
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	58
Total Luminaire Watts	30.0295
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.40
Spacing Criterion (90-270)	0.40
Spacing Criterion (Diagonal)	0.50
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.21 ft (Diameter)
Luminous Width (90-270)	0.21 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	20678	20678	20678
55	7338	7338	7338
65	3145	3145	3145
75	1467	1467	1467
85	726	726	726

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

CANDELA TABULATION

	<u>0</u>
0.0	6207.0
0.5	6197.0
1.0	6167.0
1.5	6118.0
2.0	6050.0
2.5	5964.0
3.0	5861.0
3.5	5742.0
4.0	5607.0
4.5	5460.0
5.0	5304.0
5.5	5138.0
6.0	4967.0
6.5	4791.0
7.0	4610.0
7.5	4425.0
8.0	4244.0
8.5	4064.0
9.0	3889.0
9.5	3722.0
10.0	3560.0
10.5	3403.0
11.0	3253.0
11.5	3109.0
12.0	2972.0
12.5	2847.0
13.0	2731.0
13.5	2624.0
14.0	2524.0
14.5	2436.0
15.0	2351.0
15.5	2268.0
16.0	2189.0
16.5	2119.0
17.0	2052.0
17.5	1988.0
18.0	1928.0
18.5	1871.0
19.0	1817.0
19.5	1767.0
20.0	1722.0
20.5	1679.0
21.0	1634.0
21.5	1583.0
22.0	1530.0
22.5	1474.0
23.0	1417.0
23.5	1360.0
24.0	1298.0
24.5	1229.0
25.0	1152.0
25.5	1073.0
26.0	992.1
26.5	908.9

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

CANDELA TABULATION - (Cont.)

27.0	826.3
27.5	744.1
28.0	663.6
28.5	587.4
29.0	515.1
29.5	448.3
30.0	388.6
30.5	338.1
31.0	294.6
31.5	256.5
32.0	220.7
32.5	190.1
33.0	164.5
33.5	146.5
34.0	134.5
34.5	127.6
35.0	121.4
35.5	115.2
36.0	109.3
36.5	104.3
37.0	99.7
37.5	95.5
38.0	91.4
38.5	87.4
39.0	83.6
39.5	80.0
40.0	76.5
40.5	73.1
41.0	69.9
41.5	66.7
42.0	63.6
42.5	60.5
43.0	57.1
43.5	54.2
44.0	51.4
44.5	48.8
45.0	46.2
45.5	43.7
46.0	41.2
46.5	38.8
47.0	36.5
47.5	34.3
48.0	32.2
48.5	30.2
49.0	28.2
49.5	26.1
50.0	24.4
50.5	22.9
51.0	21.6
51.5	20.3
52.0	19.1
52.5	18.0
53.0	16.9
53.5	15.9
54.0	15.0
54.5	14.2

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

CANDELA TABULATION - (Cont.)

55.0	13.3
55.5	12.6
56.0	11.8
56.5	11.2
57.0	10.5
57.5	9.9
58.0	9.4
58.5	8.8
59.0	8.3
59.5	7.9
60.0	7.4
60.5	7.0
61.0	6.6
61.5	6.3
62.0	5.9
62.5	5.6
63.0	5.3
63.5	5.0
64.0	4.7
64.5	4.4
65.0	4.2
65.5	3.9
66.0	3.7
66.5	3.5
67.0	3.3
67.5	3.1
68.0	2.9
68.5	2.7
69.0	2.6
69.5	2.4
70.0	2.3
70.5	2.1
71.0	2.0
71.5	1.9
72.0	1.8
72.5	1.6
73.0	1.5
73.5	1.4
74.0	1.3
74.5	1.2
75.0	1.2
75.5	1.1
76.0	1.0
76.5	0.9
77.0	0.9
77.5	0.8
78.0	0.7
78.5	0.7
79.0	0.6
79.5	0.6
80.0	0.5
80.5	0.5
81.0	0.4
81.5	0.4
82.0	0.4
82.5	0.3

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

CANDELA TABULATION - (Cont.)

83.0	0.3
83.5	0.2
84.0	0.2
84.5	0.2
85.0	0.2
85.5	0.1
86.0	0.1
86.5	0.1
87.0	0.1
87.5	0.1
88.0	0.1
88.5	0.0
89.0	0.0
89.5	0.0
90.0	0.0
90.5	0.0
91.0	0.0
91.5	0.0
92.0	0.0
92.5	0.0
93.0	0.0
93.5	0.0
94.0	0.0
94.5	0.0
95.0	0.0
95.5	0.0
96.0	0.0
96.5	0.0
97.0	0.0
97.5	0.0
98.0	0.0
98.5	0.0
99.0	0.0
99.5	0.0
100.0	0.0
100.5	0.0
101.0	0.0
101.5	0.0
102.0	0.0
102.5	0.0
103.0	0.0
103.5	0.0
104.0	0.0
104.5	0.0
105.0	0.0
105.5	0.0
106.0	0.0
106.5	0.0
107.0	0.0
107.5	0.0
108.0	0.0
108.5	0.0
109.0	0.0
109.5	0.0
110.0	0.0
110.5	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

CANDELA TABULATION - (Cont.)

111.0	0.0
111.5	0.0
112.0	0.0
112.5	0.0
113.0	0.0
113.5	0.0
114.0	0.0
114.5	0.0
115.0	0.0
115.5	0.0
116.0	0.0
116.5	0.0
117.0	0.0
117.5	0.0
118.0	0.0
118.5	0.0
119.0	0.0
119.5	0.0
120.0	0.0
120.5	0.0
121.0	0.0
121.5	0.0
122.0	0.0
122.5	0.0
123.0	0.0
123.5	0.0
124.0	0.0
124.5	0.0
125.0	0.0
125.5	0.0
126.0	0.0
126.5	0.0
127.0	0.0
127.5	0.0
128.0	0.0
128.5	0.0
129.0	0.0
129.5	0.0
130.0	0.0
130.5	0.0
131.0	0.0
131.5	0.0
132.0	0.0
132.5	0.0
133.0	0.0
133.5	0.0
134.0	0.0
134.5	0.0
135.0	0.0
135.5	0.0
136.0	0.0
136.5	0.0
137.0	0.0
137.5	0.0
138.0	0.0
138.5	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

CANDELA TABULATION - (Cont.)

139.0	0.0
139.5	0.0
140.0	0.0
140.5	0.0
141.0	0.0
141.5	0.0
142.0	0.0
142.5	0.0
143.0	0.0
143.5	0.0
144.0	0.0
144.5	0.0
145.0	0.0
145.5	0.0
146.0	0.0
146.5	0.0
147.0	0.0
147.5	0.0
148.0	0.0
148.5	0.0
149.0	0.0
149.5	0.0
150.0	0.0
150.5	0.0
151.0	0.0
151.5	0.0
152.0	0.0
152.5	0.0
153.0	0.0
153.5	0.0
154.0	0.0
154.5	0.0
155.0	0.0
155.5	0.0
156.0	0.0
156.5	0.0
157.0	0.0
157.5	0.0
158.0	0.0
158.5	0.0
159.0	0.0
159.5	0.0
160.0	0.0
160.5	0.0
161.0	0.0
161.5	0.0
162.0	0.0
162.5	0.0
163.0	0.0
163.5	0.0
164.0	0.0
164.5	0.0
165.0	0.0
165.5	0.0
166.0	0.0
166.5	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

CANDELA TABULATION - (Cont.)

167.0	0.0
167.5	0.0
168.0	0.0
168.5	0.0
169.0	0.0
169.5	0.0
170.0	0.0
170.5	0.0
171.0	0.0
171.5	0.0
172.0	0.0
172.5	0.0
173.0	0.0
173.5	0.0
174.0	0.0
174.5	0.0
175.0	0.0
175.5	0.0
176.0	0.0
176.5	0.0
177.0	0.0
177.5	0.0
178.0	0.0
178.5	0.0
179.0	0.0
179.5	0.0
180.0	0.0

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1112.67	N.A.	63.40
0-30	1605.55	N.A.	91.50
0-40	1699.42	N.A.	96.90
0-60	1748.3	N.A.	99.70
0-80	1753.93	N.A.	100.00
0-90	1754.15	N.A.	100.00
10-90	1307.03	N.A.	74.50
20-40	586.75	N.A.	33.40
20-50	623.07	N.A.	35.50
40-70	53.22	N.A.	3.00
60-80	5.63	N.A.	0.30
70-80	1.30	N.A.	0.10
80-90	0.21	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1754.15	N.A.	100.00

Total Luminaire Efficiency = N.A.%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	447.12
10-20	665.55
20-30	492.88
30-40	93.86
40-50	36.32
50-60	12.57
60-70	4.33
70-80	1.30
80-90	0.21
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	112	110	108	112	110	108	106	106	105	103	102	101	100	99	98	97	96
2	110	106	103	100	108	104	101	99	101	99	97	98	96	95	96	94	93	91
3	106	101	97	93	104	99	96	93	97	94	91	95	92	90	92	90	89	87
4	102	96	91	88	100	95	91	88	93	89	87	91	88	86	89	87	85	83
5	98	92	87	83	97	91	86	83	89	85	82	88	84	82	86	83	81	80
6	95	88	83	79	93	87	82	79	86	82	79	84	81	78	83	80	78	77
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	74
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	78	74	72	71
9	85	78	73	70	84	77	73	70	76	72	70	76	72	69	75	72	69	68
10	83	75	70	67	82	75	70	67	74	70	67	73	70	67	73	69	67	66

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 4CR-L25-835-XXX-DIM-UNV-ON-OF-SG-XX_.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise


X=2H	Y=2H	6.5	7.4	6.9	7.7	8.1	6.5	7.4	6.9	7.7	8.1
	3H	6.8	7.6	7.2	7.9	8.3	6.8	7.6	7.2	7.9	8.3
	4H	6.8	7.5	7.2	7.9	8.3	6.8	7.5	7.2	7.9	8.3
	6H	6.7	7.4	7.2	7.8	8.2	6.7	7.4	7.2	7.8	8.2
	8H	6.7	7.3	7.1	7.7	8.1	6.7	7.3	7.1	7.7	8.1
	12H	6.7	7.2	7.1	7.6	8.1	6.7	7.2	7.1	7.6	8.1

UGR Viewed Endwise

4H	2H	6.5	7.2	6.9	7.6	8.0	6.5	7.2	6.9	7.6	8.0
	3H	6.9	7.5	7.3	7.9	8.3	6.9	7.5	7.3	7.9	8.3
	4H	6.9	7.4	7.3	7.9	8.3	6.9	7.4	7.3	7.9	8.3
	6H	6.9	7.3	7.4	7.8	8.3	6.9	7.3	7.4	7.8	8.3
	8H	6.8	7.2	7.3	7.7	8.2	6.8	7.2	7.3	7.7	8.2
	12H	6.8	7.1	7.3	7.6	8.1	6.8	7.1	7.3	7.6	8.1
8H	4H	6.8	7.2	7.3	7.7	8.1	6.8	7.2	7.3	7.7	8.1
	6H	6.8	7.1	7.3	7.6	8.1	6.8	7.1	7.3	7.6	8.1
	8H	6.7	7.0	7.3	7.6	8.1	6.7	7.0	7.3	7.6	8.1
	12H	6.7	7.0	7.2	7.5	8.0	6.7	7.0	7.2	7.5	8.0
12H	4H	6.7	7.1	7.2	7.6	8.1	6.7	7.1	7.2	7.6	8.1
	6H	6.7	7.0	7.3	7.5	8.0	6.7	7.0	7.3	7.5	8.0
	8H	6.7	7.0	7.2	7.4	8.0	6.7	7.0	7.2	7.4	8.0

Maximum UGR = 8.3

POLAR GRAPH

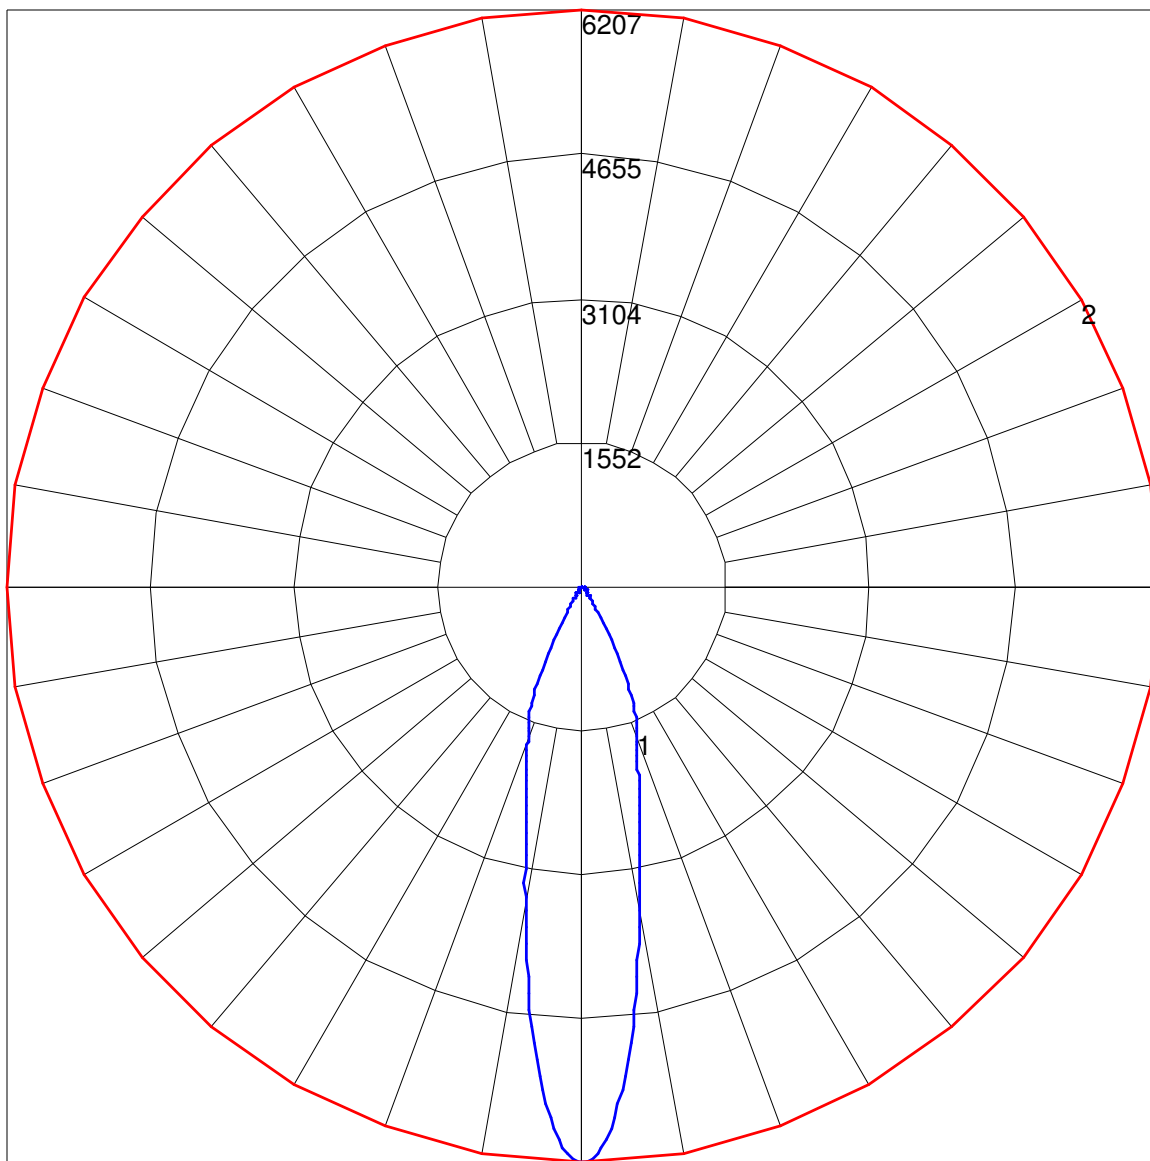

Maximum Candela = 6207 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)