



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CR-TL-L10-835-EM7W-REMOTE-XXX-DIM-UNV-OW-CS-XX_EM MODE ONLY.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN FROM BALLABS TEST NO. 20685.0

[TESTLAB] BUILDING ACOUSTICS & LIGHTING LABORATORIES, INC

[ISSUEDATE] 25-JAN-2021

[MANUFAC] WILLIAMS INDOOR

[OTHER] H.E. WILLIAMS, INC - CARTHAGE, MO 64836

[LUMINAIRE] 1 BRIDGELUX V13 LED 6"ROUND SURFACE CYLINDER

[MORE] OPEN SEMI-SPEC SPUN ALUMINUM REFLECTOR (WIDE)

[LUMCAT] 6CR-TL-L10-835-EM7W-REMOTE-xxx-DIM-UNV-OW-CS-xx (EM MODE)

[LAMPCAT] V13 BXRE-35E2000

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] Indoor, Classroom, Commercial, Corridor, Hotel, Industrial, Office, Downlight

[_SEARCH_MOUNTING] Surface

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	795
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	114
Total Luminaire Watts	7
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.22
Spacing Criterion (90-270)	1.22
Spacing Criterion (Diagonal)	0.94
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.37 ft (Diameter)
Luminous Width (90-270)	0.37 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	2411	2411	2411
55	743	743	743
65	92	92	92
75	0	0	0
85	0	0	0

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CR-TL-L10-835-EM7W-REMOTE-XXX-DIM-UNV-OW-CS-XX_EM MODE ONLY.IES

CANDELA TABULATION

	<u>0</u>
0	682.462
5	702.823
10	723.937
15	739.019
20	771.823
25	841.200
30	659.085
35	115.755
40	30.164
45	16.590
50	8.672
55	4.148
60	1.885
65	0.377
70	0.377
75	0.000
80	0.000
85	0.000
90	0.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CR-TL-L10-835-EM7W-REMOTE-XXX-DIM-UNV-OW-CS-XX_EM MODE ONLY.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	278.90	N.A.	35.10
0-30	637.94	N.A.	80.20
0-40	776.38	N.A.	97.60
0-60	794.32	N.A.	99.90
0-80	795.16	N.A.	100.00
0-90	795.16	N.A.	100.00
10-90	727.56	N.A.	91.50
20-40	497.48	N.A.	62.60
20-50	511.25	N.A.	64.30
40-70	18.68	N.A.	2.30
60-80	0.84	N.A.	0.10
70-80	0.10	N.A.	0.00
80-90	0.00	N.A.	0.00
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.00	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	795.16	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	67.60
10-20	211.30
20-30	359.04
30-40	138.45
40-50	13.76
50-60	4.18
60-70	0.74
70-80	0.10
80-90	0.00
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CR-TL-L10-835-EM7W-REMOTE-XXX-DIM-UNV-OW-CS-XX_EM MODE ONLY.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD


Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	88	93	89	86	90	87	85	88	86	83	82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	75	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	76	67	61	57	75	66	61	57	66	60	57	65	60	57	64	60	57	55
10	73	63	58	54	72	63	57	54	62	57	54	61	57	53	61	56	53	52

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CR-TL-L10-835-EM7W-REMOTE-XXX-DIM-UNV-OW-CS-XX_EM MODE ONLY.IES

POLAR GRAPH

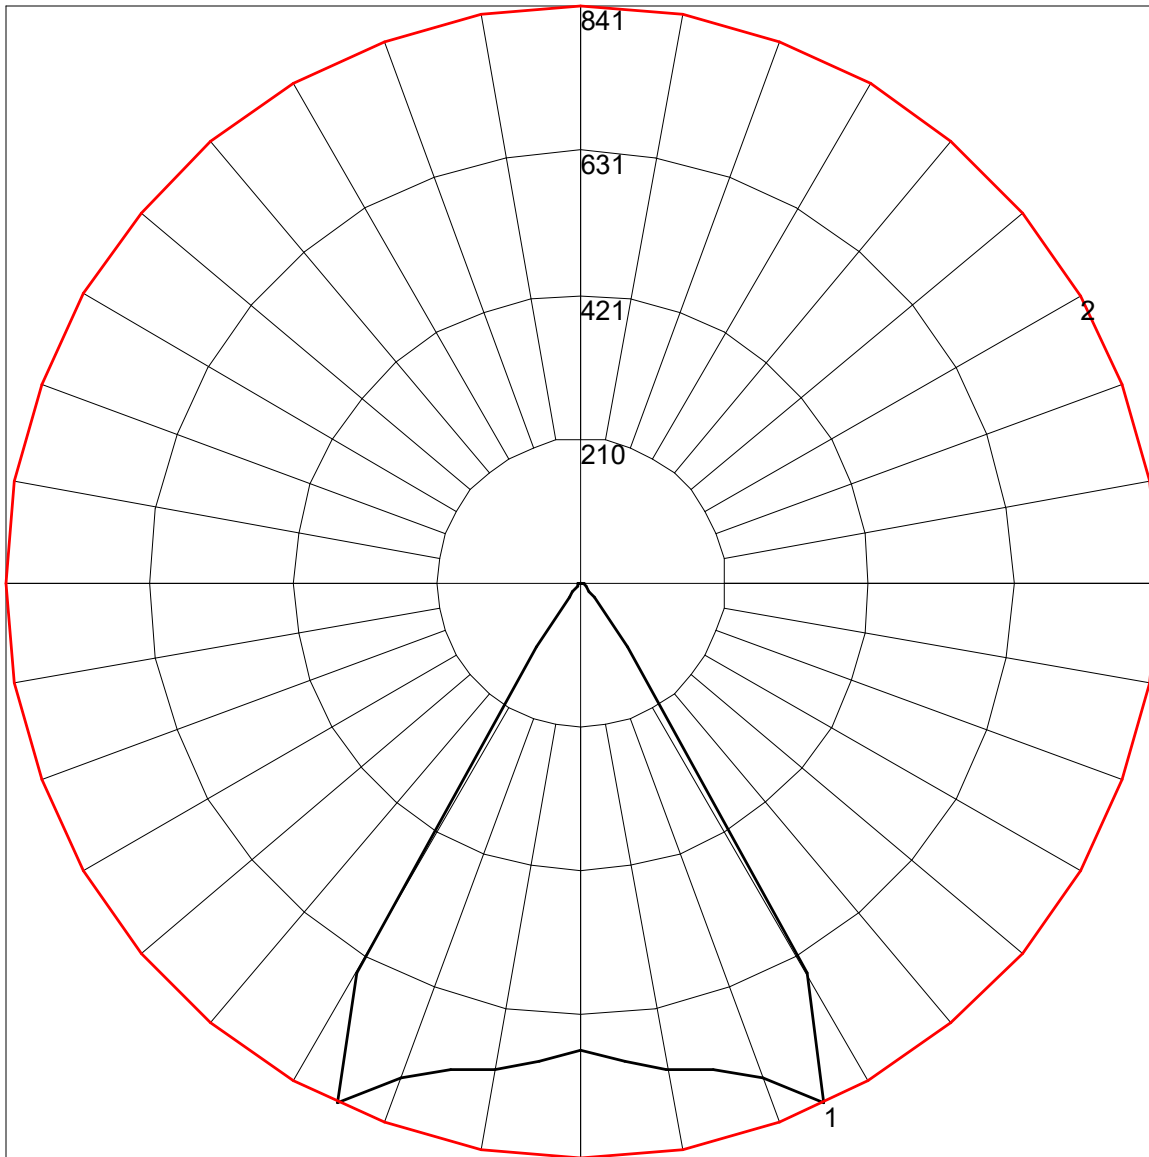

Maximum Candela = 841.2 Located At Horizontal Angle = 0, Vertical Angle = 25

1 - Vertical Plane Through Horizontal Angles (90 - 270)

2 - Horizontal Cone Through Vertical Angle (25) (Through Max. Cd.)