



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] made from 13537338.06 and UL12316380.14

[TESTLAB]

[ISSUE DATE] 02/10/2021

[MANUFAC] WILLIAMS INDOOR

[MORE] H.E. WILLIAMS, INC. - CARTHAGE, MO.

[LUMCAT] 6CRDI-TL-L20-835U-L20-835D-xxx-DIM1-UNV-OW-CSU-RM-WHD-WM

[LUMINAIRE] White formed aluminum housing, wide distrib anodized aluminum reflector trim w/clear cover glass up,

[MORE] medium distrib white painted regressed prismatic lens trim down

[LAMP] Two white LEDs (one up/one down)

[BALLAST] (2) Osram Optotronic OTi25W/120-277/2A0 DIM-1 Drivers

[_SEARCH_SOURCETYPE] LED

[_SEARCH_APPLICATION] INDOOR, DIRECT, INDIRECT

[_SEARCH_MOUNTING] WALL

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	3497
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	88
Total Luminaire Watts	39.5717
Ballast Factor	1.00
CIE Type	General Diffuse
Spacing Criterion (0-180)	N.A.
Spacing Criterion (90-270)	N.A.
Spacing Criterion (Diagonal)	N.A.
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	0.52 ft (Diameter)
Luminous Width (90-270)	0.52 ft (Diameter)
Luminous Height	1.92 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	939	939	939
55	483	483	483
65	240	240	240
75	96	96	96
85	27	27	27

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES

CANDELA TABULATION

	<u>0</u>
0.0	5176.000
0.5	5172.000
1.0	5160.000
1.5	5141.000
2.0	5115.000
2.5	5082.000
3.0	5043.000
3.5	4997.000
4.0	4944.000
4.5	4887.000
5.0	4824.000
5.5	4754.000
6.0	4679.000
6.5	4599.000
7.0	4513.000
7.5	4421.000
8.0	4325.000
8.5	4223.000
9.0	4118.000
9.5	4009.000
10.0	3896.000
10.5	3780.000
11.0	3661.000
11.5	3540.000
12.0	3417.000
12.5	3295.000
13.0	3173.000
13.5	3050.000
14.0	2926.000
14.5	2802.000
15.0	2680.000
15.5	2559.000
16.0	2438.000
16.5	2320.000
17.0	2203.000
17.5	2088.000
18.0	1975.000
18.5	1865.000
19.0	1760.000
19.5	1657.000
20.0	1557.000
20.5	1462.000
21.0	1370.000
21.5	1282.000
22.0	1199.000
22.5	1120.000
23.0	1046.000
23.5	975.200
24.0	908.200
24.5	845.100
25.0	786.100
25.5	731.200
26.0	680.000
26.5	632.000

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

27.0	587.400
27.5	546.100
28.0	507.700
28.5	471.900
29.0	439.100
29.5	408.500
30.0	380.200
30.5	354.200
31.0	330.200
31.5	308.000
32.0	287.500
32.5	268.700
33.0	251.300
33.5	235.100
34.0	220.300
34.5	206.500
35.0	193.800
35.5	182.100
36.0	171.200
36.5	161.200
37.0	151.900
37.5	143.500
38.0	135.700
38.5	128.700
39.0	122.200
39.5	116.300
40.0	111.000
40.5	106.000
41.0	101.500
41.5	97.300
42.0	93.400
42.5	89.800
43.0	86.400
43.5	83.200
44.0	80.200
44.5	77.400
45.0	74.800
45.5	72.400
46.0	70.100
46.5	67.900
47.0	65.800
47.5	63.900
48.0	62.100
48.5	60.300
49.0	58.600
49.5	57.000
50.0	55.500
50.5	54.000
51.0	52.600
51.5	51.100
52.0	49.800
52.5	48.400
53.0	47.200
53.5	45.900
54.0	44.600
54.5	43.400

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

55.0	42.200
55.5	41.000
56.0	39.900
56.5	38.800
57.0	37.700
57.5	36.600
58.0	35.500
58.5	34.500
59.0	33.500
59.5	32.500
60.0	31.500
60.5	30.500
61.0	29.500
61.5	28.600
62.0	27.600
62.5	26.700
63.0	25.700
63.5	24.800
64.0	23.900
64.5	23.000
65.0	22.200
65.5	21.300
66.0	20.500
66.5	19.600
67.0	18.800
67.5	18.000
68.0	17.200
68.5	16.500
69.0	15.700
69.5	15.000
70.0	14.300
70.5	13.700
71.0	13.100
71.5	12.500
72.0	11.900
72.5	11.400
73.0	10.900
73.5	10.400
74.0	10.000
74.5	9.500
75.0	9.100
75.5	8.700
76.0	8.300
76.5	8.000
77.0	7.600
77.5	7.200
78.0	6.900
78.5	6.500
79.0	6.200
79.5	5.900
80.0	5.500
80.5	5.200
81.0	4.900
81.5	4.600
82.0	4.200
82.5	3.900

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

83.0	3.600
83.5	3.300
84.0	3.000
84.5	2.700
85.0	2.500
85.5	2.200
86.0	1.900
86.5	1.600
87.0	1.400
87.5	1.200
88.0	1.000
88.5	0.800
89.0	0.700
89.5	0.500
90.0	3.660
90.5	3.293
91.0	3.293
91.5	3.325
92.0	3.358
92.5	3.390
93.0	3.423
93.5	3.488
94.0	3.553
94.5	3.586
95.0	3.651
95.5	3.716
96.0	3.782
96.5	3.847
97.0	3.912
97.5	3.977
98.0	4.042
98.5	4.140
99.0	4.205
99.5	4.271
100.0	4.368
100.5	4.466
101.0	4.531
101.5	4.629
102.0	4.727
102.5	4.825
103.0	4.923
103.5	5.020
104.0	5.118
104.5	5.249
105.0	5.379
105.5	5.477
106.0	5.607
106.5	5.738
107.0	5.868
107.5	5.966
108.0	6.129
108.5	6.259
109.0	6.390
109.5	6.553
110.0	6.716
110.5	6.911

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

111.0	7.074
111.5	7.237
112.0	7.433
112.5	7.661
113.0	7.857
113.5	8.085
114.0	8.313
114.5	8.541
115.0	8.802
115.5	9.063
116.0	9.324
116.5	9.617
117.0	9.910
117.5	10.236
118.0	10.562
118.5	10.888
119.0	11.280
119.5	11.638
120.0	12.095
120.5	12.518
121.0	12.975
121.5	13.496
122.0	14.018
122.5	14.572
123.0	15.192
123.5	15.844
124.0	16.561
124.5	17.311
125.0	18.158
125.5	19.038
126.0	20.049
126.5	21.125
127.0	22.298
127.5	23.472
128.0	24.711
128.5	25.982
129.0	27.351
129.5	28.818
130.0	30.448
130.5	32.176
131.0	33.969
131.5	35.860
132.0	37.946
132.5	40.261
133.0	42.934
133.5	45.999
134.0	49.454
134.5	53.399
135.0	58.061
135.5	63.994
136.0	71.753
136.5	81.761
137.0	94.214
137.5	108.917
138.0	126.064
138.5	145.461

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

139.0	166.684
139.5	189.797
140.0	214.801
140.5	242.479
141.0	272.960
141.5	305.625
142.0	340.996
142.5	378.812
143.0	419.236
143.5	462.594
144.0	508.886
144.5	557.460
145.0	607.664
145.5	658.194
146.0	708.398
146.5	759.254
147.0	810.110
147.5	861.944
148.0	913.778
148.5	965.286
149.0	1015.816
149.5	1066.020
150.0	1114.594
150.5	1161.538
151.0	1206.852
151.5	1249.884
152.0	1290.960
152.5	1328.776
153.0	1363.658
153.5	1395.606
154.0	1423.968
154.5	1450.374
155.0	1473.520
155.5	1495.036
156.0	1512.966
156.5	1527.636
157.0	1540.024
157.5	1550.130
158.0	1557.302
158.5	1562.844
159.0	1566.104
159.5	1568.060
160.0	1568.060
160.5	1567.082
161.0	1565.126
161.5	1562.844
162.0	1559.258
162.5	1555.020
163.0	1550.130
163.5	1544.262
164.0	1539.372
164.5	1533.504
165.0	1528.288
165.5	1523.072
166.0	1517.856
166.5	1512.640

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES****CANDELA TABULATION - (Cont.)**

167.0	1507.424
167.5	1501.230
168.0	1495.362
168.5	1489.168
169.0	1482.648
169.5	1476.454
170.0	1469.934
170.5	1463.740
171.0	1457.546
171.5	1451.678
172.0	1445.158
172.5	1437.334
173.0	1428.532
173.5	1418.426
174.0	1407.994
174.5	1398.540
175.0	1389.412
175.5	1381.262
176.0	1373.764
176.5	1366.918
177.0	1359.420
177.5	1352.574
178.0	1346.054
178.5	1339.534
179.0	1336.274
179.5	1333.992
180.0	1332.688

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1158.21	N.A.	33.10
0-30	1534.09	N.A.	43.90
0-40	1663.07	N.A.	47.60
0-60	1760.57	N.A.	50.30
0-80	1792.58	N.A.	51.30
0-90	1795.51	N.A.	51.30
10-90	1364.91	N.A.	39.00
20-40	504.85	N.A.	14.40
20-50	564.32	N.A.	16.10
40-70	119.62	N.A.	3.40
60-80	32.01	N.A.	0.90
70-80	9.89	N.A.	0.30
80-90	2.93	N.A.	0.10
90-110	9.77	N.A.	0.30
90-120	18.66	N.A.	0.50
90-130	35.76	N.A.	1.00
90-150	477.02	N.A.	13.60
90-180	1701.54	N.A.	48.70
110-180	1691.77	N.A.	48.40
0-180	3497.05	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	430.60
10-20	727.61
20-30	375.88
30-40	128.98
40-50	59.47
50-60	38.03
60-70	22.12
70-80	9.89
80-90	2.93
90-100	4.05
100-110	5.72
110-120	8.89
120-130	17.09
130-140	60.18
140-150	381.08
150-160	654.68
160-170	434.29
170-180	135.54

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC RW	80				70				50			30			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	101	97	95	92	93	91	88	86	78	76	75	66	65	64	55	54	54	49
2	94	89	84	81	88	83	79	76	72	69	67	62	60	58	52	51	50	46
3	89	82	76	72	83	77	72	68	67	64	61	58	56	54	50	49	47	44
4	84	75	70	65	78	71	66	62	63	59	56	55	52	50	48	46	45	42
5	79	70	64	59	74	66	61	57	59	55	52	52	49	47	46	44	43	40
6	75	65	59	55	70	62	57	53	56	52	49	50	47	44	44	42	41	38
7	71	61	55	51	66	58	53	49	53	49	46	47	44	42	42	40	39	36
8	67	58	52	48	63	55	50	46	50	46	43	45	42	40	41	39	37	35
9	64	54	49	45	60	52	47	43	48	44	41	43	40	38	39	37	36	34
10	61	52	46	42	58	49	44	41	45	41	39	41	39	36	38	36	34	33

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	3H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	4H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	6H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	8H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	12H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4

UGR Viewed Endwise


4H	2H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	3H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	4H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	6H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	8H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	12H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
8H	4H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	6H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	8H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	12H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
12H	4H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	6H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
	8H	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4

Maximum UGR = 4.4

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 6CRDI-TL-L20-835U-L20-835D-XXX-DIM1-UNV-OW-CSU-RM-WHD-WM_.IES

POLAR GRAPH

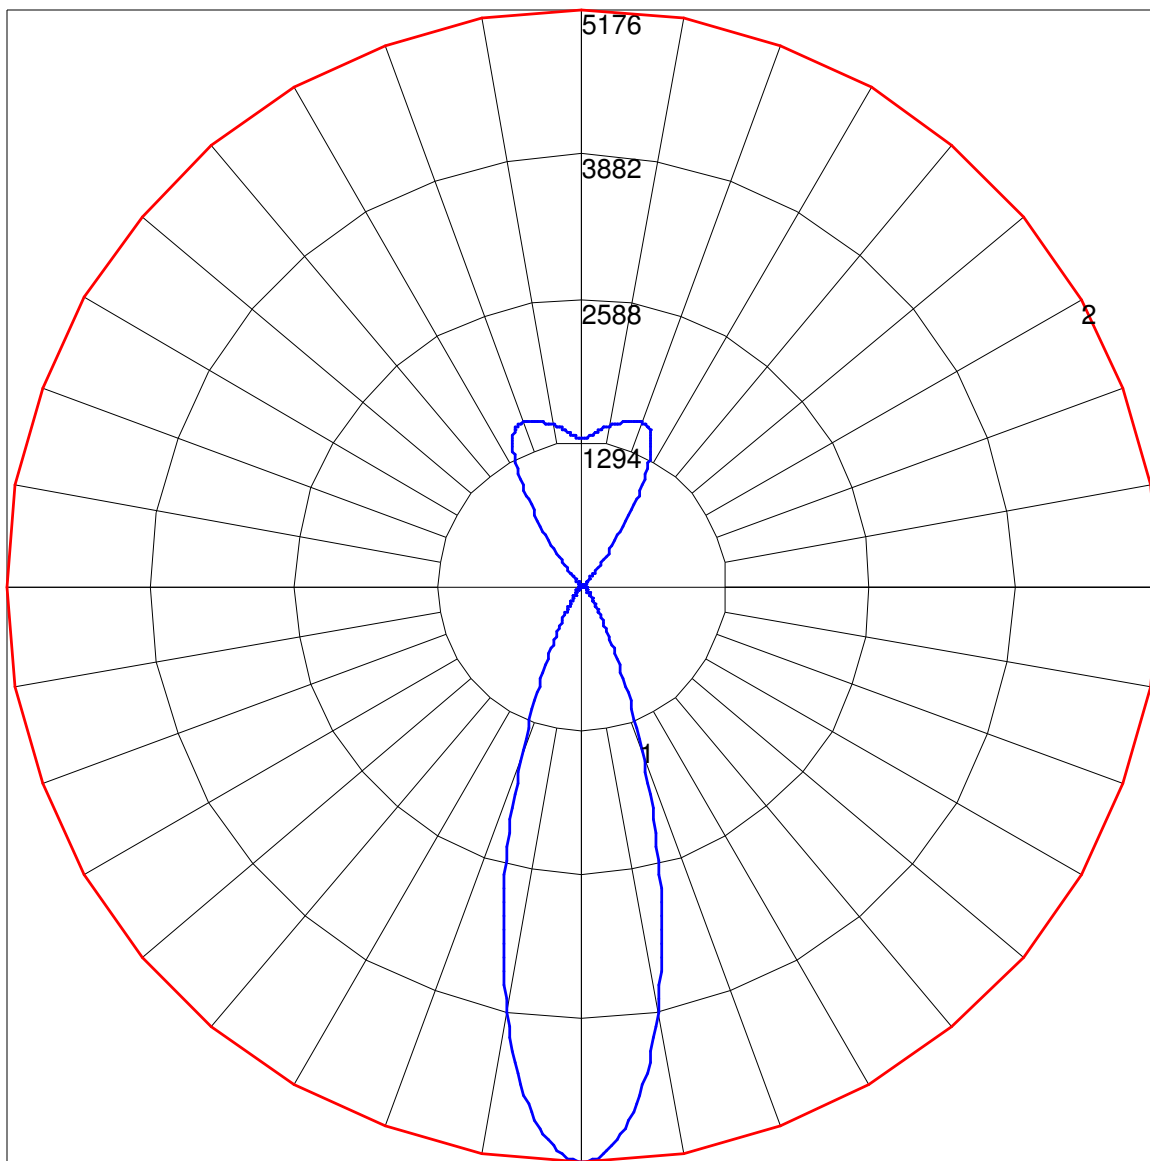

Maximum Candela = 5176 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)