



IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002

[TEST] GEN from UL #12326812.14

[TESTLAB] UL Verification Services Inc.

[ISSUE DATE] 1-FEB-2021

[MANUFAC] WILLIAMS INDOOR

[OTHER] H.E. WILLIAMS, INC. - CARTHAGE, MO.

[LUMCAT] 8CR-TL-L20-835-xxx-DIM-UNV-RM-WH-xx

[LUMINAIRE] 8" DIA. SURFACE CYLINDER

[LAMP] One white LED

[_SEARCH_SOURCE TYPE] LED

[_SEARCH_APPLICATION] Indoor, Architectural, Classroom, Commercial, Healthcare, Office, Downlight

[_SEARCH_MOUNTING] Surface

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1782
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	93
Total Luminaire Watts	19.0904
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	0.58
Spacing Criterion (90-270)	0.58
Spacing Criterion (Diagonal)	0.56
Basic Luminous Shape	Circular
Luminous Length (0-180)	0.48 ft (Diameter)
Luminous Width (90-270)	0.48 ft (Diameter)
Luminous Height	0.00 ft

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	6406	6406	6406
55	4307	4307	4307
65	3205	3205	3205
75	2213	2213	2213
85	1849	1849	1849

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

CANDELA TABULATION

	<u>0</u>
0.0	4313.0
0.5	4311.0
1.0	4305.0
1.5	4295.0
2.0	4281.0
2.5	4264.0
3.0	4243.0
3.5	4219.0
4.0	4193.0
4.5	4163.0
5.0	4131.0
5.5	4096.0
6.0	4057.0
6.5	4014.0
7.0	3968.0
7.5	3918.0
8.0	3864.0
8.5	3806.0
9.0	3744.0
9.5	3677.0
10.0	3607.0
10.5	3532.0
11.0	3452.0
11.5	3368.0
12.0	3280.0
12.5	3186.0
13.0	3090.0
13.5	2989.0
14.0	2885.0
14.5	2779.0
15.0	2669.0
15.5	2559.0
16.0	2447.0
16.5	2335.0
17.0	2225.0
17.5	2120.0
18.0	2012.0
18.5	1905.0
19.0	1800.0
19.5	1700.0
20.0	1605.0
20.5	1513.0
21.0	1423.0
21.5	1337.0
22.0	1254.0
22.5	1176.0
23.0	1102.0
23.5	1032.0
24.0	966.2
24.5	904.5
25.0	846.4
25.5	791.9
26.0	741.0
26.5	693.2

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

CANDELA TABULATION - (Cont.)

27.0	648.7
27.5	607.1
28.0	568.1
28.5	531.9
29.0	497.9
29.5	466.1
30.0	436.2
30.5	408.3
31.0	382.2
31.5	357.7
32.0	334.8
32.5	313.3
33.0	293.1
33.5	274.2
34.0	256.4
34.5	239.9
35.0	224.5
35.5	210.1
36.0	196.7
36.5	184.3
37.0	172.8
37.5	162.2
38.0	152.4
38.5	143.4
39.0	135.1
39.5	127.5
40.0	120.6
40.5	114.3
41.0	108.5
41.5	103.2
42.0	98.3
42.5	93.8
43.0	89.6
43.5	85.8
44.0	82.2
44.5	79.0
45.0	75.9
45.5	73.1
46.0	70.4
46.5	67.9
47.0	65.6
47.5	63.5
48.0	61.5
48.5	59.6
49.0	57.8
49.5	56.0
50.0	54.4
50.5	52.9
51.0	51.4
51.5	50.0
52.0	48.7
52.5	47.3
53.0	46.1
53.5	44.9
54.0	43.7
54.5	42.5

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

CANDELA TABULATION - (Cont.)

55.0	41.4
55.5	40.3
56.0	39.3
56.5	38.2
57.0	37.2
57.5	36.2
58.0	35.2
58.5	34.2
59.0	33.3
59.5	32.3
60.0	31.4
60.5	30.5
61.0	29.6
61.5	28.7
62.0	27.8
62.5	26.9
63.0	26.1
63.5	25.2
64.0	24.4
64.5	23.5
65.0	22.7
65.5	21.9
66.0	21.1
66.5	20.3
67.0	19.5
67.5	18.8
68.0	18.0
68.5	17.3
69.0	16.6
69.5	15.8
70.0	15.2
70.5	14.5
71.0	13.9
71.5	13.2
72.0	12.6
72.5	12.0
73.0	11.5
73.5	11.0
74.0	10.5
74.5	10.0
75.0	9.6
75.5	9.1
76.0	8.7
76.5	8.4
77.0	8.0
77.5	7.6
78.0	7.3
78.5	6.9
79.0	6.6
79.5	6.3
80.0	5.9
80.5	5.6
81.0	5.2
81.5	4.9
82.0	4.6
82.5	4.3

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

CANDELA TABULATION - (Cont.)

83.0	4.0
83.5	3.6
84.0	3.3
84.5	3.0
85.0	2.7
85.5	2.4
86.0	2.2
86.5	1.9
87.0	1.6
87.5	1.3
88.0	1.0
88.5	0.8
89.0	0.7
89.5	0.5
90.0	0.4
90.5	0.0
91.0	0.0
91.5	0.0
92.0	0.0
92.5	0.0
93.0	0.0
93.5	0.0
94.0	0.0
94.5	0.0
95.0	0.0
95.5	0.0
96.0	0.0
96.5	0.0
97.0	0.0
97.5	0.0
98.0	0.0
98.5	0.0
99.0	0.0
99.5	0.0
100.0	0.0
100.5	0.0
101.0	0.0
101.5	0.0
102.0	0.0
102.5	0.0
103.0	0.0
103.5	0.0
104.0	0.0
104.5	0.0
105.0	0.0
105.5	0.0
106.0	0.0
106.5	0.0
107.0	0.0
107.5	0.0
108.0	0.0
108.5	0.0
109.0	0.0
109.5	0.0
110.0	0.0
110.5	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

CANDELA TABULATION - (Cont.)

111.0	0.0
111.5	0.0
112.0	0.0
112.5	0.0
113.0	0.0
113.5	0.0
114.0	0.0
114.5	0.0
115.0	0.0
115.5	0.0
116.0	0.0
116.5	0.0
117.0	0.0
117.5	0.0
118.0	0.0
118.5	0.0
119.0	0.0
119.5	0.0
120.0	0.0
120.5	0.0
121.0	0.0
121.5	0.0
122.0	0.0
122.5	0.0
123.0	0.0
123.5	0.0
124.0	0.0
124.5	0.0
125.0	0.0
125.5	0.0
126.0	0.0
126.5	0.0
127.0	0.0
127.5	0.0
128.0	0.0
128.5	0.0
129.0	0.0
129.5	0.0
130.0	0.0
130.5	0.0
131.0	0.0
131.5	0.0
132.0	0.0
132.5	0.0
133.0	0.0
133.5	0.0
134.0	0.0
134.5	0.0
135.0	0.0
135.5	0.0
136.0	0.0
136.5	0.0
137.0	0.0
137.5	0.0
138.0	0.0
138.5	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

CANDELA TABULATION - (Cont.)

139.0	0.0
139.5	0.0
140.0	0.0
140.5	0.0
141.0	0.0
141.5	0.0
142.0	0.0
142.5	0.0
143.0	0.0
143.5	0.0
144.0	0.0
144.5	0.0
145.0	0.0
145.5	0.0
146.0	0.0
146.5	0.0
147.0	0.0
147.5	0.0
148.0	0.0
148.5	0.0
149.0	0.0
149.5	0.0
150.0	0.0
150.5	0.0
151.0	0.0
151.5	0.0
152.0	0.0
152.5	0.0
153.0	0.0
153.5	0.0
154.0	0.0
154.5	0.0
155.0	0.0
155.5	0.0
156.0	0.0
156.5	0.0
157.0	0.0
157.5	0.0
158.0	0.0
158.5	0.0
159.0	0.0
159.5	0.0
160.0	0.0
160.5	0.0
161.0	0.0
161.5	0.0
162.0	0.0
162.5	0.0
163.0	0.0
163.5	0.0
164.0	0.0
164.5	0.0
165.0	0.0
165.5	0.0
166.0	0.0
166.5	0.0

CANDELA TABULATION - (Cont.)

167.0	0.0
167.5	0.0
168.0	0.0
168.5	0.0
169.0	0.0
169.5	0.0
170.0	0.0
170.5	0.0
171.0	0.0
171.5	0.0
172.0	0.0
172.5	0.0
173.0	0.0
173.5	0.0
174.0	0.0
174.5	0.0
175.0	0.0
175.5	0.0
176.0	0.0
176.5	0.0
177.0	0.0
177.5	0.0
178.0	0.0
178.5	0.0
179.0	0.0
179.5	0.0
180.0	0.0

IES INDOOR REPORT**PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES****ZONAL LUMEN SUMMARY**

Zone	Lumens	%Lamp	%Fixt
0-20	1096.46	N.A.	61.50
0-30	1499.17	N.A.	84.10
0-40	1647.4	N.A.	92.40
0-60	1745.78	N.A.	98.00
0-80	1778.85	N.A.	99.80
0-90	1781.93	N.A.	100.00
10-90	1403.98	N.A.	78.80
20-40	550.94	N.A.	30.90
20-50	611.94	N.A.	34.30
40-70	121.00	N.A.	6.80
60-80	33.07	N.A.	1.90
70-80	10.45	N.A.	0.60
80-90	3.09	N.A.	0.20
90-110	0.01	N.A.	0.00
90-120	0.01	N.A.	0.00
90-130	0.01	N.A.	0.00
90-150	0.01	N.A.	0.00
90-180	0.01	N.A.	0.00
110-180	0.00	N.A.	0.00
0-180	1781.94	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	377.95
10-20	718.50
20-30	402.72
30-40	148.23
40-50	60.99
50-60	37.38
60-70	22.62
70-80	10.45
80-90	3.09
90-100	0.01
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	94
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89
3	104	99	94	91	103	97	93	90	95	91	89	92	90	87	90	88	86	84
4	100	94	89	85	98	92	88	84	90	86	83	88	85	83	87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76
6	92	85	80	76	91	84	79	76	83	78	75	81	77	75	80	77	74	73
7	89	81	76	72	88	80	75	72	79	75	72	78	74	71	77	73	71	70
8	86	77	72	69	85	77	72	69	76	72	68	75	71	68	74	71	68	67
9	83	74	69	66	82	74	69	66	73	69	66	72	68	65	71	68	65	64
10	80	71	67	63	79	71	66	63	70	66	63	70	66	63	69	65	63	62

IES INDOOR REPORT

PHOTOMETRIC FILENAME : 8CR-TL-L20-835-XXX-DIM-UNV-RM-WH-XX_.IES

UGR TABLE - CORRECTED

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size UGR Viewed Crosswise

X=2H	Y=2H	9.7	10.7	10.1	11.0	11.3	9.7	10.7	10.1	11.0	11.3
	3H	10.8	11.7	11.2	12.0	12.4	10.8	11.7	11.2	12.0	12.4
	4H	11.1	11.9	11.5	12.3	12.7	11.1	11.9	11.5	12.3	12.7
	6H	11.3	12.1	11.8	12.5	12.9	11.3	12.1	11.8	12.5	12.9
	8H	11.4	12.1	11.9	12.5	12.9	11.4	12.1	11.9	12.5	12.9
	12H	11.5	12.1	11.9	12.5	12.9	11.5	12.1	11.9	12.5	12.9

UGR Viewed Endwise


4H	2H	10.0	10.8	10.4	11.2	11.6	10.0	10.8	10.4	11.2	11.6
	3H	11.3	11.9	11.7	12.4	12.8	11.3	11.9	11.7	12.4	12.8
	4H	11.7	12.3	12.1	12.7	13.1	11.7	12.3	12.1	12.7	13.1
	6H	12.0	12.5	12.5	13.0	13.5	12.0	12.5	12.5	13.0	13.5
	8H	12.2	12.6	12.6	13.1	13.5	12.2	12.6	12.6	13.1	13.5
	12H	12.2	12.6	12.7	13.1	13.6	12.2	12.6	12.7	13.1	13.6

8H	4H	11.8	12.2	12.3	12.7	13.2	11.8	12.2	12.3	12.7	13.2
	6H	12.2	12.6	12.8	13.1	13.6	12.2	12.6	12.8	13.1	13.6
	8H	12.4	12.7	13.0	13.3	13.8	12.4	12.7	13.0	13.3	13.8
	12H	12.6	12.8	13.1	13.3	13.9	12.6	12.8	13.1	13.3	13.9

12H	4H	11.8	12.2	12.3	12.6	13.1	11.8	12.2	12.3	12.6	13.1
	6H	12.2	12.6	12.8	13.0	13.6	12.2	12.6	12.8	13.0	13.6
	8H	12.5	12.7	13.0	13.2	13.8	12.5	12.7	13.0	13.2	13.8

Maximum UGR = 13.9

POLAR GRAPH

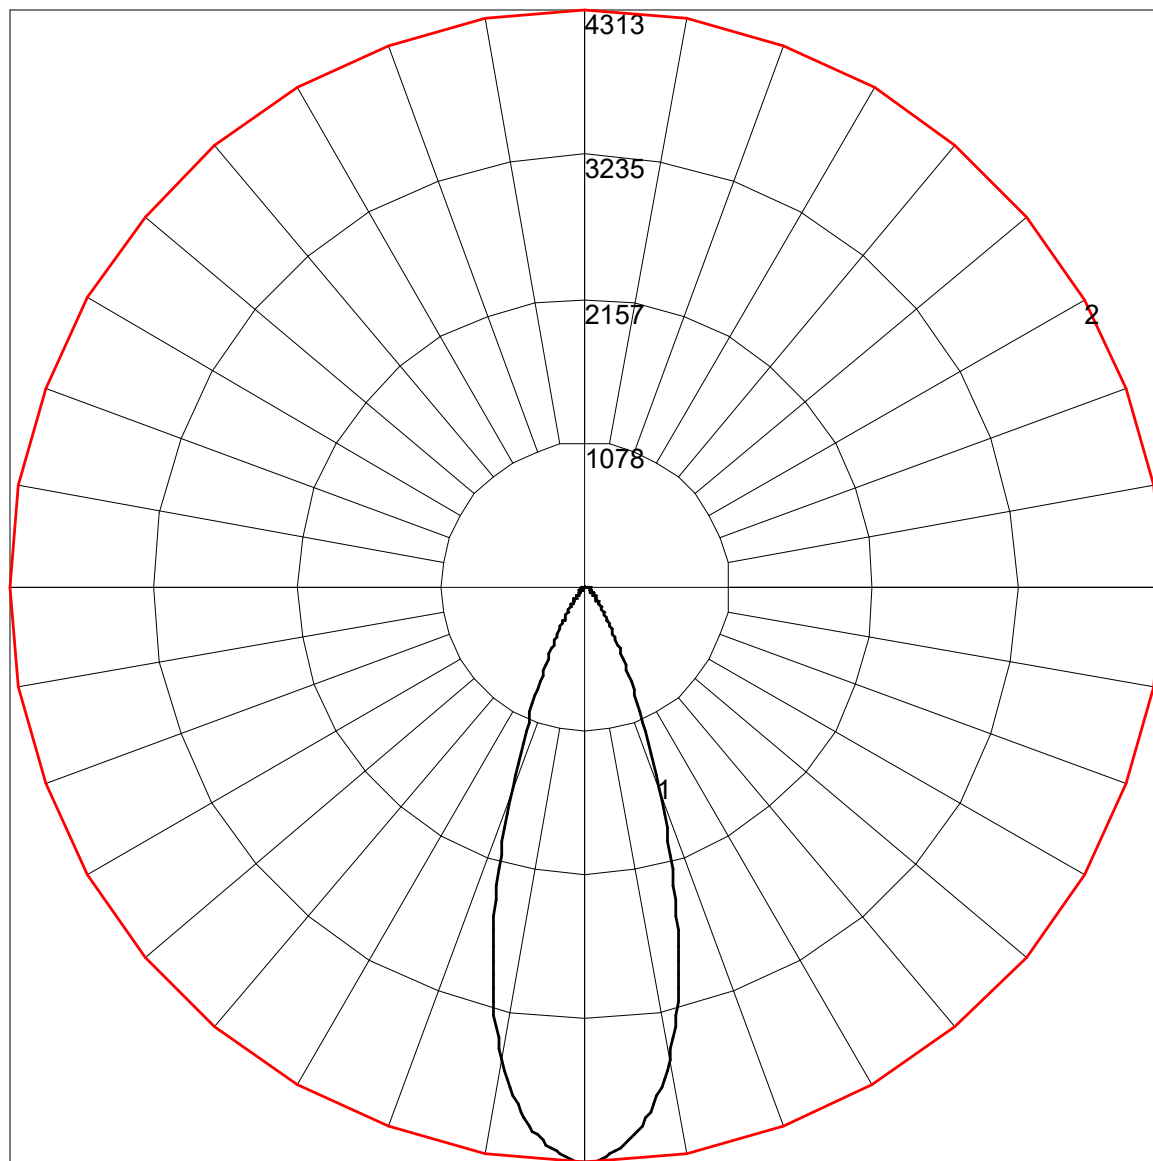

Maximum Candela = 4313 Located At Horizontal Angle = 0, Vertical Angle = 0

1 - Vertical Plane Through Horizontal Angles (90 - 270)

2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)