



Product Catalog

FLEXCO[®]
AMERICAN-MADE FLOORING

flexcofloors.com

Table of Contents

- 4 Coordinated Flooring Systems
- 4 FlexOne Pricing
- 5 Categories + Markets
- 6 Life Cycle Benefits

Rubber Flooring

- 10 FlexTones® Textured Rubber Tile
- 12 Evolving Styles® Creative Elements
- 14 Evolving Styles® Wood Elements
- 16 SpexTones™ Rubber Tile
- 18 FreeFlex® Rubber Tile
- 20 Tuflex® Force® Recycled Rubber Tile
- 22 Prime Sports™ Rubber Tile
- 24 FlexTuft® Recycled Rubber Tile
- 26 Repel™ Oil And Grease Resistant
- 28 IMO Rubber Flooring
- 30 Rubber Flooring **SPECS**
- 32 Sports Flooring/Multipurpose **SPECS**

Stair Treads

- 56 Distinct Designs Rubber Stair Treads
- 58 Vinyl Stair Treads
- 60 FlexTerior® Metal Stair Treads
- 62 Rubber Stair Treads **SPECS**
- 68 Vinyl Stair Treads **SPECS**
- 69 FlexTerior® Metal Treads **SPECS**
- 70 Stair Tread Accessories
- 71 Inserts + Strips

Accessories + Specs

- 90 Welding Beads Rubber + Vinyl
- 92 Subleveling Systems
- 94 Vinyl Flooring Accessories
- 96 Adhesives For Tile, Tread + Wall Base
- 98 Installation + Maintenance
- 100 ASTM
- 102 IMPACT Program
- 104 Inspirations Custom Cut Designs
- 106 Xpress Flooring Options
- 107 Sample Requests

Vinyl Flooring

- 36 Natural Elements Premium Luxury Vinyl Plank
- 38 Natural Elements Premium Luxury Vinyl Tile
- 40 Crosswire™ Woven Vinyl Flooring
- 42 Delane® Solid Vinyl Tile
- 44 Geodesy® Solid Vinyl Tile
- 52 Vinyl Flooring **SPECS**

ESD flooring

- 48 ESD Static Control Rubber Flooring
- 50 Delane® ESD Static Control Vinyl Flooring
- 53 ESD Flooring **SPECS**

Wall Base

- 74 Wallflowers® Premium Rubber Wall Base
- 76 Wood Elements™ Wall Base
- 78 Base Sculptures™ Wall Base Systems
- 80 Base 2000™ Wall Base
- 82 Vinyl Wall Base
- 84 Health Design™ Wall Base
- 86 Wall Base **SPECS**
- 87 Corner Blocks **SPECS**
- 88 Base Sculptures™ + Corners **SPECS**



When you partner with FLEXCO®, you're working with a proven resilient flooring manufacturer that has been producing premium American-made flooring products for over 65 years. We source safe and sustainable raw materials and produce the highest quality products to meet your stringent needs.

Coordinated

F L O O R I N G S Y S T E M S

Categories

+ M A R K E T S


With performance-driven flooring products across all product lines, FLEXCO® is taking flooring quality, selection and service to even higher levels. From tile and sheet to treads, wall base and accessories, our products work together in color, performance and style to deliver cohesive design, installation and maintenance.



Rubber Flooring + Vinyl Flooring



Stair Treads



Wall Base + Accessories



Healthcare

Whether it's the rush traffic of a trauma center or the soothing environment of a nursing home, FLEXCO® rubber and vinyl flooring handles the high traffic while delivering styles that contribute to a caring atmosphere. Specialized wall base and slip-resistant treads keep facilities clean and safe for patients and medical staff.



Retail

Advances in today's vinyl materials make products like Natural Elements Premium LVT a natural fit for busy retail environments that want to upgrade their style and performance.




Education

It's a lesson in design, durability and daily resilience. From inspiring learning experiences in today's modern classrooms to taking on class changes in the hallways, FLEXCO® rubber and vinyl flooring adds visual interest while making maintenance a breeze.



Sports

With FLEXCO®'s sports and multipurpose flooring, style is just one of our strengths. Choose from various recycled rubber products that are ready for a daily workout, while lending unique colors and versatility for weight rooms, tracks, entryways and other applications that need to stand tough.

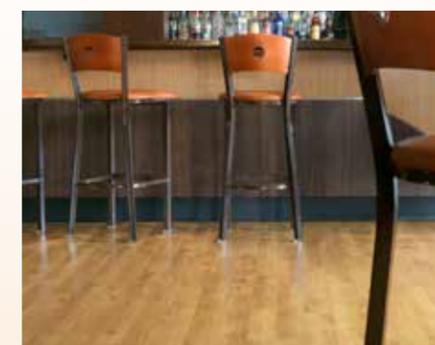

Hospitality

Go with a look of stone or wood, or create exciting splashes of color with custom patterns and designs. FLEXCO® products give you complete flexibility to make your flooring an integral part of your atmosphere.

Coordinating rubber and vinyl stair treads, custom logos and custom colors are available to complement any environment.



FlexOne Pricing

FlexOne pricing from FLEXCO® affords you an easier way to choose product. With our FlexOne pricing structure, you pay the same price for any color within the same color palette in that product line. This allows you to focus on developing floor designs that achieve your desired environment or function without worrying about price differentiation.

Just imagine a confetti of colors for a cafeteria floor or bold lines for wayfinding in a healthcare facility. Create custom flooring designs for hotel ballrooms and conference centers or install a serene expanse of solid color from wall to wall. FlexOne pricing makes it easy for you to achieve all of your design objectives.




Life Cycle

BENEFITS

RUBBER + VINYL FLOORING SYSTEMS

In highly used, highly abused environments like the healthcare sector, the “cheapest” flooring products can be the most expensive choice over the lifetime of the floor. More expensive floors – like rubber – can actually be the cheapest at a little over half the cost of the next closest option over the lifetime of the floor. Even at five years, payback for some of the more expensive floors had disqualified the cheaper floors. Theoretically, in a large hospital over 15 years’ time, millions of dollars could be saved by installing floors that do not require finishing. Rubber seems to be the best product overall. It doesn’t move over years, decay or wear like most other products.


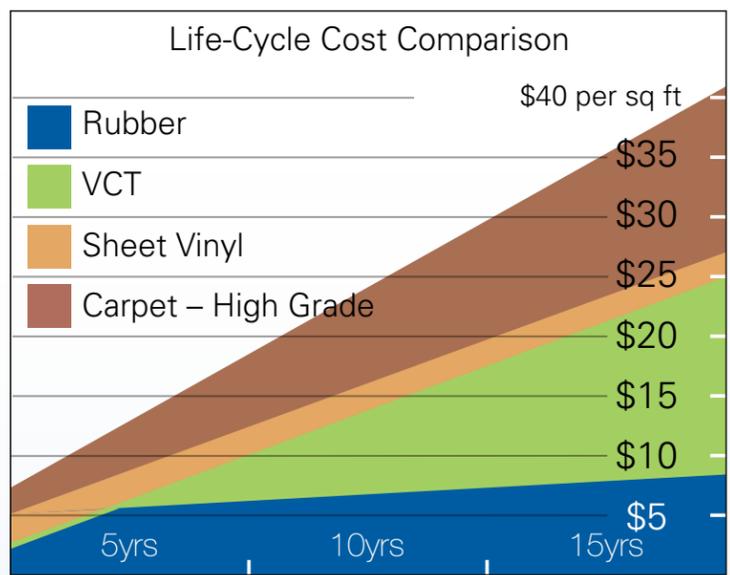


Life-Cycle Methodology Includes The Cost Cleaned:

product	material cost per sq. ft	cleaning cost per 1,000 sq. ft over 15 yrs.	
VCT	\$1.20 - \$1.50 SF	\$24,313	17x*
Sh Vinyl	\$2.47 - \$5.00 SF	\$25,879	8x*
NF Sh Vinyl	\$4.00 - \$5.00 SF	\$15,640	4x*
Rubber	\$4.00 - \$5.50 SF	\$ 8,095	2x*
Carpet	\$6.67 - \$25.50 SF	\$21,982	9x*

*denotes the number of times the original cost of the floor.

Source: How to Make Business Decisions for Facility Flooring Suzanne R. Barnes, AIA, CFM

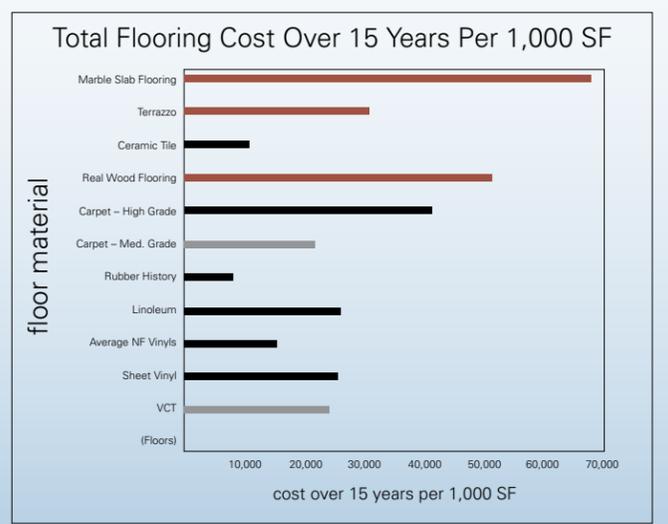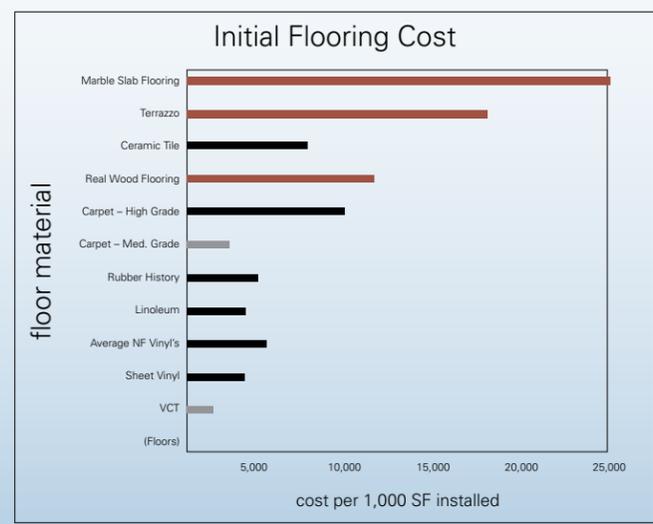



Rubber Flooring
Color Palettes
FlexTones®



Evolving Styles®



SpexTones™



Sports + Multipurpose
Flooring

Tuflex® Force®



Prime Sports™



FlexTuft®



DISTINCT DESIGNS

Rubber Flooring

TILE + SHEET

M

naturally resistant to mold and mildew, FLEXCO® rubber floors are designed for durability, versatility and slip resistance, plus they're very quiet and comfortable underfoot. Choose from textured, smooth and environmentally-friendly tile, in colors and patterns to match any design or application, from showrooms and residences to auto shops and bakeries.

FlexTones®

TEXTURED RUBBER TILE

- 1 PVC-free rubber tiles
- 2 Homogeneous color
- 3 Reduces leg fatigue and noise
- 4 FlexOne pricing - solid colors all one price
- 5 Natural resistance to bacteria and fungi in accordance with ASTM G21



F

featuring 57 colors, FlexTones® coordinate across tile, tread, wall base and accessories for consistent color and flexible design. The raised and textured patterns allow dirt and water to drain off of the walking surface, increasing traction and improving slip resistance. Our low profile versions are ideal for areas with small-wheeled vehicular traffic, such as retail stores, healthcare facilities, airport terminals and more.

FLEXCO
AMERICAN-MADE FLOORING

FlexTones®
COLORS



Complete specs on pages 30-31.

EVOLVING STYLES®

Creative Elements

RUBBER TILE + SHEET

- 1 PVC-free rubber tile and sheet
- 2 Natural resistance to bacteria and fungi in accordance with ASTM G21
- 3 Homogeneous color
- 4 Quiet and extremely comfortable walking surface
- 5 Low maintenance, no finishes required



Evolution Styles®
Creative Elements
COLORS



White w/Black
CE-100

French Gray
w/Black
CE-103



Black w/White
CE-109

Beige w/White
& Brown
CE-119



Beige w/Brown
CE-123

Light Gray
CE-125



Blue
CE-131

White w/Blue
CE-132



Delft Pansy
CE-135

Charcoal
w/Black
CE-143



Sage
CE-150

White w/Sage
CE-151



Vintage Plum
CE-160

Mediterranean
Green
CE-163



Honey
CE-164

Red w/White
CE-166

The Evolving Styles® Creative Elements collection offers so much selection. Choose from two gauges, various tile sizes and sheet rubber flooring. You also have the option of using FLEXCO® Rubber Welding Beads to create a seamless installation for clean rooms and areas that have strict requirements for added hygiene.


Complete specs on pages 30-31.

EVOLVING STYLES®
Wood Elements

RUBBER TILE + SHEET



- 1 **PVC-free rubber tile and sheet**
- 2 **Natural resistance to bacteria and fungi in accordance with ASTM G21**
- 3 **Homogeneous color**
- 4 **Quiet and extremely comfortable walking surface**
- 5 **Low maintenance, no finishes required**



Made in the U.S.A.



Evolving Styles®
Wood Elements
COLORS



Simply Cherry
WE-104



Vintage Pecan
WE-105



Amber Maple
WE-106



Classic Oak
WE-107

The Evolving Styles® Wood Elements collection combines a unique wood aesthetic with the durability and comfort of rubber. The two gauges, various tile sizes and sheet rubber flooring options open up your opportunities for gymnasiums, all-purpose rooms and other active facilities. FLEXCO® Rubber Welding Beads create a seamless installation for areas that have strict requirements for added hygiene.

Complete specs on pages 30-31.

SpexTones™

RUBBER TILE





- 1 PVC-free rubber tile
- 2 Natural resistance to bacteria and fungi in accordance with ASTM G21
- 3 Colors coordinate with FlexTones®
- 4 Conceals dirt and subsurface irregularities
- 5 Exceeds ADA recommendations for slip resistance



INTERNATIONAL MARITIME ORGANIZATION

FLEXCO
AMERICAN-MADE FLOORING

SpexTones™
COLORS

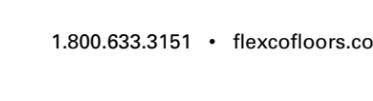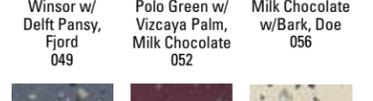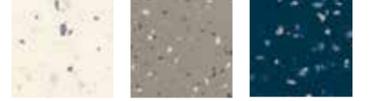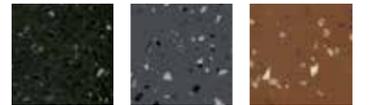

The SpexTones™ product line is highlighted by speckled coloration that works well for high-traffic areas prone to everyday dirt and scuffing. It's everything you need to specify your next project with more confidence and in less time.

Complete specs on pages 30-31.





FreeFlex®

RUBBER TILE

- 1 PVC-free rubber tile
- 2 Sizes offer limitless creative possibilities
- 3 Natural resistance to bacteria and fungi in accordance with ASTM G21
- 4 Exceeds ADA recommendations for slip resistance
- 5 Quiet and extremely comfortable walking surface



Made in the U.S.A.



Imagine a world where you're free to create, a place where your ideas are unrestricted. The FreeFlex® collection offers rubber tile sizes that coordinate well with other flooring materials, such as carpet tile and LVT, while affording the extreme durability and resilience of rubber. The creative possibilities are endless.

FreeFlex® SIZES & COLORS

Available Sizes:
6" x 36"
12" x 36"
18" x 36"

FreeFlex® is available in the following rubber tile and stair tread color palettes.

FlexTones® COLORS



See page 11 for all 57 colors available

EVOLVING STYLES® Creative Elements COLORS




See page 13 for all 16 colors available

EVOLVING STYLES® Wood Elements COLORS



See page 15 for all 4 colors available

SpexTones™ COLORS



See page 17 for all 22 colors available

FlexTones® palette available in Hammered profile.


Creative Elements, Wood Elements and SpexTones™ available in Hammered or Smooth profiles.

Complete specs on page 31.

Tuflex® Force®

RECYCLED RUBBER TILE

- 1 Red List Free
- 2 100% Recyclable
- 3 Lifetime Delamination Warranty
- 4 Exclusive 10-Year Performance Warranty
- 5 Exceeds OSHA and ADA standards for traction




Made in the U.S.A.

FLEXCO




FLEXCO
AMERICAN-MADE FLOORING

Tuflex® Force® COLORS

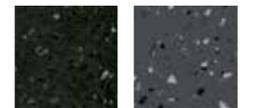


Black Dahlia w/ Medium Gray, Fjord 01

Charcoal w/ Black Dahlia, Doe 03

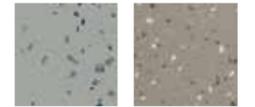


Light Gray w/ Delft Pansy, Medium Gray 025

Doe w/ Milk Chocolate, Beige 033

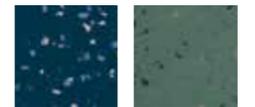


Delft Pansy w/ Winsor, Doe 035

Vizcaya Palm w/ Polo Green, Cappuccino 047

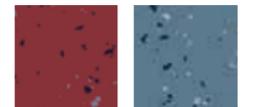


Berry w/ Black Dahlia, Medium Gray 048

Winsor w/ Delft Pansy, Fjord 049

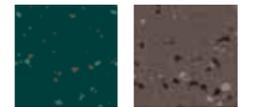

Polo Green w/ Vizcaya Palm, Milk Chocolate 052

Milk Chocolate w/ Bark, Doe 056

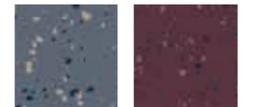

Blue Shadow w/ Delft Pansy, Doe 058

Plum Pudding w/ Delft Pansy, Medium Gray 059



Onyx 111

M

ake style and endurance an everyday practice. With its patented vulcanization process using predominantly recycled rubber, Tuflex® Force® Resilient Rubber Flooring tiles have been keeping sports and commercial facilities in peak condition since 1957.



Complete specs on pages 32-33.

Prime Sports™

RUBBER TILE

FLEXCO

5
TOP

- 1 Available in rolls, square edge tiles and interlocking tiles; custom roll options available
- 2 Four gauge options
- 3 Outstanding sound and shock absorption
- 4 Indoor/outdoor
- 5 Standard 10% chip content, or special order up to 90% chip content with one or multiple colors



certified by SCS Global Services



Made in the U.S.A.

FLEXCO
AMERICAN-MADE FLOORING


Prime Sports™
COLORS



Black Dahlia
PSF-001




Evergreen
PSF-200




Ruby Red
PSF-201




Dove
PSF-202




Vanilla
PSF-203



Starlight
PSF-204



Blue Ice
PSF-205



Daffodil
PSF-206

RUBBER FLOORING

Highly functional. Highly affordable. Prime Sports™ Flooring is a rubber recreational flooring that is well-conditioned to take on a rigorous workout or provide added walking comfort and slip-resistance. Designed for commercial, industrial and fitness applications, Prime Sports™ Flooring is recommended for play areas, golf shops, fitness centers, daycares, ramps, locker rooms, cardio areas, ice arenas and retail flooring.

Complete specs on pages 32-33.

FlexTuft®

RECYCLED RUBBER TILE

- 1 Modular tile units allow for diverse patterns
- 2 Vulcanized and non-vulcanized backing
- 3 Easy maintenance
- 4 Indoor/outdoor
- 5 90% recycled content



FLEXCO
AMERICAN-MADE FLOORING

FlexTuft®
COLORS



Tweed
FT-1

Delft & Gray
FT-3



Cranberry & Gray
FT-4

Spruce & Gray
FT-5



FlexTuft® is miles away from ordinary rubber tile. Made from recycled tires, it can withstand repeated water dousing, high traffic, heavy loading and exposure to the elements. With FlexTuft® rubber tile, what's good for the environment is also good for the most challenging indoor and outdoor settings. In fact, this durable, anti-slip flooring meets ADA recommendations for ramps and is ideal for foyers, exercise facilities and stairways.

Complete specs on pages 32-33.

RUBBER FLOORING

Repel™

OIL & GREASE RESISTANT
RUBBER FLOORING

- 1 Won't absorb oil or grease
- 2 PFOA Free
- 3 Exceeds ADA recommendations for slip resistance
- 4 Color-coordinates with wall base and tread
- 5 Formulation inhibits discoloration



R

Repel resists the effects of oil and grease and gives you the flexibility to only spec it where it's needed. The variety of the FLEXCO® portfolio lets you match the floor, the wall base and stair treads for a consistent, color-coordinated look throughout the building.

Repel is available in all rubber tile and stair tread colors, excluding sheet rubber. Repel must be specified at time of order. Do not use around hot grease areas.

FLEXCO®
AMERICAN-MADE FLOORING

Repel™
COLORS order prefix: **R**

Repel is available in all rubber tile and stair tread colors, excluding sheet rubber.

FlexTones®
COLORS



See page 11
for all 57 colors
available

EVOLVING STYLES®
Creative Elements
COLORS




See page 13
for all 16 colors
available

EVOLVING STYLES®
Wood Elements
COLORS



See page 15
for all 4 colors
available

SpexTones™
COLORS



See page 17
for all 22 colors
available

IMO

RUBBER FLOORING

- 1 The only IMO Rubber Flooring certified by the U.S. Coast Guard
- 2 EU Wheelmark certified
- 3 PVC Free
- 4 Red List Free
- 5 Made in the USA from premium raw materials



FLEXCO®

5
TOP

The shipping industry is changing every day. New environmental regulations, the demand for higher fuel efficiency and the use of new materials create a rippling effect that touches countless shipbuilding components—including flooring. FLEXCO® is on the forefront, creating a better balance of exceptional sustainability, safety and performance.

FLEXCO®
AMERICAN-MADE FLOORING

IMO Rubber Flooring COLORS

IMO is available in all rubber tile colors, excluding sheet rubber.

IMO must be specified upon order.

FlexTones® COLORS



See page 11
for all 57 colors
available

Evolving Styles® Creative Elements COLORS




See page 13
for all 16 colors
available

Evolving Styles® Wood Elements COLORS




See page 15
for all 4 colors
available

SpexTones™ COLORS



See page 17
for all 22 colors
available


For FlexTones®, Creative Elements™, Wood Elements™ + SpexTones™ color palettes

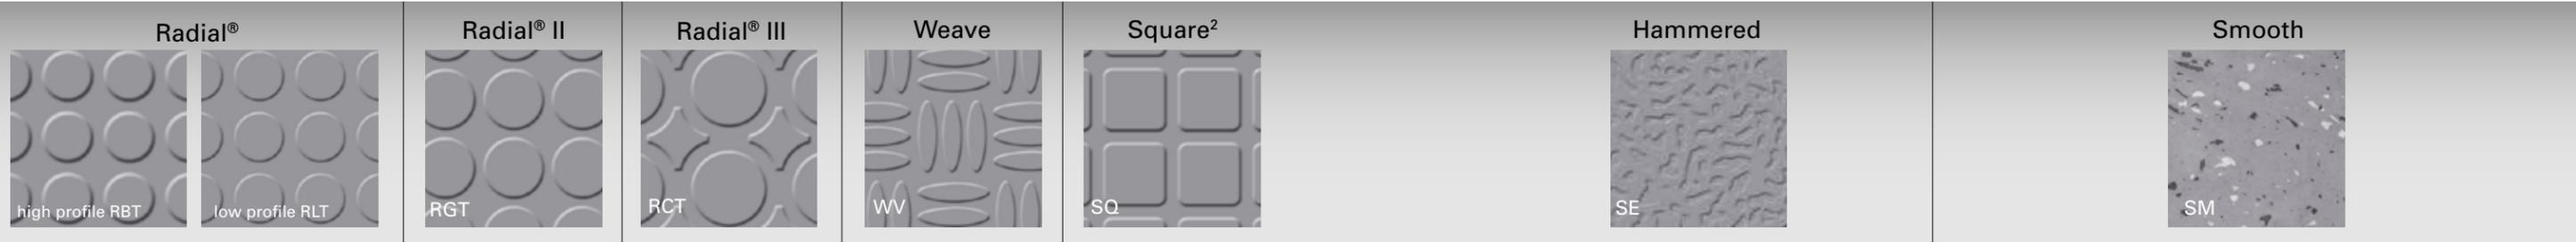

	Radial® (RBT/RLT)	Radial® II (RGT)	Radial® III (RCT)	Weave (WV)	Square² (SQ)	Hammered (SE)				Smooth					
GAUGE	1/8"	1/8"	1/8"	1/8"	1/8"	.080"	1/8"	1/8"	1/8"	1/8" Smooth †					
SIZE	18" x 18"	18" x 18"	18" x 18"	18" x 18"	18" x 18"	24" x 24"	12" x 12"	18" x 18"	36" x 36"	12" x 12"	18" x 18"	36" x 36"	6" x 36"	12" x 36"	18" x 36"
PIECES /CTN	20	20	20	20	20	20	45	20	6	45	20	6	18	10	6
WEIGHT /CTN (LB)	46	46	46	46	46	60	46	46	62	52	52	62	31.05	34.50	31.05
SQ. FT /CTN	45	45	45	45	45	80	45	45	54	45	45	54	27	30	27

(Smooth is available in Creative Elements™, Wood Elements™ + SpexTones™ colors only. Smooth rolls are not available in SpexTones™.)

	Hammered (SE)			Smooth Rolls	
GAUGE	1/8"	1/8"	1/8"	.100" Smooth Rolls	
SIZE	6" x 36"	12" x 36"	18" x 36"	.100" Smooth Rolls	
PIECES /CTN	18	10	6	.100" Smooth Rolls	
WEIGHT /CTN (LB)	31.05	34.50	31.05	.100" Smooth Rolls	
SQ. FT /CTN	27	30	27	.100" Smooth Rolls	

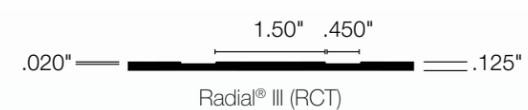

† Sheet rubber manufactured untrimmed must be double-cut on the job site.
** IMO and Repel formulation not available in sheet.
Note: Add HW to color number for pre-grooved Heat Weld tiles available in 36" x 36" x 1/8" gauge.



Rubber Flooring Recommended Adhesives
SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive
AW-510 Acrylic Adhesive
AP-520 Acrylic Roll/Trowelable Pressure-Sensitive Adhesive
EW-710 Epoxy Wet-Set Adhesive*
U-705 Urethane Wet-Set Adhesive

*EW-710 is the only approved adhesive for IMO flooring

Sports + Multipurpose Flooring




Sports Flooring Recommended Adhesives
U-705 Urethane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive

Tuflex® Force® order prefix: **TF**

GAUGE	3/8"
SIZE	Square: 27" x 27" (5.0625 Sq/Ft per tile) Interlocking Tiles: 25-3/4" x 25-3/4" (4.6046 Sq/Ft per tile)
PACKAGING	Maximum 100 tiles per pallet
WEIGHT	11.7 lbs per piece

Square Edge Tile or Interlocking Tile

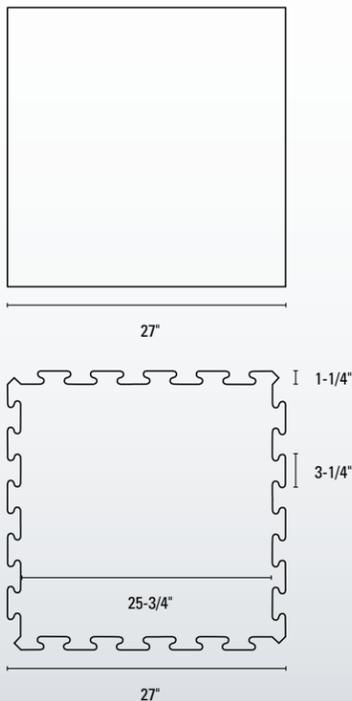


Prime Sports™ order prefix: **PSF**

GAUGE	5/32", 1/4", 3/8", 1/2"
SIZE	Rolls: 48" x 49.5' (22 Sq/Yds, 198 Sq/Ft) Square Edge Tiles: 36" x 36" (9 Sq/Ft per piece) Interlocking Tiles: 34-1/4" x 34-1/4" (8.2 Sq/Ft per piece)
PACKAGING	Unboxed tiles and rolls shrink wrapped and put on pallet

Material may contain skiving marks from the manufacturing process; FLEXCO® does not consider these defects unless they are excessive in nature. Installation of material containing these skive marks is considered acceptance of the material and therefore waiving the right of replacement except under special circumstances determined by FLEXCO®.

Square Edge Tile, Rolls or Interlocking Tile

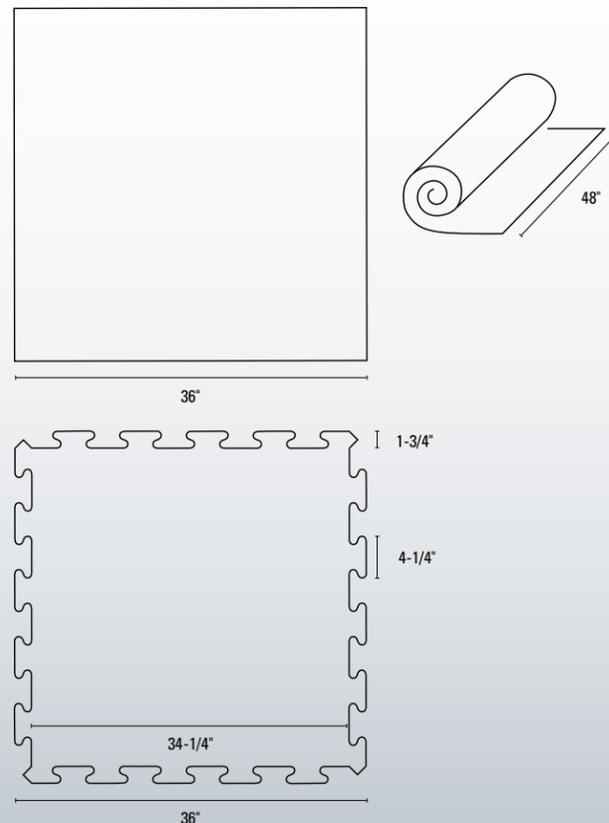

FlexTuft® order prefix: **FT**

SIZE	12" x 12"
VULCANIZED GAUGE	3/8" nominal
NON-VULCANIZED GAUGE	3/8" nominal
PIECES /CTN	25
WEIGHT /CTN (LB)	
VULCANIZED	50
NON-VULCANIZED	52
SQ FT /CTN	25

Note: Add V or NV to the product number for vulcanized or non-vulcanized tile (e.g., FTNV-1 for FlexTuft® Tweed Non-Vulcanized tile).

Non-Vulcanized FlexTuft® tile uses a glued polyester backing. Vulcanized FlexTuft® tile features rubber strips sewn into the backing.

For outdoor use, always use Vulcanized FlexTuft®.

While various environmental conditions may alter the appearance of recycled raw materials used in FlexTuft® flooring, the effects are not necessarily undesirable. When exposed to direct sunlight and other elements, fading will occur.



FLEXCO® products are easy to maintain using new Excelsior™ Maintenance Products. Visit flexcofloors.com for available options for cleaning and finishing.

Vinyl Flooring

TILE + PLANK

Natural Elements Premium
Luxury Vinyl Plank



Natural Elements Premium
Luxury Vinyl Tile



Crosswire™ Woven Vinyl
Flooring



Delane® Solid Vinyl Tile



Geodesy® Solid Vinyl Tile



From retail shops to restaurants to emergency rooms, FLEXCO[®] vinyl flooring is performance and style through and through.

With no required finishes, it's a solid solution whether your needs are anti-bacterial or all about design. Tough on heavy traffic. Easy to maintain. Our vinyl flooring will stand the tests of time in more ways than one.



Natural Elements Plank
4" x 36" or 6" x 48" planks




*Only available in 6" x 48".

NATURAL ELEMENTS


Premium Luxury Vinyl Plank

- 1 1/8" gauge (3mm), 4" x 36" or 6" x 48" vinyl plank
- 2 Urethane ceramic bead finish reduces potential for scratches and no finishes required; 28 mil wear layer exceeds ASTM F1700 for wear layer
- 3 100% pure virgin material
- 4 Resists bacteria growth
- 5 Over 50% of raw materials are sourced within a 100 mile radius of the manufacturing facility

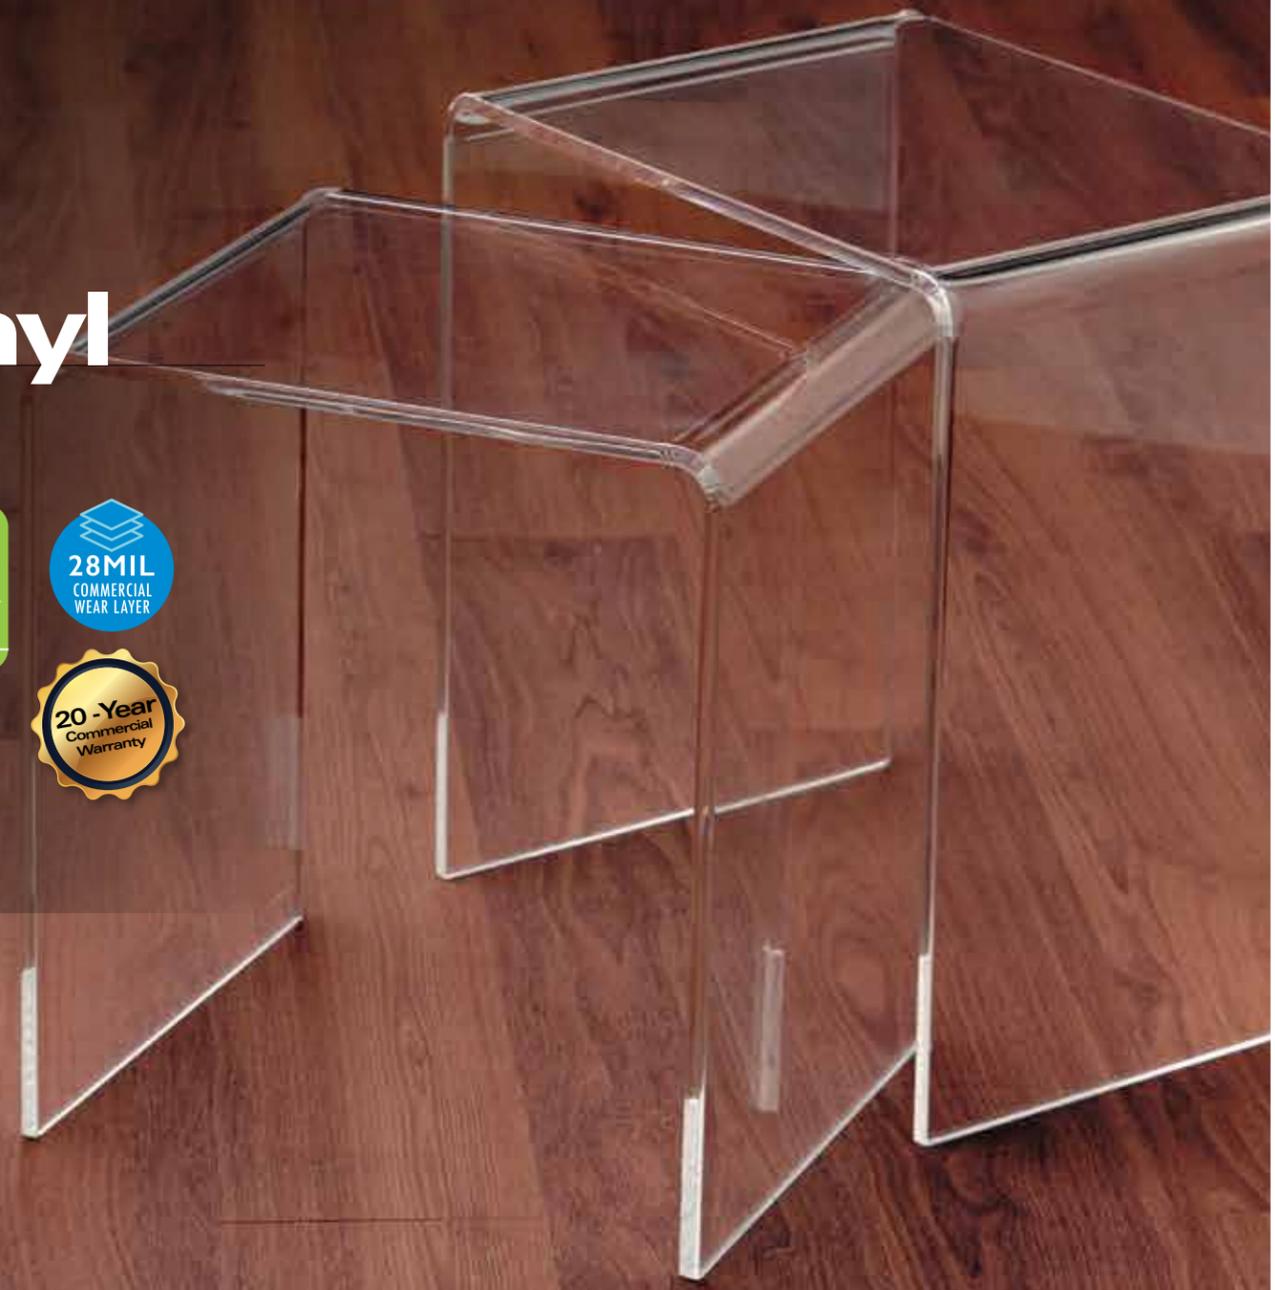

Every detail matters.

All layers phthalate-free

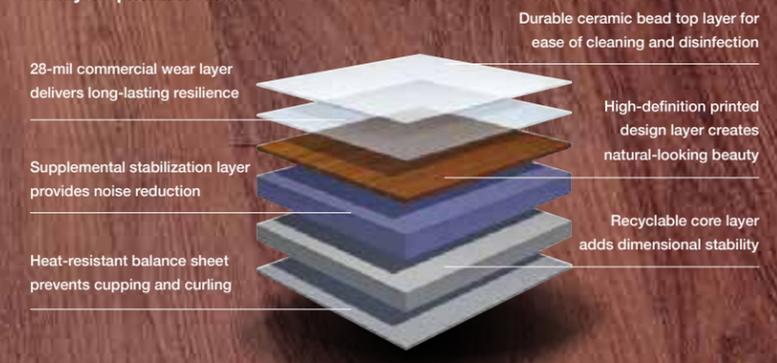

It begins with a smarter approach to manufacturing. Every layer has a purpose – enhance wear, add comfort or bring beauty to the floor. To ensure environmental responsibility and product performance down the road, we use only known sources of high-quality virgin raw materials.

Complete specs on page 52.

NATURAL ELEMENTS

Premium Luxury Vinyl Tile

- 1 1/8" gauge (3mm), 18" x 18" vinyl tile (4 colors) or 12" x 24" vinyl tile (14 colors)
- 2 Urethane ceramic bead finish reduces potential for scratches and no finishes required; 28 mil wear layer exceeds ASTM F1700 for wear layer
- 3 100% pure virgin material
- 4 Resists bacteria growth
- 5 Over 50% of raw materials are sourced within a 100 mile radius of the manufacturing facility



High-definition printing creates an attractive, natural-looking tile with a durable top layer and a resilient underlayment. And because all of our LVT product is made in the U.S.A., you can create the look you want with 48 in-demand colors and patterns.

Natural Elements Tile COLORS



Available in 12" x 24" tiles, unless otherwise noted.
*Only available in 18" x 18".

Every detail matters.

All layers phthalate-free

28-mil commercial wear layer delivers long-lasting resilience

Supplemental stabilization layer provides noise reduction

Heat-resistant balance sheet prevents cupping and curling

Durable ceramic bead top layer for ease of cleaning and disinfection


High-definition printed design layer creates natural-looking beauty

Recyclable core layer adds dimensional stability



Complete specs on page 52.

Crosswire Woven Vinyl
COLORS



Winter Solstice
250

Baltic Wave
251



Garden Path
252

Moonquake
253




Greige
254

Firefly
255



Windrift
256

Savannah Sunset
257



Thundercloud
258

Midnight Ripple
259

CROSSWIRE™
**Woven Vinyl
Flooring**

- 1 The look of carpet with the durability of vinyl
- 2 Triple-Defense waterproof protection for the warranted life of the product
- 3 Easy to clean and disinfect
- 4 Stain- and wear-resistant
- 5 Backed with a 20-year limited commercial warranty




certified by
SCS Global Services



It's one thing for flooring to look nice on day one, it's another to still look good after years of use. Daily foot traffic, cleaning and disinfecting and regular wear and tear inflict serious abuse. In heavy-use commercial environments, you need a solution that lasts.

Built to last.

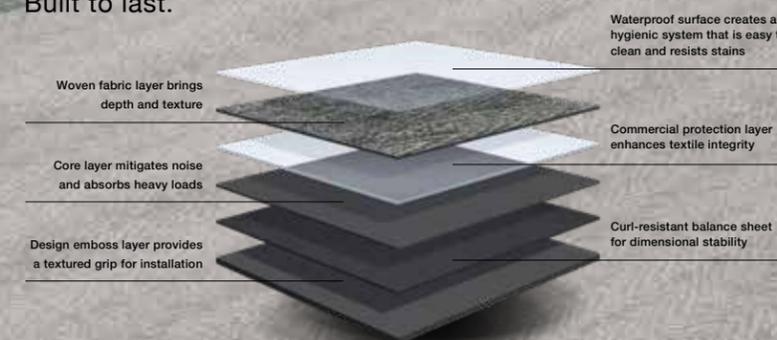

Complete specs on page 52.

DELANE®
Solid Vinyl
TILE

- 1 .080" or 1/8" gauge solid vinyl tile in various sizes
- 2 Easily buffs to a shine, no finishes required
- 3 Designed using bio-based, phthalate-free plasticizer, reducing greenhouse gas impact
- 4 May be seamlessly installed by heat welding
- 5 Flexible for quick and easy flash coving



certified by GreenGuard Services




NSF International - RESILIENT FLOORING PLATINUM



Made in the U.S.A.

Delane®
Solid Vinyl Tile
COLORS

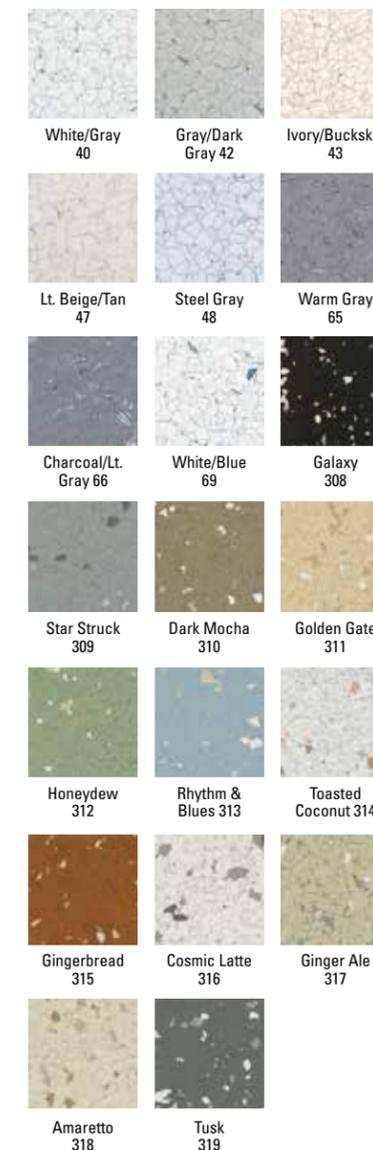

Delane® Solid Vinyl Tile is well-suited for healthcare, office, retail and hospitality applications where durability and easy maintenance are desired. Pre-grooved floor tiles can be fused together with Welding Beads in matching or contrasting colors to create a completely seamless "unitized" floor.

Complete specs on page 52.



GEODESY®
Solid Vinyl
TILE

- 1 .080" or 1/8" gauge solid vinyl tile in various sizes
- 2 Easily buffs to a shine, no finishes required
- 3 Designed using bio-based, phthalate-free plasticizer, reducing greenhouse gas impact
- 4 May be seamlessly installed by heat welding
- 5 Flexible for quick and easy flash coving



COMPLYING WITH SCS GLOBAL SERVICES




NSF/ANSI 332 - RESILIENT FLOORING PLATINUM



Made in the U.S.A.

Geodesy®
Solid Vinyl Tile
C O L O R S

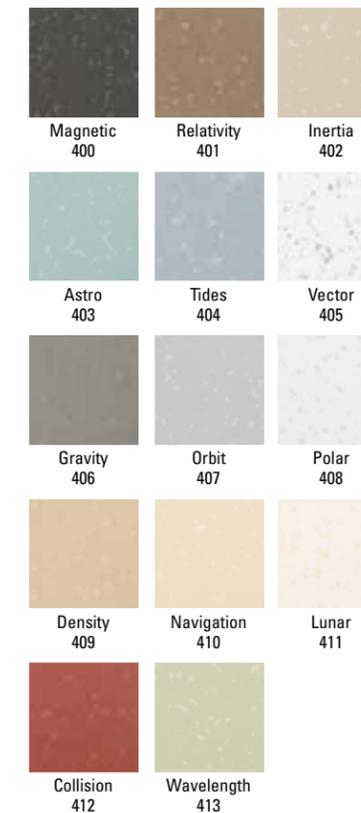

G

Geodesy® Solid Vinyl Tile brings the beautiful design of tone-on-tone speckled patterns with the durability of solid vinyl. Solid vinyl tile provides significantly better performance and cheaper maintenance than composition tiles.

Complete specs on page 52.

ESD Flooring

RUBBER + VINYL

W

ith low-maintenance rubber tile options, FLEXCO[®] ESD static control flooring offers several options for safety and style. From clean rooms to healthcare environments to data centers, it's an easy-to-monitor solution that eliminates unwanted charges in more ways than one.

ESD Rubber



Delane[®] ESD Vinyl





ESD Rubber
COLORS



ESD Rubber

STATIC CONTROL RUBBER FLOORING

- 1 .080" gauge in 24" x 24" homogeneous rubber tile
- 2 10-year conductivity warranty
- 3 Low maintenance, no finishes required
- 4 May be seamlessly installed by heat welding
- 5 Naturally resists bacteria and fungi in accordance with ASTM G21



Made in the U.S.A.



From data centers to clean rooms to healthcare facilities, damage to sensitive equipment from electrostatic discharge can cost time and money while disrupting critical daily operations. With ESD static dissipative rubber tile, FLEXCO® brings an expanded color palette plus easy maintenance to facilities looking for superior style and safety in their controlled environments.

Complete specs on page 53.

DELANE®
ESD Vinyl

STATIC CONTROL VINYL FLOORING



- 1 **1/8" gauge solid vinyl tile in various sizes, including 12" x 24"***
- 2 **Lifetime conductivity warranty**
- 3 **No finish required to maintain static dissipative qualities**
- 4 **May be seamlessly installed by heat welding**
- 5 **Performs under heavy rolling loads**

*Other options available by special order.



CERTIFIED BY
SCS Global Services




NSF/ANSI 301-RESILIENT FLOORING
PLATINUM



Made in
the U.S.A.

Delane® ESD Vinyl
COLORS

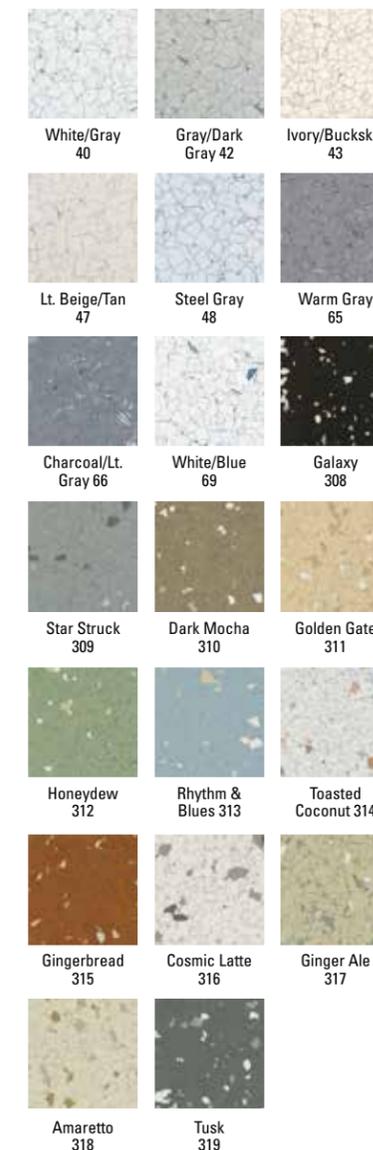

The effects and annual losses attributed to electrostatic discharge (ESD) are estimated to run into the billions of dollars just in the electronics industry alone. To control the static charge, FLEXCO® combines conductive or dissipative vinyl tile with a specially formulated conductive adhesive. This creates a conductive pathway which allows the static to flow through the tile and along the adhesive to the ground point. That makes FLEXCO® ESD static control vinyl flooring an effective first-choice solution to control unwanted human body voltage in areas where mobility cannot be restricted by wrist straps.

Complete specs on page 53.

Natural Elements Premium Luxury Vinyl Plank

order prefix: **NEW**

	GAUGE	1/8" (3mm)	1/8" (3mm)
	SIZE	4" x 36"	6" x 48"
	PIECES /CTN	36	18
	WEIGHT /CTN (LB)	36	36
	SQ FT /CTN	36	36

Natural Elements Premium Luxury Vinyl Tile

order prefix: **NES**

	GAUGE	1/8" (3mm)	1/8" (3mm)
	SIZE	18" x 18"	12" x 24"
	PIECES /CTN	16	18
	WEIGHT /CTN (LB)	36	36
	SQ FT /CTN	36	36

ESD Rubber order prefix: **SSDR**

	GAUGE	.080"
	SIZE	24" x 24"
	PIECES /CTN	20
	WEIGHT /CTN (LB)	60
	SQ FT /CTN	80

DELANE® ESD Vinyl

Static Dissipative Vinyl Tile
order prefix: **DISS**

Conductive Vinyl Tile
order prefix: **SP**

	GAUGE	1/8"	1/8"	1/8"	1/8"
	SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"
	PIECES /CTN	45	16	14	6
	WEIGHT /CTN (LB)	54	36	67	65
	SQ FT /CTN	45	32	56	54

Crosswire™ Woven Vinyl Flooring

order prefix: **WVF**

	GAUGE	1/8" (3mm)
	SIZE	9.84" x 39.37"
	PIECES /CTN	16
	WEIGHT /CTN (LB)	44
	SQ FT /CTN	43.06

Recommended Adhesives

SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive
AW-510 Acrylic Wet-Set Adhesive
AP-520 Acrylic Roll/Trowelable Pressure-Sensitive Adhesive
U-705 Urethane Wet-Set Adhesive

Recommended Underlayment

CSU-400 Cork Sound Control Underlayment
FSU-410 Floating Sound Control Underlayment

Oversized 24" x 24" tiles are also available for access panel applications.

Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., SP-40HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.

Oversized 24" x 24" tiles are also available for access panel applications.

Delane® Solid Vinyl Tile

order prefix: **SSV**

	GAUGE	1/8"	1/8"	1/8"	1/8"	.080"	.080"	.080"	.080"
	SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"	12" x 12"	12" x 24"	24" x 24"	36" x 36"
	PIECES /CTN	45	16	14	6	70	26	20	10
	WEIGHT /CTN (LB)	54	36	67	65	53	37.4	61	68
	SQ FT /CTN	45	32	56	54	70	52	80	90



Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., SSV-40HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.

Geodesy® Solid Vinyl Tile

order prefix: **GE**

	GAUGE	1/8"	1/8"	1/8"	1/8"	.080"	.080"	.080"	.080"
	SIZE	12" x 12"	12" x 24"	24" x 24"	36" x 36"	12" x 12"	12" x 24"	24" x 24"	36" x 36"
	PIECES /CTN	45	16	14	6	70	26	20	10
	WEIGHT /CTN (LB)	54	36	67	65	53	37.4	61	68
	SQ FT /CTN	45	32	56	54	70	52	80	90

Note: Add HW to color number for pre-grooved Heat Weld tiles (e.g., GE-400HW) available in 24"x24" and 36" x 36" sizes in 1/8" gauge only. No upcharge.

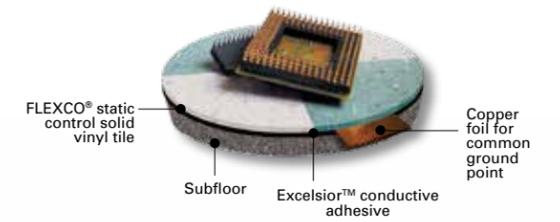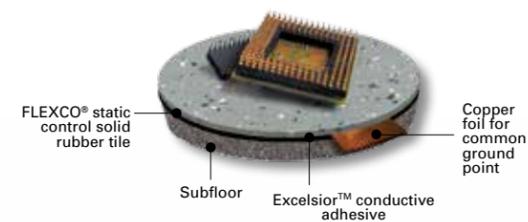

Vinyl Flooring Recommended Adhesives

SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive*
AW-510 Acrylic Adhesive
AP-520 Acrylic Roll/Trowelable Pressure-Sensitive Adhesive*
U-705 Urethane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive

*Only for Natural Elements LVT, as pressure-sensitive adhesives are not recommended for solid vinyl tile.



ESD Flooring Recommended Adhesives


ASD-800 Acrylic Wet-Set ESD Adhesive
USD-810 Urethane Wet-Set ESD Adhesive

Stair Treads

RUBBER + VINYL

Whether your priority is matching tile colors or adding safety features, FLEXCO® stair treads take design and performance up a notch. Create a seamless style from floor to floor with the high-performance of rubber or meet high-traffic demands with a durable vinyl solution. FLEXCO® stair treads deliver on every level.

Distinct Designs
Rubber Treads

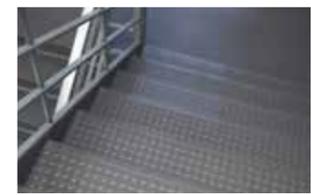

Vinyl Treads



Metal Treads



FLEXCO® Resilient Stair Treads no longer require epoxy nose filler for most installations.




Distinct Designs

RUBBER STAIR TREADS



- 1 Type TS, PVC-free rubber treads meet ASTM F2169
- 2 25-year warranty on metal-reinforced nose treads
- 3 Homogeneous construction
- 4 Natural resistance to bacteria and fungi in accordance with ASTM G21
- 5 Smooth and ribbed inserts or grit strips available



Rubber Stair Treads COLORS

Rubber stair treads are available in the following Distinct Designs Rubber Tile color palettes.

FlexTones® COLORS



See page 11 for all 57 colors available

Evolving Styles® Creative Elements COLORS




See page 13 for all 16 colors available

Evolving Styles® Wood Elements COLORS



See page 15 for all 4 colors available

SpexTones™ COLORS




See page 17 for all 22 colors available



FLEXCO® offers one of today's most extensive lines of rubber stair treads. Our system of rubber stair treads, risers, stringers and landing tiles was developed to bring style, dependability and efficiency together. So design outside the box. Choose from our Distinct Designs colors to give your project a fresh look.

Rubber treads with our exclusive metal-reinforced nose enhance performance and durability.

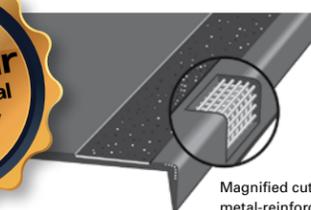

Magnified cutaway to show metal-reinforced nose.

Catholic Memorial School,
Roxbury, Massachusetts
Complete specs on pages 62-67.

Vinyl Stair Treads

COMMERCIAL + STANDARD



- 1 Commercial weight VT in 1/4" gauge for heavy traffic
- 2 Standard weight LVT in 5/32" gauge for residential applications
- 3 Exceeds ADA recommendations for slip resistance
- 4 Highly resistant to soil and stains
- 5 Ribbed inserts or grit strips available



CERTIFIED BY SCS Global Services



NSF 332-RESILIENT FLOORING PLUMBUM



Made in the U.S.A.

Vinyl Stair Treads COLORS



Black Dahlia
01

Bark
02



Medium Gray
014

Bagel
019



Almond
022

Dark Beige
037



Sahara
362

Mineral Gray
363




Greystone
364

Rain Forest
368



Khaki
371

Mocha
382



Cobalt
387

Storm Gray
395



Made of tough, long-wearing vinyl with a specially designed safety rib surface, FLEXCO® vinyl stair treads are engineered to meet all the demands of high traffic areas – particularly in settings where design counts.

Complete specs on page 68.


FlexTerior®

METAL STAIR TREADS

- 1 Extruded heat-treated aluminum is resistant to corrosion
- 2 Anti-slip epoxy coating with mineral abrasive grits
- 3 Excellent slip resistance
- 4 UV-stable, custom color matching available
- 5 Pre-drilled with countersunk holes for flush finish



FlexTerior® Treads COLORS

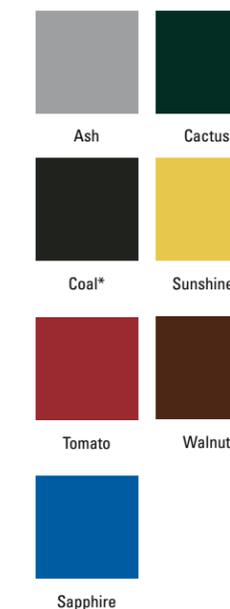

*Coal/Coal and Coal/Sunshine color combinations in stock. All other combinations are special order. Color selections must be made from actual samples.


Outdoors in rugged conditions, indoors in industrial or commercial applications, FlexTerior® treads provide a slip resistant surface that's made to last. Made of exterior-grade aluminum and inlaid with an epoxy and abrasive grit blend, FlexTerior® treads are ideal for installation on new or existing stairs and landings.

University of North Alabama,
Florence, Alabama
Complete specs on page 69.



See page 71 for information on smooth and ribbed rubber inserts or abrasive strips.



Smooth



**Heavy Duty Smooth
120, 130 & 170**

GAUGE	3/16" at nose
DEPTH	12-1/4"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	10
WEIGHT /LIN FT (LB)	1.5
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing

Grit strips for 130 in black only.
170 treads are not available with glow-in-the-dark grit strips or smooth and ribbed rubber inserts.

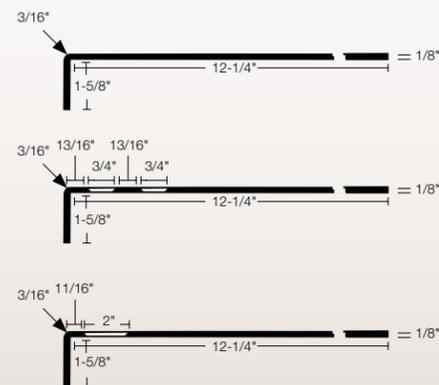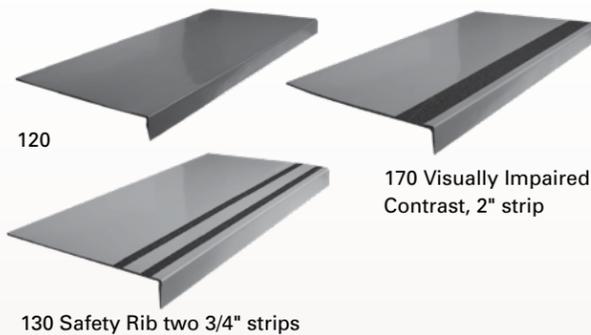



Radial®




**Extra Heavy Duty Radial®
500 & 575**

GAUGE	5/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2.8
MATCHING PROFILE	Radial® High Profile (RBT)

Exclusive metal-reinforced nose included.

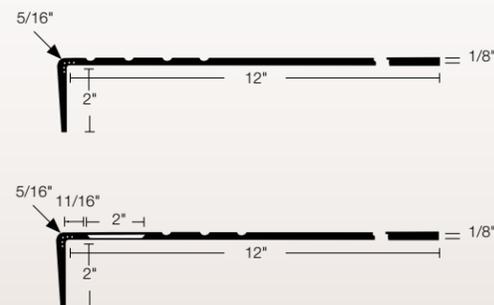
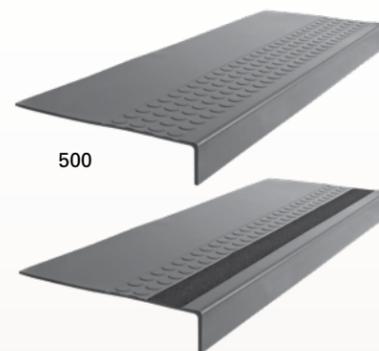


Radial®




**Heavy Duty Radial®
550 & 585**

GAUGE	3/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (72" or less), 4 (78" and up)
WEIGHT /LIN FT (LB)	2.4
MATCHING PROFILE	Radial® High Profile (RBT)

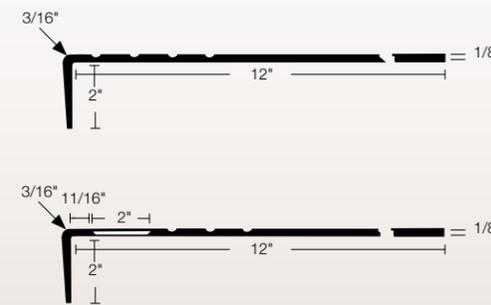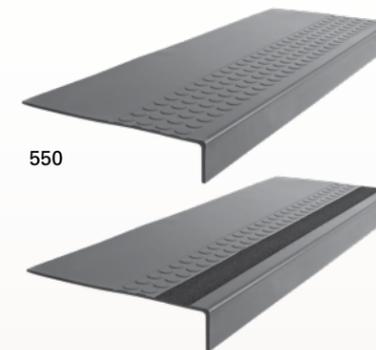



Diamond



**Extra Heavy Duty Diamond
600 & 675**

GAUGE	5/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	600 2.8 / 675 2.4
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing


Exclusive metal-reinforced nose included.

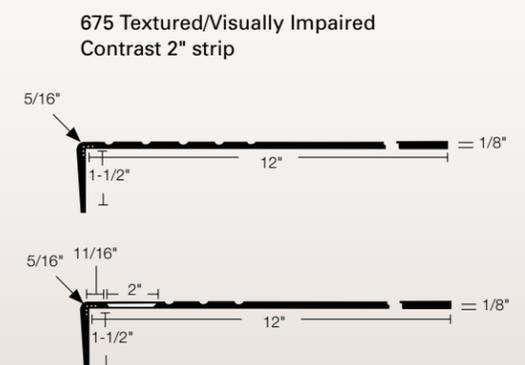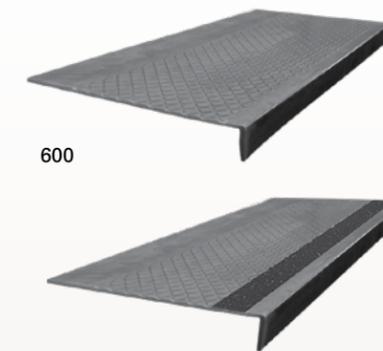





See page 71 for information on smooth and ribbed rubber inserts or abrasive strips.

Diamond




**Heavy Duty Diamond
650 & 685**

GAUGE	Square 1/4" & round 7/64" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Round Nose only up to 72" in length
PIECES /CTN	6 (72" or less), 4 (78" and up)
WEIGHT /LIN FT (LB)	2.25
MATCHING PROFILE	Smooth Tile or Sheet and Diamond Landing

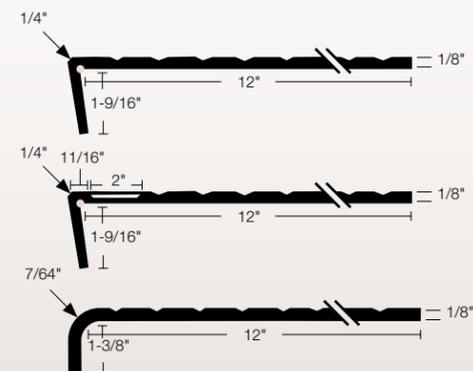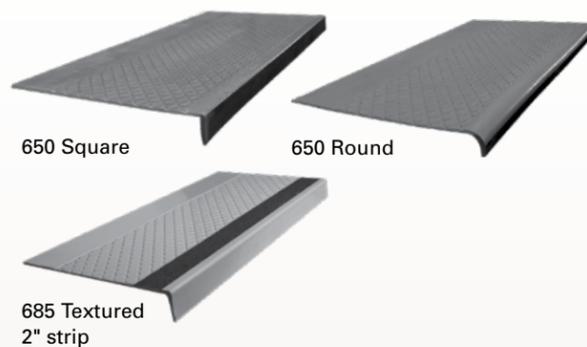


Radial® II




**Heavy Duty Radial® II
701 & 776**

GAUGE	3/16" at nose
DEPTH	12"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (72" or less), 4 (78" and up)
WEIGHT /LIN FT (LB)	2
MATCHING PROFILE	Radial® II (RGT)


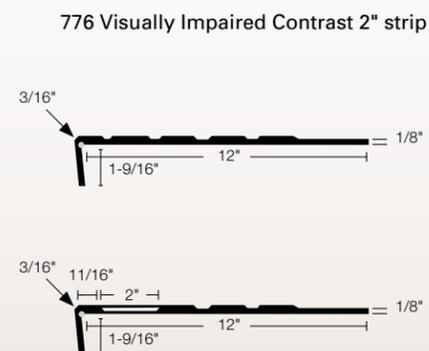


Radial® II



**Heavy Duty Extended Radial® II
701E & 776E**

GAUGE	1/4" at nose
DEPTH	15"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (48" or less), 4 (54" and up)
WEIGHT /LIN FT (LB)	2
MATCHING PROFILE	Radial® II (RGT)

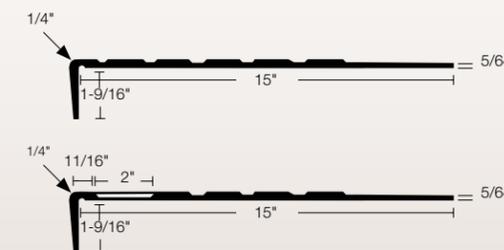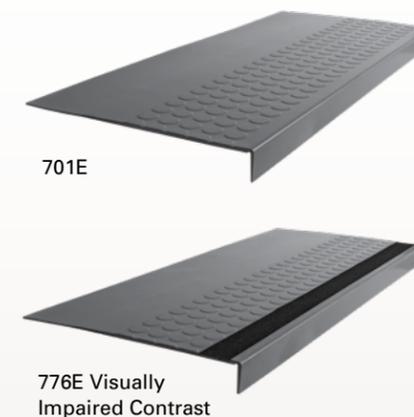



Square²



**Heavy Duty Square²
800 & 875**

GAUGE	1/4" at nose
DEPTH	12-1/4"
LENGTHS	36", 42", 48", 54", 60", 66", 72"
NOSE	Square
PIECES /CTN	6 (72" or less)
WEIGHT /LIN FT (LB)	2.8
MATCHING PROFILE	Square ² (SQ)

Exclusive metal-reinforced nose included.

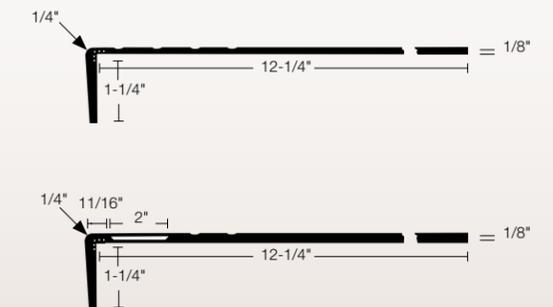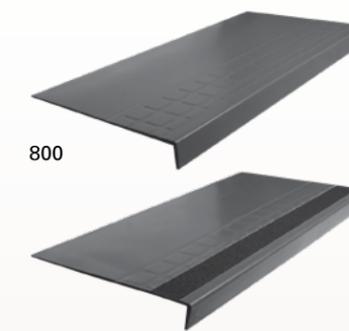

Rubber Stair Treads



See page 71 for information on smooth and ribbed rubber inserts or abrasive strips.



Heavy Duty Hammered Tread with Adjustable Square Nose 900 & 975


GAUGE	13/64" at nose
DEPTH	12-1/2"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable
PIECES /CTN	6 (72" or less), 4 (78" and up)
WEIGHT /LIN FT (LB)	2.0
MATCHING PROFILE	Hammered (SE)

Heavy Duty Radial® II One-Piece Tread with Riser 1701 & 1776


GAUGE	1/4" at nose
DEPTH	20-1/2"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square, adjustable to 60°
PIECES /CTN	6 (48" or less), 4 (54" and up)
WEIGHT /LIN FT (LB)	2.5
MATCHING PROFILE	Radial® II (RGT)

Heavy Duty Hammered One-Piece Tread with Riser 1900 & 1975


GAUGE	13/64" at nose
DEPTH	20-3/8"
LENGTHS	36", 42", 48", 54", 60", 66", 72", 78", 84", 90", 96", 102", 108"
NOSE	Square
PIECES /CTN	6 (72" or less), 4 (78" and up)
WEIGHT /LIN FT (LB)	2.5
MATCHING PROFILE	Hammered (SE)

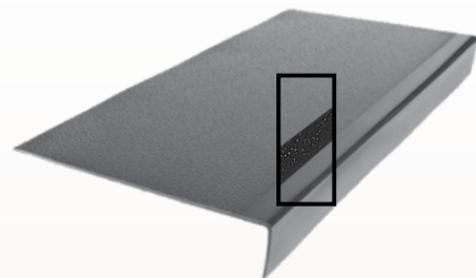




900 975 Visually Impaired Contrast 2" strip

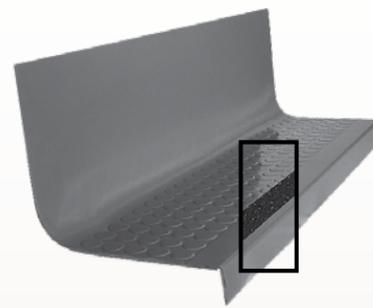


1701 1776 Visually Impaired Contrast 2" strip

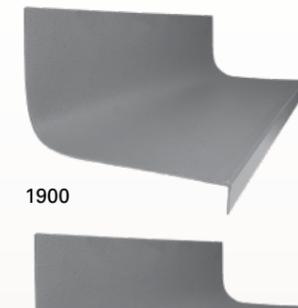

1900 1975 Visually Impaired Contrast, 2" strip

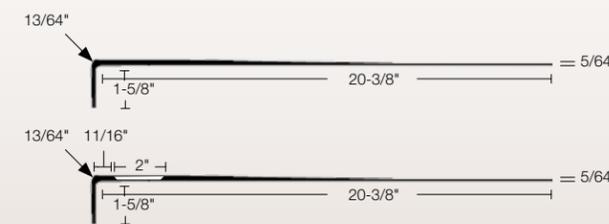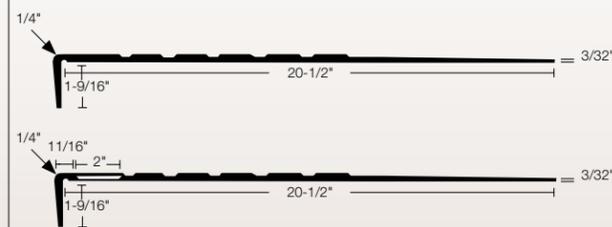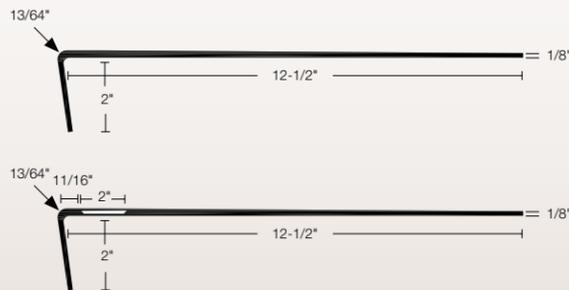


Tread Options for 701, 776, 1701, 1776, 701E, 1776E

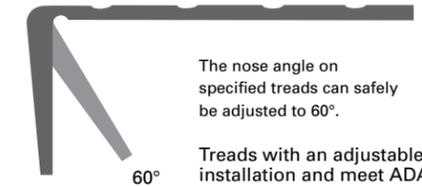

The nose angle on specified treads can safely be adjusted to 60°.

Treads with an adjustable nose help speed installation and meet ADA recommendations.

Tread Options for 500, 575, 600, 675, 800, 875

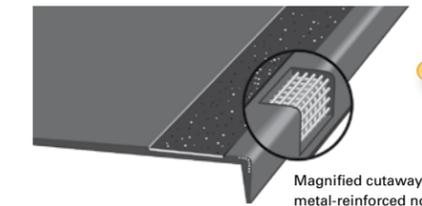


Magnified cutaway to show metal-reinforced nose.




Rubber treads with our exclusive metal-reinforced nose enhance performance and durability.

Rubber Stringers + Risers



STR



RSR

order prefix: **STR***

Stringer Material

Gauge	.080"
Size	10" x 72"
Pieces /Ctn	10
Weight /Lin Ft (lb)	0.65

order prefix: **RSR****

Risers

Gauge	1/8" solid
Size	1/8" marbled
Height	7"
Lengths	36", 42", 48", 54", 60", 72", 84", 96", 108"
Pieces /Ctn	20
Weight /Lin Ft (lb)	0.75

*Risers over 72" will be packaged 10 per carton.

*Use prefix SSTR for SpexTones™ colors. **Use prefix SRSR for SpexTones™ colors.
> Rubber stringers and risers available in FlexTones®, SpexTones™ and Evolving Styles® colors.



- ### Rubber Tread, Risers & Stringers Recommended Adhesives
- AW-510 Acrylic Adhesive
 - TP-620 Pressure-Sensitive Tape Adhesive
 - C-631 Water-Based Contact Adhesive
 - U-705 Urethane Wet-Set Adhesive
 - EW-710 Epoxy Wet-Set Adhesive
 - EN-610 Epoxy Nose Filler




Standard Safety Rib Tread

order prefix: **LVT**

GAUGE	5/32" at nose
DEPTH	12-1/4"
LENGTHS	42", 48", 72" 36" Available w/Min. Order 50 Treads
NOSE	Round or square
PIECES /CTN	10
WEIGHT /LIN FT (LB)	1.5

LVT treads are not available with glow-in-the-dark grit strips or smooth and ribbed rubber inserts.

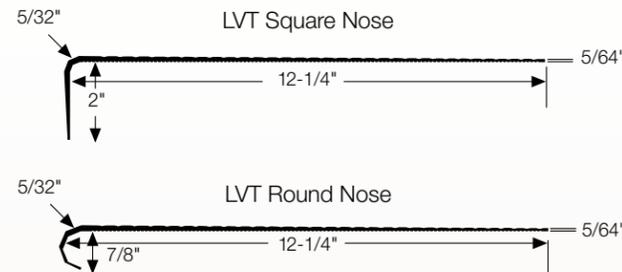


Adjustable nose portion should be secured with contact adhesive or FlexTape according to FLEXCO® instructions.

Commercial Safety Rib Tread

order prefix: **VT**

GAUGE	1/4" at nose
DEPTH	12-1/4"
LENGTHS	42", 48", 72" 36" Available w/Min. Order 50 Treads
NOSE	Round or square
PIECES /CTN	6
WEIGHT /LIN FT (LB)	2

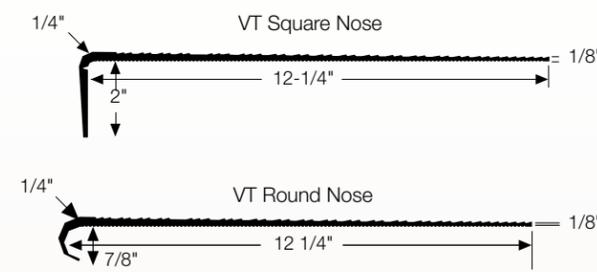



Adjustable nose portion should be secured with contact adhesive or FlexTape according to FLEXCO® instructions.

FlexTerior® Treads order prefix: **FLEX**

GAUGE	1/4" overall
DEPTH	4", 9", plus 11"
LENGTHS	36", 48" Over 48" Special Order
NOSE	Square
PIECES /CTN	6 Special Order TBD
WEIGHT /LIN FT (LB)	2.2 for 9" or 2.76 for 11"
SCREW PACKAGING	36" - 9 per set 48" - 13 per set

Note: Must indicate concrete or wood installation for proper mechanical fasteners. A premium-grade, exterior polyurethane adhesive approved by the adhesive manufacturer for bonding aluminum directly to concrete, exterior-grade plywood or metal is required.

*Leave room for contraction and expansion of treads when taking measurements for depth and length.

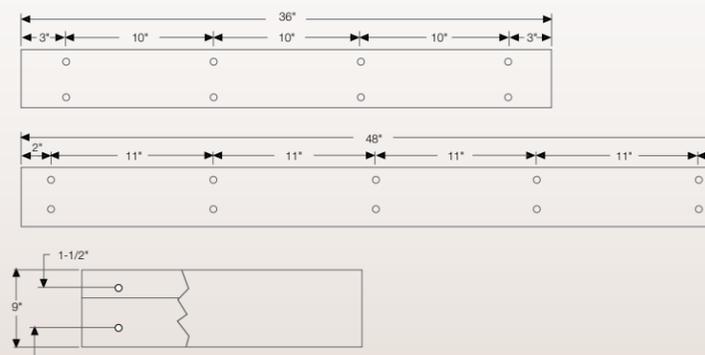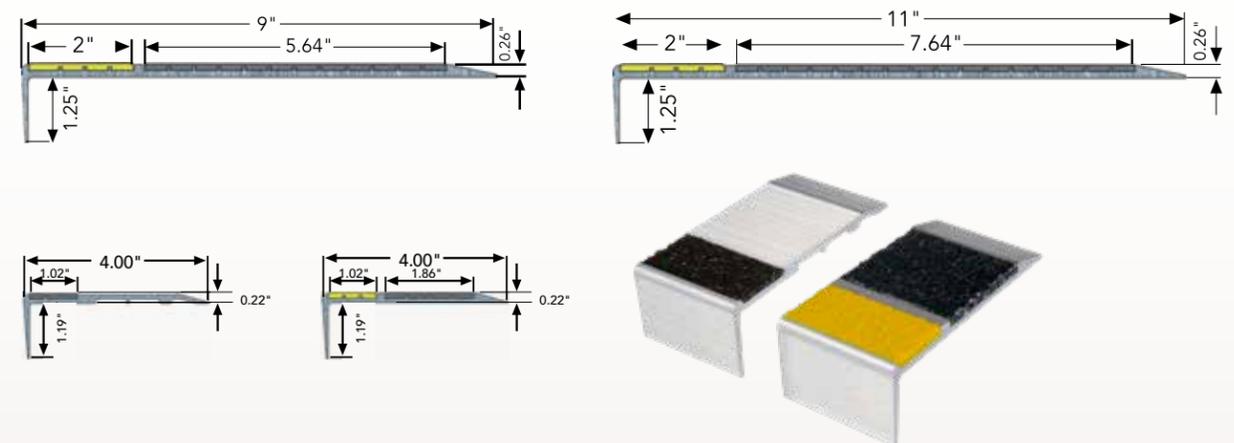

Adhesive Options
Specify type of installation for correct screws. Premium-grade, exterior polyurethane construction adhesive required.


Vinyl Stringers + Risers



STV

order prefix: **STV**

Stringer Material
Gauge .080"
Size 10"
Length 50' rolls
Weight/ 38
Lin Ft (lb) 0.75



RSV


order prefix: **RSV**

Risers
Gauge .080" solid
Height 7"
Length 50' rolls
Weight/ 38
Lin Ft (lb) 0.75



Vinyl Tread, Risers & Stringers Recommended Adhesives

- AW-510 Acrylic Adhesive
- TP-620 Pressure-Sensitive Tape Adhesive
- C-631 Water-Based Contact Adhesive
- U-705 Urethane Wet-Set Adhesive
- EW-710 Epoxy Wet-Set Adhesive
- EN-610 Epoxy Nose Filler

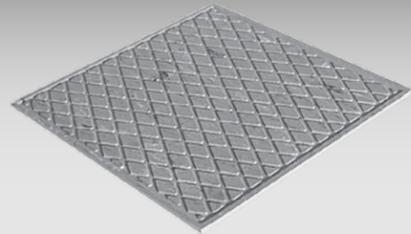

Diamond Landing Rubber Tile


order prefix: **DSA**

GAUGE	3/16"
SIZE	27" x 27"
PIECES /CTN	6
WEIGHT /CTN (LB)	40.2
SQ FT /CTN	30.37



Rubber risers, stringers, landing tiles, assurance detectable warning tile (ADWT) and other accessories make up the common denominators for use with FLEXCO® rubber stair treads.

- > Diamond pattern landing tiles are available in Evolving Styles®, SpexTones™ and FlexTones® colors to match our stair treads.

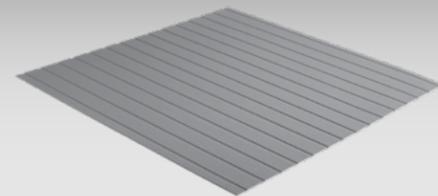

Warning Tile

order prefix: **ADWT**

GAUGE	1/8"	1/8"	1/8"
SIZE	12" x 12"	12" x 36"	36" x 36"
WEIGHT /CTN (LB)	50	60	60
SQ FT /CTN	45	54	54




Assurance detectable warning tile (ADWT) features deeply set, pre-grooved strips which can be "felt" through a cane or walking device to alert the visually impaired of approaching interior stairways.

- > Meets ANSI A117.1-2017 Section 705.4 for detectable warnings in interior locations.



Warning Tile Colors

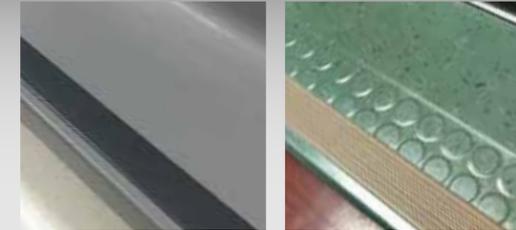


Smooth + Ribbed Rubber Inserts

FLEXCO® stair treads with smooth and ribbed inserts provide a tactile surface that's durable and easy to clean. In addition, the low-profile 2" strips are available in FlexTones® colors and 075 Canary for easy coordination with our wall base, tiles, risers, stringers and accessories.

- > Available in FlexTones® colors plus Canary Yellow.
- > Ideal for vinyl and rubber treads.
- > Available to meet ADA requirements for contrasting color.
- > Canary smooth and ribbed inserts meet OSHA safety standards.
- > 2" strips meet California Code of Regulations, Title 24.

smooth order prefix: **SVI** ribbed order prefix: **RVI**

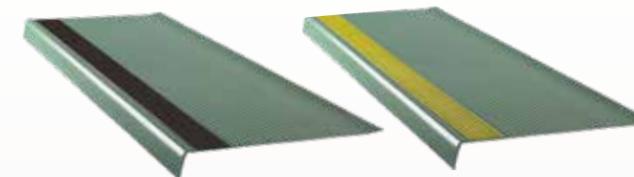

Smooth + Ribbed Rubber Insert Strip Colors

Smooth + ribbed rubber inserts are available in all 57 FlexTones® colors shown, plus Canary Yellow.



Abrasive Strips

order prefix: **GRIT**

Rubber and vinyl stair treads with abrasive grit strips are available in Glow-in-the-Dark and other colors to meet OSHA, ADA, CA Title 24 and DIN requirements. The 3/4" strips for the 130 treads are available in black only and the 2" strips are available in all colors listed below.

- > Available to meet ADA requirements for contrasting color.
- > Yellow stripping meets OSHA safety standards.
- > Glow-in-the-Dark luminescent safety strips comply with UL 1994 for Luminous Egress Path Marking Systems.
- > 2" strips meet California Code of Regulations, Title 24.

Abrasive Grit Strip Colors



Color selections must be made from actual samples.

Wall Base

RUBBER + VINYL

t's the perfect finishing touch. The final element of style to transition your look from wall to floor.

And FLEXCO® provides the fine design lines to enhance your space with color, durability and added dimension. From the smooth runs of Wallflowers® that conform to curves and angles with ease, to the many faces of Base Sculptures™, FLEXCO® wall base brings a room together.



Wallflowers®



Wood Elements™



Base Sculptures™



Base 2000™



Vinyl



Health Design™



Wallflowers®

PREMIUM RUBBER WALL BASE



- 1 Type TS vulcanized rubber
- 2 Superior finish, resists scuffing and gouging
- 3 FlexOne pricing – solid colors all one price
- 4 Will not shrink – dimensionally stable
- 5 Homogeneous color



CERTIFIED BY SCS Global Services



NSF/ANSI 321 - RESILIENT FLOORING PLATFORM



Made in the U.S.A.

W

allflowers® is the highest quality thermoset – Type TS – vulcanized rubber base on the market. It retains its visual appeal and color over the long term with very little maintenance, so it's perfect for minimizing life cycle costs.

FLEXCO®
AMERICAN-MADE FLOORING

Wallflowers® COLORS



The Wallflowers® colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Wallflowers® are also available 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

Complete specs on pages 86-87.

FLEXCO
AMERICAN-MADE FLOORING

Wood Elements™

WALL BASE

FLEXCO

5
TOP

- 1 Type TP thermoplastic rubber
- 2 Resilient rubber-vinyl blend provides good flexibility
- 3 Durable finish
- 4 Dimensionally stable
- 5 Precise gauging and a durable laminated finish



certified by SCS Global Services



NSF 332 - RESILIENT FLOORING PLATINUM



Made in the U.S.A.

Wood Elements™
COLORS



Simply Cherry
WEC-104



Vintage Pecan
WEC-105



Amber Maple
WEC-106



Classic Oak
WEC-107

W

ith FLEXCO® Wood Elements™ wall base, you get a thermoplastic Type TP rubber base that gives you the look of true wood base and the many benefits of rubber base at a lower price than wood molding. It's everything you need to create unique and eye-catching flooring designs.

Complete specs on page 88.

Base Sculptures™

WALL BASE SYSTEM



- 1 Type TP thermoplastic rubber
- 2 40' seamless rolls available in 4 profiles (Harmony, Merit, Charisma and Reflection) for seamless installations; all other profiles available in 8' lengths
- 3 Color-coordinated inside and outside corner blocks
- 4 FlexOne pricing – solid colors all one price
- 5 Paintable surface for infinite color possibilities




Member of SCS Global Services



NSF/ANSI 332 - RESILIENT FLOORING PLATFORM



Made in the U.S.A.

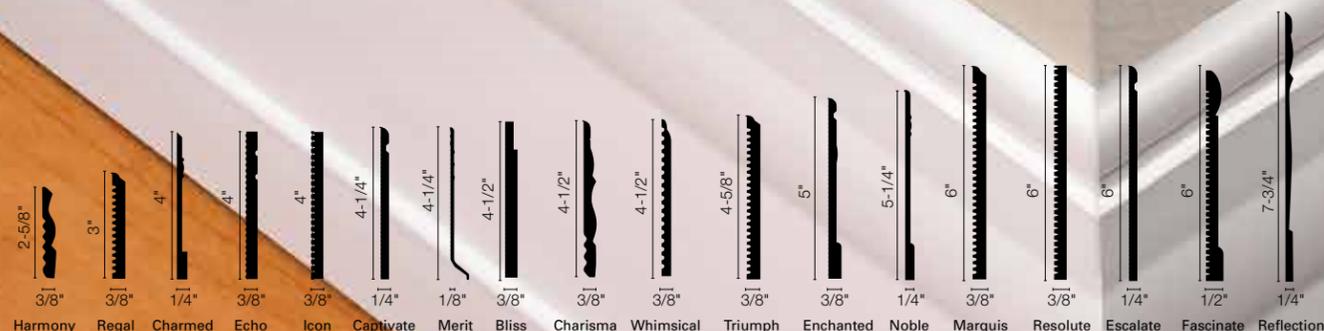

Base Sculptures™ COLORS



The Base Sculptures™ colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. The Base Sculptures™ palette also includes 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

Complete specs on pages 88-89.

Make better to make you look better. In today's world where expectations are high and product performance is required, FLEXCO® Base Sculptures™ are the ideal choice. Available in 61 colors and 18 distinct profiles, FLEXCO gives you the ultimate in creative flexibility.

Base 2000™

WALL BASE

FLEXCO



- 1 Type TP thermoplastic rubber
- 2 Resilient rubber-vinyl blend provides good flexibility
- 3 Dimensionally stable
- 4 Precise gauging and uniform height conceal floor and wall irregularities
- 5 FlexOne pricing – solid colors all one price



CERTIFIED BY
SCS Global Services



NSFANSI 331 – RESILIENT FLOORING
PLATFORM



Made in
the U.S.A.

Base 2000™ COLORS

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Baby's Breath 018	Neutral 020
Almond 022	Pebble 023	Stone 024	Light Gray 025	Arctic White 029
Meridian Bone 030	Dune 032	Doe 033	Barley 034	Delft Pansy 035
Gray 036	Dark Beige 037	Outer Banks 038	Fjord 043	True White 046
Vizcaya Palm 047	Berry 048	Winsor 049	Polo Green 052	Milk Chocolate 056
Blue Shadow 058	Plum Pudding 059	Sunflower 061	Earth 062	Mediterranean Green 063
Honey 064	Cappuccino 065	Black Brown 071	Chocolate 072	Burnt Sienna 073
Seashell 074	Driftwood 077	Umber 078	Red Rock 079	Sierra Red 080
Antique White 089	Nickel 090	Titanium 091	Graystone 092	Graphite 093
Buff 094	Gunmetal 095	Goldenrod 096	Basil 097	Wheat 098
Midnight Blue 099				

The Base 2000™ colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Base 2000™ is also available in 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

With FLEXCO® Base 2000™, you get a thermoplastic Type TP rubber base that gives you the many benefits of rubber at a lower price.

Complete specs on pages 86-87.

Vinyl

WALL BASE

FLEXCO



- 1 Type TV vinyl
- 2 Economical wall base option
- 3 FlexOne pricing – solid colors all one price
- 4 Superior finish resists scuffing and gouging
- 5 Available in 61 colors



CERTIFIED BY SCS Global Services



NSFAM01 332- RESILIENT FLOORING PLUS/UM



Made in the U.S.A.

F

LEXCO® Vinyl Type TV wall base offers a superior color finish and quality construction, yet it's made from vinyl, which makes it more economical than rubber for certain applications. When you're looking to save some expense, look no further than FLEXCO® vinyl. No limitations means just that: all wall base sizes are available in all colors, and no matter which shade you choose, all colors in each line are all priced the same.

Robert F. Kennedy Community School,
Los Angeles, California
Complete specs on page 87.

FLEXCO®
AMERICAN-MADE FLOORING

Vinyl Wall Base COLORS

Black Dahlia 01	Bark 02	Charcoal 03	Coffee Bean 04	Corn Silk 05
Cobblestone 06	Ginger 07	Autumn 08	Linen 011	Burlwood 012
Blue 013	Medium Gray 014	Taupe 016	Baby's Breath 018	Neutral 020
Almond 022	Pebble 023	Stone 024	Light Gray 025	Arctic White 029
Meridian Bone 030	Dune 032	Doe 033	Barley 034	Delft Pansy 035
Gray 036	Dark Beige 037	Outer Banks 038	Fjord 043	True White 046
Vizcaya Palm 047	Berry 048	Winsor 049	Polo Green 052	Milk Chocolate 056
Blue Shadow 058	Plum Pudding 059	Sunflower 061	Earth 062	Mediterranean Green 063
Honey 064	Cappuccino 065	Black Brown 071	Chocolate 072	Burnt Sienna 073
Seashell 074	Driftwood 077	Umber 078	Red Rock 079	Sierra Red 080
Antique White 089	Nickel 090	Titanium 091	Graystone 092	Graphite 093
Buff 094	Gunmetal 095	Goldenrod 096	Basil 097	Wheat 098
Midnight Blue 099				

The Vinyl Wall Base colors shown include all 57 FlexTones® colors (see page 11) to match rubber floor tiles, stair treads, ribbed inserts, risers, stringers and accessories. Vinyl Wall Base is also available in 018 Baby's Breath, 029 Arctic White, 046 True White and 089 Antique White.

Health Design™

WALL BASE



- 1 Type TP thermoplastic rubber
- 2 Available in 6' lengths
- 3 1/8" tapers to .080" gauge for use with multiple types of flooring
- 4 6" Height for better protection of wall surfaces
- 5 Heat-weldable for seamless floor installation



CERTIFIED BY SCS Global Services



NSF/ANSI 332 - RESILIENT FLOORING PLATINUM



Made in the U.S.A.

A

A seamless look that is cleaner in every way. In healthcare settings, the place where the floor meets the wall is critical. Not only for aesthetics, but for cleanliness. Health Design Wall Base gives you a seam that looks clean - and is clean. Bacteria stays out, and you get a seamless look with easy installation.

FLEXCO®
AMERICAN-MADE FLOORING

Health Design™
Wall Base
COLORS



Black Dahlia
01

Bark
02



Medium Gray
014

Baby's Breath
018



Almond
022

Arctic White
029




Dune
032

Delft Pansy
035




Dark Beige
037

Vizcaya Palm
047

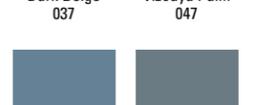

Winsor
049

Blue Shadow
058

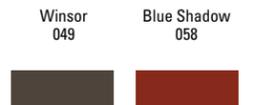

Black Brown
071

Red Rock
079



Sierra Red
080

RUBBER WALL BASE

Complete specs on page 88.

Wallflowers® order prefix: **WF**

GAUGE	1/8"
WALL HEIGHTS	2-1/2", 4", 4-1/2" and 6"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
2-1/2" COVE	30
2-1/2" STRAIGHT	26
4" COVE	48
4" STRAIGHT	43
4-1/2" COVE	50
6" COVE	69
6" STRAIGHT	69

Base 2000™ order prefix: **B2**

GAUGE	1/8"
WALL HEIGHTS	2-1/2", 4", 4-1/2" and 6"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
2-1/2" COVE	27
2-1/2" STRAIGHT	26
4" COVE	39
4" STRAIGHT	38
4-1/2" COVE	45
4-1/2" STRAIGHT	45
6" COVE	60
6" STRAIGHT	60

Vinyl order prefix: **VCB**

GAUGE	1/8" or .080"
WALL HEIGHTS	2-1/2", 4", and 6"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	1/8" .080"
2-1/2" COVE	30 20
2-1/2" STRAIGHT	26 22
4" COVE	40 32
4" STRAIGHT	43 32
6" COVE	69 50
6" STRAIGHT	69 52


Rubber Corner Blocks (INSIDE & OUTSIDE)

HEIGHT	Pcs /Ctn	Lbs /Ctn	
2-3/4"	15	1.65	Custom height orders available in 1/2" increments.
4-1/4"	15	2.10	
6-1/4"	15	3.00	


Mini Corners (FOR STRAIGHT BASE ONLY)

HEIGHT	Pcs /Ctn	Lbs /Ctn	
		Inside	Outside
2-3/4"	15	0.67	0.77
4-1/4"	15	1.04	1.18
6-1/4"	15	1.53	1.74


Cove




Straight




Cove




Straight




Cove




Straight



Rubber Corner Blocks

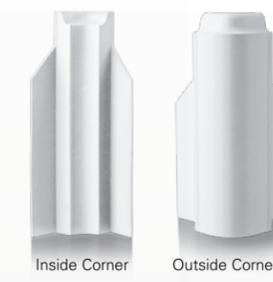

Mini Corners

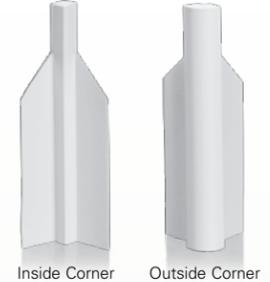

Rubber & Vinyl Wall Base & Corners Recommended Adhesives

- WB-600 Acrylic Wall Base Adhesive
- C-631 Water-Based Contact Adhesive

*For non-porous surfaces, use premium-grade, brush-on contact cement.

Wall Base Configurations




Straight base for use with carpets




Cove base for hard-surface floors

Color-matched inside and outside corners available

Corners are not available for the following:
4-1/2" or 6" inside corners (IC)
6" outside flat corners (OC)




120' rolls available for seamless installation




Wood Elements™ order prefix: **WEC**

GAUGE	1/8"
WALL HEIGHTS	4"
LENGTHS	48" lengths and 120' rolls
LIN FT/CTN	120' (lengths or rolls)
CORNERS/CTN	30
WEIGHT /CTN (LB)	
4" COVE	44



Health Design™ order prefix: **HDB**

GAUGE	1/8" tapers to .080"
WALL HEIGHTS	6"
LENGTHS	72" lengths
LIN FT/CTN	36'
WEIGHT /CTN (LB)	
WALL BASE	34

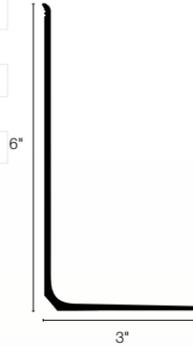

Base Sculptures™ See below for order prefixes.

GAUGE	1/8" to 1/2" nominal
WALL HEIGHTS	2-5/8", 3", 4", 4-1/4", 4-1/2", 4-5/8"
LENGTHS	5", 5-1/4", 6" and 7-3/4"
LIN FT/CTN	40'
CORNERS/CTN	15
WEIGHT /CTN (LB)	
SC HARMONY	25 40' roll
SMT MERIT	16 40' roll
SC CHARISMA	40 40' roll
SC REFLECTION	45 40' roll
SCR REGAL	29 8' pcs, 5 pcs per ctn
SCH CHARMED	27 8' pcs, 5 pcs per ctn
SEC ECHO	37 8' pcs, 5 pcs per ctn
SCI ICON	40 8' pcs, 5 pcs per ctn
SCC CAPTIVATE	40 8' pcs, 5 pcs per ctn
SCB BLISS	44 8' pcs, 5 pcs per ctn
SCW WHIMSICAL	45 8' pcs, 5 pcs per ctn
SCT TRIUMPH	47 8' pcs, 5 pcs per ctn
SCN ENCHANTED	37 8' pcs, 5 pcs per ctn
SNB NOBLE	24 8' pcs, 5 pcs per ctn
SCM MARQUIS	58 8' pcs, 5 pcs per ctn
SCE ESCALATE	27 8' pcs, 5 pcs per ctn
SRE RESOLUTE	60 8' pcs, 5 pcs per ctn
SCF FASCINATE	63 8' pcs, 5 pcs per ctn




Corners

for Base Sculptures

Rubber Corner Blocks

HEIGHT	Pcs /Ctn	Lbs /Ctn
Inside & Outside		
4-3/4"	15	2.35
8"	15	3.84

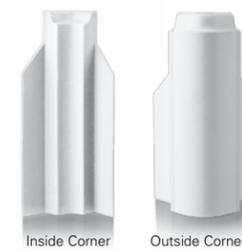


Custom height orders available in 1/2" increments.



Rubber & Vinyl Wall Base & Corners Recommended Adhesives

WB-600 Acrylic Wall Base Adhesive
C-631 Water-Based Contact Adhesive

*For non-porous surfaces, use premium-grade, brush-on contact cement.

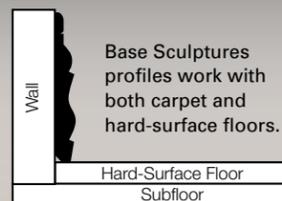

166 Quarter Round Trim

Now designers have another option that outperforms wood and raises the aesthetic level of any application, including Base Sculptures. FLEXCO® 1/2" x 1/2" Quarter Round trim is the perfect finishing touch for many wall base installations and available by request. Quarter Round trim packs as 1-40 ft./roll or in 10-12 ft. sections.



Welding Beads

R U B B E R + V I N Y L



The FLEXCO® Unitized Installation System allows rubber and vinyl tile to be seamlessly installed as a one-piece floor. Pre-grooved floor tiles are fused together with welding beads in matching or contrasting colors. The process is easy, fast and permanent, and the result is a completely seamless “unitized” floor. Welding beads are ideal in areas that have stringent requirements for added hygiene, including operating theaters, laboratories, clean rooms and other areas subjected to continual and extensive wet cleaning.



Rubber order prefix: WBR

FLEXCO® Rubber Welding Beads are available in matching or contrasting colors for rubber tiles or sheets that can be welded.



50 FOOT ROLLS
24" X 24" TILES | Divide sq. ft. by 50 for rolls required

400 FOOT ROLLS
24" X 24" TILES | Divide sq. ft. by 400 for rolls required

Vinyl order prefix: WBV

FLEXCO® Vinyl Welding Beads are available in variety of colors. Custom Colors are also available with a minimum quantity of 400 linear feet.




50 FOOT ROLLS
24" X 24" TILES | Divide sq. ft. by 50 for rolls required

36" X 36" TILES | Divide sq. ft. by 75 for rolls required

400 FOOT ROLLS
24" X 24" TILES | Divide sq. ft. by 400 for rolls required
36" X 36" TILES | Divide sq. ft. by 600 for rolls required



> Welding Beads are .160" (4mm) in size.

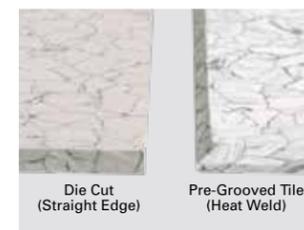

Pre-grooved 24" x 24" and 36" x 36" tile speeds installation.



Welding bead is placed in the groove and fused by heat application.



Welding bead is trimmed in two steps, with an initial trim using a trim plate.



FLEXCO® tile may be installed as self-cover.

Subleveling





SYSTEMS

FLEXCO
AMERICAN-MADE FLOORING

SUBLEVELLING SYSTEMS

Subleveling Systems SPECIFICATIONS

Item	Gauge	Size	Scoring	Number/ Carton	Wt./ Carton
1/4" Reducer	1/4" taper to .040"	12" x 48"	3/32", 1/8", 3/16"	8	37 lbs.
3/8" Reducer	3/8" taper to .040"	12" x 48"	3/32", 1/8", 3/16", 1/4", 5/16"	8	65 lbs.
1/8" Reducer	1/8" taper to .040"	12" x 48"		16	52 lbs.
1/2" Reducer	1/2" taper to .040"	18" x 48"	3/32", 1/8", 3/16", 1/4", 5/16", 3/8"	4	72 lbs.

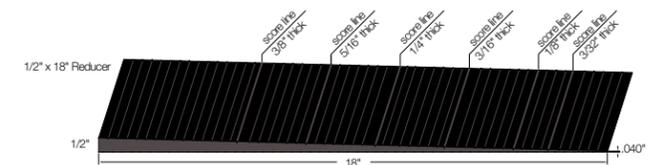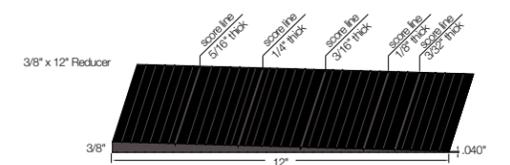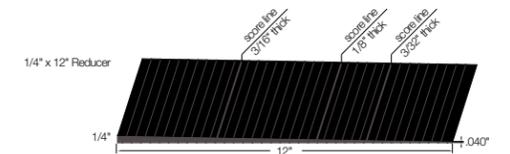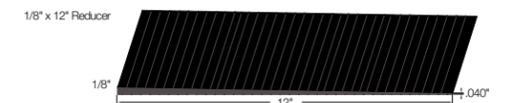

- 1 Rubber/vinyl thermoplastic blend in 1/8", 1/4", 3/8" and 1/2" pre-scored for easy installation
- 2 Applies directly over old wood, concrete, vinyl and steel subfloors
- 3 More flexible than other vinyl leveling products
- 4 Agent added for protection against mold and bacteria
- 5 Eliminates waiting on time-consuming leveling compounds to dry



CERTIFIED BY SGS Global Services



NSF/ANSI 301 - RESILIENT FLOORING FLEBLES



Made in the U.S.A.

W

hen the surface of one subfloor is higher or lower than another, it not only creates a formula for poor aesthetics, it increases the chances of accidents – particularly in high traffic environments. Leave it to FLEXCO® accessories to make the rough spots easy, allowing you to leave more complex approaches behind while looking forward to your next big task at hand. FLEXCO® subleveling systems can put you back on even ground with perfect solutions for all kinds of installations, from educational institutions and retail outlets to hospitality sites and travel centers.

Color varies due to recycled content.



Subleveling Systems Recommended Adhesives
AW-510 Acrylic Adhesive
U-705 Urethane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive



FLEXCO® vinyl accessories put the finishing touch on any project. Available in many different styles and 57 FlexTones® colors, it's easy to coordinate them with our tile, stair treads and wall base.

Features and Benefits

- > Available in 57 FlexTones® colors which coordinate with tiles, wall base and treads (except accessories 101, 102, 140, 141, 194 and 195).
- > FlexOne pricing – solid colors all one price.
- > All adapters, reducers and thresholds meet ADA requirements for transitioning from one floor to another.




Recommended Adhesives for Stair Nosings
EN-610 Epoxy Nose Filler Adhesive


Recommended Adhesives for Accessories Prior To / Following Floor Installation
EN-610 Epoxy Nose Filler Adhesive
C-631 Water-Based Contact Adhesive
EW-710 Epoxy Wet-Set Adhesive

Recommended Adhesives for Accessories During Floor Installation
AW-510 Acrylic Adhesive
U-705 Urethane Wet-Set Adhesive
EW-710 Epoxy Wet-Set Adhesive


Adapters/Transitions




193 | Corner Guard
2-1/4" return corner protector
Colors: FlexTones
Packing /Ctn: 6 / 54" sections




101 | Aluminum Single Flange Track
Smooth single flange used with snap-down dividers
Packing /Ctn: 12 / 12' sections




102 | Plastic Single Flange Track
Plastic single flange used with snap-down dividers
Colors: Black only
Packing /Ctn: 10 / 12' sections




160 | 3/8" Ceramic/Wood Carpet Transition
Molding for joining 5/16" carpet to 3/8" ceramic/wood flooring
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




163 | Snap-Down T Edge Divider
Joins carpets
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




167 | Tile and Carpet Joiner
Joins 1/4" carpet to 1/8" tile
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




161 | Snap-Down Edging
1-1/4" wide removable section joins tile to wood
Colors: FlexTones
Packing /Ctn: 20 / 12' sections



162 | Snap-Down Divider Joins carpet to tile
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




164 | Snap-Down Super Edge
1-7/8" wide removable section joins carpet to wood/ceramic
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




168 | Resilient-to-Carpet Transition
Provides smooth carpet-to-tile transition
Colors: FlexTones
Packing /Ctn: 20 / 12' sections


Edge Guards




183 | 1/4" Transition Edge Guard
1/4" butting gauge undercut
Colors: FlexTones
Packing /Ctn: 5 / 12' sections



184 | 5/16" Transition Edge Guard
5/16" butting gauge undercut
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




185 | 3/16" Transition Edge Guard
Undercut, flange and transition combined
Colors: FlexTones
Packing /Ctn: 20 / 12' sections




186 | 1/4" Carpet Edge Guard
Undercut 1/4" with 2" transition
Colors: FlexTones
Packing /Ctn: 10 / 12' sections


Cove Caps




174 | Tapered Carpet Cove Cap
Trim for coved carpet
Colors: FlexTones
Packing /Ctn: 20 / 12' sections



175 | Square Carpet Cove Cap
Cove cap for 1/4" carpet
Colors: FlexTones
Packing /Ctn: 40 / 12' sections




197 | Square Resilient Cove Cap
1/8" square cap for coved sheet vinyl
Colors: FlexTones
Packing /Ctn: 50 / 12' sections




197R | Tapered Resilient Cove Cap
Cap for coved sheet goods or vinyl tile
Colors: FlexTones
Packing /Ctn: 50 / 12' sections


Stair Nosings




171 | Carpet Stair Nosing
Undercut nosing for 1/4" and 5/16" carpet
Colors: FlexTones
Packing /Ctn: 5 / 12' sections




189 | Top Set Stair Nosing
Square nose for light-duty applications
Colors: FlexTones
Packing /Ctn: 5 / 12' sections



187 | Lap Type Square Stair Nosing
Lap type for butting 1/8" tile
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




201 | Overlap Stair Nosing
Square nosing, ribbed safety surface
Colors: FlexTones
Packing /Ctn: 10 / 12' sections




202 | Double-Butt Carpet Stair Nosing
Butt to 1/4" carpet
Colors: FlexTones
Packing /Ctn: 5 / 12' sections


Fillets/Tub Mouldings



140 | 1" Tub Moulding
High-gloss, self-stick finish cove for bathtub, counters and shelves
Colors: White or Almond
Packing /Ctn: 24 / 5' sections



141 | 1-1/2" Tub Moulding
High-gloss, self-stick finish cove for bathtub, counters and shelves
Colors: White or Almond
Packing /Ctn: 24 / 5' sections




194 | Fillet Moulding
Superb backing for flashing up the wall
Colors: White only
Packing /Ctn: 25 / 5' sections




195 | Cove Stick Fillet
Superb backing for flashing up the wall
Colors: Black only
Packing /Ctn: 10 / 12' sections


Reducers



156 | Underslung Reducer
Binder-bar edging for resilient flooring undercut
Colors: FlexTones
Packing /Ctn: 2 / 35' coils




177A | 3/8" Carpet Edge Reducer
Designed especially for carpet
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



158 | 3/8" Carpet Edge Reducer
Designed especially for 3/8" carpet
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



177B | 5/16" Carpet Edge Reducer
Reducer for 5/16" material including FlexTuff®
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



157 | 1/2" Reducer
For carpet, ceramic tile or wood floors
Colors: FlexTones
Packing /Ctn: 10 / 12' sections



192A | 1/8" Tile Reducer Strip
Beveled edge for resilient flooring material
Colors: FlexTones
Packing /Ctn: 50 / 3' sections

Adhesives



FOR TILE, TREAD + WALL BASE

ile. Sheet. Wall base. Stair treads. Optimum performance starts with quality installation, and Excelsior™ Adhesives position you to get expected results time after time. They're the perfect match for our products and your production schedule.



Color-Matched Caulks

FLEXCO® color-matched caulks are in stock to coordinate with the colors in our FlexTones® color matching system. They're ideal for touch-ups or hiding installation gaps. Custom colors to match other colors in the line are available.



Spread Rates

SP-500 Acrylic Aerosol Pressure-Sensitive Adhesive

CASE QTY

Acrylic aerosol pressure-sensitive adhesive used for installation of LVT and rubber flooring products. Water-based and VOC free, it is highly aggressive with high resistance to moisture and plasticizers. It has excellent initial grab and shear strength making it ideal for fast track construction and commercial installations.

Coverage: Rubber Flooring – 100 sq. ft. per unit; Vinyl Flooring – 150 sq. ft. per unit.

AW-510 Acrylic Adhesive

G 4

Acrylic adhesive used for the permanent installation of dimensionally stable vinyl, rubber and quartz flooring and stair tread products. Water-based, low VOC and solvent-free, yet highly aggressive with a high resistance to moisture and plasticizer migration. Adhesive is suitable for heavy traffic or rolling loads and is easy to clean up.

Porous Coverage 160 sq.ft. per gallon / Non-porous Coverage 225 sq.ft. per gallon.

AP-520 Acrylic Roll/Trowelable Pressure-Sensitive Adhesive

3

Acrylic, roller or trowel applied pressure-sensitive adhesive products. It is water-based and VOC free, yet highly aggressive with high resistance to moisture and plasticizers. Suitable for heavy traffic of rolling loads. After installation flooring is immediately usable when using AP-520 and can be immediately heat welded.

Roller Coverage: 1200 sq. ft. per unit

Trowel Coverage: 675 sq. ft. per unit

WB-600 Acrylic Wall Base Adhesive

C G 4

Solvent-free, high performance, acrylic wet-set adhesive specifically designed for permanent installation of rubber, TPR and vinyl wall base products and pre-formed corners on vertical surfaces.

Trowel Coverage: 180-340 lin. ft. per gallon depending on trowel/base size

Cartridge Coverage: 30-70 lin. ft. per cartridge depending on base size

EN-610 Epoxy Nose Filler Adhesive

C

Two-component, solvent-free epoxy caulk adhesive designed for use with indoor installations of stair treads and stair nosings. Designed to prevent flex, indentation and premature wear or damage to rubber or vinyl stair treads and stair nosings.

½" Coverage: 25 lin. ft. per cartridge

¼" Coverage: 50 lin. ft. per cartridge

TP-620 Pressure-Sensitive Tape Adhesive

CASE QTY

Solvent-free, pressure-sensitive tape-based adhesive designed for use with indoor installations of stair treads, risers, stringers and cove fillet sticks. It is designed specifically to permanently adhere rubber or vinyl products. Allows for installations to resume use immediately.

Dimensions: 1" x 164' (6 per case); 4" x 164' (3 per case); 9.5" x 164' (1 per case)

C-631 Water-Based Contact Adhesive

Q

A highly aggressive contact adhesive used for the permanent installation of vinyl and rubber resilient flooring, stair treads, wall base, flash coving and accessories in horizontal or vertical installations over porous and non-porous substrates in indoor applications. It is a low odor, non-flammable and solvent-free product.

Coverage: 20-40 sq. ft. per unit; 120-140 lin. ft. per unit

U-705 Urethane Wet-Set Adhesive

3

Premium, water resistant, single component urethane adhesive used for the installation of resilient flooring products, athletic flooring including recycled or crumb rubber flooring products. It is free of water, solvents and VOCs. With extremely high shear strength it is the perfect choice for areas with heavy traffic and rolling loads. It can be installed over porous and non-porous substrates in indoor and outdoor applications, allowing for the installation of flooring materials in entrances or areas that are not temperature controlled.

Porous Coverage: 160 sq. ft. per gallon

Non-Porous Coverage: 235 sq. ft. per gallon
Athletic Flooring Porous Coverage: 135 sq. ft. per gallon

Athletic Flooring Non-Porous Coverage: 160 sq. ft. per gallon

EW-710 Epoxy Wet-Set Adhesive

G

Non-flammable two-part urethane-modified epoxy adhesive used for permanent indoor installation of vinyl, rubber and quartz flooring products. It is low VOC and solvent-free, yet highly aggressive and cures to an incredibly hard, chemically resistant film for superior adhesive. It can be installed over porous and non-porous substrates in indoor and outdoor applications, allowing for installation of flooring materials in entrances or areas that are not temperature controlled.

Crumb Rubber Coverage: 120 sq. ft. per gallon

Smooth Porous & Non-Porous Coverage: 150 sq. ft. per gallon

Rough Porous Coverage: 135 sq. ft. per gallon

ASD-800 Acrylic Wet-Set ESD Adhesive

G

Acrylic wet-set adhesive designed for indoor installation of ESD vinyl and rubber flooring. When installed in conjunction with ESD tile and a grounding source, it will help dissipate static and electrical discharges to protect electrically sensitive equipment. Coverage: 160 sq. ft. per gallon

USD-810 Urethane Wet-Set ESD Adhesive

G

Two-part, solvent-free urethane adhesive used for the permanent installation of ESD vinyl and rubber flooring products. Low VOC and solvent-free, yet highly aggressive and cures to a flexible ESD film for superior adhesion. Ideal for areas with heavy use, machinery or rolling loads.

Smooth Porous & Non-Porous Coverage: 150 sq. ft. per gallon

Rough Porous Coverage: 135 sq. ft. per gallon



Installation

PRODUCTS

CSU-400 Cork Sound Control Underlayment

3.5' x 100' x 1.9mm Roll

Rolled sound reduction underlayment designed for indoor use under vinyl flooring. CSU-400 reduces sound transmission from room to room while providing thermal insulation and comfort. It can be installed under glue-down or loose lay flooring options.

Coverage:
350 sq. ft. per roll

FSU-410 Floating Sound Control Underlayment

3.5' x 35' x 2mm Roll

Rolled sound reduction underlayment specifically designed for indoor use under resilient flooring products. FSU-410 can be installed directly over existing floor coverings such as VAT, Sheet Vinyl, Linoleum and Hardwood Flooring, where other adhesives cannot. FSU-410 is a loose lay product that does not require adhesive to be installed and may be used with floating and glue down resilient floors.

Coverage:
122.5 sq. ft. per roll

Proper subfloor preparation is the key to great looking and long-lasting floors. These Excelsior™ underlayments help you achieve your flooring goals.



Maintenance

PRODUCTS

We offer a full line of Excelsior™ maintenance products that will make cleaning and maintaining your flooring simple. Visit flexcofloors.com to see the whole line of maintenance products.



NC-900 All Purpose Cleaner

A pH neutral, all-purpose cleaner for the initial and daily cleaning of all rubber and vinyl resilient flooring coverings. NC-900 is specially formulated to remove the mold release that is applied during the manufacturing of rubber products and can be applied in many fashions including a mop, pump-up sprayer, sponge or auto-scrubbing machine.

CM-910 Cleaner & Maintainer

A pH neutral, biodegradable cleaner and maintainer for the daily cleaning or long-term preservation of the rubber flooring products. In addition to cleaning, CM-910 creates and leaves behind a protective film that helps maintain and condition the rubber, making future cleaning processes easier. CM-910 can be applied to the floor using a mop, pump-up sprayer, or using an auto-scrubbing machine.

FR-920 Vinyl Flooring Finish Remover

A highly concentrated finish remover designed to remove topically applied flooring finishes from vinyl resilient flooring products. FR-920 can be used to remove multiple layers of floor finish and can be used to remove finish from terrazzo, porcelain and ceramic tile, and more commonly from all vinyl floor coverings, including vinyl composition tile (VCT), vinyl enhanced tile (VET) and sheet vinyl products.

PR-930 High Performance Finish Remover

A finish remover specifically designed to remove topically applied flooring finishes over resilient flooring products that are sensitive to alkalinity, such as rubber flooring and crumb/recycled rubber flooring. PR-930 allows for the removal of these finishes without causing damage to pH sensitive flooring products and is designed to remove multiple layers of floor finish.

MF-940 Matte Acrylic Floor Finish

A durable, scuff-resistance acrylic floor finish, developed for vinyl and rubber resilient flooring products such as VCT, LVT, solid vinyl tile, quartz tile and rubber. MF-940 is developed with exclusive technology that combines ease of maintenance with exceptional finish clarity, allowing the flooring material to shine without the unsightly appearance of a high-build finish.

GF-950 Gloss Acrylic Floor Finish

A flexible, extended-wear acrylic floor finish, developed for vinyl and rubber resilient flooring products such as VCT, LVT, solid vinyl tile, quartz tile and rubber. GF-950 is a biodegradable finish developed with advanced polymers that provide excellent durability without creating unsightly buildup.

PF-960 High Performance Floor Finish

A flexible floor finish developed specifically for use over rubber flooring products but is compatible with most resilient flooring products. PF-960 is a biodegradable finish developed with advanced polymers that provide excellent durability without creating unsightly buildup.

Rubber Tile ASTM Tests and Results

COVERS TEXTURED RUBBER, RADIAL®, RADIAL® II, RADIAL® III, SQUARE², WEAVE, SPEXTONES™, AND EVOLVING STYLES® TILE

Standard Specification

ASTM F1344, Specification for Rubber Floor Tile, Class I, Type A

Durability

ASTM D3389, Abrasion Resistance: Passes, ≤1 gram lost
ASTM D2240, Hardness (Shore A Durometer): Passes, ≥85

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available
ASTM F1514 Heat Stability: Passes, flat surface, Delta E ≤8.0

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, ≥0.60

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, ≥0.45 W/cm²
ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, ≤450

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

FlexTuft® ASTM Tests and Results

FOR VULCANIZED AND NON-VULCANIZED RUBBER BACKING

Fire Test Data

ASTM D2859, Pill Test: Passes and exceeds the minimum char radius of 3" (average char per 8 strips tested = 0.75" radius)

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Exceeds 0.80

Tuflex® Force® ASTM Tests and Results

Standard Specifications

ASTM D2240 - Hardness, Shore A; ≥85

ASTM D3389 - Abrasion Resistance: Passes, ≤1 gram lost

ASTM D624 - Tear Resistance; 93 +/- 15 lbs/in

ASTM D2047 - Coefficient of Friction; ≥0.60

ASTM E648 - Critical Radiant Flux, Class I; ≥0.45 watts per sq cm

ASTM E662 - Smoke Density; ≤450

Prime Sports™ ASTM Tests and Results

Standard Specifications

ASTM D3389 - Abrasion Resistance: Passes, ≤1 gram lost

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Exceeds 0.80

ASTM F373 - Thickness Tolerance: +/- 0.015"

ASTM D624 - Die C, Tear Strength: 70ppi

ASTM F137 - Flexibility: Passes - 6mm Mandrel

ASTM F1514 - Resistance to Heat: Delta E: 2.24 and AATCC Gray Scale: 3.85 average

ASTM F925 - Resistance to Chemicals: No Change. Staining Agent List - 5%, Acetic Acid, 70% Isopropyl Alcohol, Mineral Oil, 5% Sodium Hydroxide, 5% Ammonia, Bleach, 5% Phenol, Gasoline, Sulfuric Acid, Kerosene and Olive Oil.

ASTM F970 - Static Load Limit: 250 psi, (modified 400 psi)

ASTM D2240 - Harness Shore A: 60 +/- 5 minutes

ASTM D395B - Compression Set: 12% or less

ASTM D 792 - Density PCF: 65 lbs/cu/ft

Wall Base ASTM Tests and Results

Standard Specifications

ASTM F1861 (Wallflowers), Type TS, Group 1, Styles A and B

ASTM F1861 (Base 2000), Type TP, Group 2, Styles A and B

ASTM F1861 (Vinyl Base), Type TV, Group 1 or 2, Styles A and B

ASTM F1861 (Base Sculptures), Type TP, Group 1 or 2, Style D

Resilience

ASTM F925, Resistance to Chemicals: Passes

ASTM F1515, Light Stability: Excellent

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, ≥0.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes ≤450

Rubber Stair Treads ASTM Tests and Results

Standard Specification

ASTM F2169, Type TS Class 1 & 2; Group 1 & 2 Grade 1

Durability

ASTM F137, Flexibility: Passes, 1/4" mandrel, no breaks or cracks

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1514 Heat Stability: Passes, flat surface, Delta E ≤ 8.0

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, ≥ 0.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, ≤450

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, ≥0.60 flat surfaces using Neolite sensors

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

Vinyl Stair Treads ASTM Tests and Results

Standard Specification

ASTM F2169, Type TV

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 650 psi

ASTM D3389, Abrasion Resistance: Passes, ≤1 gram lost

ASTM F137, Flexibility: Passes, bend around a 1" mandrel, no breaks or cracks

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1515, Light Stability: Passes, flat surface, Delta E ≤ 8.0

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, ≥0.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated By Solid Materials: Passes, ≤450

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, ≥0.60

ESD Rubber Tile ASTM Tests and Results

Standard Specification

ASTM F1344, Specification for Rubber Floor Tile, Class I, Type A

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 1100 psi; Passes

ASTM F137, Flexibility: Passes, bend around a 1/4" mandrel, no breaks or cracks

ASTM D2240, Hardness (Shore A Durometer): Passes, ≥85

Electrical Resistance

ASTM F150, Electrical Resistance for Resilient Flooring; 1 x 10⁶ to 1 x 10⁹

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

Slip Resistance

ASTM D2047, Static Coefficient of Friction (Slip Resistance): Excellent, ≥0.60

Fire Test Data

ASTM E648 (NFPA 253), Critical Radiant Flux: Class 1, ≥0.45 W/cm²

ASTM E662 (NFPA 258), Smoke Generated by Solid Materials: Passes, ≤450

Fungi Resistance

ASTM G21, Fungi Resistance: Excellent

Delane® ESD Vinyl Tile ASTM Tests and Results

Standard Specification

ASTM F1700 - Specification for Solid Vinyl Tile; Class I, Type A

Durability

ASTM F970 - Static Load Limit; 250 PSI; Modified ASTM F970, 2500 PSI

Electrical Resistance

ASTM F150 - Electrical Resistance; • Conductive, 2.5 x 10⁴ to 1 x 10⁶ • Static Dissipative, 1 x 10⁶ to 1 x 10⁸ • ANSI/ESD S7.1, NFPA 99

Resilience

ASTM F925 - Resistance to Chemicals; Passes, List of chemicals available

ASTM F1515 - Light Stability; Passes

Slip Resistance

ASTM D2047 - Static Coefficient of Friction (Slip Resistance); ≥0.60; dry

Fire Test Data

ASTM E648 (NFPA 253) - Critical Radiant Flux; Class 1, ≥0.45 W/cm²

ASTM E662 (NFPA 258) - Specific Optical Density of Smoke Generated by Solid Materials; Passes, ≤450

Natural Elements Premium Luxury Vinyl Plank and Tile portfolio ASTM Tests and Results

Standard Specification

ASTM F1700, Specification for Solid Vinyl Tile; Class III, Type B

Fire Test Data

ASTM E648 (NFPA 253) - Critical Radiant Flux; Class 1, ≥0.45 W/cm²

ASTM E662, Smoke Density; Passes

Durability

ASTM F970, Static Load Limit: 250 psi; Modified ASTM F970: 2000 psi

Resilience

ASTM F925, Resistance to Chemicals: Excellent, list of chemicals available

ASTM F1515, Light Stability: Passes, flat surface, Delta E ≤ 8.0

Slip Resistance

ASTM D2047 - Static Coefficient of Friction (Slip Resistance); ≥0.60; dry

Solid Vinyl Tile ASTM Tests and Results

COVERS DELANE® AND GEODESY® TILE

Standard Specification

ASTM F1700, Specification for Solid Vinyl Tile: Class 1, Type A; Federal Specification SS-T-312B, Type III

Chemical	1 Hour	24 hours	Chemical	1 Hour	24 hours
Acids			Xylene	No change	Slight surface attack
Sulfuric Acid (Conc.)	No change	Light purple brown stain, surface dulling	Cresol	No change	Surface attack
Sulfuric Acid (77%)	No change	Light yellow stain, surface dulling	Gasoline (Unleaded)	Slight change	Surface attack
Sulfuric Acid (5%)	No change	No change	Mineral Oil*	Slight change	Surface attack
Nitric Acid (Conc.)	No change	Surface dulling	Carbon Tetrachloride	No change	Slight surface attack
Nitric Acid (5%)	No change	Slight surface attack	Chloroform	No change	Very slight surface attack
Hydrochloric Acid (Conc.)	No change	No change	Trichlorethylene**	Very slight surface attack	Slight surface attack
Hydrochloric Acid (5%)	No change	Slight surface attack	Ketones/Esters		
Hydrofluoric Acid (Conc.)	No change	No change	Acetone	Very slight surface attack	Surface attack
Hydrofluoric Acid (5%)	No change	No change	Methyl Ethyl Ketone	Very slight surface attack	Surface attack
Acetic Acid (Conc.)	No change	Slight surface attack	Amyl Acetate	No change	Surface attack
Acetic Acid (5%)	No change	No change	Ethyl Acetate	No change	Surface attack
Alcohols			Miscellaneous		
Isopropyl Alcohol (70%)	No change	No change	Silver Nitrate (5%)	No change	Brown/black stain
Methyl Alcohol	No change	No change	Ethyl Ether	No change	Very slight surface attack
Ethyl Alcohol	No change	No change	Formaldehyde (40%)	No change	No change
Butyl Alcohol	No change	Slight surface attack	Creosote	Yellow stain	Dark brown stain, surface attack
Alkalies			Thimerosal	No change	Pink stain
Sodium Hydroxide (5%)	No change	No change	Iodine	No change	Dark yellow stain
Ammonium Hydroxide (28%)	No change	No change	Bleach (5.25% NaOCl)	No change	No change
Aromatics					
Phenol	No change	Slight surface attack			
Benzene	No change	Slight surface attack			

* Rubber tile subject to surface attack at 24 hours.

** Rubber tile not affected.

IMPACT

PROGRAM



S

ustainability is at the heart of FLEXCO manufacturing from sourcing to processing to recycling. IMPACT is a proven recycling program that recycles flooring for alternate uses at the end of the product life cycle. We will help you collect flooring, arrange for its take-back, and find new uses that will divert it from landfills and oceans.

How the IMPACT Take-Back Program Works:

1. Contact Marcus Hyde to participate in our IMPACT program. Call 1-800-862-7539, ext. 7224, or email impact@flexcofloors.com. We will ship a Gaylord collection container to your site for your qualified flooring materials for recycling.
2. Provide reporting information. Include the project name, location and contact information for sustainability reporting.
3. Secure return freight payment in advance. Once you are ready to recycle, contact a shipper to return your container to FLEXCO. You may use your own method for shipping, however it must be prepaid.
4. Return your container to FLEXCO. We will take care of the rest. Recycled flooring is then repurposed as new flooring and other practical products.

The Upcycle Impact

Responsible. Resourceful. Recyclable.



The Downcycle Impact

Replace. Reclaim. Repurpose.



Inspirations

C U S T O M D E S I G N S

No matter what you envision FLEXCO can make it happen with our Custom Design services. From all-purpose rooms, to sports courts to corporate lobbies and more, your design is fully integrated, extending through the thickness of every tile for a beautiful floor with uncompromising performance.

Custom Cut Designs

A logo. An emblem. An intricate pattern. Specify your custom design from our product portfolio for long-lasting, color-coordinated beauty.

- > Choose from any FLEXCO color palette.
- > Precision Waterjet Technology can replicate even the most detailed designs flawlessly for a look that can't be achieved by hand cutting.



FlexTones® C O L O R S



See page 11
for all 57 colors
available

Creative Elements C O L O R S




See page 13
for all 16 colors
available

Wood Elements C O L O R S



See page 15
for all 4 colors
available

SpexTones™ C O L O R S



See page 17
for all 22 colors
available

Solid Vinyl Tile C O L O R S




See page 42-45
for all 34 colors
available

Natural Elements Premium Luxury Plank & Tile C O L O R S



See page 36-39
for all 48 colors
available

Tuflex® Force® C O L O R S



See page 20
for all 13 colors
available

Prime Sports™ C O L O R S



See page 23
for all 8 colors
available



C U S T O M D E S I G N S

Game Line Kits

Whether you have a full-size court, a multi-purpose gym or a smaller facility with reduced court dimensions, our Game Line Kits install as an integrated part of the flooring and stand up to high-impact use with two construction options available.

Waterjet-Cut Game Line Kits


- > Kits available in 57 FlexTones colors or the base colors from Creative Elements or Wood Elements palettes
- > Game Line Kits are waterjet-cut, field tile to be cut onsite
- > Custom colors available; minimum quantity required

Painted Game Line Colors


- > 2" wide lines
- > 10 standard colors or virtually any color available with a custom formulation




Painted Game Line Standard Colors endura

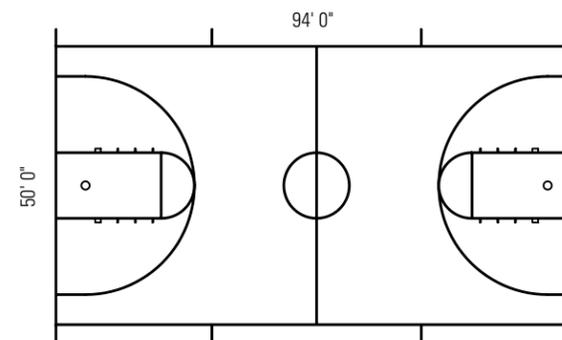

BASKETBALL COURT GAME LINE KIT

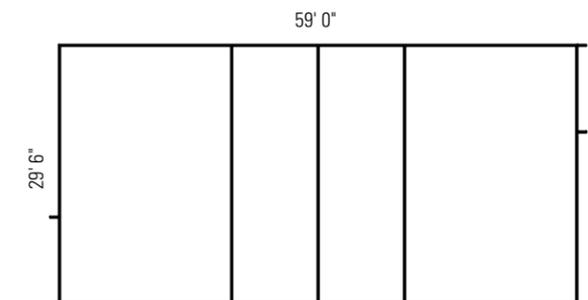

VOLLEYBALL COURT GAME LINE KIT

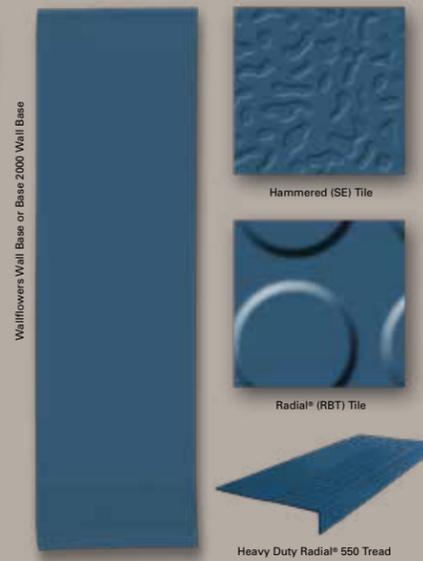

Xpress

F L O O R I N G O P T I O N S

Our Xpress Ship flooring options provide expedited delivery of **six of our most popular products in eight colors.** Choose from coordinated wall base, tile and stair tread options that provide the products you need and the service you want. Daily stock means fast delivery to keep your installation on schedule.


Xpress ship daily stock availability

Wallflowers® Premium Wall Base	4" x 48"	30 pcs per box	250 cartons per color in stock daily
Base 2000™ Wall Base	4" x 48"	30 pcs per box	250 cartons per color in stock daily
Radial® RBT Tile	18" x 18"	20 pcs per carton	3,000 square feet per color in stock daily
Hammered Tile	18" x 18"	20 pcs per carton	1,000 square feet per color in stock daily
Radial® 550 Treads	48"	6 pcs per carton	200 pieces per color in stock daily
Hammered 1900	48"	6 pcs per carton	50 pieces per color in stock daily

Sample Requests

R U B B E R + V I N Y L

FLEXCO® has a variety of sampling kits and chain sets available to assist with making your flooring, wall base and accessory selections. FLEXCO® offers custom color matching for several of our products and custom cutting to help you bring your design vision to life. Contact customer service at 1.800.633.3151 or submit your request online at flexcofloors.com. You may also email your sample request to samples@flexcofloors.com.

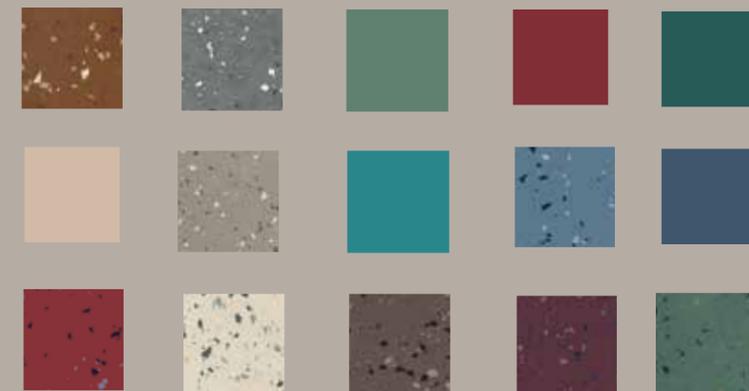

Affiliations & Certifications

- > AIA, ASID and IIDA Industry Partner
- > Certified Installation Manager Program
- > Coast Guard and International Maritime Organization (IMO) certified products
- > Member of the U.S. Green Building Council
- > National Association of Floor Covering Technicians
- > The Construction Specifications Institute
- > World Floor Covering Association
- > National Association of Floor Covering Distributors
- > American Public Transit Association
- > ESD Association
- > ASTM Committee
- > Floor Covering Installers of North America
- > International Facility Management Association
- > International Standards and Training Alliance of Floor Covering Professionals (INSTALL)
- > Resilient Floor Covering Institute
- > Color Marketing Group
- > CHPS Standards
- > FloorScore®
- > GREENGUARD® Gold
- > Tuscumbia, AL Manufacturing Facility
ISO 14001:2015 Certified

flexcofloors.com

1.800.633.3151 + Fax: 1.800.346.9075
1401 East 6th Street + Tuscumbia, AL 35674



FLEXCO®
AMERICAN-MADE FLOORING