
Instruction Manual



Walter Table Light Size 1 US-FT587 Walter Table Light Size 2 US-FT588

Established in 1990, Original BTC manufactures relaxed, familiar lighting for traditional and contemporary homes.

All products are hand-assembled in Oxford from high quality components, produced in the UK.

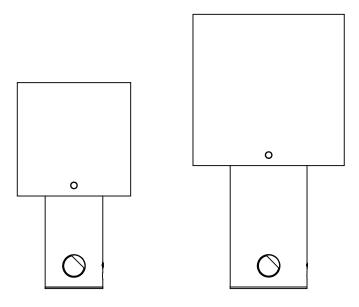







Walter Table Light

120V ac 60Hz | IP20 |

US-FT587 Walter Table Light Size 1 US-FT588 Walter Table Light Size 2

The Walter Table Light has a unique 1960s feel, with a striking combination of satin copper and either opal or anthracite glass shades. Our squirrel cage light bulbs complement the style beautifully, as do the black cotton braided cable. The lights are available in 2 sizes and they have an integral dimmer on the base.

LAMP GUIDANCE				
BASE	SHAPE	TYPE*		WATTAGE**
E26	A BALL	INCANDESCENT CFL ECO-HALOGEN LED***	✓ * ✓	60W MAX - 42W 10W

- * Warm white (2700k) low energy lamps recommended.
- ** Wattage value provided as a guide to suitable lamps. Lower wattage than stated may be used.
- *** Dimming performance may be unstable with LED bulbs. Please check with bulb manufcaturer

Not suitable for use with CFL bulbs

ENG WARNING - RISK OF FIRE AND ELECTRIC SHOCK.

SUITABLE FOR DRY LOCATIONS ONLY

 $\label{eq:fr} {\sf FR} \quad {\sf ATTENTION-RISQUE} \ {\sf D'INCENDIE, RISQUE} \ {\sf DE CHOC}.$

POUR EMPLACEMENTS SECS SEULEMENT

Safety Instructions

These instructions are provided for your safety in order to prevent the risk of Fire, Electric shock or Injury. Please retain for future reference. When fitting is in operation, some parts will become hot; take care when using/handling.


- Ensure the lamp type and max wattage is followed- do not exceed. Take care not to overtighten lamp.
- Do not touch the lamp (bulb) or lamp holder while in operation, as both become very hot.
- Turn off and unplug fitting, leaving lamp to cool before changing lamp. Dispose of old lamps carefully.
- Adjust light fitting only when power to the fitting is off and has been left to cool.
- Never leave a fitting without a lamp in position.
- Keep light fitting away from combustible materials such as soft furnishings.
- Ensure children do not play with the light fitting.
- Ensure the light is positioned on a solid, level and non-slip surface and make sure the position of the cable does not pose a trip hazard.
- If the electrical flex or electrical components become damaged at any point, the fitting must be unplugged from the power supply immediately and not operated until the damaged parts are fixed/replaced.
- For use in a dry, indoor environment only. Ensure the fitting does not come into contact with any liquids.

Cleaning and Maintenance


Metal finishes should only be cleaned with a soft, dry cloth. Do not use polishes or abrasives. Glass can be cleaned by hand, using a soft damp cloth with a diluted mild detergent (nonabrasive) or suitable glass cleaner if necessary. Switch off power to the fitting before cleaning.

Glass shade installation

- 1 Offer up shade to arm supports, so that holes in the shade line up with the arms
- 2 Whilst supporting the shade, gently insert each screw, locating into the thread of the arms
- 3 Evenly screw each screw into the arms, tightening a little at a time until shade is firmly secured in place
- 4 DO NOT OVERTIGHTEN screws

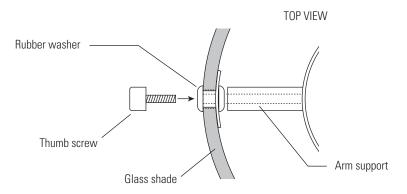

Adjusting Fitting

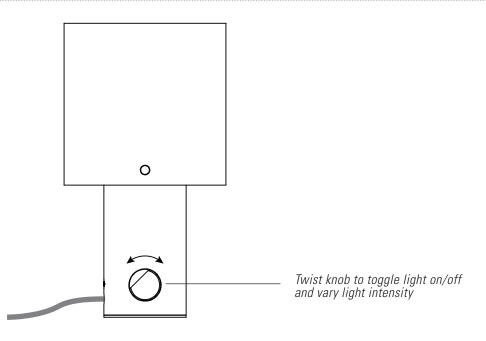



Take great care when fitting shade and handling product- glass is fragile. When handling the light, always support from below - do not lift from the glass.