

ACCESSORIES

PRICE LIST

January 3, 2011

Updated May 11, 2022

800.424.2432

Contents
Refer to KI Terms & Conditions document or visit ki.com.



Contents
Refer to KI Terms & Conditions document or visit ki.com.

All Terr	rain® Screens	
	General Information	3
	Product Color Options	4
	Full-Height Core with Four-Point Base	Ę
	Full-Height Core with Three-Point Base	(
	Accessories	7
Rails fo	or Paper Management Tools	
	General Information	8
	Product Color Options	(
	Wall Rail	10
	Panel Rail	11
Isle™ P	ower and Data Unit	12
Worksı	urface Accessories	
	Keyboard Tray with Trackless Arm	13
	Corner Worksurface Keyboard Trays	14
	Keyboard Trays with Standard Arms	18
	Keyboard Drawer	2
	CPU Sling	22
	Adjustable/Securable CPU Holder Compact CPU Holder	23
	Mini CPU Holder	25
Pneum	atic Monitor Arm	
	Extended Arm	26
Monito	r Arms	27
Power	Module and Electrical Accessories	
	Product Color Options	32
Access	ory Power Modules	
	Drop-in USB Charger	33
	Wireless Charging Module	34
	Ashley Duo™ Module General Information	35
	Ashley Duo™ Module	36
	PowerUp® and Villa Undermount R8 Module	38 39
	Dean Clamp-on Module	4(
	Dubbel Undersurface Module	40
	Node In-surface Module	42
Flectric	cal Accessories	4;



SCREENS

Screen Frame

Screens shall be available in the following sizes: heights of 54" and 66"; widths of 24", 30", 36", 42" and 48".

The framework shall be constructed of extruded aluminum horizontal and vertical members. The framework shall have a powder-coat finish.

Foot and Peg Legs

The screen shall be available with four contact points with the floor, which is made up of two feet. 24" and 30" wide screens shall be available with three points of contact with the floor, which is made up of one foot and one peg leg.

The foot and peg leg shall be constructed of molded aluminum with a powder-coat finish. The foot and peg leg shall be fastened to the vertical and horizontal framework and will support the screen. The foot and peg leg will provide sufficient clearance to allow nesting of screens for storage purposes.

Casters

Casters shall be available for the screen. Four large twin-wheel casters shall be constructed with 70mm (2-3/4") diameter black tread and black hub. Casters shall have a swivel radius of 2-1/2". Casters shall be available in both locking and nonlocking swivel versions.

There shall be three caster options available to use with the feet and peg leg combinations: three casters are specified; two locking and one-swivel casters are used. When four casters are specified, two locking and two swivel casters are used. When two casters and one glide are specified, two locking casters are used with one glide.

Glides

Screens shall also be available with telescoping glides. Glides shall have a nominal mounting height (3-1/4") equal to the caster height, allowing casters and glides to be interchangeable without changing the screen height. Glides shall be adjustable by 1/2" from the nominal position. Each glide shall include a telescoping hood that maintains contact with the bottom of the foot or peg leg. Glide base shall be KI Glacier white molded nylon. Glide body and telescoping hood shall be black nylon. Glide base diameter shall be 2-3/4".

There shall be three glide options available to use with the feet and peg leg combinations: three glides, two casters and one glide, or four glides.

Fabric Core

The fabric screen core shall be constructed of mineral fiberboard, a fiberglass matting overlay with the fiber adhered to both sides. The finished thickness shall be 1/2". The core shall be trapped in the screen framework. The fabric core is

standard with the same fabric on both sides of the cores.

Markerboard Core

The markerboard core shall be constructed of 20-gauge painted steel adhered to both sides of a corrugate core to a finished thickness of 1/2". The paint shall be colormatched to the white porcelain paint finish of other KI markerboard products. The core shall be trapped in the screen framework.

Clear Plastic Core

The clear plastic core shall be constructed of fluted, extruded, clear polycarbonate. It shall be extruded to a 10mm thickness. The core shall be trapped in the screen framework.

Edge Trim

The vertical frame extrusion shall receive a powder coated aluminum edge trim.

Full-Height Core Screen

The full-height core screens shall extend from the top of the screen's framework to the bottom of the screen's framework. Core options of fabric, markerboard, and clear plastic shall be available.

Fabric

Fabric will be applied as swatched by the fabric manufacturer. Fabric that is required to be applied differently than is swatched will need a Product Modification Request written specifying the direction the fabric is to be applied.

All Terrain® Screens
Product Color Options

All Terrain® Screens
Product Color Options

i ioduct ooio	ТОриона		
Paint Color			

(IIIIL GUIUI	
	Black	BL
	Blue Grey	GR
	Bronze Metallic	ZM
	Cayenne	CY
	Champagne Metallic	CM
	Cool Grey	CG
	Cottonwood	CO
	Earthen Clay	EY
	Espresso Metallic	EX
	Everglade Shade	EV
	Flannel	FN
	Glitz Metallic	GΖ
	Hazy Jade	HJ
	Honey Bee	HY
	Light Tone	LG
	Mardi Gras	MG
	Misty Brown	MY
	Nemo	NE
	Nordic	ND
	Poppy Red	PR
	Purple Haze	PH
	Rubber Ducky	RK
	Sand	SA
	Sky Blue	SK
	Starlight Silver Metallic	SX
	Surf's Up	SP
	Twilight Shadow	TI
	Ultra Blue	UB
	Warm Grey	WG
	Zesty Lime	ZL

View color swatches for items listed within this document.

Full-Height Core with Four-Point Base



All Terrain® Screens

Full-Height Core with Four-Point Base

							•					
			MODEL NUMBER	}								
	MODEL	WxDxH	Basic Model	Paint Base Color		Approx. Packaged Weight	Delivered Pricing Unupholstered	Delivered Pricing Fabric Grade 1 & C.O.M.	Delivered Pricing Fabric Grade 2	Delivered Pricing Fabric Grade 3 & Pallas Vertical Fabric Grade PV	Delivered Pricing Pallas Vertical Fabric Grade PV1	Delivered Pricing Pallas Vertical Fabric Grade PV2
		24 x 16 x 54"	ATS42454FHC/CP			18.0#	\$ 974					
	Fluted Plastic Core - Four-Point Base (CF	24 x 16 x 66"	ATS42466FHC/CP			20.0#	982					
	Aluminum frame Aluminum frame	30 x 16 x 54"	ATS43054FHC/CP			18.0#	1042					
	Cast aluminum legsTrim will match paint color	30 x 16 x 66"	ATS43066FHC/CP			21.0#	1045					
	Casters or glides	36 x 16 x 54"	ATS43654FHC/CP			19.0#	1089					
	 Core material same on both sides 	36 x 16 x 66"	ATS43666FHC/CP			22.0#	1117					
		42 x 16 x 54"	ATS44254FHC/CP			20.0#	1137					
		42 x 16 x 66"	ATS44266FHC/CP			23.0#	1161					
· ·		48 x 16 x 54"	ATS44854FHC/CP			21.0#	1171					
ATS4		48 x 16 x 66"	ATS44866FHC/CP			24.0#	1183					
	Fabric-Covered Tackboard Core - Four-		ATS42454FHC/FB			18.0#	N/A	\$ 985	\$ 1001	\$ 1008	\$ 1003	\$ 1046
	Point Base (FB)		ATS42466FHC/FB			20.0#	N/A	990	1006	1016	1008	1054
	Aluminum frameCast aluminum legs		ATS43054FHC/FB			18.0#	N/A	1054	1068	1080	1071	1115
	Trim will match paint color		ATS43066FHC/FB			21.0#	N/A	1061	1077	1089	1081	1126
	Casters or glides		ATS43654FHC/FB			19.0#	N/A	1098	1129	1145	1131	1220
	Core material same on both sides	36 x 16 x 66"	ATS43666FHC/FB			22.0#	N/A	1135	1161	1177	1164	1255
		42 x 16 x 54"	ATS44254FHC/FB			20.0#	N/A	1147	1173	1194	1177	1271
8		42 x 16 x 66"	ATS44266FHC/FB			23.0#	N/A	1171	1200	1218	1203	1296
		48 x 16 x 54"	ATS44854FHC/FB			21.0#	N/A	1188	1213	1233	1218	1309
ATS4			ATS44866FHC/FB			24.0#	N/A	1196	1221	1243	1226	1315
.	Markerboard Core (Painted Steel) - Four-		ATS42454FHC/MB			31.0#	\$ 983					
	Point Base (MB) • Aluminum frame		ATS42466FHC/MB			37.0#	986					
	Cast aluminum legs		ATS43054FHC/MB			36.0#	1050					
	 Trim will match paint color 		ATS43066FHC/MB			43.0#	1055					
	Casters or glidesCore material same on both sides		ATS43654FHC/MB			41.0#	1095					
	- Gore material same on both sides		ATS43666FHC/MB			49.0#	1129					
			ATS44254FHC/MB			45.0#	1142					
8			ATS44266FHC/MB			56.0#	1168					
ATO 4		48 x 16 x 54"	ATS44854FHC/MB			50.0#	1183					
ATS4		48 x 16 x 66"	ATS44866FHC/MB			62.0#	1192					
			(A)	B O	O							

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

Select base style.

4CW - 4 black casters (2 locking)

4GB - 4 black/white glides

4MW - 2 black casters, 2 black/white

glides

Select paint color.

Refer to the **Product Color Options** page in this

OSelect fabric color. Refer to ki.com/fabrics

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping
Ships assembled, FOB Pembroke, ON K8A 0E1, freight prepaid. Freight class 70.

Full-Height Core with Three-Point Base



All Terrain® Screens Full-Height Core with Three-Point Base

							▼					
			MODEL NUMBER	R								
	MODEL		Basic Model		aint Fabric	Approx. Packaged Weight	Delivered Pricing Unupholstered	Delivered Pricing Fabric Grade 1 & C.O.M.	Delivered Pricing Fabric Grade 2	Delivered Pricing Fabric Grade 3 & Pallas Vertical Fabric Grade PV	Delivered Pricing Pallas Vertical Fabric Grade PV1	Delivered Pricing Pallas Vertical Fabric Grade PV2
	Fluted Plastic Core - Three-point base	24 x 16 x 54"	ATS32454FHC/CP			16.0#	\$ 948					
	(CP)	24 x 16 x 66"	ATS32466FHC/CP			18.0#	953					
	 Aluminum frame 		ATS33054FHC/CP			17.0#	1017					
	Cast aluminum legs		ATS33066FHC/CP			19.0#	1021					
	Trim will match paint colorCasters or glides	00 % 10 % 00	7110000001110/01			10.0#	1021					
	Core material same on both sides											
•												
	Fabric-Covered Tackboard Core - Three-	24 × 16 × 54"	ATS32454FHC/FB			16.0#	N/A	\$ 961	\$ 977	\$ 986	\$ 982	\$ 1022
	Point Base (FB)		ATS32466FHC/FB			18.0#	N/A	φ 966	φ 377 983	990	φ 302 985	1029
	Aluminum frame		ATS33054FHC/FB			17.0#	N/A	1031	1046	1057	1050	1094
	 Cast aluminum legs 		ATS33066FHC/FB			19.0#	N/A	1039	1052	1061	1055	1098
	Trim will match paint color Contain an alider	30 x 10 x 00	A13330001110/11D			13.0π	IVA	1009	1002	1001	1000	1090
	Casters or glidesCore material same on both sides											
	ooro matoriai oamo on both oldoo											
8												
	Markerboard Core (Painted Steel) -	24 x 16 x 54"	ATS32454FHC/MB			29.0#	\$ 955					
	Three-Point Base (MB)		ATS32466FHC/MB			36.0#	961					
	Aluminum frame		ATS33054FHC/MB			34.0#	1022					
	Cast aluminum legsTrim will match paint color		ATS33066FHC/MB			42.0#	1030					
	Casters or glides											
	Core material same on both sides											
· ·												
		L				_						
			A	$oldsymbol{\Theta}$	0							

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

Select base style.

2C1 - 2 black locking casters, 1 glide

3CW - 3 black casters (2 locking)

- 3 black/white glides

Select paint color.

Refer to the **Product Color Options** page in this

OSelect fabric color. Refer to ki.com/fabrics

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping
Ships assembled, FOB Pembroke, ON K8A 0E1, freight prepaid. Freight class 70.



All Terrain® Screens
Accessories

					▼		
			MODEL NUMBER				
	MODEL		Basic Model	Approx. Packaged Weight	Delivered Pricing		
	3" Caster Kit Kit includes two locking and two non-locking casters and stems Casters feature twin 2-15/16" diameter wheels		2.KP80635	2.0#	\$ 39		
HRDPT	 Black hub, black caster 						
	Glides Same height as casters Provides 1/2" height adjustment	3-3/8"	2.KP103000BLWH	1.0#	\$ 38		
	. Tortago I. 2 . Tolgitt asjastinoni						
HRDPT	Manualia Madada and Torro	40 0 4/0"	MD TDAY	10"	Φ 47		
	Magnetic Markerboard Tray2 One 16" magnetically mounted aluminum pen and eraser tray Clear aluminum anodized finish	16 x 2-1/2"	MB.IKAY	1.0#	\$ 47		
HRDPT							
	Magnetic Markerboard Kit One 16" magnetically mounted aluminum pen and eraser tray with one erase and four pens Clear aluminum anodized finish	r	MB.MARKERKIT	1.0#	\$ 113		
HRDPT							
			A				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping
Ships assembled, FOB Pembroke, ON K8A 0E1,
freight prepaid. or Manitowoc, WI 54220 (MBTRAY, MBMARKERKIT). Freight class 70.

Rails for Paper Management Tools
General Information



Rails for Paper Management Tools
General Information

Wall Rail

The wall rail shall be constructed of two aluminum extrusions. One extrusion shall be fastened to the wall. The second extrusion shall be snapped onto the first extrusion. The second extrusion shall provide a means for displaying and storing KI paper management accessories.

The second extrusion shall have a machining operation performed on the end of it for aesthetic appeal and shall have a powder-coat finish. The extrusion shall be available in lengths of: 24", 36", 48", 72" and 96".

Panel Rail

The panel rail shall be constructed of one aluminum extrusion and two 16-gauge, cut and formed steel brackets. The extrusion shall mount to KI panel and wall systems.

The extrusion shall provide a means for displaying and storing KI paper management accessories. The extrusion shall have a machining operation performed on the end of it for aesthetic appeal and shall have a powder-coat finish. The extrusion shall be available in lengths of: 24", 36", 48", 72" and 96".

The extrusion shall slide along the brackets to allow for the extrusion to be "off-module" from the panel and wall system.

Rails for Paper Management Tools Product Color Options



Rails for Paper Management Tools Product Color Options

Paint Colors

Zesty Lime

Black BL Blue Grey GR ZM Bronze Metallic Cayenne CY Champagne Metallic CM Cool Grey CG Cottonwood CO Earthen Clay ΕY Espresso Metallic EX ΕV Everglade Shade Flannel FN GZ Glitz Metallic Hazy Jade Honey Bee HY LG Light Tone MG Mardi Gras Misty Brown MY Nemo NE Nordic ND PR Poppy Red Purple Haze PH Rubber Ducky RK Sand Sky Blue SK SX Starlight Silver Metallic SP Surf's Up Twilight Shadow ΤI Ultra Blue UB WG Warm Grey

View color swatches for items listed within this document.

ZL

Rails for Paper Management Tools

Rails for Paper Management Tools

			MODEL NUM	IBER		
					Approx.	
			Basic	Paint	Packaged	Delivered
	MODEL	WxDxH	Model	Color	Weight	Pricing
	Wall Rail	24 x 3/8 x 2-1/4"			0.5#	\$ 108
	Accommodates KI paper management	36 x 3/8 x 2-1/4"	ATWR36/WM		1.0#	140
		48 x 3/8 x 2-1/4"			1.0#	150
	fastens to wall	72 x 3/8 x 2-1/4"	ATWR72/WM		1.5#	213
	 Wall rail attaches to second extrusion 	96 x 3/8 x 2-1/4"	ATWR96/WM		2.0#	220
ATAC						

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are avail-

HOW TO BUILD A MODEL NUMBER

A

(3)

A Select basic model.

BSelect paint color. Refer to the **Product Color Options** page in this FINISH INFORMATION

Additional Paint Colors

Other paint colors are available with additional lead time. Contact KI.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping
Ships assembled, FOB Pembroke, ON K8A 0E1, freight prepaid. Freight class 70.

Rails for Paper Management Tools

Rails for Paper Management Tools Panel Rail

						<u>▼</u>
			MODEL NUM	IBER		
					Approx.	
	MODEL	WxDxH	Basic Model	Paint Color	Packaged Weight	Delivered Pricing
	Panel Rail - WireWorks® panels bracketr				0.5#	\$ 99
~	(WW)		ATWR36/WW		1.0#	128
	Accommodates KI paper management		ATWR48/WW		1.0#	133
	accessories	72 x 3/8 x 2-1/4"	ATWR72/WW		1.5#	184
	Includes system furniture bracketryCan be hung off-module; rail must be	96 x 3/8 x 2-1/4"	ATWR96/WW		2.0#	196
4	wider than panel	30 X 0/0 X Z 1/4	7(1)(1)(30)(1)(1)		2.0#	100
ATAC	·					
711710						
	Panel Rail - System 3000® panels	24 x 3/8 x 2-1/4"	ATWR24/S3		0.5#	\$ 99
	bracketry (S3)		ATWR36/S3		1.0#	128
	 Accommodates KI paper management 	48 x 3/8 x 2-1/4"	ATWR48/S3		1.0#	133
	accessories • Includes system furniture bracketry	72 x 3/8 x 2-1/4"	ATWR72/S3		1.5#	184
	Can be hung off-module; rail must be		ATWR96/S3		2.0#	196
4	wider than panel		1			
ATAC						
	Panel Rail - Genius® movable wall	24 x 3/8 x 2-1/4"	ATWR24/GW		0.5#	\$ 99
	bracketry (GW)	36 x 3/8 x 2-1/4"	ATWR36/GW		1.0#	128
	Accommodates KI paper management	48 x 3/8 x 2-1/4"	ATWR48/GW		1.0#	133
	accessoriesIncludes system furniture bracketry	72 x 3/8 x 2-1/4"	ATWR72/GW		1.5#	184
	 Can be hung off-module; rail must be 	96 x 3/8 x 2-1/4"	ATWR96/GW		2.0#	196
·	wider than panel					
ATAC						
			A	B		
			w	\mathbf{v}		

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: • The ☐ indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are avail-

HOW TO BUILD A MODEL NUMBER

A Select basic model.

BSelect paint color.

Refer to the **Product Color Options** page in this

FINISH INFORMATION

Additional Paint Colors

Other paint colors are available with additional lead time. Contact KI.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Pembroke, ON K8A 0E1, freight prepaid. Freight class 70.

Isle[™] Power and Data Unit



Isle[™] Power and Data Unit

					1	<u> </u>	
				MODEL NUMBER			
	MODEL	Features	DIA	Basic Model	Approx. Packaged Weight	Delivered Pricing	
	Isle™	Black	25.5 H x 18"	ISLE.BL	35.0#	\$ 2353	
	long (15 amps)	Cottonwood	25.5 H x 18"		35.0#	2353	
		Starlight Silver	25.5 H x 18"	ISLE.SX	35.0#	2353	
() [[[[[]]]] FIOUI							
Receptacle	Includes tether and anchor slots for						
	security (tether and anchor are custome provided)	r					
	 Designed to clear under standard height 						
	tables						
	Glides only						
HRDPT							

(

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: ullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are avail-

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.


Worksurface Accessories

Keyboard Tray with Trackless Arm



Worksurface Accessories

Keyboard Tray with Trackless Arm

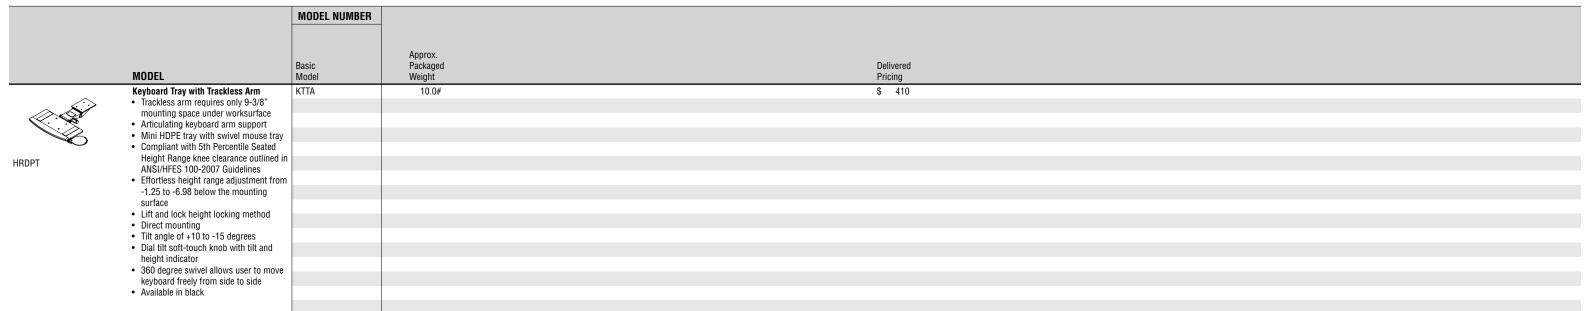

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

Φ

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.



Worksurface Accessories Corner Worksurface Keyboard Trays

			MODEL NUMBER		
			Racio	Approx. Pagkanad	Delivered
	MODEL	W x D	Basic Model	Approx. Packaged Weight	Pricing
				17.0#	\$ 447
	Keyboard Tray for Corner Worksurfaces without Mouse Tray				• 17
	 Ergonomically shaped, low-profile ABS 				
	plastic keyboard tray features anti-skid				
	grip strips • Snap in foam-gel wrist rest is easy to				
	clean and wear resistant				
	 23.0" glide track requires 24" deep 				
HRDPT	clearance under worksurface				
חהטרו	Low profile arm design provides maximum log room				
	mum leg roomPatented lift-and-lock spring-assisted				
	counterbalancing system allows for				
	precise height adjustment (up 3.0" and				
	down 7.75") without use of knobs or levers				
	 Fully adjustable 7.5" extended length 				
	neck accommodates corner mounts				
	 360° swivel allows user to move key- 				
	board freely from side to side				
	 Soft touch knob provides tilt control +/-15 degrees 				
	Available in black only				
	·				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \square indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.



Worksurface Accessories Corner Worksurface Keyboard Trays

		MODEL NUMBE	R		
			Approx.	- · ·	
	MODEL	W x D Basic Model	Packaged Weight	Delivered Pricing	
		23 x 12.3" KOMG.23.M	17.0#	\$ 524	
	Keyboard Tray for Corner Worksurfaces with Mouse Tray	23 X 12.3 NOIVIG.23.IVI	17.07	ψ 324	
	Sliding mouse surface has three forward				
	index positions for optimal ergonomic				
(. V	posture				
	Slide-through mousing surface adjusts				
	easily from side to side for left or right				
F 3	hand usage; mouse tray does not tilt				
	Ergonomically shaped, low-profile ABS plastic keyboard tray features anti-skid				
LIDDOT	plastic keyboard tray features anti-skid				
HRDPT	grip strips, built-in cable manager and fence				
	Snap in foam-gel wrist rest is easy to				
	clean and wear resistant				
	23.0" glide track requires 24" deep				
	clearance under worksurface				
	 Low profile arm design provides maxi- 				
	mum leg room				
	Patented lift-and-lock spring-assisted				
	counterbalancing system allows for				
	precise height adjustment (up 3.0" and				
	down 7.75") without use of knobs or levers				
	Fully adjustable 7.5" extended length				
	neck accommodates corner mounts				
	360° swivel allows user to move key-				
	board freely from side to side				
	 Soft touch knob provides tilt control 				
	+/-15 degrees				
	Available in black only				
		A			

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \square indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.



Worksurface Accessories Corner Worksurface Keyboard Trays

		M	ODEL NUMBER		
				Approx	
		Bas	eie	Approx. Packagad	Delivered
	MODEL	W x D Mo	odel	Approx. Packaged Weight	Pricing
	Keyboard Tray for Corner Worksurfaces	21 x 13" KOI	ING.23.PIN	18.0#	\$ 755
	with Tilt and Swivel Mouse Tray				
_ / 🔎	 Ergonomically shaped, rigid phenolic 				
	tray is sturdier than steel, and offers				
	anti-skid grip strips				
	Built-in mouse guard with cable manage-	-			
	ment prevents mouse from slipping off				
	tray				
HRDPT	Adjustable and detachable swivel and tilt				
TINDIT	mouse tray attaches right or left				
	 Snap in foam-gel wrist rest is easy to clean and wear resistant 				
	23.0" glide track requires 24" deep				
	clearance under worksurface				
	 Low profile arm design provides maxi- 				
	mum leg room				
	 Patented lift-and-lock spring-assisted 				
	counterbalancing system allows for				
	precise height adjustment (up 3.0" and				
	down 7.75") without use of knobs or				
	levers				
	 Fully adjustable 7.5" extended length 				
	neck accommodates corner mounts				
	 360° swivel allows user to move key- 				
	board freely from side to side				
	 Soft touch knob provides tilt control 				
	+/-15 degrees				
	 Available in graphite tray and black arm 				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \square indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.



Worksurface Accessories Corner Worksurface Keyboard Trays

		MODEL NUMBER		
			Approx.	
		Basic Model	Approx. Packaged Weight	Delivered
				Pricing
	Keyboard Tray for Corner Surface-Sit-to- Stand Tilt & Swivel Mouse Tray	KOMSG.23.PM	18.0#	\$ 920
	Stand Tilt & Swivel Mouse Tray			
	Ergonomically shaped, rigid phenolic			
~~.~~! <i>\</i>	tray is sturdier than steel, and offers anti-skid grip strips			
	Built-in mouse guard with cable manage-			
	ment prevents mouse from slipping off			
HRDPT	tray			
HNDFI	Adjustable and detachable swivel and tilt			
	mouse tray attaches right or left			
	Snap in foam-gel wrist rest is easy to clean and wear resistant			
	• 23.0" glide track requires 24" deep			
	clearance under worksurface			
	Low profile arm design provides maxi-			
	mum lea room			
	Sit-to stand spring-assisted counterbal- ancing system allows for precise height			
	ancing system allows for precise height			
	adjustment (up 8.25" and down 6.0") without use of knobs or levers			
	360° swivel allows user to move key-			
	board freely from side to side			
	Soft touch knob provides tilt control			
	+/-15 degrees			
	Available in graphite tray and black arm			

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \square indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.

Worksurface Accessories Keyboard Trays with Standard Arms



Worksurface Accessories Keyboard Trays with Standard Arms

			MODEL NUMBER		
	MODEL	W x D	Basic Model	Approx. Packaged Weight	Delivered Pricing
	Keyboard Tray for Rectangular Worksur- faces without Mouse Tray	23 x 12.3"	KOMG.20	15.0#	\$ 525
	faces without Mouse Tray				
	 Ergonomically shaped, low-profile ABS 				
	plastic keyboard tray features anti-skid grip strips				
	 Snap in foam-gel wrist rest is easy to 				
	clean and wear resistant				
HRDPT	• 20" glide track requires 21" deep clear-				
	ance under worksurface				
	 Low profile arm design provides maximum leg room 				
	Patented lift-and-lock spring-assisted				
	counterbalancing system allows for				
	precise height adjustment (up 2.5" and down 5.8") without use of knobs or				
	down 5.8") without use of knobs or levers				
	 Fully adjustable 5.5" standard length 				
	neck accommodates straight desktops				
	with limited space				
	360° swivel allows user to move key-				
	board freely from side to side				
	 Soft touch knob provides tilt control +/-15 degrees 				
	Available in black only				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Pembroke, ON K8A 0E1, freight prepaid. Freight class 70.

Worksurface Accessories Keyboard Trays with Standard Arms



Worksurface Accessories Keyboard Trays with Standard Arms

			MODEL NUMBER		
				Approx	
			Basic	Approx. Packaged	Delivered
	MODEL	W x D	Basic Model	Weight	Pricing
	Keyboard Tray for Rectangular Worksur-	23 x 12.3"	KOMG.20.M	15.0#	\$ 602
	faces with Mouse Tray				
	Sliding mouse surface has three forward				
	index positions for optimal ergonomic				
	posture				
	Slide-through mousing surface adjusts easily from side to side for left or right				
\	hand usage				
	Ergonomically shaped, stable, low-pro-				
HRDPT	 Ergonomically shaped, stable, low-pro- file ABS plastic keyboard tray features 				
	antiskid grip strips, built-in cable				
	manager and fence				
	Snap in foam-gel wrist rest is easy to clean and wear resistant				
	20" glide track requires 21" deep clear-				
	ance under worksurface				
	Low profile arm design provides maxi-				
	mum leg room				
	 Patented lift-and-lock spring-assisted 				
	counterbalancing system allows for				
	precise height adjustment (up 2.5" and down 5.8") without use of knobs or				
	levers				
	Fully adjustable 5.5" standard length				
	neck accommodates straight desktops				
	with limited space				
	360° swivel allows user to move key-				
	board freely from side to side				
	 Soft touch knob provides tilt control +/-15 degrees 				
	Available in black only				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

(

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Pembroke, ON K8A 0E1, freight prepaid. Freight class 70.

Worksurface Accessories Keyboard Trays with Standard Arms



Worksurface Accessories Keyboard Trays with Standard Arms

			MODEL NUMBER		
			Racin	Approx. Packaged	Delivered
	MODEL	W x D	Model	Weight	Pricing
	Keyboard Tray for Rectangular Worksur- faces with Tilt Mouse Tray	21 x 13"	KOMG.20.PM	16.0#	\$ 838
	faces with Tilt Mouse Tray				
	 Ergonomically shaped, rigid phenolic 				
$\langle \langle \cdot \cdot \cdot \cdot \rangle \rangle$	tray is sturdier than steel, and offers				
	anti-skid grip strips				
	Built-in mouse guard with cable management provents mayor from aligning off.	-			
	ment prevents mouse from slipping off tray				
	Adjustable and detachable swivel and tilt				
HRDPT	mouse tray attaches right or left				
	 Snap in foam-gel wrist rest is easy to 				
	clean and wear resistant				
	20" glide track requires 21" deep clear-				
	ance under worksurface				
	 Low profile arm design provides maximum leg room 				
	Patented lift-and-lock spring-assisted				
	counterbalancing system allows for				
	precise height adjustment (up 2.5" and				
	down 5.8") without use of knobs or				
	levers				
	Fully adjustable 5.5" standard length				
	neck accommodates straight desktops				
	with limited space • 360° swivel allows user to move key-				
	board freely from side to side				
	Soft touch knob provides tilt control				
	+/-15 degrees				
	 Available in graphite tray and black arm 				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

(

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Pembroke, ON K8A 0E1, freight prepaid. Freight class 70.

Worksurface Accessories Keyboard Drawer



Worksurface Accessories Keyboard Drawer

			MODEL NUMBER			
		W x D	Basic Model	Approx. Packaged Weight	Delivered Pricing	
	Sliding Keyboard Drawer • Sliding drawer mounts under worksur-	20-7/8 x 10-1/2"	KBD.24.BL	9.0#	\$ 259	
	face 12" telescoping slides Standard with molded palm rest Cannot be used on 24" deep corner units Available in black only	3				
HRDPT	• Available iii black offly					
	Sliding Keyboard Drawer w/Mouse Tray • Sliding keyboard drawer with non-hand-	20-7/8 x 10-1/2"	KBDM.30.BL	10.0#	\$ 324	
	ed sliding mousing surface Standard with molded palm rest 24" has 12" telescoping slides 30" has 16" telescoping slides					
UDDDT	Cannot be used on 24" deep corner units Available in black only					

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

(

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Pembroke, ON K8A 0E1, freight prepaid. Freight class 70.

Worksurface Accessories



Worksurface Accessories

MODEL NUMBER Approx. Packaged Weight Basic Model Delivered MODEL WxD Pricing CPU Sling 5-3/8 x 18" CPU.SLING 10.0# \$ 226 Vertically supports and stores CPU below the worksurface

Straps have positive locking clamps

Provides 5-1/2" of travel and 359° swivel • Maximum weight capacity is 75 lbs. Available in black only
 Recommended for 30" deep worksurfac- Accommodates CPU with maximum circumference of 65"

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

Worksurface Accessories Adjustable/Securable CPU Holder



Worksurface Accessories

				-	
		MODEL NUMBER			
	MODEL	Basic Model	Approx. Packaged Weight	Deliv Pricir	ered ng
	CPU Holder, No Lock Slide mechanism 17" forward slide Vertical 13-1/2" to 22-1/2" Horizontal (side-to-side) 3-1/2" to 9" No more than 85 lbs	KOCPUS	13.0#	\$	316
	Black onlyCheck under surface clearances before				
HRDPT	ordering				
	CPU Holder with Lock	KOCPUL	14.0#	\$	428
HRDPT	Integrated lock within the handleBlack only				
	Black only				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

(

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

Worksurface Accessories Compact CPU Holder



Worksurface Accessories Compact CPU Holder

		MODEL NUMBER						
		Pagia	Approx. Packaged	Delivered				
	MODEL	Basic Model	Weight	Pricing				
	Compact CPU Holder	KOCPUE	7.0#	\$ 90				
	 Vertically or horizontally supports and stores CPU below the worksurface 							
	Available in black only							
	 Holder in the vertical position accommo- 							
	dates CPU's 5.5 to 9.8 inches wide and 15.5 to 20 inches tall							
\parallel \sim	Holder in the horizontal position accommodates CPU's 13.8 to 18.8 inches wide							
	modates CPU's 13.8 to 18.8 inches wide and 7.3 to 11.3 inches tall							
HRDPT	• Can hold up to 70-80 lbs in the vertical							
וווערו	position							
	 Can hold up to 30 lbs in the horizontal position 							
	 Mounting plate overall dimensions 5.38" 							
	x 3.95"							

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES

Special Carton Marking


With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

Worksurface Accessories Mini CPU Holder



Worksurface Accessories Mini CPU Holder

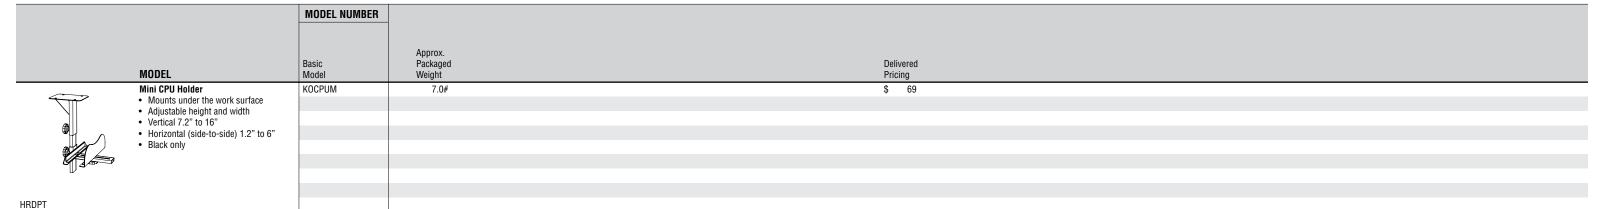

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

(

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107,

freight prepaid. Freight class 70.

Pneumatic Monitor Arm



Pneumatic Monitor Arm

			MODEL NUMBER				
	MODEL		Basic Model	Approx. Packaged Weight	Delivered Pricing		
	Extended Arm for 6-11 lb. Monitors	Clamp Mount	K.61092.SL.CM	9.0#	\$ 647		
	Arm extends up to 19.6" from the base						
16	 Vertical range of motion is 9.2-19.6" high from the center of the bracket 						
	Holds 6-11 lb monitors						
**	 Horizontal range of motion is 3.8-18.0" 						
%	 After installation monitor can be rotated 						
4	to either portrait or landscape						
HRDPT	75/100 VESA compliant180 degree rotation on the base						
TINEST T	90 degree monitor pivot						
	 CM option comes with a standard clamp 						
	mount/grommet kit						
	Finish is silverClamp mount (CM) requires 2-3/4" of						
	under worksurface clearance, consult						
	the assembly instructions for alternative						
	mounting options						

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.



Monitor Arms

MODE Feature	<u></u>					•
MODEL Features F				MODEL NUMBER		
MODEL Features Stood Stood Stood Features To produce the tother does mount or grown count or gr				MODEL NOMBER		
HRDPT Control State Peakures State Peakures State Peakures Pea						
HRDPT Control State Peakures State Peakures State Peakures Pea						
MODEL 17 Post, Sinjek Zerean 17 Post Sinjek Serean 17 Post Sinjek Serean 17 Post Sinjek Serean 17 Post Sinjek Serean 18 Sinjek Bisson 19 Post Sinjek Serean 19 Post Sinjek Sinjek Serean 19 Post Sinjek Serean 19 Post Sinjek Si				D i .	Approx.	Delivered
12 Pets, Stagle Streem 1-7 port to table-righe mount or 1-7 port to table-righ		MODEL	Engluson	Basic	Packaged	Delivered
HEIDET 1 Type of will half-edge mount of growth of the final adjustment from the first 75 & 100mm and the first 75 & 100mm and the first 1 the first						
grommet mount Sweeth Stagler John to 10 75 5 100 mm File allabor to nomeing Supports on 11 fb. 10 at series monitor Can be used on both frequenting stables and passer monitor frequenting stables and passer monitor or stagler and passer monitor Those allows manual height adjustment shows that contract contrac	e.				6.0#	
Operation and the pollutions of the pollutions o	A	 12" post with table-edge mount or 	White finish	CFS01.WH	6.0#	218
HRDPT This patients Supports one 14 is this streem monitor Can't be used on both freetanding tables and partimemental loves monitor 1 mount of remaining the portrait orientation 1 mount of remaining tables 1 mount of rema		grommet mount	Black finish	CES01 BI	6.0#	218
HRDET - Plea strackes to moment - Support on 4 14, list sceen ministr - Support on 4 14, list sceen ministr - Support moment all space on ministr - Support moment all space on ministr - Support moment all space on ministr - Includes parts for first clarge or grow- ment mount - Includes parts for first clarge or grow- ment mount - 12° port with tisher-sign mount or growmen mount - Supports work of lab, first sceen moniters task-foll-back - Can be used no both freestanding tables - and parel-mounted worksurfaces - to other-form and/sage portinal - orientation - Per altow manual height adjustment - Includes parts for first Called - Per altow small height adjustment - Includes parts for manuface portinal - orientation - Per altow small height adjustment - Includes parts for forts clarge portinal - orientation - Per altow small height adjustment - Includes parts for forts clarge portinal - orientation - Per altow small height adjustment - Includes parts for forts clarge portinal - orientation - Per altow small height adjustment - Includes parts for forts charge portinal - orientation - Per altow small height adjustment - Includes parts for forts charge portinal - orientation - Per altow small height adjustment - Includes parts for forts charge portinal - orientation - Per altow small height adjustment - Includes parts for forts charge portinal - orientation - Per altow some mount levels - Support shall be supported and the second program orientation or forts charge portinal - orientation or forts charge porti		Swiver/tilt adapter plate for 75 & 100mm	Diddit iiiidii	0.001.52	0.0%	
HRDPT - Supports on 14 fb. that screen monitor - Can be used in obth Trestanding tables - and panel monantial venticenthese - to route for him indiscape to protrial - orientation - Peal allows manual height adjustment - through a 9° reapy to accommodate - treating settler or 100 - Several find adapter place for 75 & 100 - Several fin		Plate attaches to monitor				
ARDPT - Can be used on both frestanding tables and pame mounted vorsum tracts - 30° swell investment allows monitor or constitution or consti	3	• Cupports and 14 lb flat coroon monitor				
ARDPT and panel-mounted worksurfaces solved movement allows monitor for treate from indicating to portrail orientation. 1. The part of th	•	Can be used on both freestanding tables				
Soft swider movement allows monitor to rotate from indiscage to portrait orientation Pice allows manual height adjustment through a 9" range to accommodate user preference Includes parts for either claimp or gromment and the process of the process	HRDPT	and nanel-mounted worksurfaces				
to rotate from landscape to portrat certaintion Pota allows manual height adjustment through a 9" range to accommodate user preference in mount of mount of the charp or grow-ment mount of the charp of growner mount of growner						
orientation Pole allows manual height adjustment through a 9" range to accommodate user preference Includes parts for either clamp or gromment mount 10 Monitor is not included 12 Pol. buil Screen 17 post with stable-stigs mount or promet mount 18 Swyd-filt adapter pilet for 75 & 100mm file patterns 19 Supports two 14 lb. fils screen monitors back-to-back 20 Can be used on both freestanding tables and pand-mounted worksurfaces and pand-mounted worksur						
Pole allows manual height adjustment through a 9" range to accommodate user preference I includes parts for either clamp or grownmet mount Monitor is not included 12" Post, Dual Screen 12" Post, Use in Experiment mount Switch table-edge mount or growneth mount 15" post with table-edge mount or growneth mount Switch table-						
through a 9' range to accommodate user preference • Includes parts for either clamp or grommet mount • Monitor is not included 12' Post, Unal Screen Silver finish or grommet mount Silver finish or grommet mount Silver finish hole patterns • Supports two 14 ib. flat screen monitors back-to-back Care bused on both freestanding tables and panel-mounted worksurfaces Silver finish hole patterns • Supports two 14 ib. flat screen monitors back-to-back Care bused on both freestanding tables and panel-mounted worksurfaces Silver finish contact to rotate from landscape to portrait orientation Pole allows manual height adjustment through a 9' range to accommodate user preference Includes parts for either clamp or grom-						
user preference Includes parts for either clamp or grommet mount * Monitor is not included 12" Post, Dual Screen 12" post with table-edge mount or grommet mount * Whe finish note patterns • Supports two 14 lb. flat screen monitors back-to-back • Can be used on both freestanding tables and panel-mounted worksurfaces and panel-mounted worksurfaces of swiver movement allows monitor to rotate from landscape to portrat orientation • Pole allows manual height adjustment through a 9" range to accommodate user preference includes parts for either clamp or grom-		through a 9" range to accommodate				
### RODITION OF THE PORT OF TH		user preference				
12" Past, Dual Screen 15" White finish 16" CFS02. SL 16" CFS02. WH 16" CFS02. WH 16" CFS02. SL 1						
12" Post, Dual Screen 12" Post with Table-edge mount or grommet mount 12" Post with Table-edge mount or grommet mount 12" Post with Table-edge mount or grommet mount 12" Post, Dual Screen 12" Post with Table-edge mount or grommet mount 12" Post, Dual Screen 12" Post, Dual Screen 12" Post with Table-edge mount or grommet mount 15" Post with Table-edge mount or grommet mount 16" Post with Table-edge mount or growmet mount 16" Post with Table-edge mount or grow						
- 12" post with table-edge mount or grommer mount - Swivel/tilt adapter plate for 75 & 100mm hole patterns - Supports two 14 lb. flat screen monitors back-to-back - Can be used on both freestanding tables and panel-mounted worksurfaces - 360" swivel movement allows monitor to rotate from landscape to portrait orientation - Pole allows manual height adjustment through a 9" range to accommodate user preference - Includes parts for either clamp or grom-		 Monitor is not included 				
+ 12" post with table-edge mount or grommer mount - Swivel/tilt adapter plate for 75 & 100mm hole patterns - Supports two 14 lb. flat screen monitors back-to-back - Can be used on both freestanding tables and panel-mounted worksurfaces - 360" swivel movement allows monitor to rotate from landscape to portrait orientation - Pole allows manual height adjustment through a 9" range to accommodate user preference - Includes parts for either clamp or grom Includes parts for either clamp or grow Includes parts for either clamp or grow-						
grommet mount Swive/Nitt adapter plate for 75 & 100mm hole patterns Supports two 14 lb. flat screen monitors back-to-back Can be used on both freestanding tables and panel-mounted worksurfaces 360° swivel movement allows monitor to rotate from landscape to portrait orientation Pole allows manual height adjustment through a 9" range to accommodate user preference Includes parts for either clamp or grom-			Silver finish	CFS02.SL	8.0#	\$ 416
FRDPT Black finish black finis	Section 1		White finish	CFS02.WH	8.0#	416
HRDPT - Supports two 14 lb. flat screen monitors back-to-back - Can be used on both freestanding tables and panel-mounted worksurfaces - 360° swivel movement allows monitor to rotate from landscape to portrait orientation - Pole allows manual height adjustment through a 9" range to accommodate user preference - Includes parts for either clamp or grom-	424	grommet mount				
HRDPT **Supports two 14 lb. flat screen monitors back-to-back **Can be used on both freestanding tables and panel-mounted worksurfaces **HRDPT **360° swivel movement allows monitor to rotate from landscape to portrait orientation **Pole allows manual height adjustment through a 9" range to accommodate user preference **User preference** **Includes parts for either clamp or grom-**		Swivel/tilt adapter plate for 75 & 100mm	Didok ililion	OI COL.DL	0.0#	
back-to-back Can be used on both freestanding tables and panel-mounted worksurfaces HRDPT 360° swivel movement allows monitor to rotate from landscape to portrait orientation Pole allows manual height adjustment through a 9" range to accommodate user preference Includes parts for either clamp or grom-	North Control of the	noie patterns				
HRDPT * 360° swivel movement allows monitor to rotate from landscape to portrait orientation * Pole allows manual height adjustment through a 9" range to accommodate user preference * Includes parts for either clamp or grom-	٧٠,	back-to-back				
and panel-mounted worksurfaces • 360° swivel movement allows monitor to rotate from landscape to portrait orientation • Pole allows manual height adjustment through a 9" range to accommodate user preference • Includes parts for either clamp or grom-		Can be used on both freestanding tables				
HRDPT • 360° swivel movement allows monitor to rotate from landscape to portrait orientation • Pole allows manual height adjustment through a 9" range to accommodate user preference • Includes parts for either clamp or grom-		and panel-mounted worksurfaces				
to rotate from landscape to portrait orientation Pole allows manual height adjustment through a 9" range to accommodate user preference Includes parts for either clamp or grom-	HRDPT					
orientation • Pole allows manual height adjustment through a 9" range to accommodate user preference user preference • Includes parts for either clamp or grom-						
through a 9" range to accommodate user preference Includes parts for either clamp or grom-		orientation				
user preference Includes parts for either clamp or grom-		 Pole allows manual height adjustment 				
• Includes parts for either clamp or grom-		through a 9" range to accommodate				
• Includes parts for eitner clamp or grom-		user preference				
		Includes parts for either clamp or grom-				
met mount Monitors are not included		met mount				
Monitors are not included		• Monitors are not included				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

(A)

A Select basic model.



Grommet Mount

The grommet mount is required for use on the following products: DataLink®, InTandem®, WorkZone®, True® and 700 Series® Desk. Grommet Mount requires a 3/8" to 3-1/2" dia. hole for worksurfaces up to 2-1/2" thick drilled in surface on location or through a KI Product Modification Request (specify location).



Table-edge Mount

The table edge mount CANNOT be used on the following products: DataLink®, InTandem®, WorkZone®, True® and 700 Series® Desk. The table edge mount attaches on worksurfaces up to 2-1/2" thick. The lower portion of the clamp can be removed allowing the bracket to be inserted between the worksurface and panel without removing the worksurface.

SPECIFICATIONS

+1/-90° Swivel +1/-180 Rotation +/-180 Worksurface Range 0-3.5" for table edge mount Material - Steel and aluminum

Warranty - These products are warranted as follows: Lifetime Monitor - These products are not included.

SPECIAL SERVICES

Special Carton Marking With specially marked information N/C

Shipping Ships assembled, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.



Monitor Arms

					•
			MODEL NUMBER		
			MIODEL NOMBER		
				Approx.	
			Basic	Packaged	Delivered
	MODEL	Features	Model	Weight	Pricing
	12" Post, Single Screen, 10" Arm	Silver finish	CFS03.SL	7.0#	\$ 278
f &			CFS03.WH	7.0#	
		White finish			278
S	 10" arm with one wire management clip 10" arm bas integrated wire manage 	Black finish	CFS03.BL	7.0#	278
. 2	10" arm has integrated wire manage-				
	ment channel and cover				
T	Swivel/tilt adapter plate for 75 & 100mm				
	hole patterns				
€0	Supports one 14 lb. flat screen monitor				
HRDPT	Can be used on both freestanding tables				
	and panel-mounted worksurfaces				
	360° swivel movement allows monitor				
	to rotate from landscape to portrait				
	orientation				
	Pole allows manual height adjustment				
	through a 9" range to accommodate				
	user preference				
	 Includes parts for either clamp or grom- 				
	met mount				
	Monitor is not included				
	- Monitor is not included				
_		Silver finish	CFS04.SL	9.0#	\$ 339
	able Double Extension Arm	White finish	CFS04.WH	9.0#	339
•	 12" post with table-edge mount or 	Black finish	CFS04.BL	9.0#	339
	grommet mount	Didox iiiioii	0.0052	0.0%	
n /P	 One 10" arm and one 9" arm with two 				
	wire management clips				
	 10" arm has integrated wire manage- 				
<₩,	ment channel and cover				
Te l	Swivel/tilt adapter plate for 75 & 100mm				
LIDDOT	hole patterns				
HRDPT	Supports one 14 lb. flat screen monitor				
	Can be used on both freestanding tables				
	and panel-mounted worksurfaces				
	360° swivel movement allows monitor				
	to rotate from landscape to portrait				
	orientation				
	Pole allows manual height adjustment				
	through a 9" range to accommodate				
	user preference				
	Includes parts for either clamp or grom-				
	met mount				
	Monitor is not included				
	24" of forward/backward movement				
	Arm folds back to post to maximize desk				
	space				
			A		
			•		

HOW TO ORDER

Indicate the following information on order form:


- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of □ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER





Grommet Mount

The grommet mount is required for use on the following products:
DataLink®, InTandem®, WorkZone®,
True® and 700 Series® Desk.
Grommet Mount requires a 3/8" to
3-1/2" dia. hole for worksurfaces up to
2-1/2" thick drilled in surface on
location or through a KI Product
Modification Request (specify
location).



Table-edge Mount

The table edge mount CANNOT be used on the following products:
DataLink®, InTandem®, WorkZone®, True® and 700 Series® Desk. The table edge mount attaches on worksurfaces up to 2-1/2" thick. The lower portion of the clamp can be removed allowing the bracket to be inserted between the worksurface and panel without removing the worksurface.

SPECIFICATIONS

Tilt +1/-90°
Swivel +1/-180
Rotation +/-180
Worksurface Range 0-3.5" for table edge mount
Material - Steel and aluminum

Warranty - These products are warranted as follows: Lifetime Monitor - These products are not included.

nted as


SPECIAL SERVICES

Special Carton Marking With specially marked information N/C

Shipping Ships assembled, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.



Monitor Arms

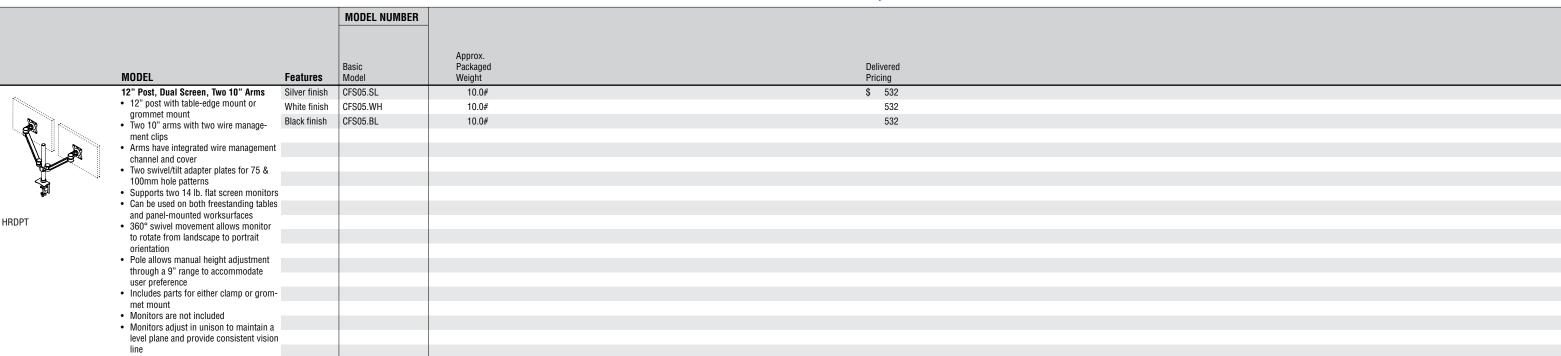



Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: • The ☐ indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of
 indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

(A)

A Select basic model.



Grommet Mount

The grommet mount is required for use on the following products:
DataLink®, InTandem®, WorkZone®,
True® and 700 Series® Desk.
Grommet Mount requires a 3/8" to
3-1/2" dia. hole for worksurfaces up to
2-1/2" thick drilled in surface on
location or through a KI Product
Modification Request (specify
location).



Table-edge Mount

The table edge mount CANNOT be used on the following products:
DataLink®, InTandem®, WorkZone®, True® and 700 Series® Desk. The table edge mount attaches on worksurfaces up to 2-1/2" thick. The lower portion of the clamp can be removed allowing the bracket to be inserted between the worksurface and panel without removing the worksurface.

SPECIFICATIONS

Tilt +1/-90°
Swivel +1/-180
Rotation +/-180
Worksurface Range 0-3.5" for table edge mount
Material - Steel and aluminum

Warranty - These products are warranted as follows: Lifetime

Monitor - These products are not included.

With specially marked information N/C

SPECIAL SERVICES
Special Carton Marking

Shipping Ships assembled, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.



Monitor Arms

			MODEL NUMBER				
	MODEL	Features	Basic Model	Approx. Packaged Weight	Delivered Pricing		
	12" Post, Dual Screen, Two Double	Silver finish	CFS06.SL	11.0#	\$ 662		
	Extension Arms	White finish	CFS06.WH	11.0#	662		
	 12" post with table-edge mount or 	Black finish	CFS06.BL	11.0#	662		
	grommet mount		GI 300.DL	11.0#	002		
	Two 10" arms and two 9" arms (one 10"						
	and one 9" arm per monitor) with four						
	wire management clips • 10" arms have integrated wire manage-						
	ment channel and cover						
	Two swivel/tilt adapter plates for 75 &						
Ħ	100mm hole patterns						
-	 Each extended arm supports one 14 lb. 						
HRDPT	flat screen monitor						
нкирт	 Can be used on both freestanding tables 						
	and panel-mounted worksurfaces						
	360° swivel movement allows monitor						
	to rotate from landscape to portrait orientation						
	Pole allows manual height adjustment						
	through a 9" range to accommodate						
	user preference						
	 Includes parts for either clamp or grom- 						
	met mount						
	 Monitors are not included 						
	 24" of forward/backward movement 						
	 Arm folds back to post to maximize desk 	(
	space						
	Monitors adjust in unison to maintain a						
	level plane and provide consistent vision line						
	IIIIG						

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

Δ

A Select basic model.



Grommet Mount

The grommet mount is required for use on the following products: DataLink®, InTandem®, WorkZone®, True® and 700 Series® Desk. Grommet Mount requires a 3/8" to 3-1/2" dia. hole for worksurfaces up to 2-1/2" thick drilled in surface on location or through a KI Product Modification Request (specify location).



Table-edge Mount

The table edge mount CANNOT be used on the following products: DataLink®, InTandem®, WorkZone®, True® and 700 Series® Desk. The table edge mount attaches on worksurfaces up to 2-1/2" thick. The lower portion of the clamp can be removed allowing the bracket to be inserted between the worksurface and panel without removing the worksurface.

SPECIFICATIONS

+1/-90° Swivel +1/-180 Rotation +/-180 Worksurface Range 0-3.5" for table edge mount Material - Steel and aluminum

Warranty - These products are warranted as follows: Lifetime Monitor - These products are not included.

SPECIAL SERVICES


Special Carton Marking With specially marked information N/C

Shipping Ships assembled, FOB Manitowoc, WI 54220,

freight prepaid. Freight class 70.



Monitor Arms

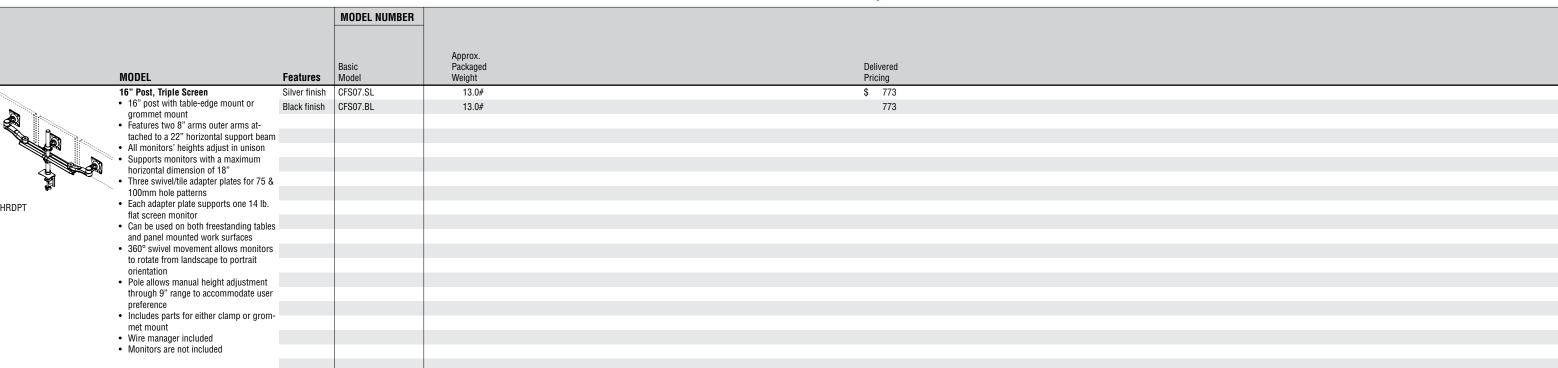

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: • The ☐ indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of
 indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

(

A Select basic model.



Grommet Mount

The grommet mount is required for use on the following products:
DataLink®, InTandem®, WorkZone®,
True® and 700 Series® Desk.
Grommet Mount requires a 3/8" to
3-1/2" dia. hole for worksurfaces up to
2-1/2" thick drilled in surface on location or through a KI Product
Modification Request (specify location).



Table-edge Mount

The table edge mount CANNOT be used on the following products:
DataLink®, InTandem®, WorkZone®, True® and 700 Series® Desk. The table edge mount attaches on worksurfaces up to 2-1/2" thick. The lower portion of the clamp can be removed allowing the bracket to be inserted between the worksurface and panel without removing the worksurface.

SPECIFICATIONS

Tilt +1/-90°
Swivel +1/-180
Rotation +/-180
Worksurface Range 0-3.5" for table edge mount
Material - Steel and aluminum

Warranty - These products are warranted as

follows: Lifetime

Monitor - These products are not included.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping

Ships assembled, FOB Manitowoc, WI 54220, freight prepaid. Freight class 70.

Power Module and Electrical Accessories

BL



Power Module and Electrical Accessories Product Color Options

Ashley Duo Module Colors

BL Black Warm Grey WG TT Cottonwood

PowerUp Module Poly Colors

Product Color Options

Black BL Cool Grey CG Flannel FN GR Grey Light Tone LG Misty Brown MY Sand SA Warm Grey WG

Villa Module Poly Colors

Dean, Dubbel, Node Power Module Color (Corded, Pattern)

Black BL CG Cool Grey Cottonwood CO Warm Grey WG

Villa Grommet Paint Colors

Black BL Blue Grey GR Bronze Metallic ZM Champagne Metallic CM Cool Grey CG Cottonwood CO FN Flannel MY Misty Brown Starlight Silver Metallic SX Warm Grey WG

Finish Cards

View color swatches for items listed within this document.

Paints

Plastics/Poly

<u>Laminates</u>

Wood/Veneer

Edge Styles

Molded Edges

Hard Plastics <u>Glass</u>

Accessory Power Modules Drop-in USB Charger



Accessory Power Modules Drop-in USB Charger

		MODEL NUMBER				
		Pagia	Approx. Packaged	Dalivarad		
	MODEL L	Basic Model	Weight	Delivered Pricing		
		" USB.CHARGE.BL	1.0#	\$ 121		
	Available only in black			• · - ·		
6 6 1 1 1 1 1 1 1 1 1 1	Snaps into the universal data tree ports (in place of the data)					
The state of the s	Must be plugged into separate power					
	source					
	Will work with any KI Power-Up already					
	in the field • Cord length is 72"					
	 4 amps combined for both USB charging 					
HRDPT	ports					
	 Plug dimensions are 1-1/2" deep x 3-3/8" high x 1-7/8" wide 					
	5 5/6 High X 1 7/6 Mide					
		A				
		$\boldsymbol{\omega}$				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES

Special Carton Marking


With specially marked information N/C

Shipping Ships assembled, FOB Bonduel, WI 54107, freight prepaid. Freight class 85.

Accessory Power Modules Wireless Charging Module



Accessory Power Modules Wireless Charging Module

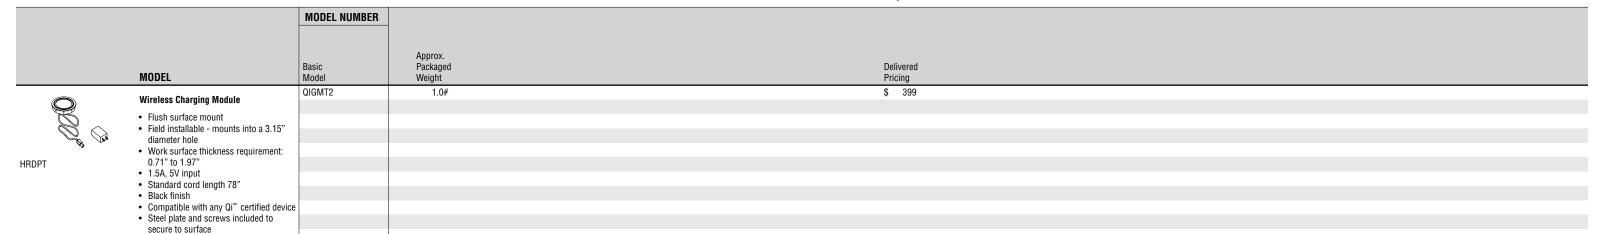

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A

A Select basic model.

SPECIAL SERVICES **Special Carton Marking**


With specially marked information N/C


Shipping Ships assembled, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.




Accessory Power Modules Ashley Duo™ Module General Information

Ashley Duo Module





Ashley Duo Under Mount Module







Accessory Power Modules Ashley Duo™ Module



Accessory Power Modules Ashley Duo™ Module

						▼	
			MODEL NU	JMBER			
	MODEL	Features	Basic Model	Module Color	Approx. Packaged Weight	Delivered Pricing	
	Ashley Duo Module	3'	ASHDU0.3		2.4#	\$ 266	
00000	Provides two 3-prong receptacles and	8'	ASHDU0.8		3.0#	277	
	two dob power dutices (2.1A cacil)	15'	ASHDU0.15		3.7#		
	 Modules offer a 3', 8' or 15' 3-prong 	10	ASHDUU.15		3./#	290	
	plug power sourceAttach with a thin mounting bracket with						
	thumb screws						
	 Wire management not included 						
HRDPT	 Fits work surfaces .75" to 1.5" in thick- 						
	ness • 15A approved						
	 Dimensions are 5.5" x 3.2" x 4.5" 						
22,2	Ashley Duo Module with Activ8	2', Activ8	ASHDUO.A8		2.6#	\$ 283	
1000 8	 Provides two 3-prong receptacles and two USB power outlets (2.1A each) 						
i.	Modules offer an Activ8 2' cord						
	· Attach with a thin mounting bracket with						
	thumb screws						
	Infeeds and jumpers sold separatelyWire management not included						
HRDPT	• Fits work surfaces .75" to 1.5" in thick-						
	ness						
	• 15A approved						
	• Dimensions are 5.5" x 3.2" x 4.5"						
			Λ	B			

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

Select module color.

BL - Black

WG - Warm Grey

- Cottonwood

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

Accessory Power Modules Ashley Duo™ Module



Accessory Power Modules Ashley Duo™ Module

			MODEL NUM	IBER				
	MODEL	Features	Basic Model	Module Color	Approx. Packaged Weight	Delivered Pricing		
	Ashley Duo Under Module	3'	ASHDUO.U.3		1.8#	\$ 234		
	Provides two 3-prong receptacles and two USB power outlets (2.1A each)	8'	ASHDUO.U.8		2.0#	241		
		15'	ASHDUO.U.15		2.7#	258		
	Modules offer a 3', 8' or 15' 3-prong	10	A011000.0.10		Σ.! π	230		
	plug power sourceUnder table units attach with a thin flush							
	mount bracket							
	 Installs in minutes 							
	 Wire management not included 							
	• 15A approved							
	• Dimensions are 5.5" x 2.8" x 1.8"							
	Ashley Duo Under Module with Activ8	3', Activ8	ASHDUO.U.A8		1.9#	\$ 246		
60 00 B	Provides two 3-prong receptacles and							
	two USB power outlets (2.1A each) Modules offer an Activ8 3' cord							
	Under table units attach with a thin flush							
	mount bracket							
	Installs in minutes							
HRDPT	Infeeds and jumpers sold separately Wire management not included.							
	Wire management not included15A approved							
	 Dimensions are 5.5" x 2.8" x 1.8" 							
			A	$oldsymbol{\Theta}$				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- \bullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

BSelect module color.

BL - Black
TT - Cottonwood

- Warm Grey

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships assembled, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

Accessory Power Modules PowerUp® and Villa



Accessory Power Modules PowerUp® and Villa

					* V *		
	MOD	EL NUMBER	ł				
				Approx.			
MODEL	L Basic Model	Poly	Paint Color	Packaged Weight	Delivered Pricing		
PowerUp®	22" 14.226			1.0#	\$ 138		
fixed seating tables or powered tables		60.108		1.0#	138		
with multi-circuit power beams.	180" 14.226	60.180 □□]	1.0#	138		
with multi-circuit power beams. • 108" and 180" cord length for use in							
ilon-powered tables							
 Module designed to fit rectangular KI 							
cutout (3" x 6.25") PT • Data tree is provided to allow client							
Data troo to providou to allow official							
provided data jacks to be inserted in the							
module							
Not for use with Activ8 single circuit							
components • Cord terminates in a 3-prong plug							
Gord terminates in a 3-prong plug							
				10"			
Villa Module	36" 14.326		BL	1.0#	\$ 298		
Duplex receptacles provide 2 outlets, 2 USB-A charging ports, 1 open data port		3.108	BL	1.0#	298		
USB-A charging ports, 1 open data port with data tree • Module only, grommet to be ordered	180" 14.326	3.180	BL	1.0#	298		
Module only, grommet to be ordered							
Three cord length options							
Black only							
Mounts on the under surface below a							
PT cutout to allow power access							
 Cord terminates in a 3-prong plug 							
	L						
	•	A C	Θ (

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A Select basic model.
- Select poly color
 Refer to the **Product Color Options** page in this price list.

Select paint color.

Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 85.

Accessory Power Modules Undermount R8 Module



Accessory Power Modules Undermount R8 Module

MODEL NUMBER Approx. Packaged Weight Basic Model Delivered MODEL Pricing Undermount R8 Module 14.1450.SLVR 3.0# \$ 280 · Silver in color • Includes 8-15A, 120 VAC receptacles, 2 outer most rotated 90 degrees to accommodate large plugs • 144" power cord Under table mount attaches with 4 screws (included) Module hangs down from surface 1" to allow easier access to plug in/unplug Inlcudes 4 wire management clips ETL listed for US and Canada Dimensions are 16.3" x 2.3" x 2.8"

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A

A Select basic model.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 125.

Accessory Power Modules Dean Clamp-on Module



Accessory Power Modules Dean Clamp-on Module

			MODEL NUMB	BER		
					A	
			Basic	Module	Approx. Packaged	Delivered
	MODEL	Features	Basic Model	Color	Weight	Pricing
	Dean Clamp-on Power Module (Corded)		MOD.MC1.36		1.0#	\$ 275
0 4 2	 Toolessly clamps onto worksurfaces 3/4" to 1-1/2" thick 	108" Cord			1.0#	280
	Not compatible with modesty panels	180" Cord	MOD.MC1.180		1.0#	290
	 Provides two 3-prong receptacles, one USB-A and one USB-C charging port 					
	USB-A and one USB-C charging port					
HRDPT	 Includes two strain-relief clips included for wire management 					
	 15A approved 					
	UL listed					
(a V.2)	Dean Clamp-on Power Module (Pattern) Toolessly clamps onto worksurfaces	40" Pattern Cord	MOD.PMC1.40		1.0#	\$ 330
	3/4" to 1-1/2" thick					
	 Not compatible with modesty panels 					
W.F	 Provides two 3-prong receptacles, one USB-A and one USB-C charging port 					
LIDDRT	Pattern Infeed, jumpers, and gangers					
HRDPT	ordered separately					
	Wire management not included 154 approved.					
	15A approvedUL listed					
			A	₿		

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

BSelect module color.

Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 125.

Specifications and prices are subject to change

without prior notice.

Accessory Power Modules Dubbel Undersurface Module



Accessory Power Modules Dubbel Undersurface Module

			MODEL NUME	BER						
	MODEL	Features	Basic Model	Module Color	Approx. Packaged Weight		livered cing			
	Dubbel Undersurface Power Module	36" Cord	MOD.MB1.36		1.0#		215			
(BY2)	(Corded)	108" Cord			1.0#		220			
	 Under table unit attaches with two screws into the worksurface 	180" Cord	MOD.MB1.180		1.0#		230			
Ψ	 Provides two 3-prong receptacles and 									
	two USB-A charging port Includes two strain-relief clips included									
HRDPT	Includes two strain-relief clips included for wire management									
	 15A approved 									
	UL listed									
	Dubbel Undersurface Power Module	40" Pattern Cord	MOD.PMB1.40		1.0#	\$	280			
(1) P	(Pattern)									
	 Under table unit attaches with two screws into the worksurface 									
QL g	Provides two 3-prong receptacles and									
	two USB-A charging port									
HRDPT	 Pattern Infeed, jumpers, and gangers ordered separately 									
	 Wire management not included 									
	 15A approved 									
	UL listed		_							
			Α	ß						

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

BSelect module color.

Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 125.

Accessory Power Modules Node In-surface Module



Accessory Power Modules Node In-surface Module

						~	
			MODEL NUMB	ER			
					Approx.		
			Basic Model	Module	Approx. Packaged	Delivered	
	MODEL	Features	Model	Color	Weight	Pricing	
	Node In-surface Power Module (Corded)	108" Cord	MOD.MO1.108		1.0#	\$ 210	
	 Fits into a 3" diameter round cutout 	180" Cord	MOD.MO1.180		1.0#	220	
	which can be field installed						
	Provides two 3-prong receptacles, one						
	USB-A and one USB-C charging port Includes two strain-relief clips included						
	for wire management						
HRDPT	• 15A approved						
	• UL listed						
	Node In-surface Power Module (Pattern)	20" Pattern Cord	MOD.PM01.20		1.0#	\$ 280	
	 Fits into a 3" diameter round cutout 				1.0#	290	
	which can be field installed						
	 Provides two 3-prong receptacles, one USB-A and one USB-C charging port 						
	 Pattern Infeed, jumpers, and gangers 						
	ordered separately						
HRDPT	Wire management not included						
	15A approved						
	UL listed						
			1				

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

BSelect module color.

Refer to the **Product Color Options** page in this price list.

Δ

3

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 125.

Electrical Accessories



Electrical Accessories

					•
		MODEL NUM	IBER		
				A	
		Basic	Paint	Approx. Packaned Del	livered
	MODEL	Basic Model	Paint Color	Approx. Packaged Del Weight Pric	cing
	Grommet for Villa	GRM.VG1		1.0#	78
	Metal grommet design to fit in a KI cutout				
	cutout • Includes a brush grommet to hide the				
	gaps				
HRDPT					
	Vertical Cable Manager • Silver in color	47.2320.SLVR		1.0#	104
	Multi-directional manager holds wires in				
	static and adjustable tables				
	Weighted base keeps manager in position				
	Includes magnetic link to easily attach to table leg				
	Attaches to underside of table with or				
	without wire management trough • Includes 63 links, 1-3 link magnetic piece, 1 top connector, 2 screws, 1 base				
	piece. 1 top connector. 2 screws. 1 base				
	plate				
HRDPT					
111011					
		A	$oldsymbol{\Theta}$		

HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: \bullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are avail-

HOW TO BUILD A MODEL NUMBER

A Select basic model.

Select paint color.

Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 125.

Electrical Accessories



Electrical Accessories

					•	
			MODEL NUMBER			
	MODEL	L	Basic Model	Approx. Packaged Weight	Delivered Pricing	
	Pattern Jumper	53"	JPPAT.53	1.0#	\$ 98	
HRDPT	Each jumper kit includes jumper and	75"	JPPAT.75	1.0#	104	
	grey power distribution block Review product Planning Guide for	101"	JPPAT.101	1.0#	125	
	table-to-table jumper length guidance.					
HRDPT	Pattern Infeed • 108" cord plugs into standard 15 amp		IFPAT	0.0#	\$ 275	
2	outlet • Kit includes Pattern infeed, grey power					
	distribution block, 12" Pattern jumper and white power distribution block					
	Can be installed anywhere in the run (middle or end)					
	 Jumper length cannot exceed 600" or 					
	50' per infeed • 90 degree angled plug					
	 Does not include vertical wire manage- ment 					



HOW TO ORDER

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: ullet The \square indicates that a choice is required.

- ullet The absence of the \square indicates that no choice is required.
- ullet Alpha-numeric characters in place of \Box indicate that no other alternatives are avail-

HOW TO BUILD A MODEL NUMBER

A Select basic model.

Select paint color.

Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 125.

1330 Bellevue Street P.O. Box 8100 Green Bay, WI 54308-8100 800.424.2432 ki.com

KI and Furnishing Knowledge are registered trademarks of Krueger International, Inc.

© 2020 Krueger International, Inc. All Rights Reserved. Code KI-PLW-000225/KI/PDF

