RYME Specifications

- Loose Lay
- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 5.0 mm
- Size, Peninsula / Alpine / Tuscany: 9" x 48" (228 mm x 1219 mm)
- Size, Béton: 39.37" x 39.37" (1000 mm x 1000 mm)
- 100% Phthalate Free
- Reach Compliant
- Warranty: 20-Year Commercial & Lifetime Residential


RYME+ Specifications


Same as RYME above, but with the following: Overall Thickness: 5.5 mm

- IXPE Acoustical Backing (Sound Rating: STC 53, IIC 55 and \triangle IIC 20 – with 6" slab concrete assembly with no ceiling)
- Warranty: 15-Year Light Commercial & Lifetime Residential



- Patented Coating
- 30% More Scratch Resistance **Over Typical Coatings**
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

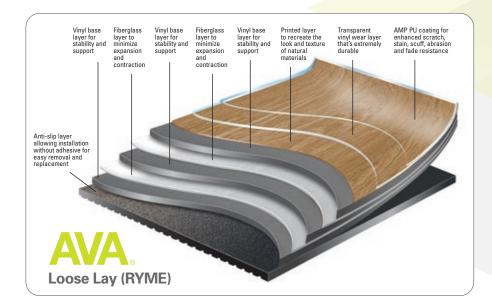

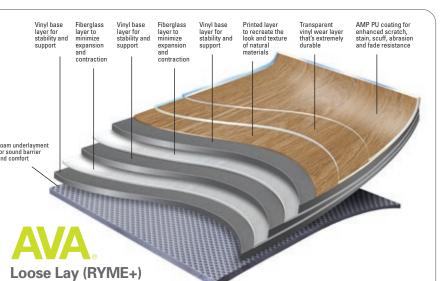

ASTM F1700 SOLID VINYL TILE:	CLASS III, TYPE B
ASTM F1914 RESIDUAL INDENTATION:	PASSES, <10%
ASTM F137 FLEXIBILITY:	PASSES, 25.4MM MANDREL
ASTM F2199 DIMENSIONAL STABILITY:	PASSES, <0.020 IN. PER LIN. FT.
ASTM F925 CHEMICAL RESISTANCE:	PASSES (ASK FOR CHART)
ASTM F1514 HEAT COLOR STABILITY:	PASSES, < Δ8E
ASTM F1515 LIGHT COLOR STABILITY:	PASSES, < Δ8E
ASTM F970 STATIC LOAD LIMIT:	PASSES, 250 LBS.
ASTM F970 MODIFIED FOR MAX WEIGHT:	1,200 LBS.
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450
ASTM D2047 SLIP RESISTANCE:	>0.6 (DRY)

Other products in the AVA collection: AVA DSGN® AVA STYL® AVA SNSE® AVA SPRK® AVA SMPL® AVA 2STYL® AVA VRSE® AVA RSRV® AVA REVV® AVA VEXX® AVA 2DSGNTM AVA MRGETM AVA ORBT™

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA®, DSGN®, STYL®, SNSE®, SPRK®, SMPL®, 2STYL®, VRSE®, RSRV®, REVV®, VEXX®, 2DSGN™, MRGE™, RYME™ and ORBT™ are trademarks of Novalis® Innovative Flooring.

© 2020 Novalis® Innovative Flooring


avaflor.com • 877.861.529





AVARYME

AVA BYME

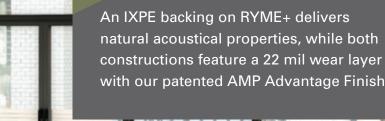

than standard glue down LVT.

Featuring 16 popular colors to complen other AVA® collections, AVA® RYME™

offers large 9" x 48" loose-lay planks

contemporary and rustic classic oak

n 39.37" x 39.37" tiles. Quick and easy

o install with less floor prep, RYME and

RYME+ hide flooring imperfections better

signs, plus four unique concrete design










































Peninsula Oak Canyon

Anti-Slip Backing for RYME

Peninsula (9" x 48" / 228 mm x 1219 mm)

Straight Edge




Microbevel Edge / Embossed in Register

AO2D008L / RYME+: AO2D008AL


AO2D005L / RYME+: AO2D005AL


AO2D007L / RYME+: AO2D007AL

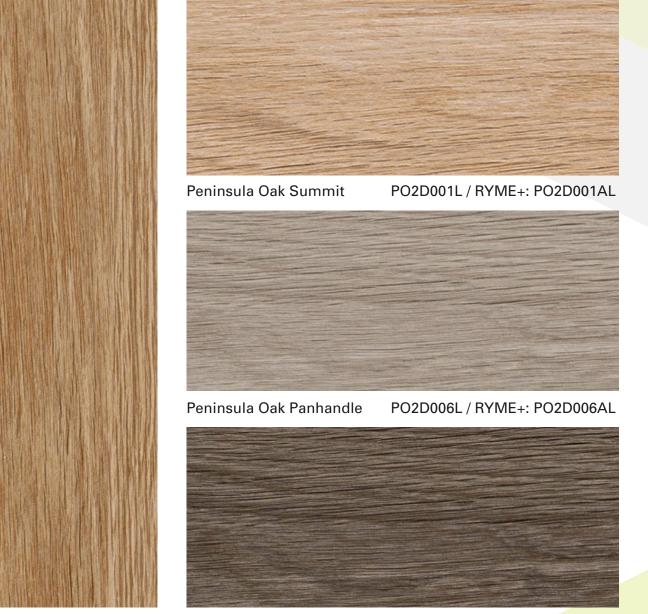





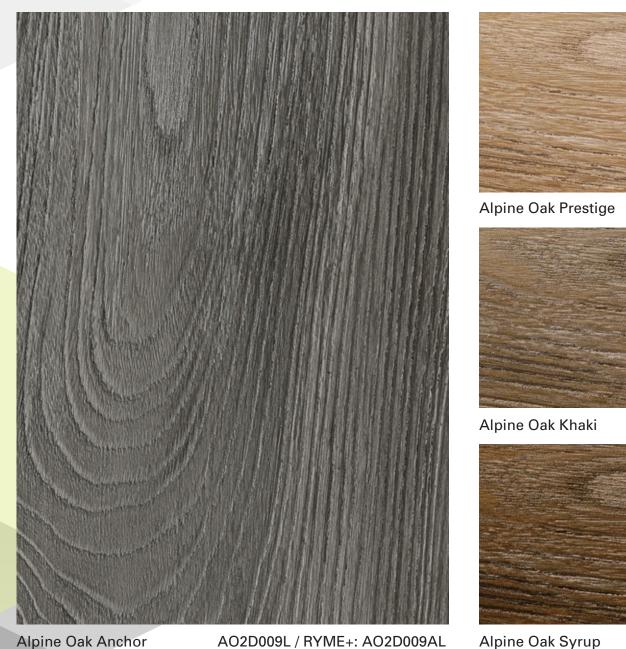

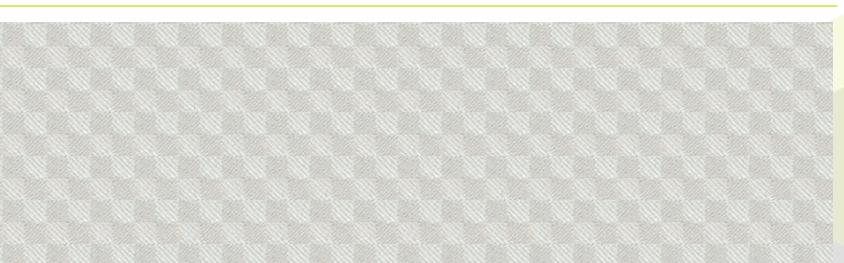

IXPE Acoustical Backing for RYME+ (For Peninsula, Alpine and Tuscany; use "-AL" product SKUs)

Tuscany (9" x 48" / 228 mm x 1219 mm)





Microbevel Edge / Embossed in Register

Béton Pearl








Tuscany Oak Peanut

The RYME Alpine and Tuscany palettes have an EIR embossing which stands for Embossed in Register.

EIR is a manufacturing method that creates a grain appearance consistent with the look of a real hardwood grain. This process aligns the embossing on the sheet with the printed wood grain design and intensifies the visual impact of the depth, texture and appearance of the floor while still providing durability and ease of maintenance.

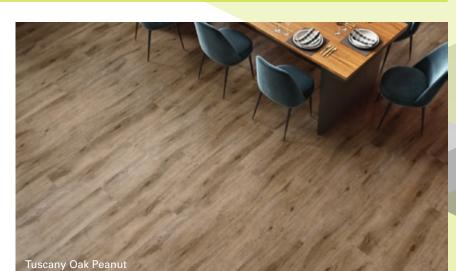





Straight Edge



BN004L Béton Steel BN003L Béton Harbor

