


Specifications

- Wear Layer: 22 mil (0.55 mm)
- Overall Thickness: 2.5 mm
- Size, Organics / Distressed Concrete: 9.84" x 39.37" (250 mm x 1000 mm)
- Size, Béton: 39.37" x 39.37" (1000 mm x 1000 mm)
- Straight Edge
- 100% Phthalate Free
- Reach Compliant
- Warranty: 20-Year Commercial



- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

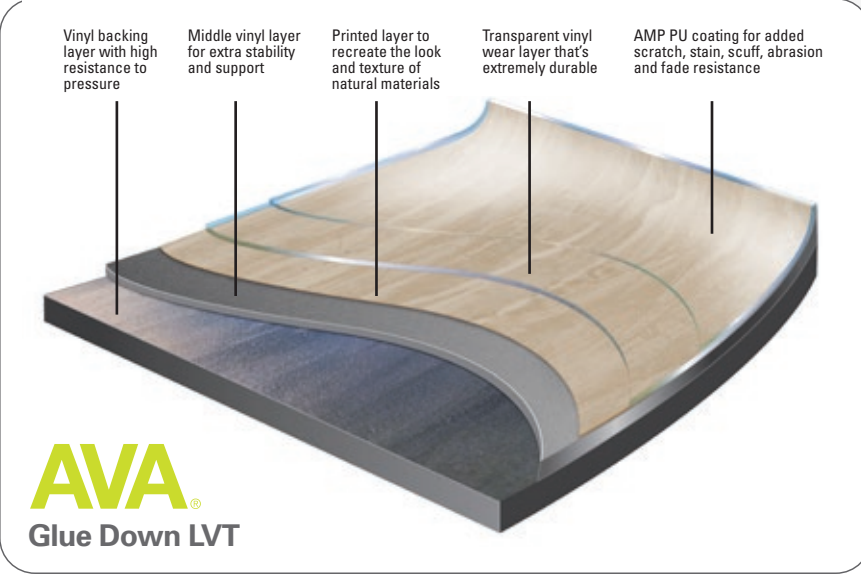

ASTM F1700 SOLID VINYL TILE:	CLASS III, TYPE B
ASTM F1914 RESIDUAL INDENTATION:	PASSES, <10%
ASTM F137 FLEXIBILITY:	PASSES, 25.4MM MANDREL
ASTM F2199 DIMENSIONAL STABILITY:	PASSES, <0.020 IN. PER LIN. FT.
ASTM F925 CHEMICAL RESISTANCE:	PASSES (ASK FOR CHART)
ASTM F1514 HEAT COLOR STABILITY:	PASSES, < Δ8E
ASTM F1515 LIGHT COLOR STABILITY:	PASSES, < Δ8E
ASTM F970 STATIC LOAD LIMIT:	PASSES, 250 LBS.
ASTM F970 MODIFIED FOR MAX WEIGHT:	1,200 LBS.
ASTM E648 (NFPA 253) CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM²
ASTM E662 (NFPA 258) SMOKE DENSITY:	PASSES, <450
ASTM D2047 SLIP RESISTANCE:	>0.6 (DRY)



Other products in the AVA collection:
AVA DSGN® AVA STYL® AVA SNSE®
AVA SPRK® AVA SMPL® AVA 2STYL®
AVA VRSE® AVA RSRV® AVA REVV®
AVA VEXX® AVA 2DSGN™ AVA RYME™
AVA ORBT™

With worldwide sales offices and distribution partners, AVA is a leader in the design and manufacturing of innovative and sustainable resilient flooring. Established in 1984, AVA has developed a diverse range of designs and products that have won numerous awards and are recognized by the industry as setting the benchmark in LVT.

AVA®, DSGN®, STYL®, SNSE®, SPRK®, SMPL®, 2STYL®, VRSE®, RSRV®, REVV®, VEXX®, 2DSGN™, MRGE™, RYME™ and ORBT™ are trademarks of Novalis® Innovative Flooring.

© 2020 Novalis® Innovative Flooring

avaflor.com • 877.861.5292
sales@avaflor.com



Distressed Concrete, Erie / Superior



Béton Iron

AVA®MRGE



NOVALIS®
INNOVATIVE FLOORING

AVA®MRGE

AVA®MRGE



The AVA® MRGE™ collection features four distressed concrete colorways and four modern concrete colorways, plus 10 delicately blended organic styles in earth tone colorways for a total of 18 styles.

MRGE's 2.5mm 22mil wear layer construction provides superior performance in the toughest commercial settings. The highly durable AMP finish – which provides 30% more scratch resistance over typical coatings – makes MRGE suitable for most any high-traffic commercial application, including Hospitality, Corporate and Retail.

Organic, Fossil and Dune





Fossil

SN001



Bark

SN002



Dove

SN004




Dune

SN003



Seashell

SN009

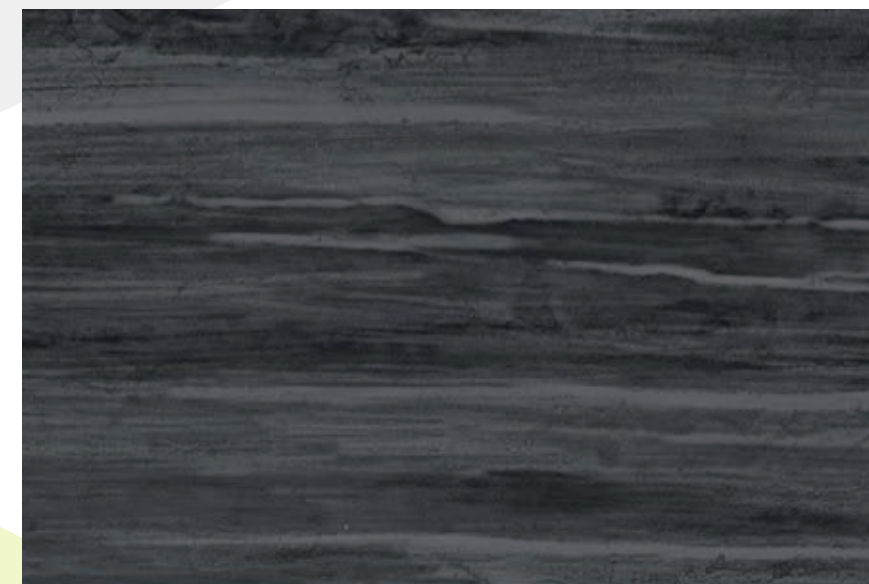

Onyx

SN008



Slate

SN007



Flint

SN006



Cloud

SN005



Haze

SN010



Huron

DI003



Superior

DI002



Ontario

DI004



Erie

DI001



Béton Pearl

BN001



Béton Iron

BN002



Béton Steel

BN003



Béton Harbor

BN004