

CONCRETE LOOK

FORMULA TM COLORBODY PORCELAIN

adaltile IMAGINE WHAT'S POSSIBLE M

# Beauty Grounded in Strength

Timeless style meets advanced technology with Formula™. This sleek, double-load porcelain tile is engineered for optimal durability, adding stylish design to high-traffic spaces and lasting sophistication to any floor or wall application. Available in seven natural colors in polished and unpolished finishes, this versatile tile is impressive in both form and function.

- INNOVATION THAT ENDURES
  - Advanced double-layered technology allows optimum durability
  - Even high-traffic areas can achieve exceptional style with this contemporary yet timeless look
- ENDLESS OPTIONS FOR INFINITE STYLE
  - Available in seven versatile colors in polished or unpolished finishes
  - Ideal for commercial, institutional or residential floor and wall applications
  - Offered in 12 x 24, 24 x 24 and 24 x 48 sizes with coordinating trim

CONCRETE

USAGE























MOSAIC/


















SEE CHARTS FOR FULL PRODUCT DETAILS

SIZES:					
	24 x 48 Floor Tile		24 x 24 Floor Tile		12 x 24 Floor Tile
	FIN	ISHES:	POLISHED	)   UN	POLISHED





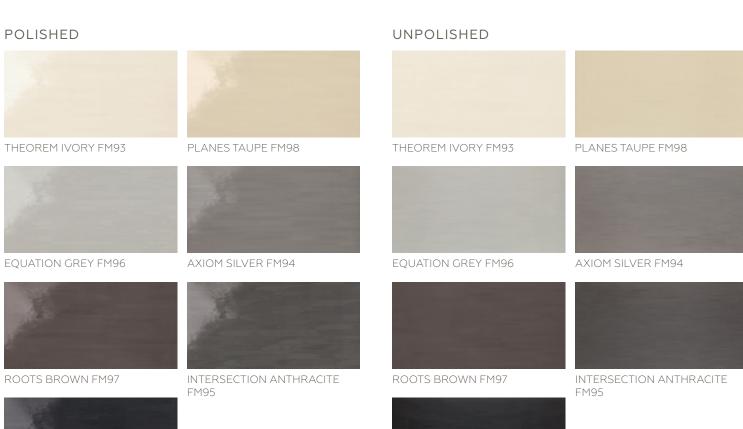

















UNION BLACK FM99



## SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
24 x 48 Floor Tile	(23-7/16" x 47-1/16") (59.50 cm x 119.50 cm)	3/8" Polished 7/16" Unpolished	15.50	2
	(23-7/16" x 23-7/16") e (59.50 cm x 59.50 cm)	3/8" Polished 7/16" Unpolished	11.64	3
12 x 24 Floor Tile	(11-11/16" x 23-7/16") (29.65 cm x 59.50 cm)	3/8" Polished 7/16" Unpolished	9.70	5

#### **APPLICATIONS**

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	<b>✓</b>
Wet & Level – Interior Floor	≥ 0.42	<b>√</b> *
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	<b>✓</b>
Countertops	N/A	<b>✓</b>
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

## APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

## PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/ TestResults.

#### TRIM

Туре	Number	Size	Pieces/ Carton
Bullnose	S-43F9	3 x 24	10
Cove Base†	S-36C9T	6 x 12	20
Cove Base Outcorner <sup>†</sup>	SC-36C9T	1 x 6	10

Cove base trim is intended to coordinate with floor tile in the standard 90-degree installation position.

#### INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installing tile with a length 15" or greater in a staggered brick-joint pattern; overlap should not exceed 33%.)	High (V3)

## DUDABILITY

DURABILITY					
Floor Surface Wear Resistance					
1	Residential Bathrooms	3	All Residential / Light Commercial		
2	All Residential Areas	4	All Residential / Commercial		

## NOTES

Since there are variations in all fired ceramic and natural products. tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

## PRE-CONSUMER RECYCLED MATERIALS PRE-CONSUMER

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.





7834 C.F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



<sup>\*</sup> Unpolished only

<sup>†</sup> Available in Unpolished only