



CONCRETE LOOK

EXHIBITION™
COLORBODY™ PORCELAIN



 daltile®
IMAGINE WHAT'S POSSIBLE™

EXHIBITION™

COLORBODY™ PORCELAIN

Make Your Space a Work of Art

Exhibition™ from Daltile takes its inspiration from trendy art galleries and stylish exposés. It takes on a cement look for a distinct and expressive appearance. Exhibition's artistic personality pairs especially well with large and contemporary spaces. And its warm and cool color tones complement the most diverse palettes.

• ARTISTIC ELEMENTS

- Give your space a unique and modern look inspired by concrete
- Ideal for large projects and open spaces

• HIGH-END & HARD WEARING

- Select from an array of cool and warm tones that pair perfectly
- Rich aesthetic with unparalleled durability

CONCRETE LOOK

USAGE



SPECIAL FEATURES

NOT APPLICABLE
FOR ALL PRODUCTS
IN THIS SERIES. SEE
CHARTS FOR FULL
PRODUCT DETAILS.

Cover photo features Trend Grey 12 x 24 on the floor.
Above photo features Trend Grey 12 x 24 on the floor.

SIZES:



24 x 48
Floor Tile



24 x 24
Floor Tile



12 x 24
Floor Tile

FINISHES: MATTE

FLOOR TILE



STARK WHITE EX01



MODE BEIGE EX06




TAILOR BEIGE EX07



GREY EX02




TREND GREY EX03

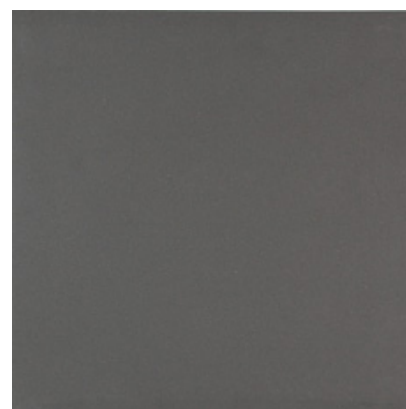

DARK GREY EX04



MODERN TAN EX08

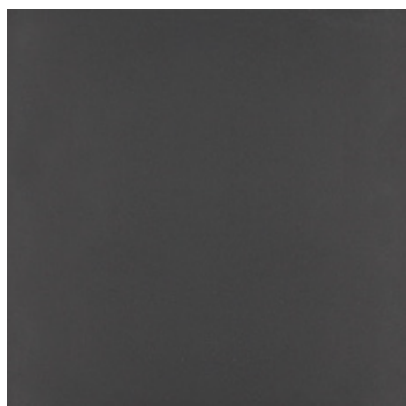

BLACK EX05



SLIP RESISTANT



WATERPROOF



STAINPROOF



DENTPROOF



SCRATCH-RESISTANT



FIRE-RESISTANT






CLIMATEPRO™



SIMPLICLEAN™

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	24 x 48 Floor Tile	(23-3/8" x 46-7/8") (59.50 cm x 119.20 cm)	3/8"	15.50	2
	24 x 24 Floor Tile	(23-3/8" x 23-3/8") (59.50 cm x 59.50 cm)	3/8"	11.64	3
	12 x 24 Floor Tile	(11-5/8" x 23-3/8") (29.65 cm x 59.50 cm)	3/8"	9.70	5

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:


Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in freezing and non-freezing climates, when proper installation methods are followed.

TRIM

Type	Number	Size	Pieces/ Carton
 Bullnose	S43C9	3 x 12	30
 Cove Base	S36C9T	6 x 12	20
 Cove Base Outcorner	SC36C9T	1 x 6	10

Floor bullnose, cove base, and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16") when multiple sizes are installed in a modular pattern, and when installed in a staggered brick-joint pattern; overlap should not exceed 33%)	 High (V3)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 450 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

DURABILITY

Floor Surface Wear Resistance			
1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	(4)	All Residential / Commercial

NOTES

Special consideration needs to be given when installing tiles greater than 15". Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.

PRE-CONSUMER RECYCLED MATERIALS

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.