WESTERN EDGE COLLECTION

The vast, cracked architecture of the Southwestern terrain tells its unspoken story through the broken geometry of granulated earth, rich unadulterated tones, and persevering patterns of sunbathed vegetation extending past the horizon. The Western Edge™ Collection illustrates the complex simplicity of the desert landscape as its variegated form echoes across diverse layers of history.

BELLTEY

LOS ANGELES









DRY LAKE

4DLT60AA0T Conspiracy Theory 402031 18 in x 36 in

Monolithic




















Monolithic









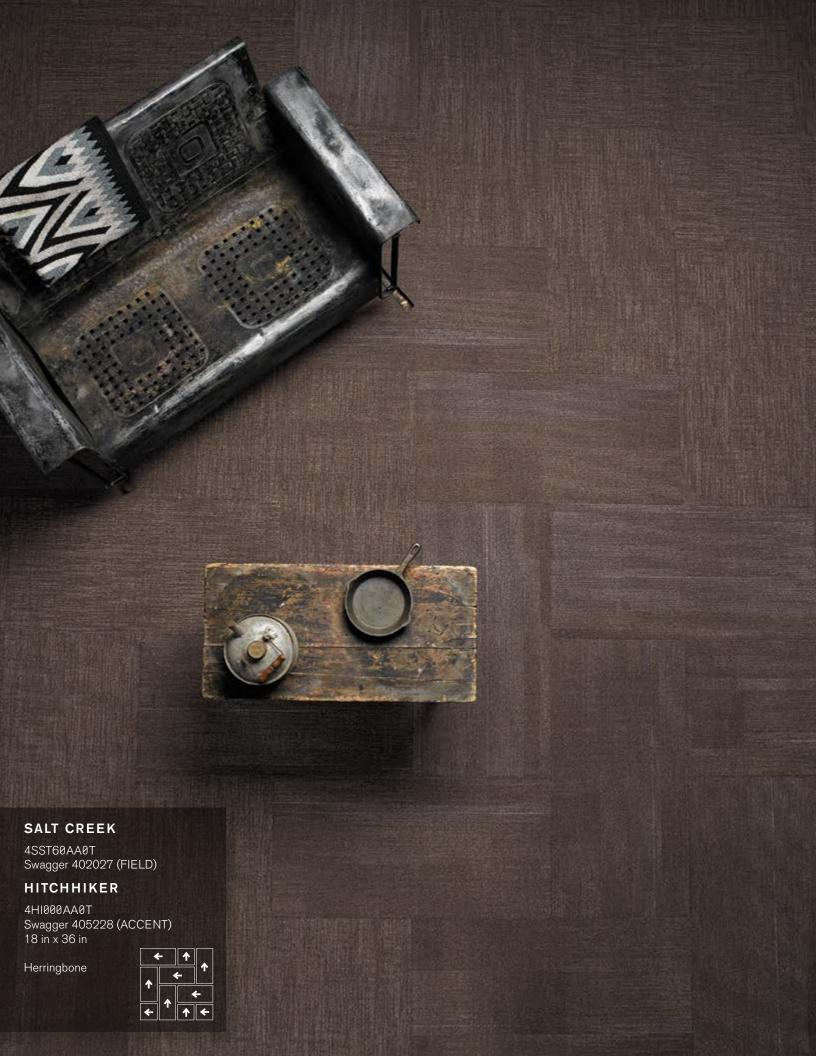



WESTERN EDGE COLLECTION

SPECIFICATIONS DRY LAKE™ Style Number 4DLT6

Product Construction Tufted Textured Loop

Fiber Antron® Lumena™ Type 6,6 Nylon

Dye Method Solution Dyed XTERA™ Soil/Stain Protection

Secondary Backing

Broadloom High PerformancePC

Carpet Tile NexStep® Cushion Tile / AFIRMA™ Hardback Tile

Machine Gauge 1/12 in (47.2 ends/10 cm) Stitches 10.8/in (42.5 ends/10 cm)

Pile Density 5,642 oz/yd3

Total Weight

High PerformancePC Broadloom 52 oz/yd² (1,763.1 g/m²) NexStep® Cushion Tile 94 oz/yd2 (3,187.1 g/m2) 75 oz/yd2 (2,542.9 g/m2) AFIRMA™ Hardback Tile

Total Thickness

High PerformancePC Broadloom 0.230 in (5.8 mm) NexStep® Cushion Tile 0.330 in (8.4 mm) AFIRMA™ Hardback Tile 0.210 in (5.3 mm)

Pattern Repeat

Broadloom Pattern Match Not Required

Carpet Tile None

Radiant Panel Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648) Smoke Density < 450 Dm corr (ASTM-E662), Flaming

Static ≤ 3.5 kV (AATCC-134), Step

Flammability Passes Methenamine Pill Test (CPSC-FF1-70) SALT CREEK™

4SST6

Tufted Textured Loop

Antron® Lumena™ Type 6,6 Nylon

Solution Dyed XTERA™

High PerformancePC

NexStep® Cushion Tile / AFIRMA™ Hardback Tile

1/12 in (47.2 ends/10 cm) 10.8/in (42.5 ends/10 cm)

6,150 oz/yd3

52 oz/yd2 (1,763.1 g/m2) 94 oz/yd2 (3,187.1 g/m2) 75 oz/yd2 (2,542.9 g/m2)

0.230 in (5.8 mm) 0.330 in (8.4 mm) 0.210 in (5.3 mm)

Pattern Match Not Required

None

Passes Class 1, ≥ 0.45 W/cm² (ASTM-E648) < 450 Dm corr (ASTM-E662), Flaming

≤ 3.5 kV (AATCC-134), Step

Passes Methenamine Pill Test (CPSC-FF1-70)

Dry Lake and Salt Creek are available in 12 standard colorways.











STYLE NUMBERS

DRY LAKE	SALT CREEK	BACKING	SIZE
4DLT60620R	4SST60620R	High PerformancePC Broadloom	12 ft (3.657 m) - Also available in Area Rugs
4DLT60AA0T	4SST60AA0T	NexStep® Cushion Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4DLT60220T	4SST60220T	NexStep® Cushion Tile	24 in x 24 in (60.96 cm x 60.96 cm)
4DLT60AA0K	4SST60AA0K	AFIRMA™ Hardback Tile	18 in x 36 in (45.72 cm x 91.44 cm)
4DLT60220K	4SST60220K	AFIRMA™ Hardback Tile	24 in x 24 in (60.96 cm x 60.96 cm)

RECOMMENDED CARPET TILE INSTALLATION METHODS

18 in x 36 in



for specific backing options.

Herringbone











Bentley's High PerformancePC, NexStep® Cushion Tile, and AFIRMA™ Hardback Tile products are Cradle to Cradle Certified™ Silver. Bentley products are also certified under the NSF/ANSI Standard 140 - Sustainable Carpet Assessment (NSF 140). Six of Bentley's standard backing products are NSF 140 certified at the Gold level or above. Bentley's carpet

Patterned carpet may require special attention by the installer to assure a suitable match, and must be addressed in the original labor quotation. Products that go through the shearing process may result in a small loss of yarn weight. Slight variations in color among different production lots are normal and should be considered in the overall installation plan. Carpet specifications and components are subject to normal manufacturing tolerances and may change without notice. Technical performance characteristics are subject to adjustment based on results of post-manufacture testing. Product warranted in accordance with the terms and conditions of Bentley's standard printed warranty in effect at time product is sold. All other warranties, including without limitation any implied warranties of merchantability or fitness for a particular purpose, are hereby disclaimed. Made in USA. Warning: unauthorized reproduction of this carpet design constitutes copyright infringement. ©2017 Bentley Mills, Inc.

products are manufactured in our California mill, a LEED for Existing Buildings: Operations and Maintenance (LEED® - EBOM) Gold certified facility. Please inquire about product warranties





The printed images may not be an accurate reproduction of the product's actual colorways. We strive to offer an authentic representation, but images may vary according to press run. These images are intended as a guide only. If you would like a sample of this product, please call Customer Care at 800.423.4709.