

KEILHAUER

# Juxta Table

## Assembly Guide



## Tools Required

(1) Pneumatic Driver Gun



(1) Robertson Bit



(1) Hex Bit



## Hardware Included


(5) 1/4-20 x 1<sup>3/4</sup>"  
Socket Head  
Cap Bolts




(5) 1/4-20 x 3/4"  
Button Socket  
Cap Bolts




(8) 1/4-20 x 5/8"  
Rod Bolts

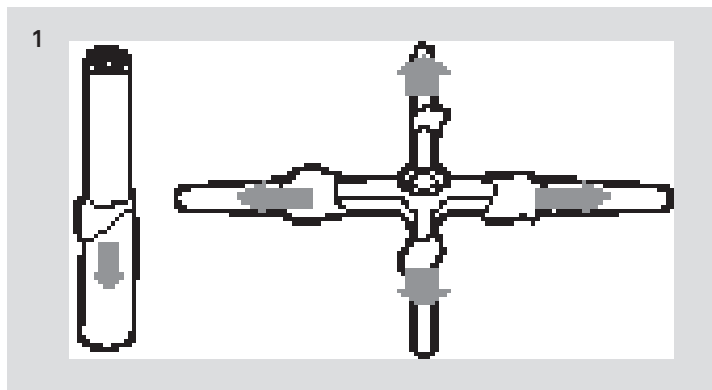


Peel back protective polyfoam on both column and base.

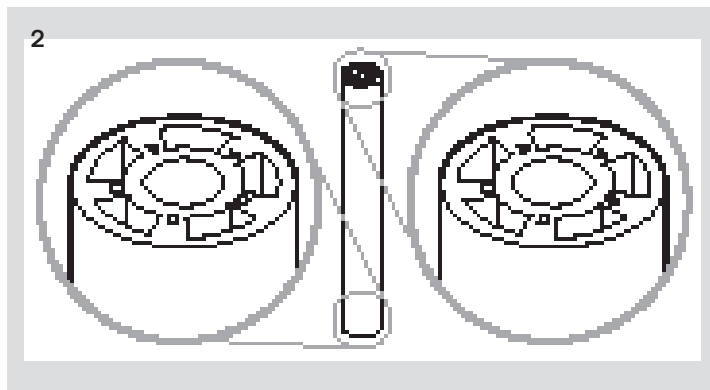


Both ends of the column are the same.

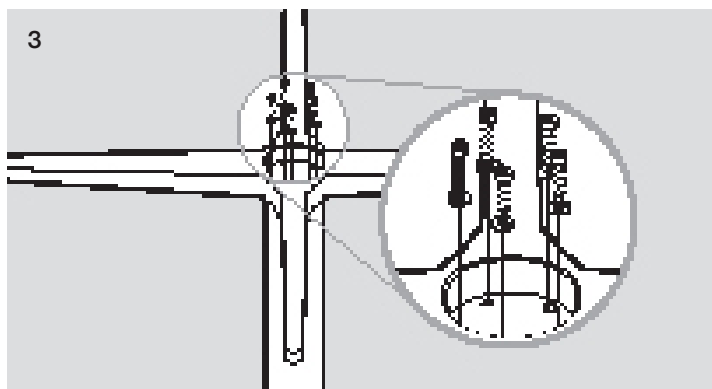


Line up the holes and assemble using the five 1/4-20 x 1<sup>3/4</sup>" socket head cap bolts and lock washers.

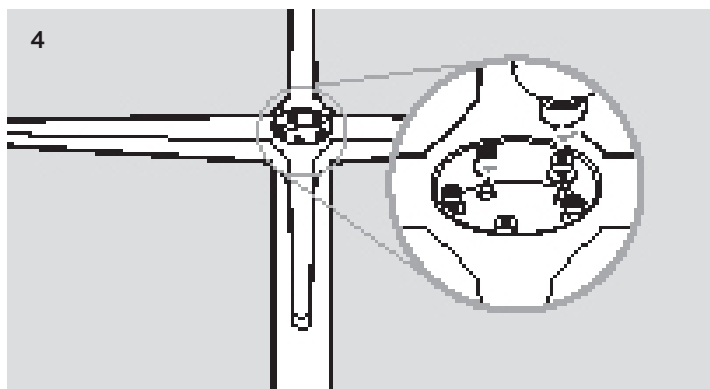

Tighten bolts using a staggered procedure until all of the bolts are tight.

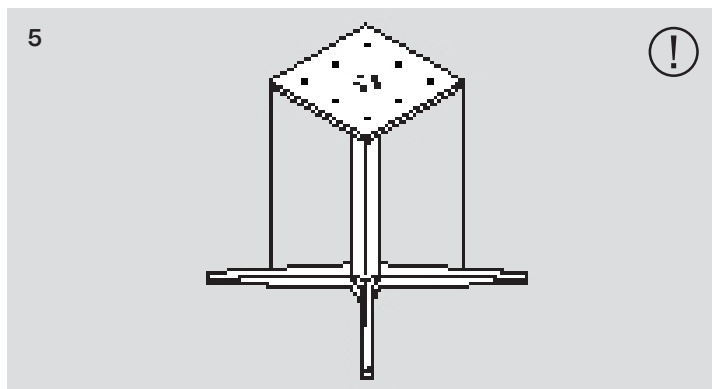

Assemble the mounting plate to the column. The corner of the plate must line up with the leg.

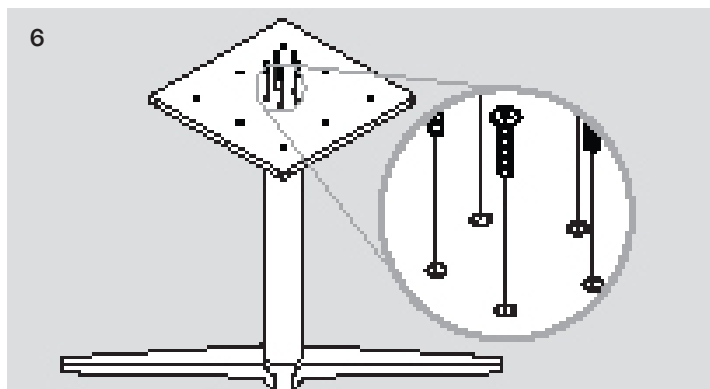


Use five 1/4-20 x 3/4" button socket cap bolts in a staggered procedure until all of the bolts are tight.

- (5) Lock Washers  
for Socket Head  
Cap Bolts




**Warning**

Ensure mounting plate is aligned  
with the table leg, as shown in  
step 5.

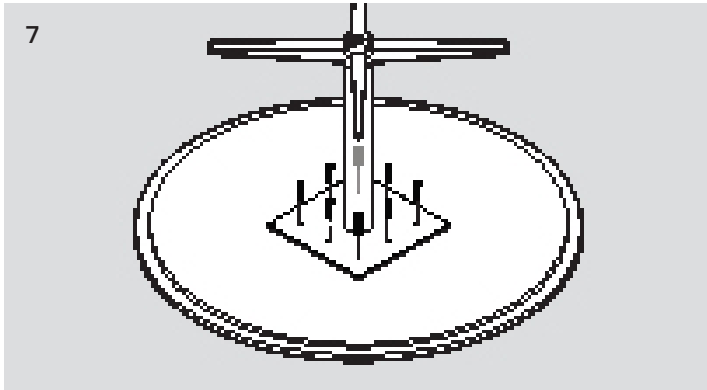

Assemble the base to the top. Using eight 1/4-20 x 5/8" rod bolts, secure the base to the top by tightening in a staggered procedure.

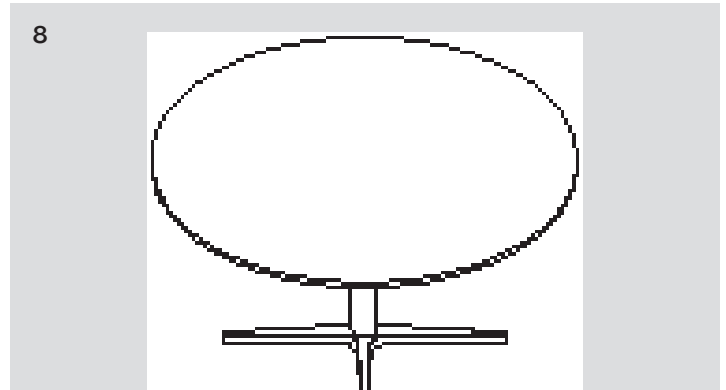

Move the table into place.

**Juxta Table** Designed by EOOS

**keilhauer.com**

1450 Birchmount Road  
Toronto, Ontario, Canada  
M1P 2E3

T 416 759 5665  
F 416 759 5723  
1 800 724 5665

KEILHAUER