


Mesh Tile

Product Type	Carpet Tile
Collection	Open Work
Style Number	5T044
Construction	Multi-Level Pattern Loop
Fiber	Ecosolution Q® Nylon
Dye Method	57% Solution Dyed / 43% Yarn Dyed
Primary Backing	Synthetic
Secondary Backing	Ecoworx® Tile
Protective Treatments	SSP® Shaw Soil Protection
Recommended Adhesive	LokWorx+ Carpet Tile Adhesive, Shaw 5100, Shaw 4151, LokDots, LokWorx Adhesive Tabs, Shaw 3800 or LokWorx Carpet Tile Adhesive

	u.s.	metric
Product Size	24 in x 24 in	61 cm x 61 cm
Area per Carton	48 ft²	4.46 m²
Pieces per Carton	12 pcs	
Gauge	1/10 in	39.4 per 10 cm
Stitches	10.0 per in	40.0 per 10 cm
Finished Pile Thickness	0.131 in	3.33 mm
Average Density	6046 oz/yd³	0.224 g/cm³
Kilotex		12.15
Total Thickness	0.259 in	6.58 mm
Tufted Weight	22 oz/yd²	745.9 g/m²



Recommended Installation Method

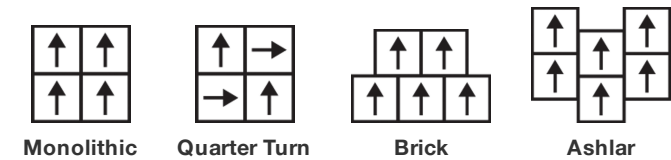

Performance + Testing

Radiant Panel	Class I	
NBS Smoke	Less Than 450	
Electrostatic Propensity	Less Than 3.5 kv	
CRI Green Label Plus (GLP)	CRI Green Label Plus (GLP) GLP9968	
Pill Test	Pass*	*Pill test data is based on style
ADA Compliance	>0.6, meets the recommended static coefficient of friction for ADA walking surfaces and accessible routes***	

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

Lifetime Commercial Limited Warranty

Coordinating Products

Carpet Tile: **Bias Tile, Kasuri Tile**
Broadloom: **Effect, Inlay**

Leed v4 Contribution Credits

MR Credit: Building Product Disclosure and Optimization
Environmental Product Declarations - Option 1: Environmental Product Declaration (EPD)

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 1: Material Ingredient Reporting

MR Credit: Building Product Disclosure and Optimization
Material Ingredients - Option 2: Material Ingredient Optimization

MR Credit: Building Product Disclosure and Optimization
Sourcing of Raw Materials - Option 2: Leadership Extraction Practices

EQ Credit: Low Emitting Materials
Option 1: Product Category Calculations

MR Credit: Interiors Life-Cycle Impact Reduction
Option 3: Design for Flexibility

3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804

C2C Silver Level (Version 4.0)

3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804

Environmental Guarantee: Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Carpet Within The United States And Canada At No Cost to The Customer.

Green Label Plus Certification: GLP9968

Ecoworx Tile with Lokdots Installation System

Material Health & Environmental Certifications

Certifications below apply exclusively to the carpet tile rug itself and not the LokWorx Tabs adhesive

Health & Wellbeing

Material Ingredient Transparency

Cradle to Cradle Certified® | Silver Level (Version 4.0)
Health Product Declaration (HPD) | 1,000 ppm Disclosure
Living Building Challenge (LBC) | Free of Red List Chemicals
Declare | LBC Compliant
NSF 140 | Gold

Indoor Air Quality

CRI Green Label Plus (GLP) | GLP9968

Climate Impact

Environmental Product Declaration (EPD)

Total Recycled Content

Product Packaging

3rd Party Certified in Accordance with ISO14044, ISO14025 & EN15804

36% (Pre-Consumer 36% | Post-Consumer 0%)

100% Recyclable

Global Product Assessment

Building Research Establishment (BRE) | Certified
Good Environmental Choice Australia (GECA) | Certified
Singapore Green Label | Certified

GSA | Approved

CE Marking (EN 14041) | 3rd Party Certified

Environmental Guarantee* | Through Our Environmental Guarantee, Shaw Pledges to Transport And Recycle Any Ecoworx Carpet Within The United States And Canada At No Cost to The Customer.

Country of Origin | USA**

Additional Information

* To learn more about the recyclability of our products and our re[TURN], please visit shawcontract.com/sustainability.

**Meets or exceeds all local and national regulations in country of manufacture.

***This carpet is manufactured to be ADA compliant, but to be fully ADA compliant, the end-user must ensure the carpet is adhered to the floor and installed as outlined in the ADA standards.

[Installation Guidelines](#)

[Maintenance Guidelines](#)

Specifications are subject to nominal manufacturing variance. Material supply and/or manufacturing processes may necessitate changes without notice.

This product is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another product design is also strictly prohibited.

Visit shawcontract.com/testing for more information.

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bengaluru +91 80 6773 0202 | Beijing +86 10 6568 588 | Chicago +1 312 467 1331 | Dubai +971 4 584 6956 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | London +44 207 961 4120 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543 | Mexico City +52 5010 7600 | Mumbai +91 22 6284 5050 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | Paris +33 (0) 1 81 22 44 39 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550 | São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +1 800 556 302

© 2023 Shaw Industries Group, Inc., a Berkshire Hathaway Company
March 29, 2023

2 of 3

