



SPEC-00279 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022


GYROSHIFT MULTIPLES 2" ADJUSTABLE FLUSH MOUNT

S2, S2AF

PROJECT: _____

TYPE: _____

NOTE: _____

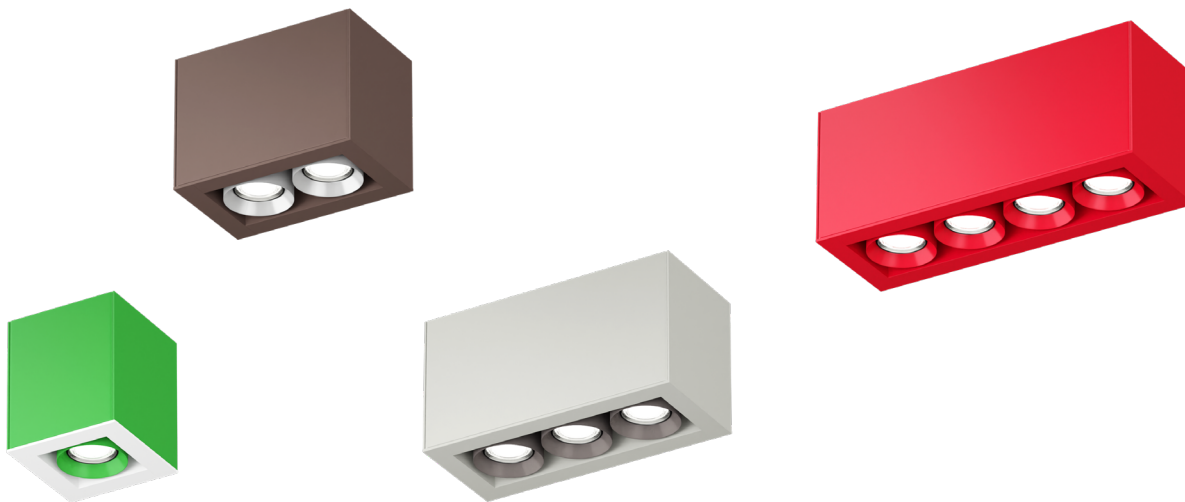

LED LIGHT ENGINE

RATED WATTAGE	10W, 15W, 20W
DELIVERED LUMENS	Up to 1143 lm Per Head
EFFICACY	Up to 89 lpw Per Head
CCT @ 90CRI	2700K, 3000K, 3500K, 4000K
COLOR QUALITY	90+ CRI, 2-Step SDCM
LED LIFETIME	55,000 hours @ L70

DELIVERED LUMENS MATRIX - LUMENS PER LIGHT

10W	10° Optic	30° Optic	50° Optic
2700K (90CRI)	861 lm	949 lm	859 lm
3000K (90CRI)	914 lm	1007 lm	912 lm
3500K (90CRI)	958 lm	1055 lm	956 lm
4000K (90CRI)	994 lm	1094 lm	992 lm

15W	10° Optic	30° Optic	50° Optic
2700K (90CRI)	1275 lm	1404 lm	1272 lm
3000K (90CRI)	1353 lm	1490 lm	1350 lm
3500K (90CRI)	1418 lm	1562 lm	1415 lm
4000K (90CRI)	1471 lm	1620 lm	1467 lm

SILENT VU™ OPTICS TECHNOLOGY

OPTICS	10°, 30°, 50° Installed
ADJUSTABLE	45° tilt, Infinite Rotation, Tool Free Locking Below Ceiling
MEDIA	Clear, Solite, Frosted, Linear Spread, Hex Louver, Wall Wash

POWER SUPPLY

INPUT VOLTAGE	120-277V, or 120V
DIMMING	TRIAC, ELV, 0-10V, EcoSystem®, DALI

INSTALLATION OPTIONS

- Flush mount to ceiling over standard J-Box

LISTINGS AND WARRANTY

- cULus Listed to US and Canadian standards for Damp Locations
- Five (5) years limited warranty
- CA Title 24 JA-8 Compliant



DAMP
LOCATION



JA8 TITLE
24
COMPLIANT

5 YEAR
LIMITED WARRANTY



SPEC-00279 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022


GYROSHIFT MULTIPLES 2" ADJUSTABLE FLUSH MOUNT

S2, S2AF

PROJECT: _____

TYPE: _____

NOTE: _____

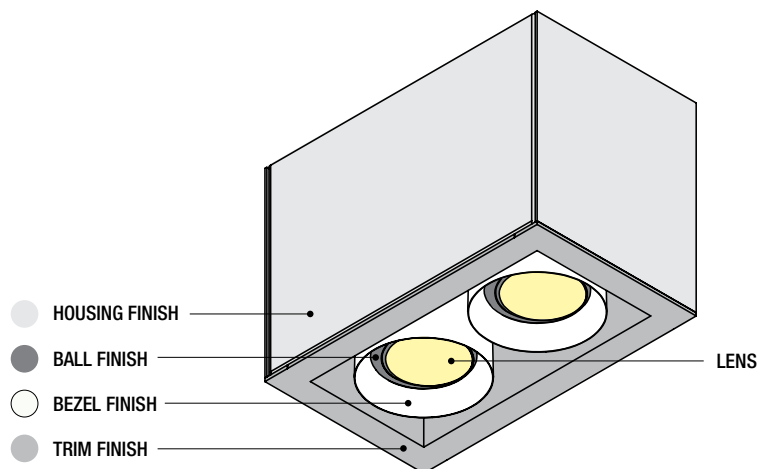

Under Trim:

Inside trim finish is always the same as the Flange finish.

FINISH

ABL (Aegean Blue)	PNC (Painted Natural Copper)
BB (Burnished Bronze)	RD (Red)
BK (Gloss Black)	SGR (Sage Green)
BLU (Blue)	SND (Sand)
DVG (Dove Gray)	SS (Satin Silver)
FLG (Flannel Gray)	TBZ (Textured Bronze)
GA (Galvanized)	TGP (Textured Graphite)
GWT (Gloss White)	TNG (Tangerine)
LG (Lime Green)	TTL (Tahitian Teal)
MB (Matte Black)	WT (Semi Gloss White)
MBL (Midnight Blue)	YEL (Yellow)
PNA (Painted Natural Aluminum)	

ORDER MATRIX

TRIM ORDER MATRIX (EXAMPLE: S2-1L-BKBK BK-279010-CLFR-00)

TRIM STYLE	BALL FINISH	BEZEL FINISH	TRIM FINISH	CCT	CRI	OPTIC	MEDIA 1	MEDIA 2	REV
S2-1L 1 Light	-ABL (Aegean Blue)	ABL	ABL	-27 (2700K)	90 (CRI)	-10 (10°)	-NL (No Lens)	-NL (No Lens)	-00
	-BB (Burnished Bronze)	BB	BB	-30 (3000K)			-CL (Clear Lens)	-CL (Clear Lens)	
	-BK (Gloss Black)	BK	BK	-35 (3500K)			-FR (Frosted)	-FR (Frosted)	
	-BLU (Blue)	BLU	BLU	-40 (4000K)			-MP (Solite)	-MP (Solite)	
S2-2L 2 Light	-DVG (Dove Gray)	DVG	DVG				-LS (Linear Spread)	-LS (Linear Spread)	
S2-3L 3 Light	-FLG (Flannel Gray)	FLG	FLG						
	-GA (Galvanized)	GA	GA						
	-GWT (Gloss White)	GWT	GWT				-HEX (Hex Cell)	Holds 1 Media only when HEX or WW selected.	
S2-4L 4 Light Linear	-LG (Lime Green)	LG	LG				-WW (Wall Wash)		
	-MB (Matte Black)	MB	MB						
	-MBL (Midnight Blue)	MBL	MBL						
	-PNA (Painted Natural Aluminum)	PNA	PNA						
	-PNC (Painted Natural Copper)	PNC	PNC						
	-RD (Red)	RD	RD						
	-SGR (Sage Green)	SGR	SGR						
	-SND (Sand)	SND	SND						
	-SS (Satin Silver)	SS	SS						
	-TBZ (Textured Bronze)	TBZ	TBZ						
	-TGP (Textured Graphite)	TGP	TGP						
	-TNG (Tangerine)	TNG	TNG						
	-TTL (Tahitian Teal)	TTL	TTL						
	-WT (Semi Gloss White)	WT	WT						
	-YEL (Yellow)	YEL	YEL						

MEDIA

S2-Lens-CL-0	(Clear Lens)
S2-Lens-FR-0	(Frosted Lens)
S2-Lens-MP-0	(Solite Lens)
S2-Lens-LS-0	(Linear Spread)
S2-Lens-HEX-0*	(Hex Louver)
S2-Lens-WW-0*	(Wall Wash)

BEAM SPREADS

Downlight	Adjustable	Wall Wash

OPTICS

S2-10-OPTIC-0	(10° Spot)
S2-30-OPTIC-0	(30° Narrow Flood)
S2-50-OPTIC-0	(50° Flood)



SPEC-00279 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

GYROSHIFT MULTIPLES 2" ADJUSTABLE FLUSH MOUNT

S2, S2AF

PROJECT: _____

TYPE: _____

NOTE: _____

ORDER MATRIX

HOUSING ORDER MATRIX (EXAMPLE: S2AF-1LFL-WT15S-00)

HOUSING SIZE	HANGING TYPE	HOUSING FINISH	WATTS PER LIGHT	DRIVER	REV
S2AF-1L 1 Light Housing	FL (Flush Mount)	-ABL (Aegean Blue)	-10 (10W)	S (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V) <i>Forward and reverse phase dimming at 120V only.</i>	-00
		-BB (Burnished Bronze)	-15 (15W)		
S2AF-2L 2 Light Housing		-BK (Gloss Black)			
		-BLU (Blue)			
S2AF-3L 3 Light Housing		-DVG (Dove Gray)			
		-FLG (Flannel Gray)			
S2AF-4L 4 Light Housing		-GA (Galvanized)			
		-GWT (Gloss White)			
		-LG (Lime Green)			
		-MB (Matte Black)			
		-MBL (Midnight Blue)			
		-PNA (Painted Natural Aluminum)			
		-PNC (Painted Natural Copper)			
		-RD (Red)			
		-SGR (Sage Green)			
		-SND (Sand)			
		-SS (Satin Silver)			
		-TBZ (Textured Bronze)			
		-TGP (Textured Graphite)			
		-TNG (Tangerine)			
		-TTL (Tahitian Teal)			
		-WT (Semi Gloss White)			
		-YEL (Yellow)			





SPEC-00279 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

GYROSHIFT MULTIPLES 2" ADJUSTABLE FLUSH MOUNT

S2, S2AF


PROJECT: _____

TYPE: _____


NOTE: _____

LINE DRAWINGS

S2AF-1LFL 2" - 1 Light Flush Mount

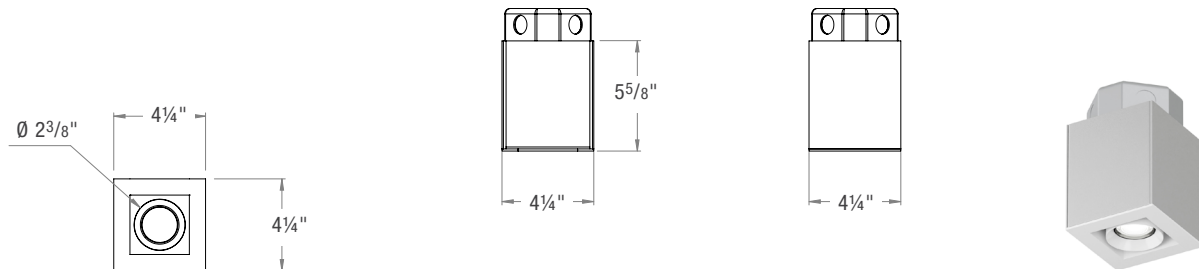

S2AF-2LFL 2" - 2 Light Flush Mount

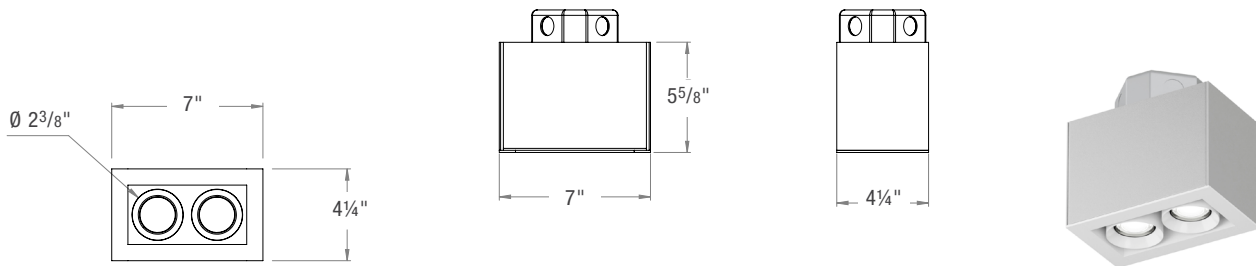



SPEC-00279 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

GYROSHIFT MULTIPLES 2" ADJUSTABLE FLUSH MOUNT

S2, S2AF

PROJECT: _____

TYPE: _____



NOTE: _____

LINE DRAWINGS

S2AF-3LFL

2" - 3 Light



Flush Mount

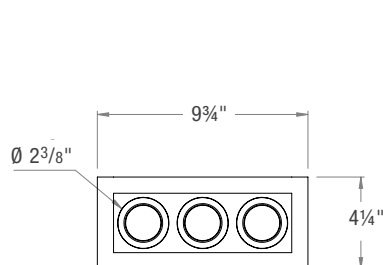

S2AF-4LFL

2" - 4 Light Linear

Flush Mount

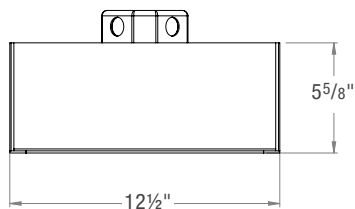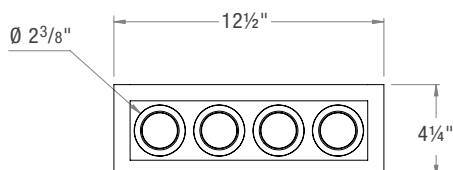



SPEC-00279 GYROSHIFT-MULTIPLES, 2", V-1.3, UPDATED 10/14/2022

GYROSHIFT MULTIPLES 2" ADJUSTABLE FLUSH MOUNT


S2, S2AF

PROJECT: _____

TYPE: _____

NOTE: _____

STANDARD FINISHES




ABL
Aegean Blue



BB
Burnished Bronze



BK
Gloss Black



BLU
Blue



DVG
Dove Gray



FLG
Flannel Gray




GA
Galvanized




GWT
Gloss White



LG
Lime Green



MB
Matte Black



MBL
Midnight Blue



PNA
Painted Natural Aluminum



PNC
Painted Natural Copper



RD
Red



SGR
Sage Green



SND
Sand



SS
Satin Silver



TBZ
Textured Bronze



TGP
Textured Graphite




TNG
Tangerine



TTL
Tahitian Teal



WT
Semi Gloss White



YEL
Yellow