

# GyroShift 5" Wall Mount Cylinder

30W LED Downlight  
Round


Catalog #:

Type:

Project:

Date:

Notes:

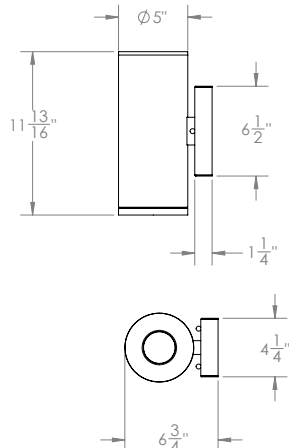

## STANDARD FINISHES

<b>ABL</b> (Aegean Blue)	<b>PNC</b> (Painted Natural Copper)
<b>BB</b> (Burnished Bronze)	<b>RD</b> (Red)
<b>BK</b> (Gloss Black)	<b>SGR</b> (Sage Green)
<b>BLU</b> (Blue)	<b>SND</b> (Sand)
<b>DVG</b> (Dove Gray)	<b>SS</b> (Satin Silver)
<b>FLG</b> (Flannel Gray)	<b>TBZ</b> (Textured Bronze)
<b>GA</b> (Galvanized)	<b>TGP</b> (Textured Graphite)
<b>GWT</b> (Gloss White)	<b>TNG</b> (Tangerine)
<b>LG</b> (Lime Green)	<b>TTL</b> (Tahitian Teal)
<b>MB</b> (Matte Black)	<b>WT</b> (Semi Gloss White)
<b>MBL</b> (Midnight Blue)	<b>YEL</b> (Yellow)
<b>PNA</b> (Painted Natural Aluminum)	

## Electrical Data

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	30W	1745 lm	58 lpw
3000K	90 CRI	30W	1850 lm	61 lpw
3500K	90 CRI	30W	1945 lm	64 lpw
4000K	90 CRI	30W	2025 lm	68 lpw
Warm Dim	-	10W	608 lm	61 lpw

Lumens will vary depending on CCT, optic & lens option

## Specifications

### Field Replaceable LED Light Engine

- 30W LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 10°, 30° and 50° optics included
- 45° adjustability with 360° aiming

### Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

### Downlight Cylinder

Utilizes one LED to illuminate in one direction

### Mounting

Rectangle 6-1/2" x 4-1/4" x 1-1/4" canopy included with standard universal dim driver (7-1/2" x 6" x 1-1/4" canopy included with Lutron and eldoLED drivers)

### Finishes

Available in many colors with optional coastal coating to protect finish in coastal environments

### Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations



## Order Matrix

### GyroShift 5" Wall Mount Cylinder (Example: LW5-SFT-10S2710ABL-NLNL-0)

Series	Wattage	Driver	CCT / CRI	Optic	Finishes	Coastal Coating Option	Media 1	Media 2	Rev
<b>LW5-SFT</b> (Round)	<b>-10</b> (10W)	<b>S<sup>2</sup></b> (ERP, Universal Dim, Triac/ELV/0-10V 1% 120-277V)	<b>27</b> (2700K/90 CRI)	<b>10</b>	<b>ABL</b>	(blank) (No coating)	<b>-NL</b> (No Lens)	<b>NL</b>	<b>-0</b>
	<b>-15</b> (15W)		<b>30</b> (3000K/90 CRI)	<b>30</b>	<b>BB</b>	<b>-C</b> (Coating)	<b>-CL</b> (Clear Lens)	<b>CL</b>	
	<b>-20</b> (20W)	<b>L3<sup>1</sup></b> (Lutron Hi-Lume® Fade-to-Black 1% 120-277V)	<b>35</b> (3500K/90 CRI)	<b>50</b>	<b>BK</b>		<b>-FR</b> (Frosted Lens)	<b>FR</b>	
	<b>-25</b> (25W)		<b>40</b> (4000K/90 CRI)		<b>BLU</b>		<b>-MP</b> (Solite Lens)	<b>MP</b>	
	<b>-30</b> (30W)	<b>EL1<sup>1</sup></b> (eldoLED DALI 1% 120-277V)	<b>WD*</b> (1850-3000K)		<b>DVG</b>		<b>-LS</b> (Linear Spread)	<b>LS</b>	
		<b>EL2<sup>1</sup></b> (eldoLED 0-10V 1% 120-277V)			<b>FLG</b>		<b>-HEX*</b> (Hex Louver)		
		<b>DMX<sup>1</sup></b> (DMX 0.1% 120-277V)			<b>GA</b>		<b>-WW*</b> (Wall Wash)		
					<b>GWT</b>				
					<b>LG</b>				
					<b>MB</b>				
					<b>MBL</b>				
					<b>PNA</b>				
					<b>PNC</b>				
					<b>RD</b>				
					<b>SGR</b>				
					<b>SND</b>				
					<b>SS</b>				
					<b>TBZ</b>				
					<b>TGP</b>				
					<b>TNG</b>				
					<b>TTL</b>				
					<b>WT</b>				
					<b>YEL</b>				

- Includes larger canopy
- Forward and reverse dimming at 120V only

### Media

<b>S3-LENS-CL-0</b> (Clear Lens)	<b>S3-LENS-LS-0</b> (Linear Spread)
<b>S3-LENS-FR-0</b> (Frosted Lens)	<b>S3-LENS-HEX-0*</b> (Hex Louver)
<b>S3-LENS-MP-0</b> (Solite Lens)	<b>S3-LENS-WW-0*</b> (Wall Wash)

\*Note: Can only fit 1 media if HEX or WW is selected

### Emergency

<b>EM-1000</b> (25W LED Remote Inverter)
<b>EM-1002</b> (10W LED Remote Emergency Driver)

Spec-00257 Revised 06/12/2023

Patent: [www.csllighting.com/patents](http://www.csllighting.com/patents)

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • [www.csllighting.com](http://www.csllighting.com)  
©2023 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc. All rights reserved. Subject to change without notice.

