

# GyroShift 5" Cylinder

30W LED Pendant  
Round


Catalog #:

Type:

Project:

Date:

Notes:

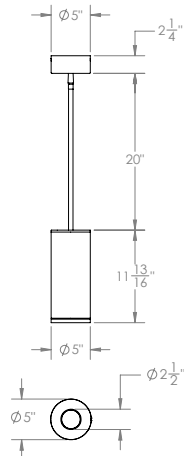

## STANDARD FINISHES

<b>ABL</b> (Aegean Blue)	<b>PNC</b> (Painted Natural Copper)
<b>BB</b> (Burnished Bronze)	<b>RD</b> (Red)
<b>BK</b> (Gloss Black)	<b>SGR</b> (Sage Green)
<b>BLU</b> (Blue)	<b>SND</b> (Sand)
<b>DVG</b> (Dove Gray)	<b>SS</b> (Satin Silver)
<b>FLG</b> (Flannel Gray)	<b>TBZ</b> (Textured Bronze)
<b>GA</b> (Galvanized)	<b>TGP</b> (Textured Graphite)
<b>GWT</b> (Gloss White)	<b>TNG</b> (Tangerine)
<b>LG</b> (Lime Green)	<b>TTL</b> (Tahitian Teal)
<b>MB</b> (Matte Black)	<b>WT</b> (Semi Gloss White)
<b>MBL</b> (Midnight Blue)	<b>YEL</b> (Yellow)
<b>PNA</b> (Painted Natural Aluminum)	

## Electrical Data

CCT	CRI	Wattage	Delivered Lumens	Efficacy
2700K	90 CRI	30W	1745 lm	58 lpw
3000K	90 CRI	30W	1850 lm	61 lpw
3500K	90 CRI	30W	1945 lm	64 lpw
4000K	90 CRI	30W	2025 lm	68 lpw
Warm Dim	-	10W	608 lm	61 lpw

Lumens will vary depending on CCT, optic & lens option

## Specifications

### Field Replaceable LED Light Engine

- 30W LED with 2 SDCM binning
- 2700K, 3000K, 3500K and 4000K at 90 CRI
- 45 degree adjustability with 360 degree aiming

### Finishes

Available in many colors with optional coastal coating to protect finish in coastal environments

### Field Replaceable Dimming Driver

- Multiple dimming drivers available
- Power factor > 0.9, 50/60Hz

### Listing / Warranty

- Five (5) year limited warranty
- UL listed to US and Canadian standards for damp locations

### Mounting

- 4' of stem included; (1) 6", (2) 12" & (1) 18" (includes couplers)  
Contact the factory for custom sloped ceiling projects
- 10' field adjustable cord available, must specify
- 5" x 2-1/4" round canopy included with standard universal dim driver  
(7-1/8" x 2-1/4" round canopy with Lutron and eldoLED drivers)



## Order Matrix

### GyroShift 5" Pendant Cylinder (Example: LP5-SFT-10S2710ABL-NLNL-ST-0)

Series	Wattage	Driver	CCT / CRI	Optic	Finishes	Coastal Coating Option	Media 1	Media 2	Option	Rev	Canopy
LP5-SFT (Round)	-10 (10W)	S <sup>2</sup> (ERP Universal Dim, Triac/ELV 0-10V 1% 120-277V)	27 (2700K/90 CRI)	10	ABL	(blank) (No coating)	-NL (No Lens)	NL	-ST <sup>1</sup> 4' Stem	-0	(blank) (standard canopy)
	-15 (15W)		30 (3000K/90 CRI)	30	BB	-C (Coating)	-CL (Clear Lens)	CL	-BC 10' Black Cord		-CC1 <sup>5</sup> (Conduit 3-1/4" canopy)
	-20 (20W)		35 (3500K/90 CRI)	50	BK		-FR (Frosted Lens)	FR	-WC 10' White Cord		-CC2 (Conduit 3-7/8" canopy)
	-25 (25W)	L3 <sup>1</sup> (Lutron Hi-lume® Fade-to-Black 1% 120-277V)	40 (4000K/90 CRI)		BLU		-MP (Solite Lens)	MP	-LV <sup>2</sup> 10' Low Voltage Aircraft Cable		
	-30 (30W)		WD* (1850-3000K)		DVG		-LS (Linear Spread)	LS			
					FLG		-HEX* (Hex Louver)				
		EL1 <sup>1</sup> (eldoLED DALI 1% 120-277V)			GA		-WW* (Wall Wash)				
		EL2 <sup>1</sup> (eldoLED 0-10V 1% 120-277V)			GWT						
		DMX <sup>1</sup> (DMX 0.1% 120-277V)			LG						
					MB						
					MBL						
					PNA						
					PNC						
					RD						
					SGR						
					SND						
					SS						
					TBZ						
					TGP						
					TNG						
					TTL						
					WT						
					YEL						

- Includes larger canopy
- Forward and reverse dimming at 120V only
- Damp location Rated
- Stem kit includes: (1) x 6", (2) x 12", (1) x 18"
- CC1 and CC2 only for S driver option

## Media

S3-LENS-CL-0 (Clear Lens)  
S3-LENS-FR-0 (Frosted Lens)  
S3-LENS-MP-0 (Solite Lens)

S3-LENS-LS-0 (Linear Spread)  
S3-LENS-HEX-0\* (Hex Louver)  
S3-LENS-WW-0\* (Wall Wash)

\*Note: Can only fit 1 media if HEX or WW is selected

## Emergency

EM-1000 (25W LED Remote Inverter)  
EM-1002 (10W LED Remote Emergency Driver)

Spec-00255 Revised 06/12/2023

Patent: [www.csllighting.com/patents](http://www.csllighting.com/patents)

14508 Nelson Ave. City of Industry, CA 91744 • tel: 626.336.4511 • fax: 626.330.4266 • [www.csllighting.com](http://www.csllighting.com)  
©2023 Creative Systems Lighting, A Division of Troy-CSL Lighting, Inc. All rights reserved. Subject to change without notice.

