



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023


ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

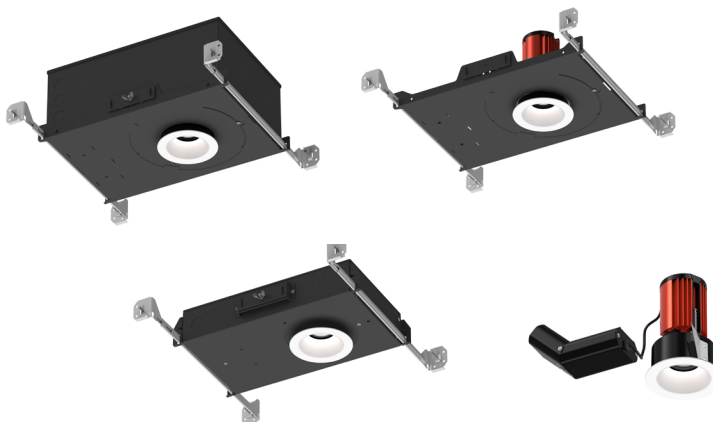

SILENT VU™ OPTICS TECHNOLOGY

OPTICS	10°, 30°, 50°, 80° Field Changeable
ADJUSTABLE	0° to 40° tilt (Adjustable housings only)
MEDIA	Clear, Solite, Frosted, Linear Spread, Hex Louver

LED LIGHT ENGINE

RATED WATTAGE	10W, 15W, 20W
DELIVERED LUMENS	Up to 1855 lm @ 4000K-20W-30°Optic
EFFICACY	Up to 96.2 LPW @ 4000K-10W-30°Optic
CCT @ 90CRI	2700K, 3000K, 3500K, 4000K, Warm Dim
COLOR QUALITY	90+ CRI, 2-Step SDCM
LED LIFETIME	55,000 hours @ L90

DELIVERED LUMENS MATRIX

		10° Optic	30° Optic	50° Optic	80° Optic
10 Watt	2700K (90CRI)	848 lm	912 lm	874 lm	739 lm
	3000K (90CRI)	900 lm	968 lm	927 lm	785 lm
	3500K (90CRI)	943 lm	1014 lm	972 lm	822 lm
	4000K (90CRI)	978 lm	1052 lm	1008 lm	853 lm
	Warm Dim (98CRI)	572 lm	627 lm	587 lm	460 lm
15 Watt	2700K (90CRI)	1235 lm	1329 lm	1273 lm	1078 lm
	3000K (90CRI)	1311 lm	1410 lm	1351 lm	1144 lm
	3500K (90CRI)	1374 lm	1478 lm	1417 lm	1199 lm
	4000K (90CRI)	1425 lm	1533 lm	1469 lm	1243 lm
	Warm Dim (98CRI)	877 lm	961 lm	899 lm	705 lm
20 Watt	2700K (90CRI)	1495 lm	1608 lm	1541 lm	1304 lm
	3000K (90CRI)	1587 lm	1706 lm	1635 lm	1384 lm
	3500K (90CRI)	1663 lm	1789 lm	1714 lm	1451 lm
	4000K (90CRI)	1725 lm	1855 lm	1778 lm	1504 lm
	Warm Dim (98CRI)	1059 lm	1161 lm	1086 lm	852 lm

POWER SUPPLY

INPUT VOLTAGE	120-277V, 50/60Hz
DIMMING	Multiple dimming drivers available
SERVICABILITY	Below Ceiling Access (Above ceiling access required when using L3, EL1, EL2, DMX drivers)

TRIM OPTIONS

- Fixed or Adjustable
- Standard or Trimless
- Wall Wash
- Round or Square
- Pinhole, Slot Pinhole
- Wet Location

TRIM COLORS

- White
- Black
- Custom Color
- Champagne
- Satin Aluminum

REFLECTOR COLORS

- White
- Black
- Clear Alzak
- Champagne
- Satin Aluminum
- Custom Color

HOUSING INSTALLATION

- New Construction includes (2) galvanized steel adjustable hanger bars
- Remodel option available
- 5/8" – 2" ceiling thickness
- Min Plenum Height: 2½" Shallow, 5½" Adjustable
- Ceiling Material: Drywall, T-bar grid, Wood and Millwork
- Steel junction box with up to (6) ½" knockouts
- IC, SIC models are Air Tight
- IC, SIC models are CCEA (Chicago Plenum)
(Note: polycell spray-in foam insulation must be kept 3" from housing)

LISTINGS AND WARRANTY

cULus Listed for 40°C Ambient	ASTM E283 Certified Airtight for IC Rated Housings
UL Listed for Damp Location (All Styles)	UL Listed for Wet Location (Wet Location Trim Style)
IC Rated and Non IC Rated Available	CCEA (Chicago Plenum) Approved for IC Rated Housings
Five (5) years limited warranty	CA Title 24-JA8 Compliant





SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

**ACROBAT
2" LED DOWNLIGHT****A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC**

PROJECT: _____

TYPE: _____

NOTE: _____

ORDER MATRIX**A2-IC, A2-NC, A2-RM****2" NEW CONSTRUCTION / REMODEL HOUSING (EXAMPLE: A2-IC-RST-10S-SHB)**

HOUSING BASE				
FAMILY APERTURE	INSTALLATION TYPE		TRIM SHAPE	TRIM STYLE
A2- Acrobat 2"	IC	(Adjustable New Construction, IC, CCEA)	-R (Round)	ST (Standard)
	NC	(Adjustable New Construction)	-S (Square)	TL (Trimless)
	RM	(Adjustable Remodel)		WC (Wood Ceiling)
DRIVER ASSEMBLY				
WATTAGE	LED DIMMING DRIVER		HANGER BAR	WARM DIM
-10 (10 Watt)	S ⁵	(Universal Dim Driver: 1%-100% 0-10V, TRIAC, ELV, 120V/277V)	-SHB (Standard)	(blank) (Standard)
-15 (15 Watt)	L3 ^{2,3,4}	(Lutron Hi-Lume® Dim Driver: 1%-100% EcoSystem, 120V/277V)	-C24 (24" C-Channel)	-WD ⁶ (Warm Dim)
-20 ¹ (20 Watt)	EL1 ^{2,3}	(EldoLED DALI Dim: 1%-100% DALI, 120V/277V)	-C48 (48" C-Channel)	
	EL2 ^{2,3}	(EldoLED Dim: 1%-100% 0-10V, 120V/277V)		
	DMX ^{2,3}	(DMX Dim: 1%-100% DMX, 120V/277V)		
	REMOTE LED DIMMING DRIVER			
	SR1 ⁵	(Remote Universal Dim: 1%-100% 0-10V, TRIAC, or ELV, 120V/277V)	Hanger bars not included with RM housings.	

1. 20 Watt option only available for NC (Adjustable New Construction), RM (Adjustable Remodel), SNC (Shallow New Construction) housings.

2. Driver access above ceiling only.

3. Driver only available for IC and NC housings.

4. Ambient temperature rated for 25 C.

5. TRIAC, ELV dimming for 120V only.

6. WD CCT must also be selected in Module section.

2" NEW CONSTRUCTION / REMODEL TRIM (EXAMPLE: A2-2790-RSTWT-STWTNL-30)

FAMILY APERTURE	LED PERFORMANCE		TRIM		
	CCT	CRI	TRIM SHAPE	TRIM STYLE	TRIM FINISH
A2- Acrobat 2"	27 (2700K)	90 (90 CRI)	-R (Round)	ST (Standard)	TL⁷ (Trimless/Wood Ceiling)
	30 (3000K)		-S (Square)	TL (Trimless)	WT (White)
	35 (3500K)			WC (Wood Ceiling)	BK (Black)
	40 (4000K)				CN (Champagne)
	WD⁶ (1800K~3000K)				SA (Satin Aluminum)
					CC¹ (Custom Color)
REFLECTOR			OPTIC AND MEDIA		
REFLECTOR STYLE	REFLECTOR FINISH	REFLECTOR LENS	OPTIC	MEDIA 1	MEDIA 2
-ST² (Standard)	WT (White)	NL (No Lens)	-10 (10° Spot)	(blank) (None)	(blank) (None)
-PH² (Pinhole)	BK (Black)	CL (Clear)	-30 (30° Narrow Flood)	CL (Clear Lens)	CL (Clear Lens)
-SP² (Slot Pinhole)	CA⁴ (Clear Alzak)	MP (Solite)	-50 (50° Flood)	MP (Solite Lens)	MP (Solite Lens)
-SW (Wall Wash)	CN (Champagne)	FR (Frosted)	-80 (80° Wide Flood)	FR (Frosted Lens)	FR (Frosted Lens)
-AL^{2,3} (Adjustable Lensed)	SA (Satin Aluminum)			LS (Linear Spread Lens)	LS (Linear Spread Lens)
		CC¹ (Custom Color)		HX⁵ (Hex Louver)	

1. Custom color only available for ST (Standard) Trim and ST (Standard), AL (Adjustable Lens) Reflectors only, contact CSL for details.

2. Wet Location rated when used with Additional Reflector Lens.

3. Must be ordered with corresponding Additional Reflector Lens.

4. CA (Clear Alzak) Finish only available for Round reflectors as ST (Standard) or AL (Adjustable Lens) styles.

5. Cannot be used with a second Media.

6. Media 1 lens required. For WD with 10°, 30°, 50° Optic use MP (Solite Lens).

For WD with 80° Optic use FR (Frosted Lens).

7. Must be used with TL or WC trim style.



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

**ACROBAT
2" LED DOWNLIGHT****A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC**

PROJECT: _____

TYPE: _____

NOTE: _____

ORDER MATRIX**A2-SIC, A2-SNC****2" SHALLOW PLENUM NEW CONSTRUCTION HOUSING (EXAMPLE: A2-SIC-RST-02790-30-10S-SHB)**

HOUSING BASE					
FAMILY APERTURE	INSTALLATION TYPE		TRIM SHAPE	TRIM STYLE	
A2- Acrobat 2"	SIC	(Shallow Plenum New Construction, IC, CCEA)	-R (Round)	ST	(Standard)
	SNC	(Shallow Plenum New Construction)	-S (Square)	TL	(Trimless)
				WC	(Wood Ceiling)
CEILING		LED PERFORMANCE		OPTIC AND MEDIA	
CEILING THICKNESS	CCT	CRI	OPTIC	MEDIA 1	MEDIA 2
-0 (5/8" Ceiling Thickness)	27 (2700K)	90 (90 CRI)	-10 (10° Spot)	(blank) (None)	(blank) (None)
-1 (1 1/4" Ceiling Thickness)	30 (3000K)		-30 (30° Narrow Flood)	CL (Clear Lens)	CL (Clear Lens)
-2 (2" Ceiling Thickness)	35 (3500K)		-50 (50° Flood)	MP (Solite Lens)	MP (Solite Lens)
	40 (4000K)		-80 (80° Wide Flood)	FR (Frosted Lens)	FR (Frosted Lens)
	WD³ (1800K~3000K)			LS (Linear Spread Lens)	LS (Linear Spread Lens)
				HX¹ (Hex Louver)	
DRIVER ASSEMBLY					
WATTAGE	LED DIMMING DRIVER		HANGER BAR		
-10 (10 Watt)	S⁴ (Universal Dim Driver: 1%-100% 0-10V, TRIAC, ELV, 120V/277V)		-SHB (Standard)		
-15 (15 Watt)			-C24 (24" C-Channel)		
-20² (20 Watt)	SR1⁴ (Remote Universal Dim: 1%-100% 0-10V, TRIAC, or ELV, 120V/277V)		-C48 (48" C-Channel)		

1. Cannot be used with a second media.

2. 20 Watt option only available for SNC (Shallow Plenum New Construction) only.

3. Media 1 lens required. For WD with 10°, 30°, 50° Optic use MP (Solite Lens). For WD with 80° Optic use FR (Frosted Lens).

4. TRIAC, ELV dimming for 120V only.

2" SHALLOW PLENUM NEW CONSTRUCTION TRIM (EXAMPLE: A2-RSTWT-STWT-NL)

TRIM				REFLECTOR		
FAMILY APERTURE	TRIM SHAPE	TRIM STYLE	TRIM FINISH	REFLECTOR STYLE	REFLECTOR FINISH	REFLECTOR LENS
A2- Acrobat 2"	R (Round) S (Square)	ST (Standard)	TL⁴ (Trimless/Wood Ceiling)	-ST² (Standard)	WT (White)	-NL (No Lens)
		TL (Trimless)	WT (White/)	-PH² (Pinhole)	BK (Black)	-CL (Clear)
		WC (Wood Ceiling)	BK (Black)	-SP² (Slot Pinhole)	CA³ (Clear Alzak)	-MP (Solite)
			CN (Champagne)	-SW (Wall Wash)	CN (Champagne)	-FR (Frosted)
			SA (Satin Aluminum)		SA (Satin Aluminum)	
			CC¹ (Custom Color)		CC¹ (Custom Color)	

1. Custom color only available for ST (Standard) Trim and ST (Standard), AL (Adjustable Lens) Reflectors only, contact CSL for details.

2. Wet Location rated when used with Additional Reflector Lens.

3. CA (Clear Alzak) Finish only available for Round reflectors as ST (Solite) or AL (Adjustable Lens) styles.

4. Must be used with TL or WC trim style.

EMERGENCY OPTIONS**EM-1000** (25W Remote Inverter)**EM-1003** (35W Remote Inverter)**EM-1004** (50W Remote Inverter)**EM-1002** (10W Remote Inverter)**EM-1003-CA** (35W Remote Inverter) Title 20**EM-1006** (25W Remote Inverter) Title 20



ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

HOUSING AND LIGHT ENGINE LINE DRAWINGS

A2-IC

New Construction IC Housing





A2-IC-R

Acrobat 2" - Adjustable New Construction IC Housing - Round



A2-IC-S

Acrobat 2" - Adjustable New Construction IC Housing - Square

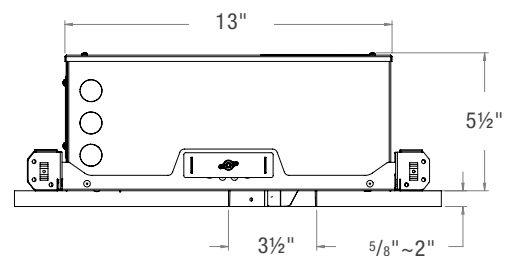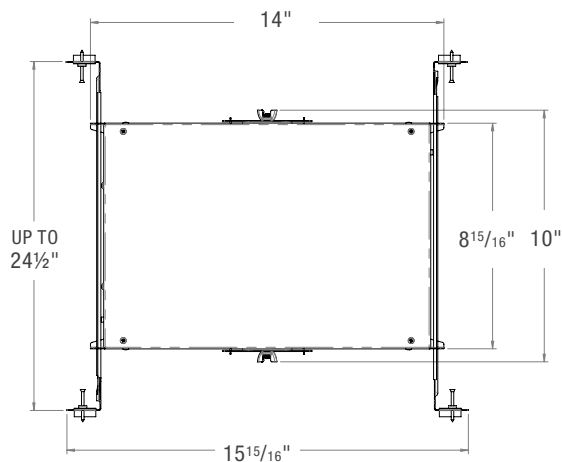



ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____


NOTE: _____

SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

HOUSING AND LIGHT ENGINE LINE DRAWINGS


A2-NC

New Construction Housing

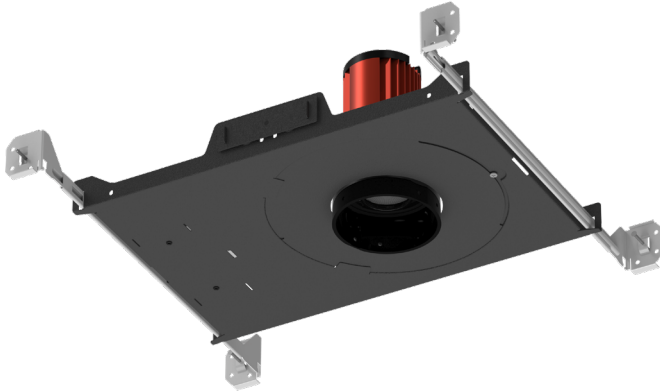



A2-NC-R

Acrobat 2" - Adjustable New Construction Housing - Round

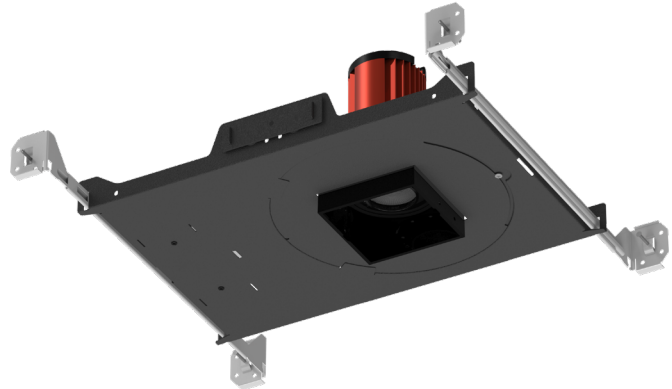

A2-NC-S

Acrobat 2" - Adjustable New Construction Housing - Square

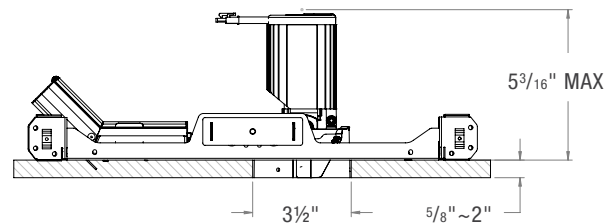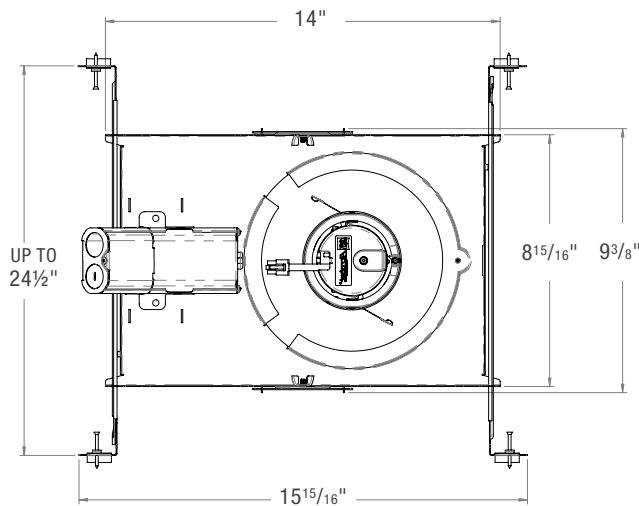



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____


HOUSING AND LIGHT ENGINE LINE DRAWINGS

A2-RM
Remodel Housing




A2-RM-R

Acrobat 2" - Adjustable Remodel Housing - Round

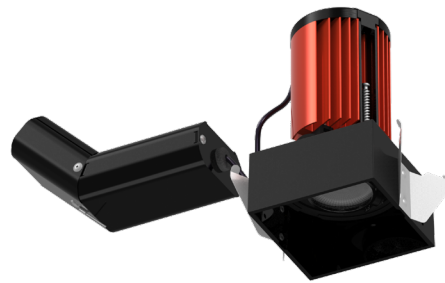

A2-RM-S

Acrobat 2" - Adjustable Remodel Housing - Square

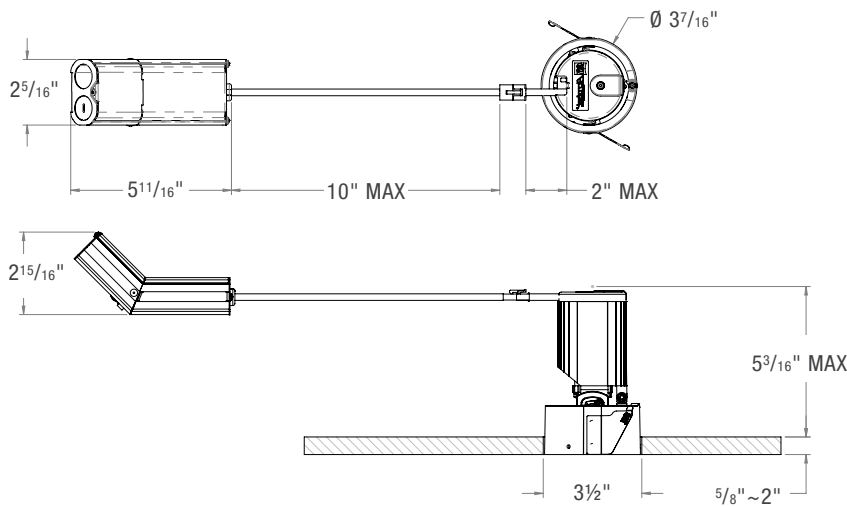



ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____


NOTE: _____

SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

HOUSING AND LIGHT ENGINE LINE DRAWINGS


A2-SIC, A2-SNC
Shallow Plenum Housing

CEILING THICKNESS




-0

5/8" Ceiling Thickness




-1

1 1/2" Ceiling Thickness



-2

2" Ceiling Thickness

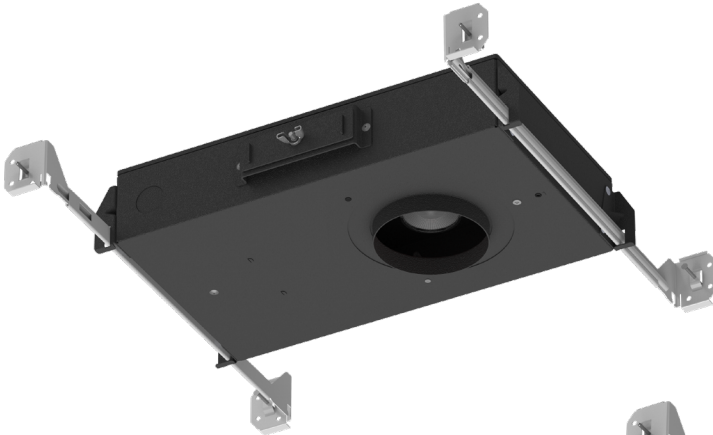


A2-SIC-R

Acrobat 2" - Shallow Plenum New Construction IC Housing - Round

A2-SNC-R

Acrobat 2" - Shallow Plenum New Construction Housing - Round


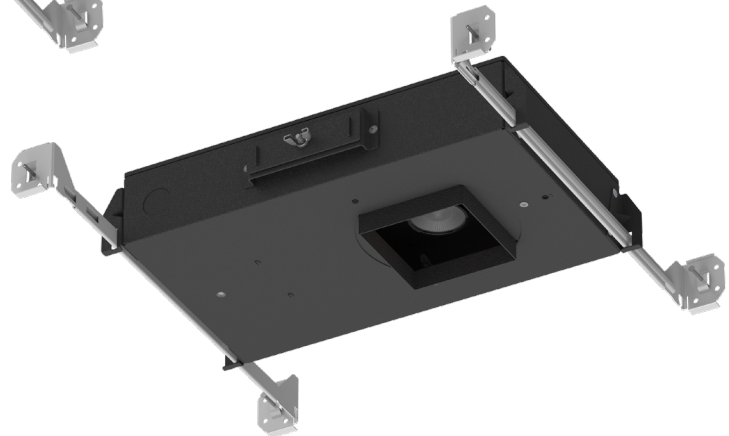


A2-SIC-S

Acrobat 2" - Shallow Plenum New Construction IC Housing - Square

A2-SNC-S

Acrobat 2" - Shallow Plenum New Construction Housing - Square

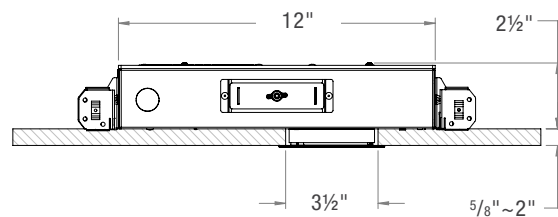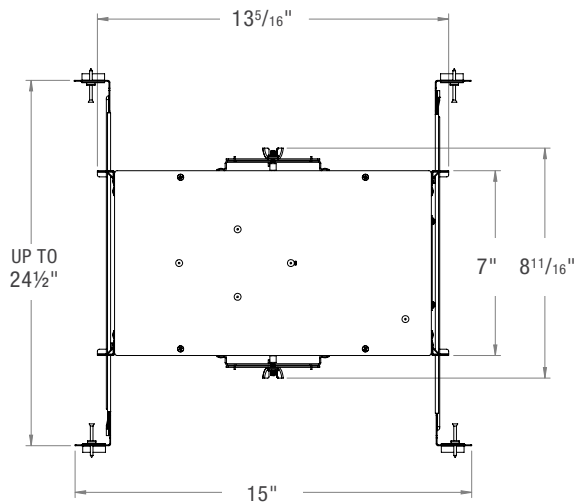



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT


A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____


NOTE: _____

TRIM STYLES

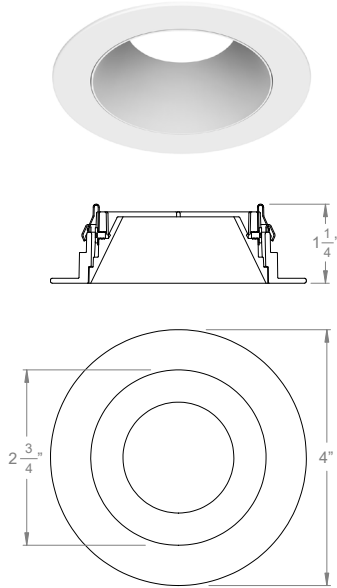


RST

2" Acrobat Round Standard Trim
(with Standard Reflector)

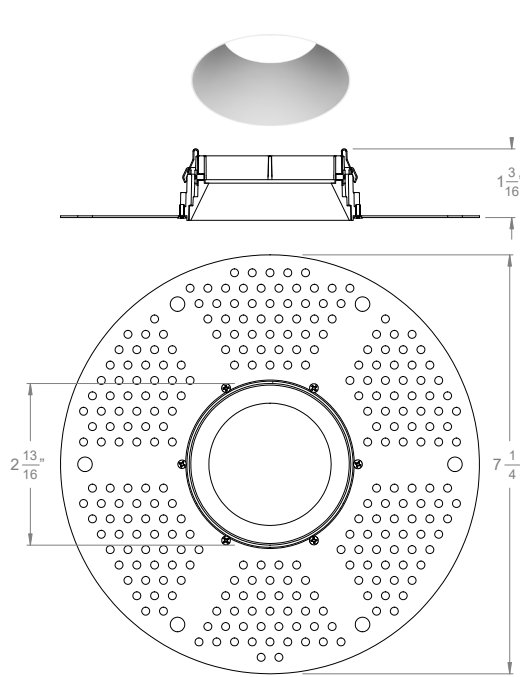


RTL

2" Acrobat Round Trimless Mud Plate
(with Standard Reflector)

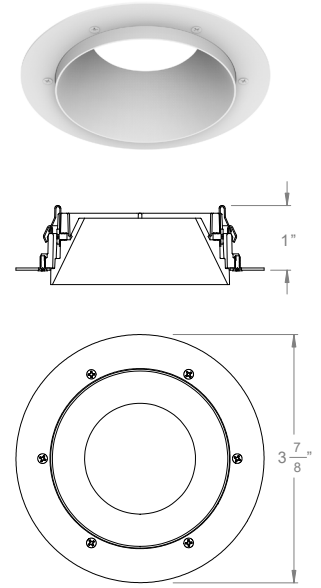


RWC

2" Acrobat Round Wood Ceiling Trim
(with Standard Reflector)

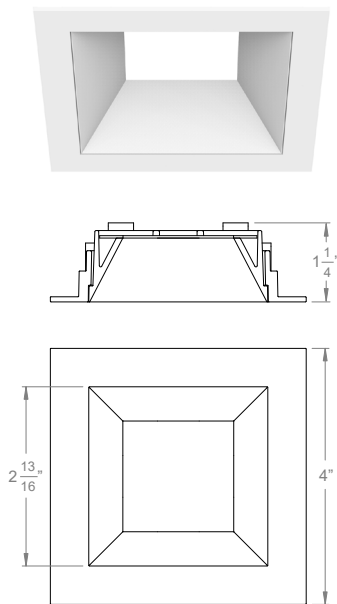


SST

2" Acrobat Square Standard Trim
(with Standard Reflector)

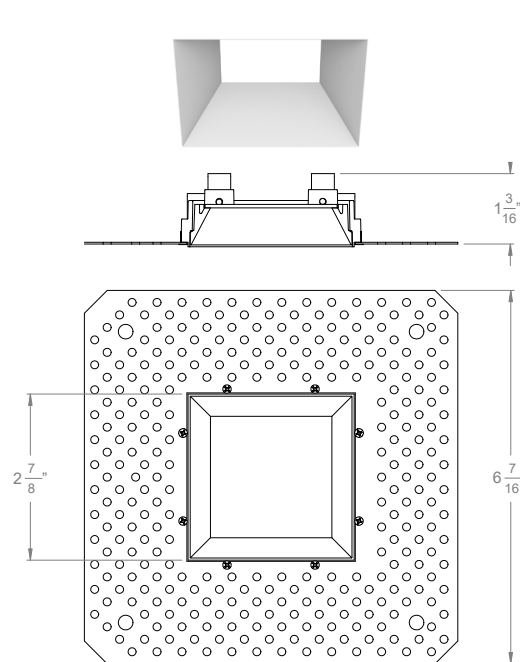

STL

2" Acrobat Square Trimless Mud Plate
(with Standard Reflector)

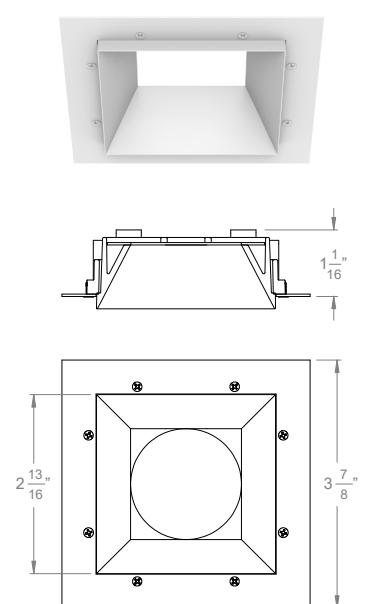

SWC

2" Acrobat Square Wood Ceiling Trim
(with Standard Reflector)

ACROBAT 2" LED DOWNLIGHT



A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

REFLECTOR STYLE (ROUND)

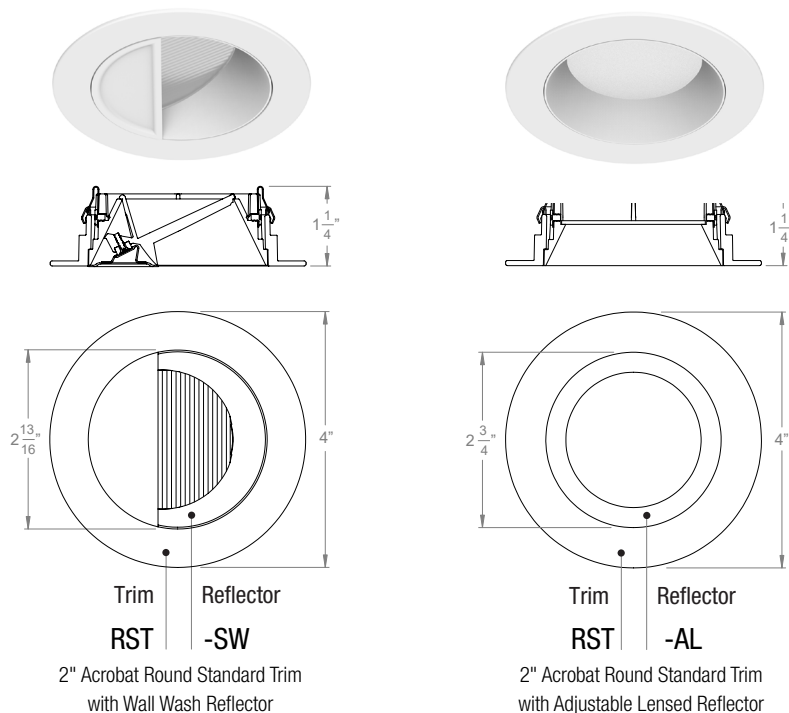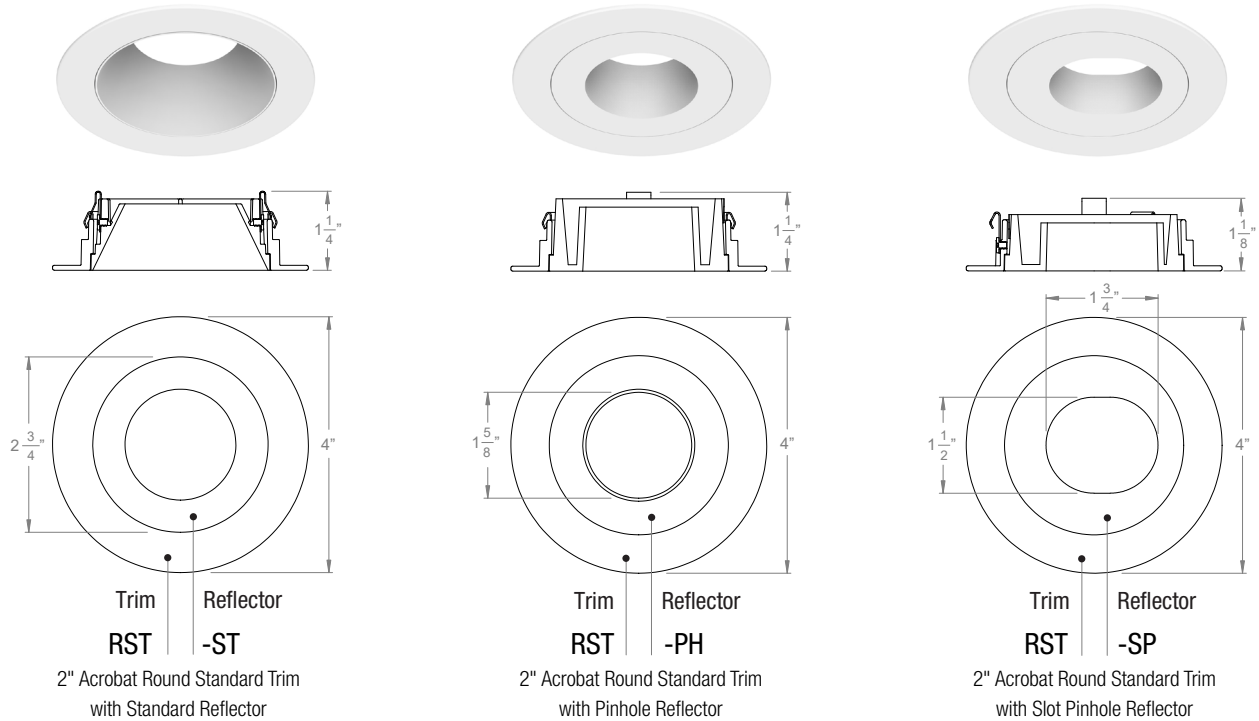



ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC



PROJECT: _____

TYPE: _____

NOTE: _____

SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

REFLECTOR STYLE (SQUARE)

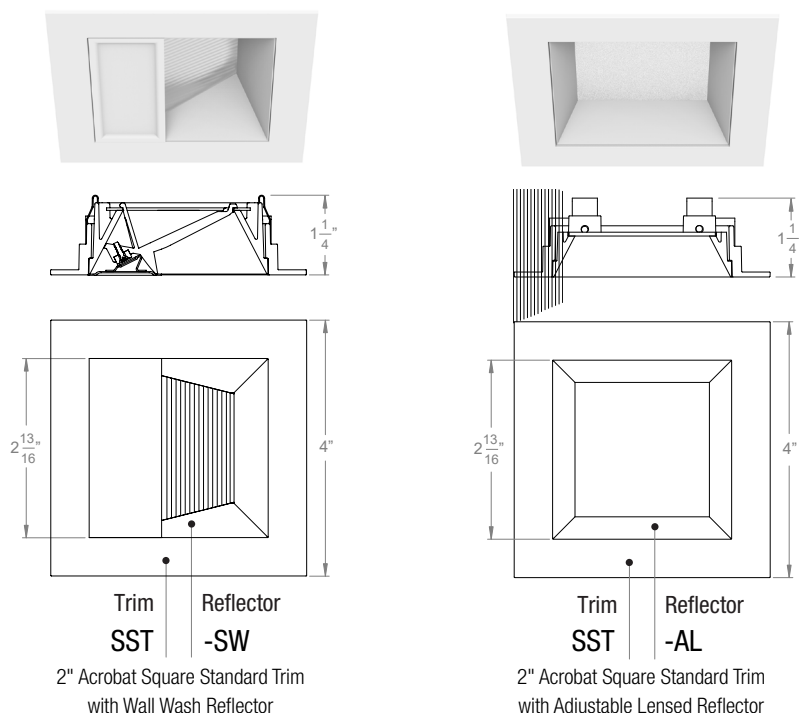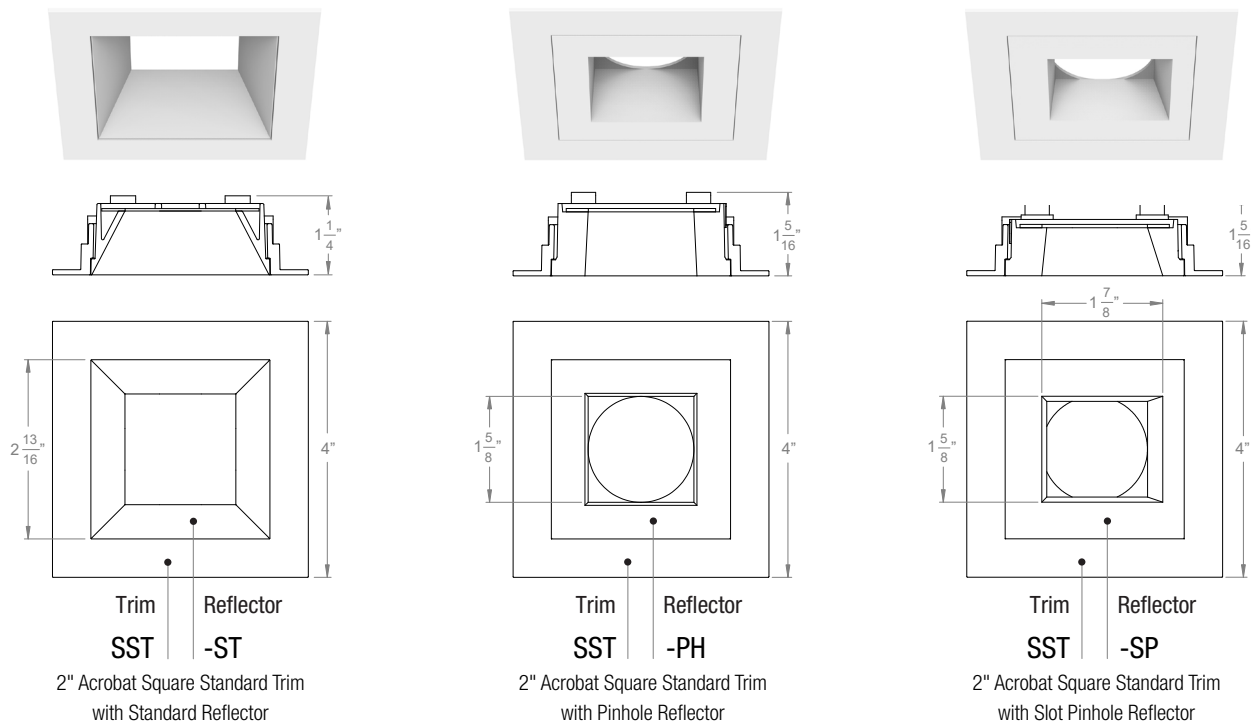



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT


A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

TRIM FINISHES




RSTWT-STWT

WT White Trim
WT White Reflector




RSTBK-STBK

BK Black Trim
BK Black Reflector




RSTCN-STCN

CN Champagne Trim
CN Champagne Reflector




RSTWT-STSA

WT White Trim
SA Silver Reflector




RSTWT-STBK

WT White Trim
BK Black Reflector




RSTWT-STCN

WT White Trim
CN Champagne Reflector




SSTWT-STWT

WT White Trim
WT White Reflector




SSTBK-STBK

BK Black Trim
BK Black Reflector




SSTCN-STCN

CN Champagne Trim
CN Champagne Reflector




SSTWT-STSA

WT White Trim
SA Silver Reflector



SSTWT-STBK

WT White Trim
BK Black Reflector



SSTWT-STCN

WT White Trim
CN Champagne Reflector



ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____


NOTE: _____

SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023


PHOTOMETRICS

Acrobat Downlight 2" NC, RM Models (2700K, 90 CRI, 10° Optic, 20W)
Round, Standard, White Trim

Polar Plot

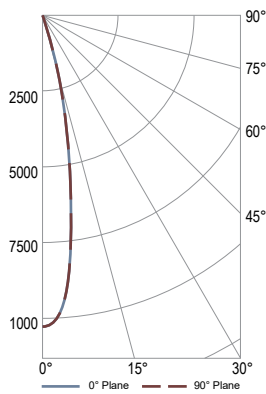

Cone of Light Tabulation

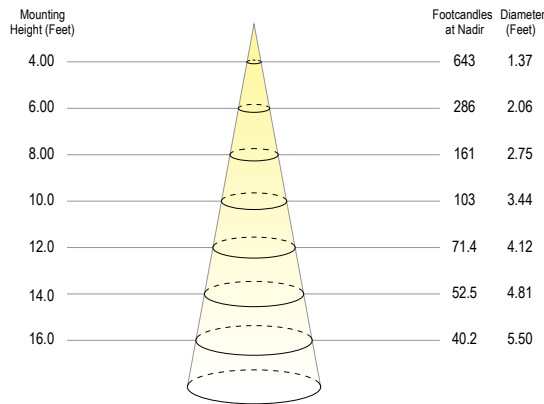

Voltage	Current	Power
120.1 VAC	0.1809 A	21.47 W

Power Factor	Frequency	Current THD
0.989	60 Hz	12.7%


Summary of Results

Spacing Criteria Total Lumen Output: 1495 Lumens
0-180: 0.34 Luminaire Efficacy: 69.6 lm/w
90-270: 0.34 Maximum Candela: 10288 Candela


Zone	Lumens	% of Luminaire
0-40	1467	98.1%
0-60	1487	99.5%
0-90	1496	100.0%

Acrobat Downlight 2" NC, RM Models (2700K, 90 CRI, 30° Optic, 20W)
Round, Standard, White Trim

Polar Plot

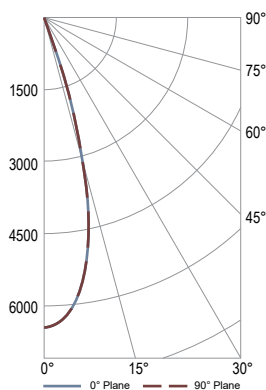

Cone of Light Tabulation

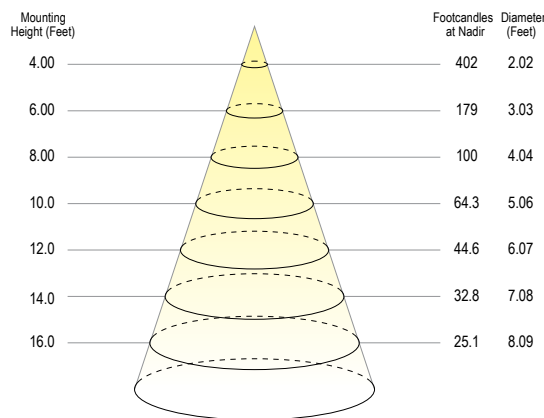

Voltage	Current	Power
120.0 VAC	0.1819 A	21.59 W

Power Factor	Frequency	Current THD
0.988	60 Hz	12.8%

Summary of Results

Spacing Criteria Total Lumen Output: 1608 Lumens
0-180: 0.51 Luminaire Efficacy: 74.5 lm/w
90-270: 0.51 Maximum Candela: 6604 Candela

Zone	Lumens	% of Luminaire
0-40	1592	99.0%
0-60	1603	99.7%
0-90	1608	100.0%



ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____


NOTE: _____

SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023


PHOTOMETRICS

Acrobat Downlight 2" NC, RM Models (2700K, 90 CRI, 50° Optic, 20W)
Round, Standard, White Trim

Polar Plot

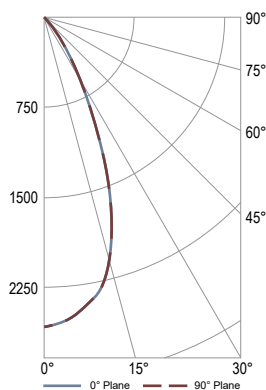

Cone of Light Tabulation

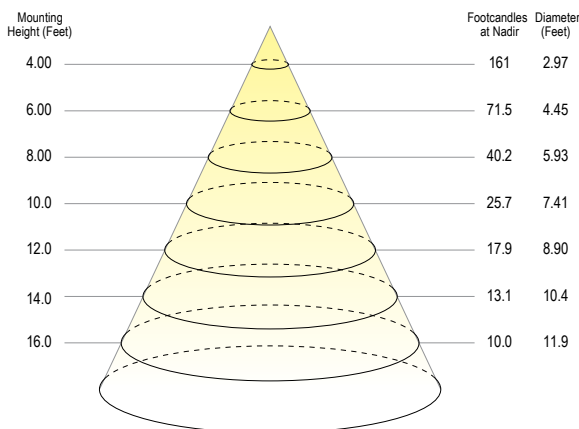

Voltage	Current	Power
120.1 VAC	0.1788 A	24.13 W

Power Factor	Frequency	Current THD
0.984	60 Hz	16.0%


Summary of Results

Spacing Criteria Total Lumen Output: 1541 Lumens
0-180: 0.74 Luminaire Efficacy: 72.9 lm/w
90-270: 0.74 Maximum Candela: 2572 Candela


Zone	Lumens	% of Luminaire
0-40	1472	99.5%
0-60	1537	99.7%
0-90	1541	100.0%

Acrobat Downlight 2" NC, RM Models (2700K, 90 CRI, 80° Optic, 20W)
Round, Standard, White Trim

Polar Plot

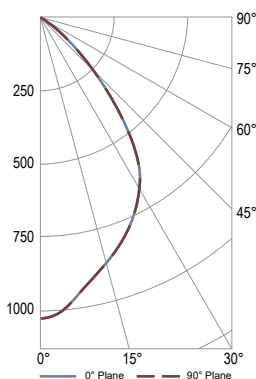

Cone of Light Tabulation

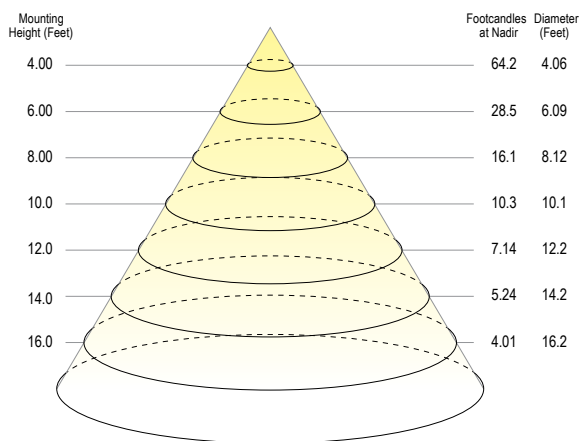

Voltage	Current	Power
120.1 VAC	0.1782 A	21.06 W

Power Factor	Frequency	Current THD
0.984	60 Hz	16.0%

Summary of Results

Spacing Criteria Total Lumen Output: 1304 Lumens
0-180: 1.01 Luminaire Efficacy: 61.9 lm/w
90-270: 1.01 Maximum Candela: 1028 Candela

Zone	Lumens	% of Luminaire
0-40	1024	78.6%
0-60	1287	98.7%
0-90	1304	100.0%



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"S" ERP PHASE-CUT DIMMERS			
Dimmer Information			
Manufacturer	Product	Manufacturer	Product
Cooper	DAL06P	Lightolier	ZP260QEW
	DLC03P	Lutron	CT103P
	SLC03P		DV600P
Leviton	6161		DVCL-153P
	6631-2		DVELV303P
	6633-P		FAELV500
	6673-10W		LG600P
	6683-IW		MAELV600
	IPE04		S600P
	IPI06-1LZ		S-603PG
	VPE06		SELV300P
			TG-600P
			TGCL-153P

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

S- ERP DRIVER 2 WIRE PHASE DIMMING

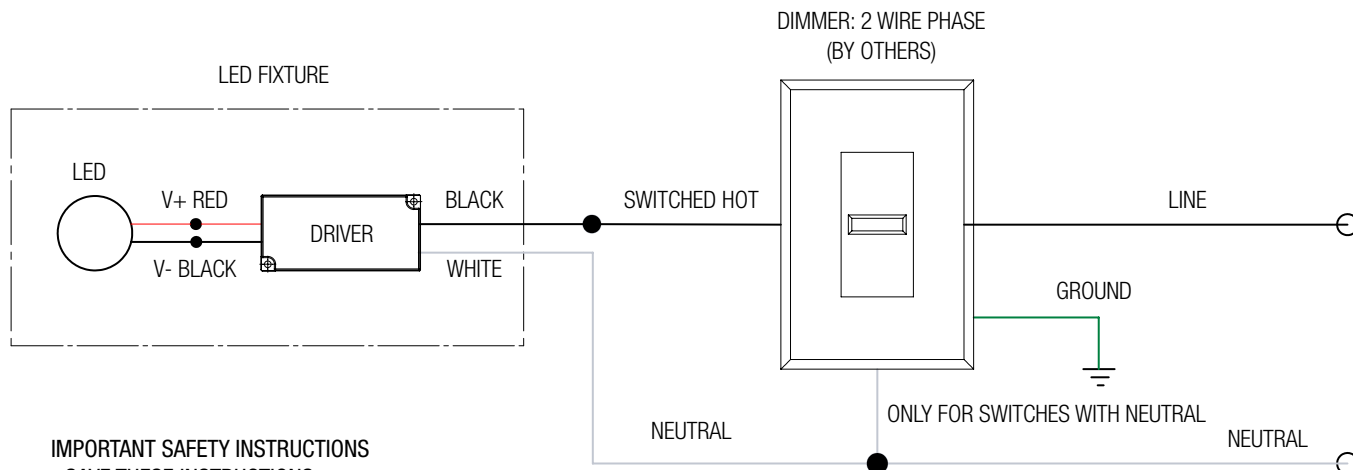

IMPORTANT SAFETY INSTRUCTIONS - SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance with local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"S" ERP 0-10V	
Dimmer Information	
Manufacturer	Product
Leviton	IP740-DLZ
Lightolier	ZP600FAM120
	V2000FAMU
Lutron	DVTV
	NTFTV
Crestron	CLS-EXP-DIMFLV
	DIN-4DIMFLV4
	DIN-A08
	GLX-DIMFLV8

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

S- ERP DRIVER 0-10V DIMMING

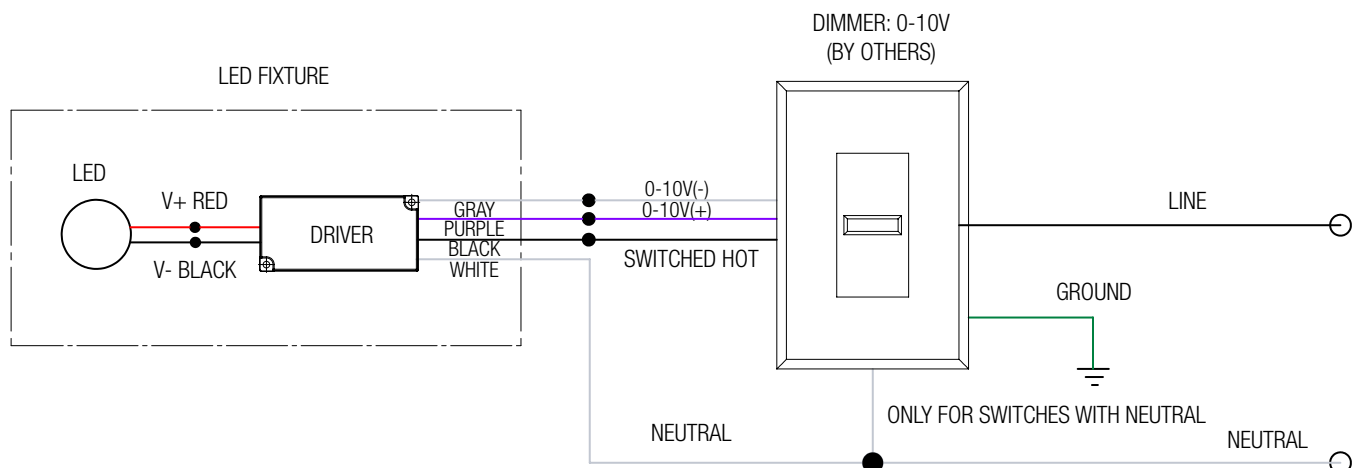

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"L3" Lutron Fade-to-Black	
Dimmer Information	
Manufacturer	Product
Lutron	LQSE-2ECO-D
	RMJ-ECO32-DV-B
	FCJ/FCJS-ECO
	QSN-1ECO-S
	QSN-2ECO-S
	EcoSystem ESN
	Grafik Eye QS with EcoSystem
	Quantum

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

L3- LUTRON FADE-TO-BLACK DRIVER EcoSystem DIMMING

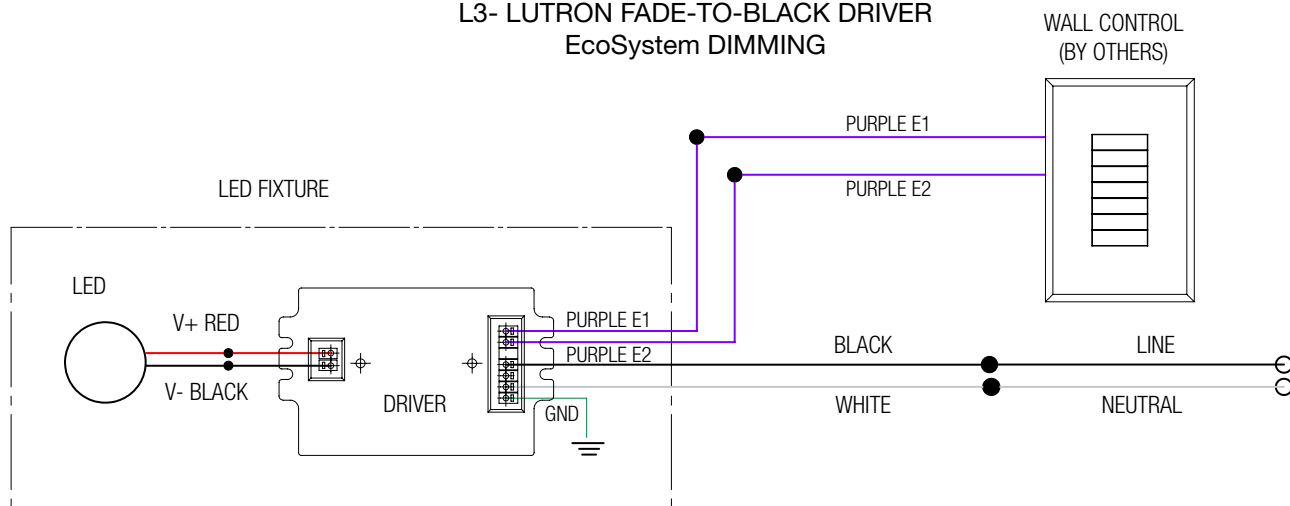

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance with local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"EL1" eldoLED DALI 1%	
Dimmer Information	
Manufacturer	Product
	DALI Controls

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

EL1- eldoLED DRIVER DALI DIMMING

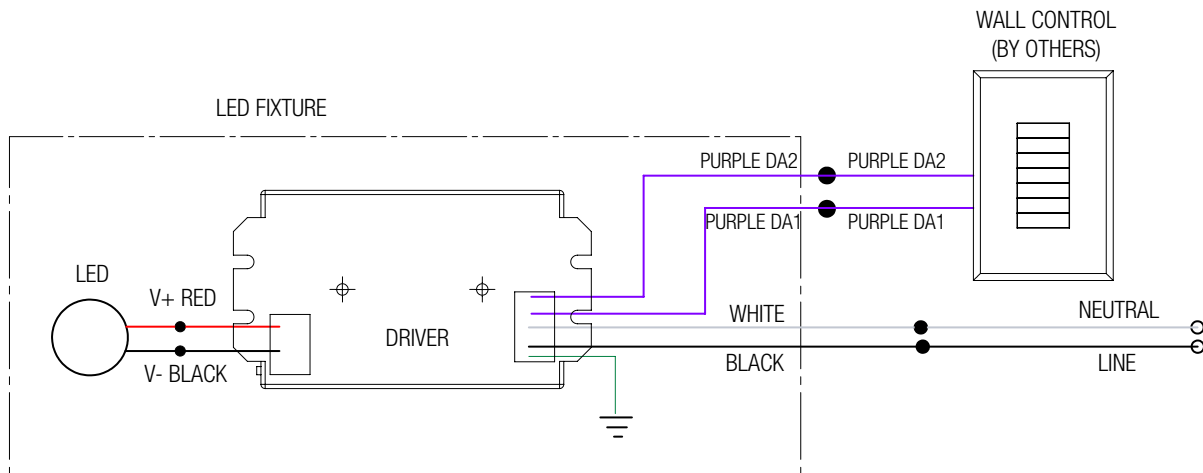

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance to local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"EL2"eldoLED 0-10V 1%	
Dimmer Information	
Manufacturer	Product
Leviton	IP740-DLX
Lightolier	ZP600FAM120
Lutron	DVTV
	NTFTV
	NFTV
Creston	CLS-EXP-DIMFLV
	DIN-4DIMFLV4
	DIN-A08
	GLX-DIMFLV8

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

EL2- eldoLED DRIVER 0-10V DIMMING

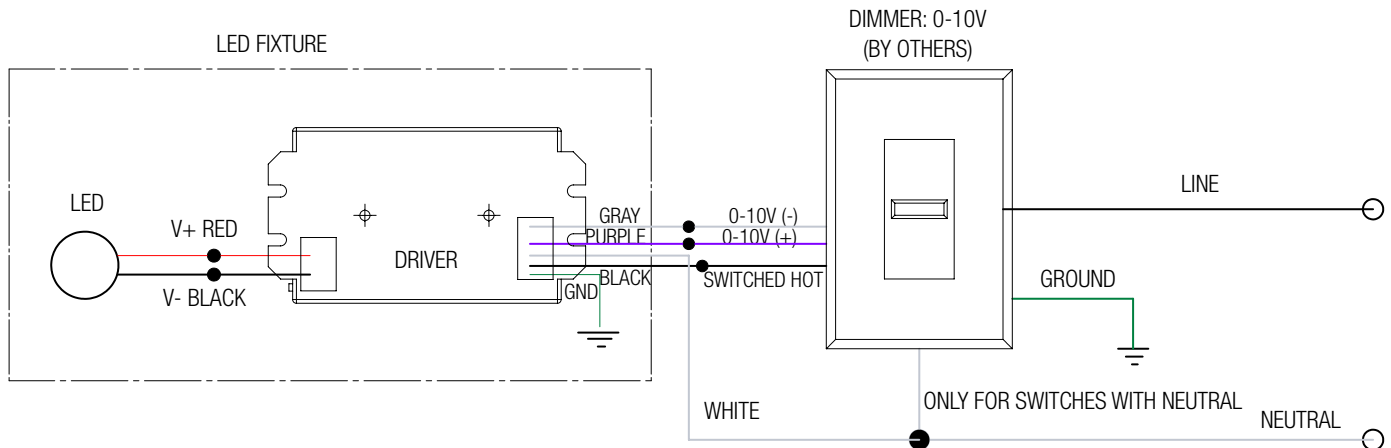

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance with local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).



SPEC-00275 ACROBAT 2.0, 2", V-6.2, UPDATED 06/12/2023

ACROBAT 2" LED DOWNLIGHT

A2-IC, A2-NC, A2-RM
A2-SIC, A2-SNC

PROJECT: _____

TYPE: _____

NOTE: _____

DIMMING DRIVER COMPATIBILITY


DIMMER LIST

"DMX" Moons	
Dimmer Information	
Manufacturer	Product
	DMX Controls

NOTES:

Wiring diagrams are examples of typical installations intended to illustrate the number of wires that must be run to fixture. These diagrams are not intended to specify all equipment necessary for a given dimming circuit. Refer to specific dimmer manufacturer's documentation for details.

DMX- MOONS DRIVER DMX DIMMING

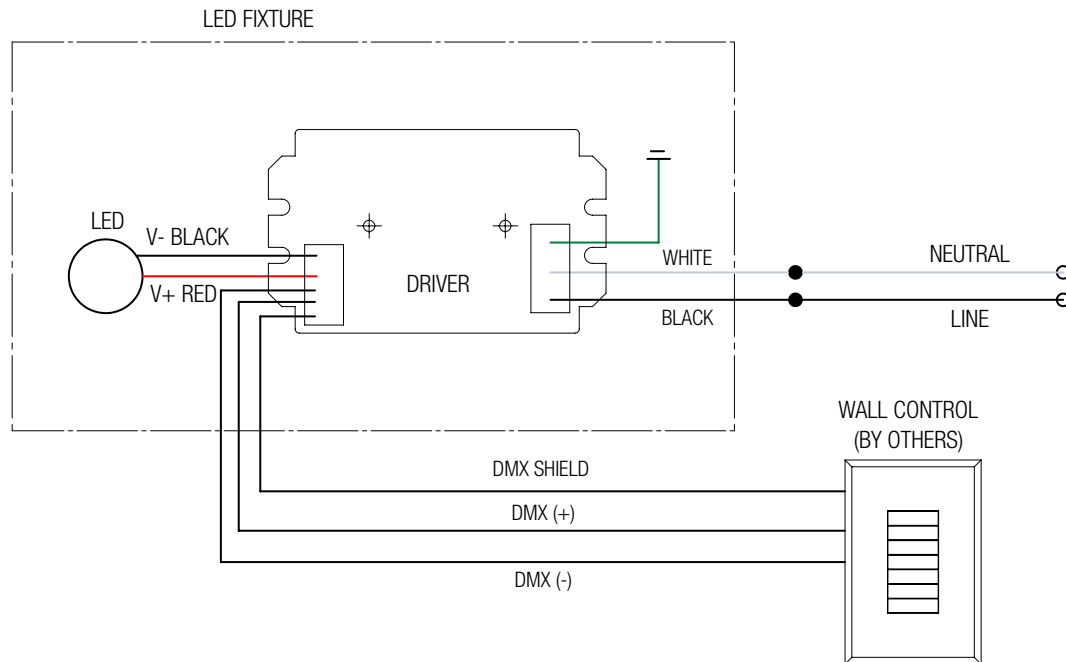

IMPORTANT SAFETY INSTRUCTIONS

- SAVE THESE INSTRUCTIONS

1. Keep these instructions in a safe place for future reference.
2. Only qualified electricians in accordance with local codes should install these fixtures.
3. De-energize the electrical circuit at the circuit breaker prior to installation process or servicing.
4. Make sure all connections are in accordance with the National Electrical Code and any local regulations.
5. Cap any wires not used separately (not together).