



Model: JAVA 1L COFFEE
Codes: 100270764
Group: G-257
Format: 3 139/256"X21 67/256"X141/256" approx.

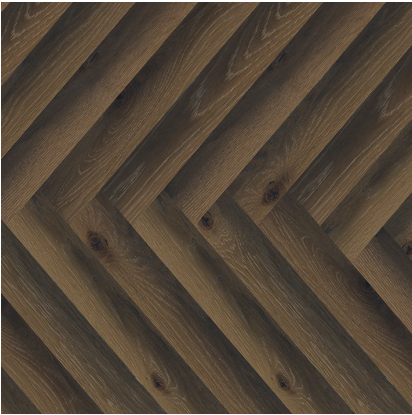



COMPOSITION				
	Size	Material	Type of material	
Layer 1	0.060-0.070	Varnish	APRESTO MATTE	
Layer 2	3	Hardwood Layer	Oak wood	
Layer 3	9	Intermediate Layer	Coniferous wood slats	
Layer 4	2	Backside	Coniferous Wood	

TOLERANCES		
Squareness of the item	0.2% of width.	

LABORATORY TESTS		
Thermal conductivity	0.108 W/M*°K W/M*K	UNE-EN 12667:2002**
Formaldehyde emissions	Clase E1	EN-717/1:2006**
Flammability	Dfl-S1	UNE EN 13501-1:2007**
Biological durability	Clase 2	
Slip resistance (pendulum-wet)	CL 2 (40)	UNE 41901*
Slip resistance (pendulum-dry)	CL 3 (65)	UNE 41902*
Slip resistance (dcof)	0.63	ANSI A137.1*



FEATURES

- 

This installation system consists in assembling the boards with slots and cuts on their edges by applying a slight pressure on the boards. The boards are then bonded with white glue. Tools are needed for the installation.
- 

Slight smoothing of the wood using a brush to achieve a surface with a slight relief.
- 

L'ANTIC COLONIAL's varnishing, in two finishes, APRESTO (gloss) and APRESTO MATE (matte), provides a unique surface quality that satisfies the most demanding requirements. Advantages: It achieves the highest cleanliness because, since the pores are sealed, dirt and dust remain on the surface and can be easily cleaned.
- 

Is suitable for installing on water radiant heating
- 

Material with some knots on its surface that can have different sizes depending on the type of wood. These, along with any cracks that may appear, are covered with putty.
- 

Made with oak wood.
- 

Material from an Asian country.
- 

3 mm
- 

Applying a color oil or varnish on the wood surface in order to get different color ranges.
- 

Beveled cut on all 4 edges of the board for emphasizing size
- 

Quality product made with selected raw materials, guaranteeing its full residential use for 30 years as provided by L' Antic Colonial.
- 

Format where only one board has been used to finish the entire base surface
- 

It is necessary to apply adhesive for installing it.
- 

There are considerable color changes between pieces.
- 

Structure formed by an upper layer that shows the noble aspect of the material, an intermediate layer of wood of different typology, depending on the collection, or HDF board that compensates the tensions between the different parts and a lower plywood that provides dimensional stability.
- 

It is necessary to apply adhesive for installing it.

PACKING

Sales units per box	6.28 SQF/CS	
Sales units per pallet	552.23 SQF/PAL	
Sales units per square meter	1 M2	
Sale unit	M2	
Base unit	ST	
Net weight	250.57 LB/SQF	
Gross weight	260.83 LB/SQF	

