

Framery 2Q

01/2020

framery

SERIOUS ABOUT HAPPINESS

For more product information,
3D models and Framery insight
on our website:

FRAMERYACOUSTICS.COM

framery

SERIOUS ABOUT HAPPINESS

Framery 2Q

Product Information



01/2020

Framery 2Q

The full-size meeting room

Framery 2Q office booth is designed for 4-6 people. It's the best place to co-create, brainstorm and have meetings. Our superior sound insulation system ensures that your meetings won't disturb the office – and the office noise won't disturb you.



Framery 2Q Standard

Have it in your style. You can choose 2Q without furniture, leaving you the option to furnish it the way you like. The superb sound insulation ensures you and your team total sound privacy and the adjustable airflow creates a happy atmosphere to work in.

Options

- Frame and exterior colors
- Working height
 - Standard 72 cm / 28.3 in
 - High 90 cm / 35.4 in
- Table option
- Screen bracket
- Whiteboard
- Booking System Ready

Interior variations



Framery 2Q Lounge

Living room in your office. Framery 2Q Lounge variation provides a more casual environment for company meetings, a calm space to retreat to during the work-day, or an area for socialization. Custom-designed Clint Sofa, large whiteboard, free-standing Piaggio table and a wall shelf make up for a functional yet relaxed setting.

Options

- Frame and exterior colors
- Clint sofa colors
- Piaggio table
- Screen bracket
- Whiteboard
- Booking System Ready

Features

Exterior	Painted sheet metal or brushed stainless steel
Glass	Sound control laminated glass
Frame and table	Formica laminate on birch plywood with varnish trim
Solid walls, roof and floor	A sandwich element of sheet metal, birch plywood, recycled acoustic foam and acoustic felt. An anti-static and stain resistant low loop pile carpet for interior floor.
Weight	Without furniture: 950 kg / 2094 lb
Airflow	Total airflow is 121,1 l/s / 436 m³/h

Minimum recommended space for the air to circulate is 20 cm / 7.9" above the pod.

Standard: Power cord can be led from the floor and the ceiling. If led from the floor, the cord length is 2.7 m / 106.3 in

Lounge: Power cord can be only led out of the bottom from backside of the pod, the length is 3.5 m / 137.8 in


All electric components can be changed if there is a malfunction.

Framery's products can be plugged into a wall socket. The pods have their own power supplies that give 24 V DC to the lights and 12V DC fans. The lights and fans are operated by a motion detector. Inside the pods, there are country-specific power outlets for charging mobile devices.

Measurements

Exterior	220 cm x 235 cm x 280 cm (height, width, depth) 86.6 in x 92.4 in x 110.4 in (height, width, depth)
Door	Left handed Doorway 86 cm / 33.8 in Clear opening width 82 cm / 32.3 in

Framery 2Q

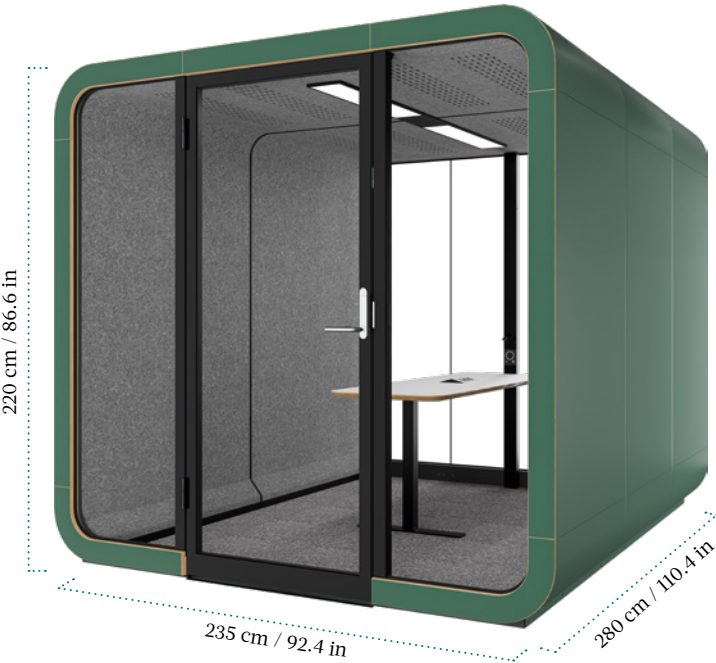

Power

Power consumption Framery 2Q	
42 W while in use	Maximum power consumption:
<ul style="list-style-type: none">• LED lights: 24 W• Fans in total: 18 W	<ul style="list-style-type: none">• 45 W total• LED light ceiling: 27 W• Fans in total: 18 W
5 W standby power consumption	
<ul style="list-style-type: none">• Fans are working on 25% of the maximum power	

Outlets

Framery 2Q Standard	Without table
	Petra: 3 power sockets + 2 charging USB sockets
	With table
Framery 2Q Lounge	Peak: 4 power sockets + 2 charging USB sockets + HDMI socket
	Both outlet options available for order with LAN
	Wall shelf
	Pluto: 2 power sockets + 2 charging USB sockets
	Clint sofas:
	Phase: 4 power sockets, 2 under each Clint sofa

Input and output values	Input: <ul style="list-style-type: none">• 100–240 VAC, 8.0 A, 50–60 Hz Output VAC (socket): <ul style="list-style-type: none">• 100–240 VAC, 6.6 A, 50–60 Hz Output USB (TUF) charging: <ul style="list-style-type: none">• Maximum combined output of 5 A at 5 VDC (25 W)
-------------------------	---

Power consumption is a constant value that is determined by the power usage of the pods' internal components (electric unit, motion detector, light and fans).



Framery 2Q Standard

Working height options



Standard table

- Table height: 72 cm / 28.3 in
- 4 power sockets + 2 charging USB sockets + HDMI socket
- Optional screen bracket and whiteboard



High table

- Table height: 90 cm / 35.4 in
- 4 power sockets + 2 charging USB sockets + HDMI socket
- Optional screen bracket and whiteboard



Without table

- 3 power sockets + 2 charging USB sockets
- Optional screen bracket and whiteboard

Framery 2Q Standard's optional whiteboard is the same as in Lounge, located on the inside wall of the pod.


Screen bracket for Framery 2Q - Standard

Framery 2Q Standard screen bracket is located on the back glass, attached to the power column.

Screen specifications:

- Maximum display size 50" - Recommended size 43" with flat VESA 100 x 100 or 200 x 200 (with adapter) mounting surface.

Screen not included

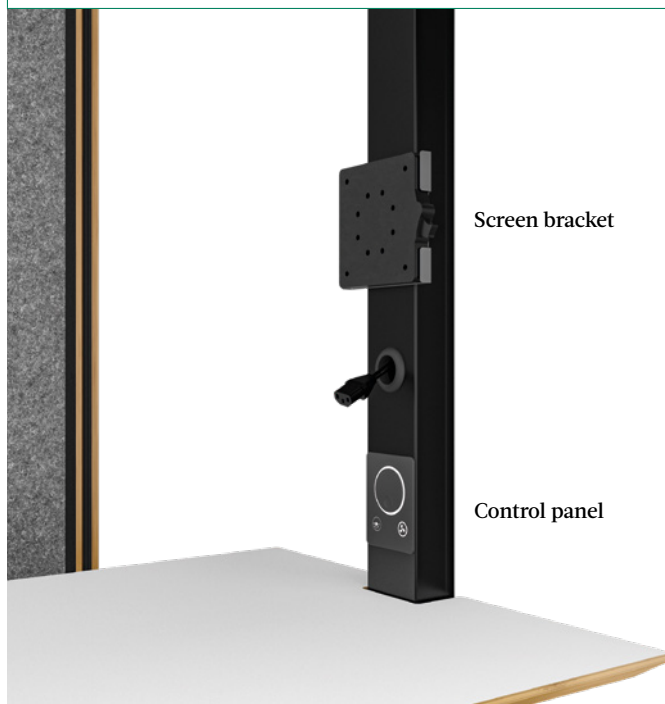

Screen bracket

Control panel

Framery 2Q Lounge

Whiteboard with screen bracket.

Attached to plywood under the cork board.

Power cord can be led through in the wire groove to the power outlet under the felt seam list.



Whiteboard without screen bracket.

Easy-to-remove cork board with magnet attachment.




Screen bracket for Framery 2Q - Lounge

Framery 2Q Lounge screen bracket is located on the center of the Lounge whiteboard.

Screen specifications:

- Recommended size 43" - Maximum weight 30 kg / 66 lbs
- VESA support:** 100 x 100, 100 x 150, 150 x 100, 200 x 100, 100 x 200, 200 x 200, 300 x 200, 400 x 200

Screen not included

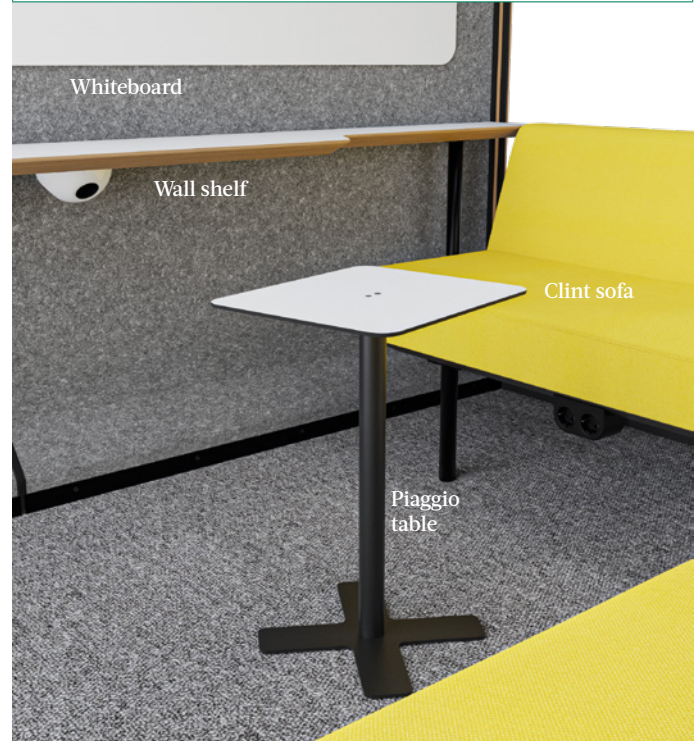

Exterior and frame colors



*White
(Standard)



Black



Piglet Pink



Purple Red



Forest Green



Lemon



Cloudy Gray



50's Blue



Burned Orange



Petrol Blue



Spring Green




Misty Blue

**White exterior available with
the following finishes: Glossy /
Ultramatt / Whiteboard paint*

Upholstery fabrics



Clint Lemon




Clint Gray



Piglet Pink



Purple Red



Spring Green



Cloudy Gray



50's Blue



Misty Blue



Petrol Blue



Burned Orange



Forest Green

Spring Green exterior
Spring Green frames



ABAX offices, Larvik, Sweden

Framery's Quality Management System is certified against ISO 9001 and Framery's Environmental Management System is certified against ISO 14001. CE marking is a manufacturer's declaration that a product meets the requirements of relevant EC directives. The EC directives for Framery O, Q and 2Q pods are: Low Voltage Directive (LVD) 2006/95/EC, Electromagnetic Compatibility Directive (EMC) 2004/108/EC, Restriction of Hazardous Substances (RoHS) Directive 2011/65/EU and Ecodesign Directive 2009/125/EC.



Acoustics

We do not give out the results of sound insulation measurements done to our products. The reason for this is that, at the moment, there isn't a uniform way of doing these measurements. If we were to give out these results, they would likely be compared to results measured in another way. This kind of comparison would be misleading. However, we're confident that the sound insulation of our products is the best in the product category.

ISO 23351-1 (<https://www.iso.org/standard/75299.html>) is a new standard that is in the final phases of ISO's approval process. It will be the first standard that can be used to determine the level of sound insulation of furniture ensembles such as pods, and to produce a single figure, called speech level reduction (Ds), that describes it.

Material safety

We conduct emissions testing for the products every time a major update is planned for Framery products in order to be sure that there aren't any harmful compounds volatilizing from the products such as formaldehydes or VOCs. We want to embrace transparency of the materials we use for our products and thus we have compiled Health Product Declarations® (HPD) for our products. Our HPDs can be found and downloaded for free online from the Health Product Declaration Collaborative public repository.

Fire safety

No flammable materials are used in Framery products. The fire safety of all surface materials, upholstery and acoustics materials of the products are tested and classified by either national or international standards. EN 13501-1 classification for the used materials is the following: acoustic wool is classified B-s1, d0, acoustic felt B-s2, d0 and carpet Cfl-s1. All surface materials have also been tested against ASTM E84 / UL 723 and are classified at least as Class C. Outer frames with laminated surface are IMO certified (French Maritime Authority). Moulded foam used in Tovi stool seat meets CA TB 117:2013 requirements. Fabric meets the performance requirements of BS EN 1021-1 and 1021-2. According to Inspecta, an EU accredited inspection body, there is no need for installing sprinklers in Framery O, Q or 2Q in Europe.

Framery has conducted extensive fire testing in US for the products and results- suggest that there is no need for installing sprinklers in Framery O, Q and 2Q in North America either. It is still recommended to check the requirements with local AHJ / fire inspector in North America as interpretations may differ.

Sustainability

Framery's products consist mostly of plywood, steel, glass and acoustic materials. Plywood used in Framery products has a sustainable forestry FSC or PEFC certification. Sound dampening panels are made up to 60% and the felt panels are made up to 80% of recycled PET plastic (e.g. Plastic bottles). Significant part of all steel, aluminium and glass is recycled during their manufacturing processes. 3rd Party Certifier has conducted a Life Cycle Assessment (LCA) and compiled Environmental Product Declarations (EPD) for both Framery O and Framery Q.

Certificates

