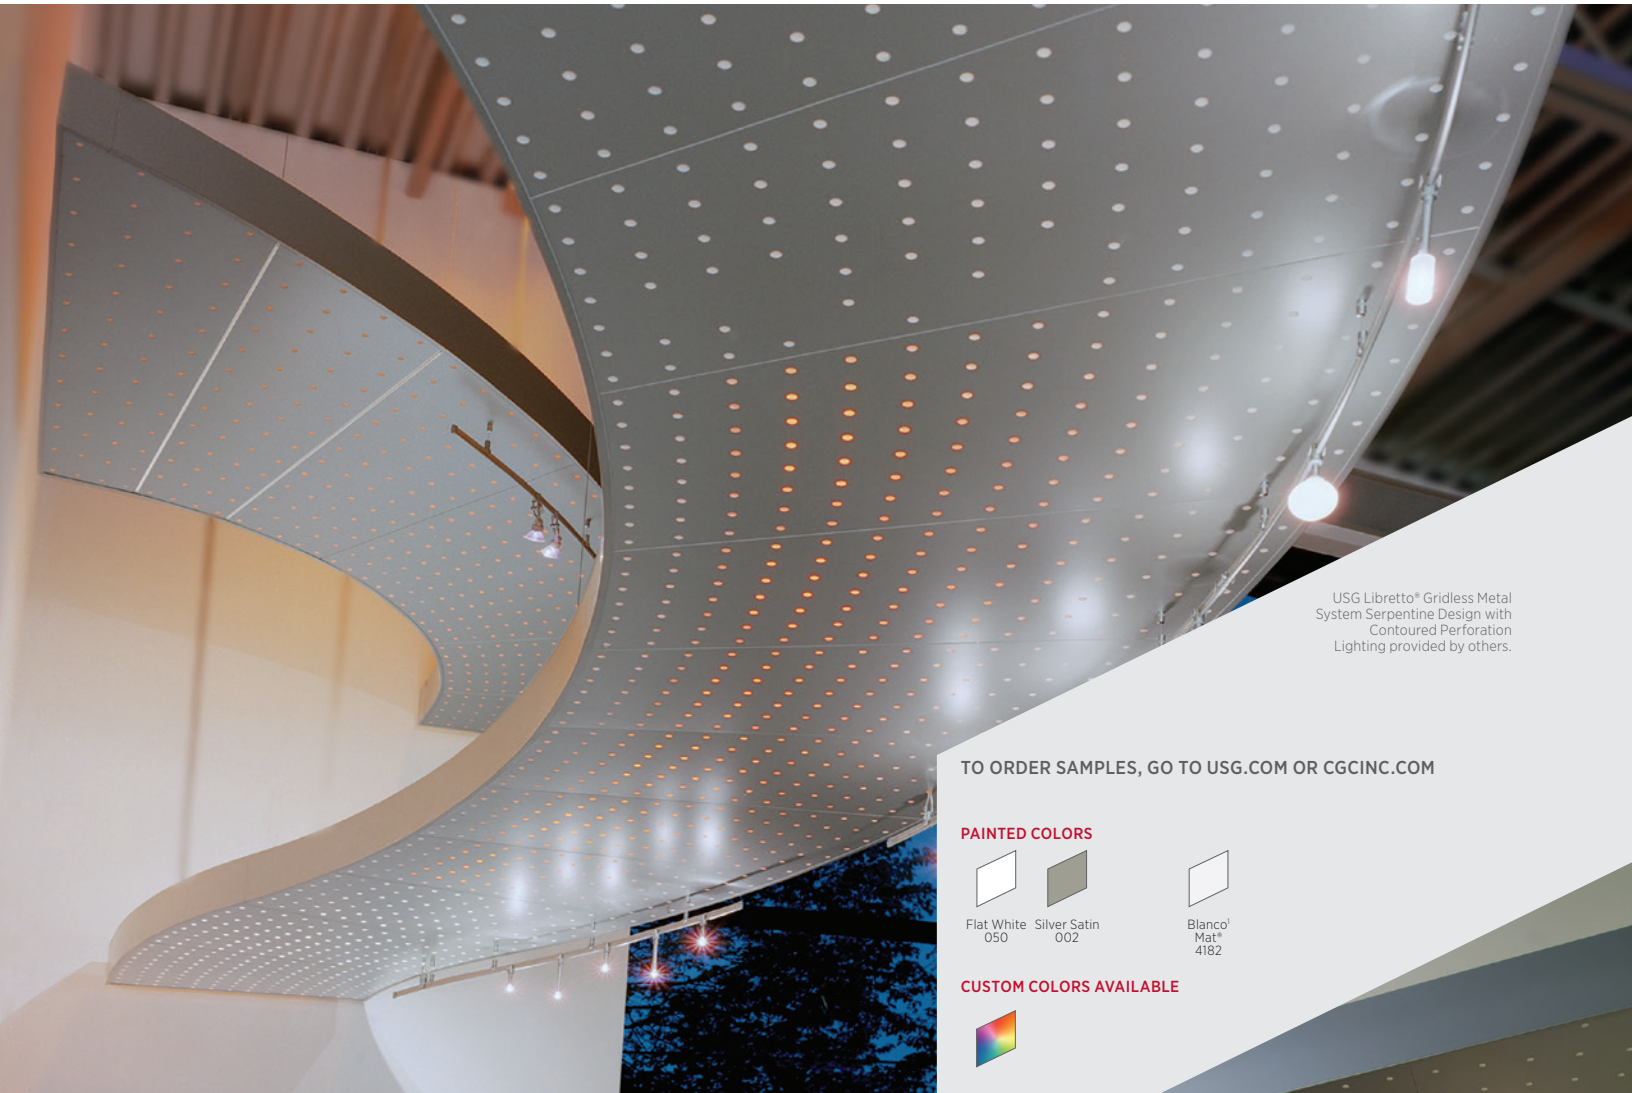


USG LIBRETTO® GRIDLESS METAL SYSTEM



USG Libretto® Gridless Metal
System Serpentine Design with
Contoured Perforation
Lighting provided by others.

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED COLORS



Flat White
050



Silver Satin
002



Blanco!
Mat+
4182

CUSTOM COLORS AVAILABLE



FEATURES AND BENEFITS

- Collaborate with USG to create a custom design tailored to your space.
- Individually fabricated aluminum panels interconnect to form a continuous, uninterrupted plane.
- Carrier system is concealed and custom-fit, with choice of three perimeter profiles to achieve proper scale.
- You can request a contoured pattern that follows the shape of your USG Libretto® ceiling, specify a custom graphic or select a standard pattern for a square or rectangular ceiling.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Curved Ceilings
- New Construction or Renovation
- No Visible Grid
- Backlit Ceilings



USG LIBRETTO® GRIDLESS METAL SYSTEM

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative





FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)


PRODUCT INFORMATION

Materials	Perimeter Profile	Plenum Depth	Finishes
Panels: Aluminum Carrier system: Cold-rolled steel Edge profile: Cold-rolled steel	4", 6" or 8" in height.	Minimum 12", with 8" clearance above top edge of perimeter profile.	Panels available perforated with a contoured pattern that follows the shape of your ceiling, a custom graphic pattern, or a standard pattern for a square or rectangular ceiling. Optional black or white Acoustibond™ backer available. Smooth, unperforated metal also available.

DETAILS
Design Concepts


Radial	Crescent	Serpentine	Four-Sided Polygon
			 

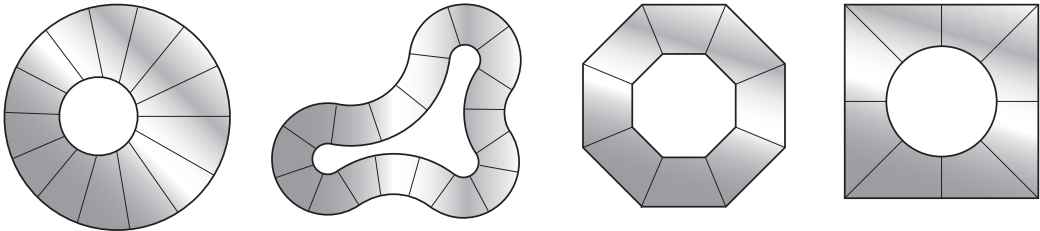Torus



Assembly

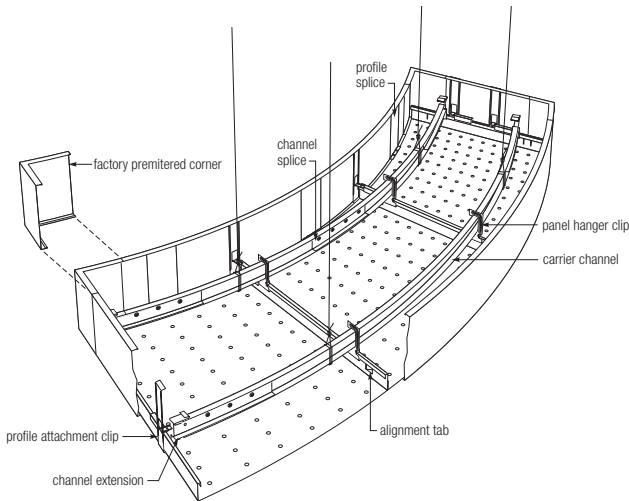View from above



Low Emissions (VOC)

CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

Product literature

System brochure: IC525
Data sheet: IC526
Warranty: SC2102
Installation Guides: IC453
Seismic Technical Guide: SC2494
Perforation Guide: IC425
Cleaning Instructions: IC518

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 and CAN/ULC S102
Surface-burning characteristics
(with light diffusing backer)

Class A
Flame Spread: 25 or less
Smoke development: 50 or less

Limitation

Some commercially acceptable color variation may occur
between lots and between different size products of the same
color. For more information about metal ceiling finishes, refer
to *Metal Ceilings Technical Guidelines* published by the Ceilings
& Interior Systems Construction Association.

Recycled content

USG Libretto® aluminum panels: ≤ 25% recycled content;
USG Libretto® suspension and trim: 25% recycled content.

Notes

1. Libretto® panels available in Blanco Mat® 4182 up to 2' wide and
up to 6' long.

PHYSICAL DATA

Notice

The information in this document
is subject to change without notice.
CGC Inc. or USG Corp. assumes
no responsibility for any errors that
may inadvertently appear in this
document.

IC526/rev. 7-23

© 2023 USG Corporation and/or
its affiliates. All rights reserved.
Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, LIBRETTO,
IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design
elements and colors, and related marks are trademarks of
USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene
practices during installation. Wear appropriate personal
protective equipment. Read SDS and literature before
specification and installation.

