


USG PARALINE® BAFFLES LINEAR CEILING AND WALL SYSTEM

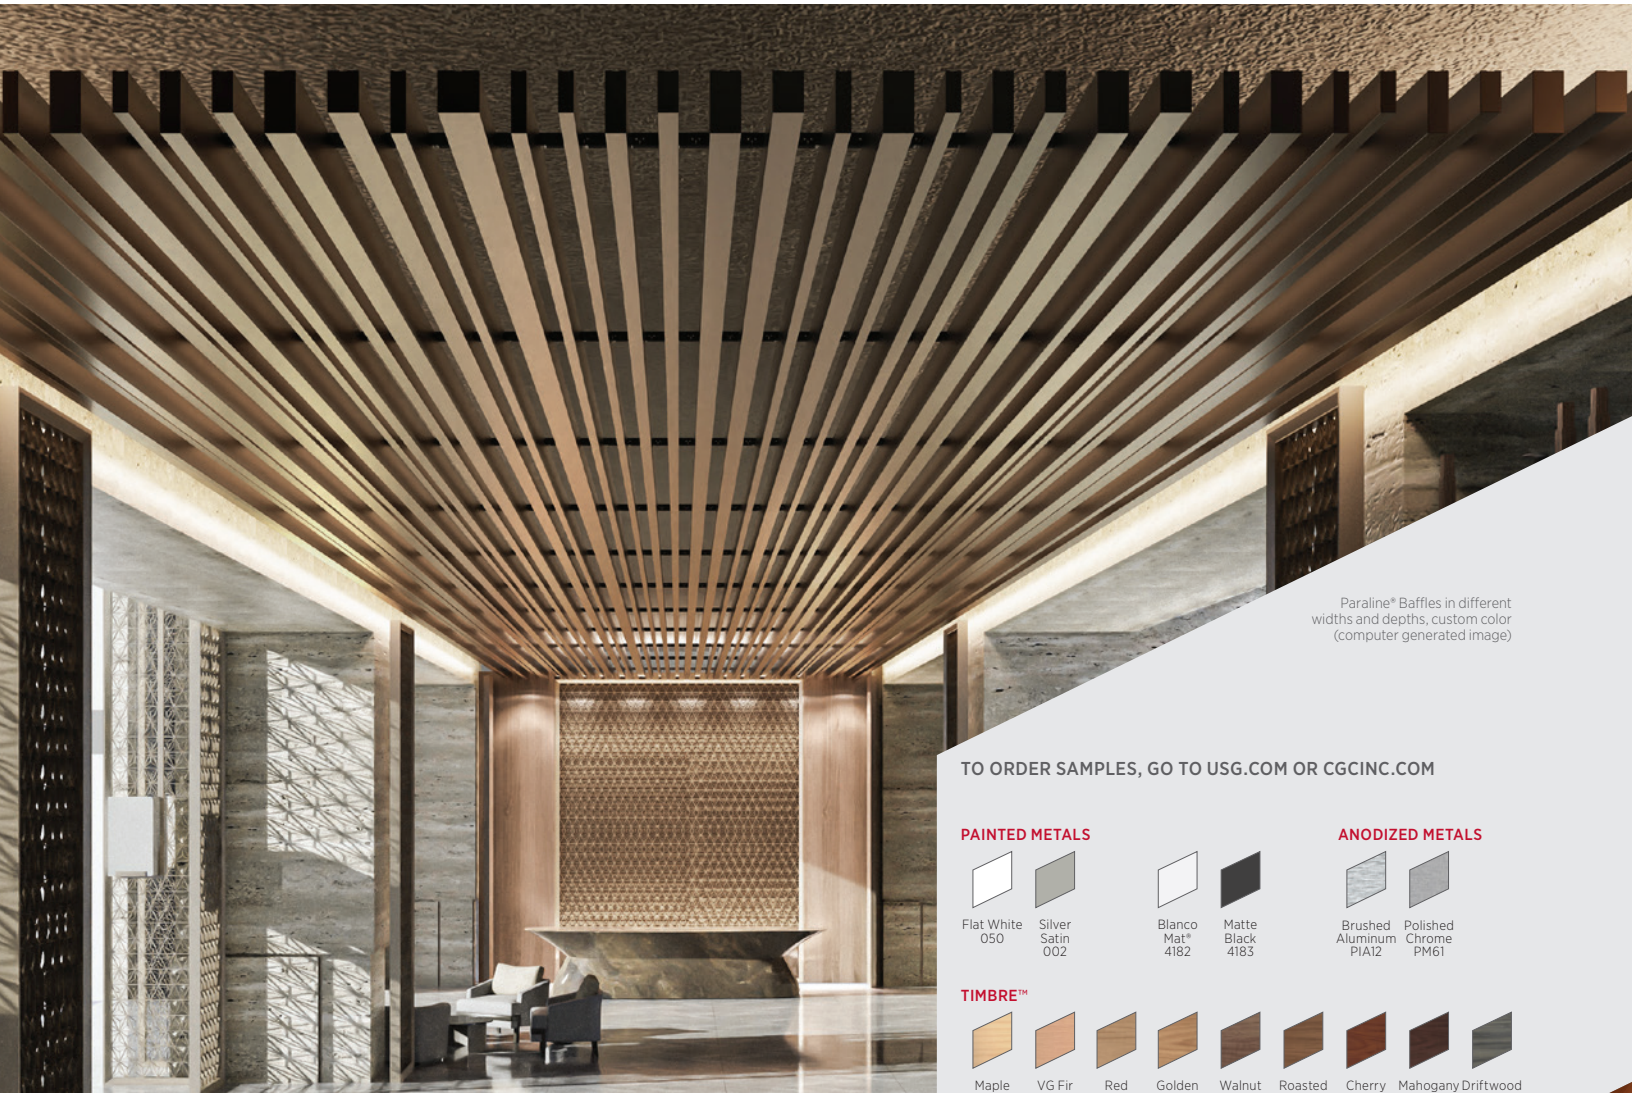

Paraline® Baffles in different widths and depths, custom color (computer generated image)

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS

Flat White
050

Silver
Satin
002

Blanco
Mat®
4182

Matte
Black
4183

ANODIZED METALS

Brushed
Aluminum
PIA12

Polished
Chrome
PM61

TIMBRE™

Maple
4010

VG Fir
4011

Red
Birch
4012

Golden
Glow Oak
4198

Walnut
4014

Roasted
Chestnut
4197

Cherry
4013

Mahogany
4015

Driftwood
4199

CUSTOM COLORS AVAILABLE



FEATURES AND BENEFITS

- Elegant and durable linear metal ceiling system consists of variable width and length baffles attached to standard USG Donn® Brand DX®, Gridware™ or Curvatura™ grid systems
- Clip on design offers unlimited access with no plenum depth requirements
- Unconstrained by suspension system in independent suspension applications
- Ideal for providing combined visual accents and acoustical control
- Available in acoustical or non-acoustical options
- Grouping Bar for increased installation speed and exact baffle spacing

APPLICATIONS

- Interior Applications
- Wall Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Sloped Ceilings
- Curved Ceilings
- New Construction or Renovation
- Downward Accessible
- Layout is Field Customizable

USG PARALINE® BAFFLES

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800.USG.4YOU (874-4968)




PRODUCT INFORMATION

| Materials | Baffle Sizes - Height x Width x Length | Fire Rating | LR | Recycled Content | Acoustical Performance Data |
|---|--|-------------------------|------------------------------------|--------------------------------------|---------------------------------------|
| Aluminum baffles; painted, anodized and powder coated | 4" x 1.5" x 24" - 144" 6" x 1.5" x 24" - 144" 4" x 2.0" x 24" - 144" 6" x 2.0" x 24" - 144" Standard lengths in 24" increments | Class A ASTM E84 | 0.93 for Blanco Mat 4182 | Up to 65% Recycled Content | Up to 0.40 Sabins per LF ¹ |

DETAILS

| | | | |
|--|--|---|--|
| DX® Grid Attachment <p>clip</p> <p>DX tee</p> <p>DX tee</p> <p>spacing varies per design</p> <p>Paraline Baffles typ</p> | DX® Grid Attachment <p>main tee or cross tee</p> <p>metal baffle grid attachment clip</p> <p>4" or 6" high metal baffle</p> | Curvatura™ Grid Attachment <p>Curvatura main tee</p> <p>Curvatura attachment clip</p> <p>4" or 6" high metal baffle</p> | Independently Suspended <p>hanger wire</p> <p>cable with cable connector</p> <p>free attachment clip</p> <p>4" or 6" high metal baffle</p> |
| DX® Grid with Grouping Bar <p>Cross Tee</p> <p>Main Tee</p> <p>Grouping Bar</p> | Grouping Bar Attachment <p>Fixing Bracket required with baffles wider than 1-1/2"</p> <p>Optional Fixing Bracket (required for seismic applications)</p> | Wall Mount (4" or 6" On Center baffle battens) <p>Z-Clip</p> <p>2" long Wall Mount Batten</p> | |

PERSPECTIVE

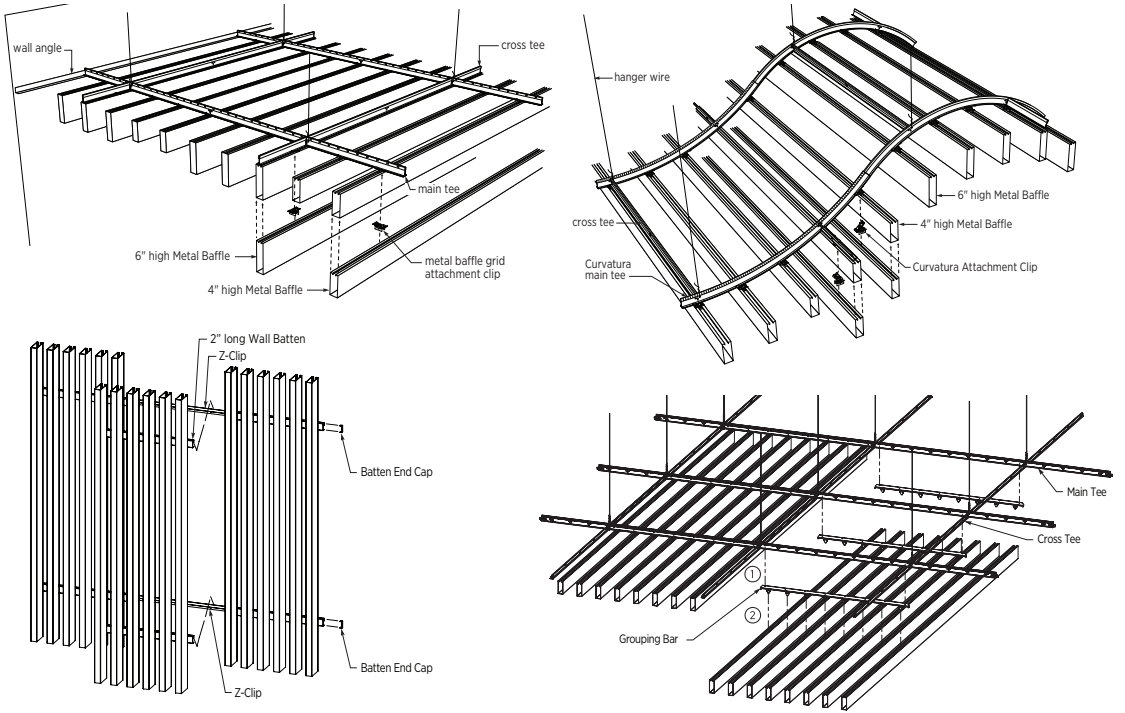

Low Emissions (VOC)
CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

PHYSICAL DATA

| | | | |
|--|---|---|---|
| Product literature System Guide: IC701 Data sheet: IC700 Installation Guide: IC702 Field Cutting Instructions: IC718 | Warranty: SC2102 Perforation Selection Guide: IC425 Cleaning Instructions: IC518 | ASTM E84 and CAN/ULC S102 surface-burning characteristics (with Acoustibond™ backer) Class A Flame spread: 25 or less Smoke developed: 50 or less | Limitation Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to <i>Metal Ceilings Technical Guidelines</i> published by the Ceilings & Interior Systems Construction Association (CISCA). |
| Online tools usgdesignstudio.com or cgcdesignstudio.com | | Installation Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system. | Note 1. 1.5 in. wide x 4 in. high baffle with CD25039 (A250) perforation, Acoustibond backer and poly bag infill. 2. For perforated then post painted Paraline® Baffles use fiberglass in polybag for sound absorption 3. All perforations, including CD06305NB (AO62), are on vertical sides of baffles only. |
| The Timbre finish used on Paraline Baffles incorporates a coating manufactured by a third party manufacturer which provides a 30-year limited warranty under the circumstances set forth in the warranty. This limited warranty is issued to USG Ceilings Plus, LLC and USG Interiors, LLC ("USG"). In the event our customer experiences a problem with the coating covered by the third party manufacturer's limited warranty, USG will use the information you provide to file a claim under the limited warranty. | | Seismic Paraline Baffles with Grouping Bar has been engineered, full scale dynamic tested, and approved per AC156, AC368, and ASTM E318, test criteria when installed per USG installation instructions. System Approved for seismic categories A through F. | |

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC700/rev. 7-23
© 2023 USG Corporation and/or its affiliates. All rights reserved.
Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CURVATURA, DONN, DX, GRIDWARE, PARALINE, TIMBRE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.