


# USG TRUE® WOOD RENDITIONS™ PANELS



USG True® Wood Renditions™  
Architectural Accent Panels  
in Swirls pattern.

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)



## FEATURES AND BENEFITS

- The elegance, warmth and majesty of true wood.
- Natural wood veneers.
- Eight design motifs.
- One panel design; dozens of layouts or provide your own design.
- FSC® certified.
- Class A fire rating.

## APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Wall Applications
- Sloped Ceilings
- New Construction or Renovation
- Patterned Aesthetics

2'x2' USG True® Wood Swirls

USG TRUE™ WOOD RENDITIONS™ PANELS

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800 USG.4YOU (874-4968)






2'x2' Accessible Reveal Panels

Funnels	Rosettes	Swirls	Boxes
Tangents	Corners	Deco	Ellipses

USG DX® only - Heavy Duty



AR Edge only

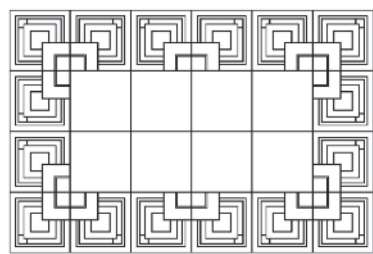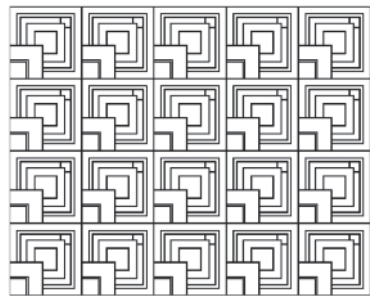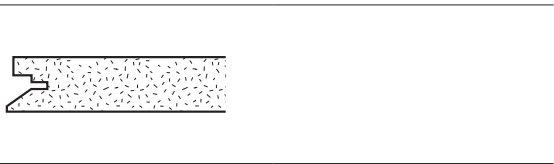

Design using 24 panels

See IC652 for more ceiling layouts.

PHYSICAL DATA

<p><b>Product literature</b> Data sheet: IC650 Finishes sheet: IC559 Tech Guide: IC561 Design Guide: IC652 Warranty: SC2102 Handling Guide: IC5449</p> <p><b>Online tools</b> usgdesignstudio.com or cgcdesignstudio.com</p>	<p><b>ASTM E84 and CAN/ULC S102 surface-burning characteristics</b> Class A Flame spread: 25 or less Smoke developed: 50 or less</p> <p><b>Weight</b> 3 lb./sq. ft.</p> <p><b>Material</b> No added urea-formaldehyde core, with face-cut veneers.</p>	<p><b>Notes</b></p> <ul style="list-style-type: none"><li>- Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.</li><li>- Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.</li><li>- These representations should not be used to finalize color selection(s).</li><li>- Building environmental conditions should be maintained in accordance with ASHRAE Standard 62.1, 2013.</li><li>- Refer to <i>CISCA Wood Ceilings Technical Guidelines</i> for best practices on installing wood ceilings.</li><li>- For Canadian product needs, please contact your local sales representative.</li><li>- For Funnels, Swirls, Boxes, Deco, and Ellipses, customer to indicate grain direction.</li></ul>
--	--	--

USG TRUE™ WOOD  
ARCHITECTURAL  
ACCENTS PANEL OPTIONS

GRID PROFILE OPTIONS  
Panel edge detail

EXAMPLE OF CEILING  
LAYOUT BOXES

**Notice**  
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

**IC650/rev. 3-23**  
© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.