


TILE & STONE

TECHNICAL DATA **2021**



Interceramic®
CRAFTED FOR LIFE

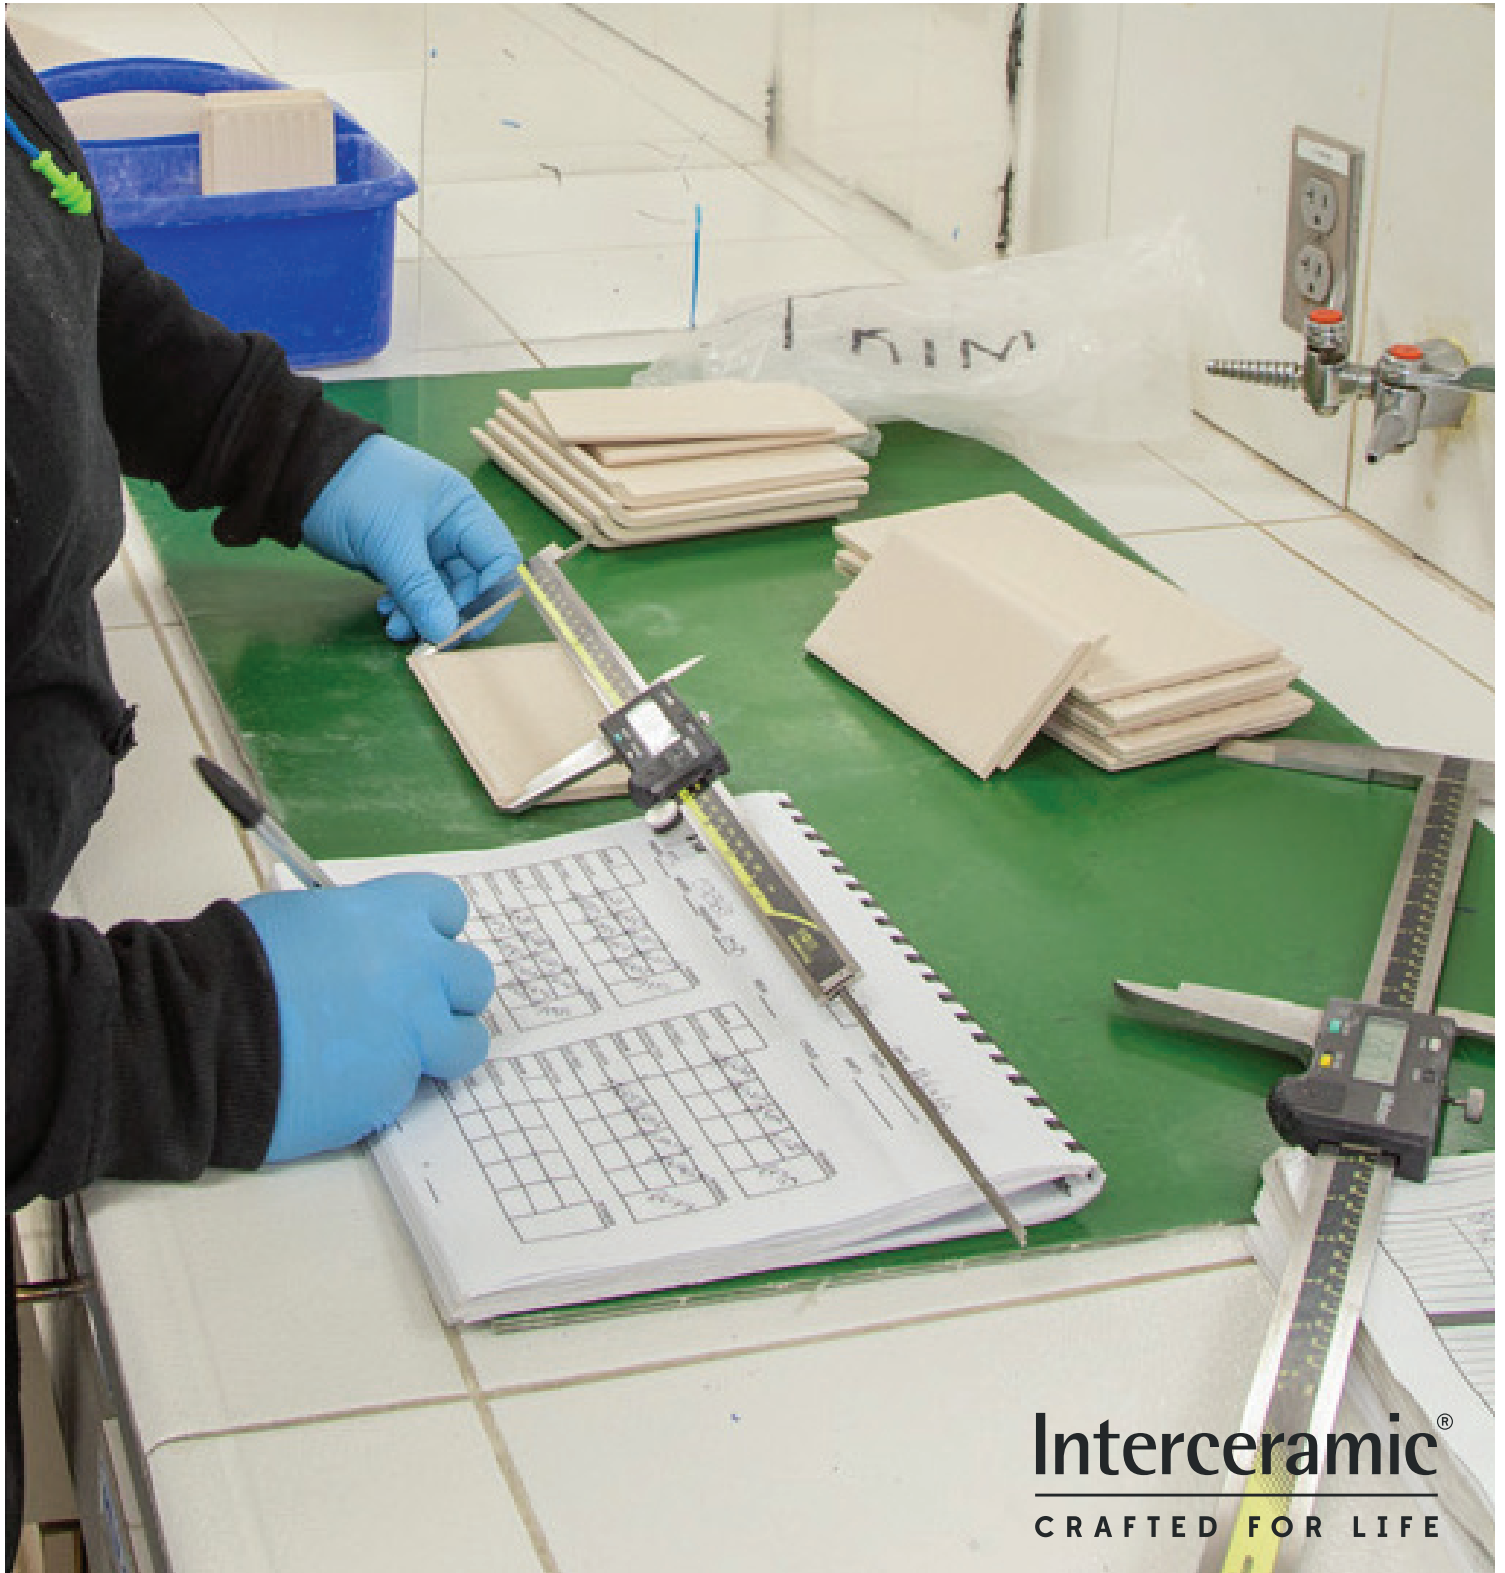

TILE TECHNICAL DATA

FLOOR TILE

Series	Trim Available	Wear Rating/ PEI	Shade/ Texture Spectrum (STS) Rating	DCOF ACU Test	Scratch Hardness	Water Absorption	Breaking Strength	Frost Resistance	Recycle Content		Tile Thickness	Rec. Grout Joints*
									Pre-Consumer	Post-Consumer		
ANSI Designation					MOHS Scale	ASTM C373	ASTMC648	ASTM C1026				
ANSI Standard					N/A	≤3%	≥250 lbs	Resistant			± 0.3 mm	
Amalfi Stone 🍀 - Durabody	Yes	IV/III	V4	>0.42	8.0	<3.00%	>400 lbs	Resistant	19.40%	11.10%	12x24 = 10.8 mm 16x16 = 8.8 mm 13x13 = 8.2 mm	3/16"
Amalfi Stone 🍀 - Porcelain	Yes	IV/III	V4	>0.42	8.0	<0.50%	>500 lbs	Resistant	5.00%	16.00%	20x20 = 10.5 mm 12x24 = 11.2 mm	3/16"
Amazonia	No	IV	V3	>0.42	8.0	<0.50%	>450 lbs	Resistant	N/A		11.3 mm	3/16"
Aquarelle	No	IV	V2	<0.42	7.0	<3.00%	>300 lbs	Resistant	20%		24x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Aria	Yes	IV/III	V2	Matte: >0.42 Polished: <0.42	5.5	<0.50%	>600 lbs	Resistant	3.00%	N/A	18x36 = 11.0 mm 12x24 = 9.5 mm	1/8"
Artisan Wood	No	IV/III	V3	>0.42	6.5	<0.50%	>550 lbs	Resistant	N/A	N/A	9.0 mm	1/8"
Black Forest	No	IV/III	V3	>0.42	6.5	<0.50%	>450 lbs	Resistant	12.50%	23.70%	11½x47 = 11.3 mm 7½x47 = 11.3 mm	1/8"
Burano 🍀 - Durabody	Yes	IV/III	V2	>0.42	6.5	<3.00%	>450 lbs	Resistant	5.00%	16.00%	12x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Burano 🍀 - Porcelain	Yes	IV/III	V2	>0.42	6.5	<0.50%	>500 lbs	Resistant	19.00%	N/A	20x20 = 10.5 mm 12x24 = 11.2 mm	3/16"
Catalina	Yes	IV	V3	>0.42	6.0	<0.50%	>500 lbs	Resistant	5.00%	16.00%	20x20 = 10.5 mm 12x24 = 11.2 mm 13x13 = 9.0 mm	3/16"
Cementine	No	III	V2	<0.42	5.0	<3.00%	>300 lbf.	Resistant	19.20%	11.40%	8.8 mm	3/16"
ColorTheory	Yes	130m³	V1	>0.42	7.0	<0.50%	>540 lbf.	Resistant	10.00%	N/A	24x24 = 9.8mm 12x24 = 9.6 mm 4x24 = 9.6 mm	1/8"
Concrete	Yes	IV/III	V2	>0.42	8.0	<0.50%	>600 lbs	Resistant	3.00%	N/A	6x24 = 10.3 mm 12x24 = 10.3 mm 24x24 = 10.3 mm	1/8"
Connect	No	IV/III	V2	>0.42	6.5	<3.00%	>300	Resistant	18.20%	16.40%	8x8 = 7.6 mm	3/16"
Construct	Yes	IV/III	V3	>0.42	5.0	<0.50%	>500 lbs	Resistant	5.00%	16.00%	18x36 = 11.3 mm 12x24 = 11.2 mm	3/16"
Contessa	Yes	IV	V2	>0.42	7.0	<0.50%	>450 lbs	Resistant	17%		11.0-11.3 mm	3/16"
Contour	Yes	IV	V3	>0.42	6.0	<3.00%	>450 lbs	Resistant	19.20%	11.40%	12x24 = 10.8 mm 16x16 = 8.8 mm 3x11 = 9.5 mm	3/16"
Cortina	Yes	IV/III	V3	Matte: >0.42 Polished: <0.42	5.5	<0.50%	>600 lbs	Resistant	3.00%	N/A	18x36 = 11.0 mm 12x24 = 9.5 mm	1/8"
Crescent	Yes	IV/III	V3	<0.42	5.0	<3.00%	>400 lbs	Resistant	19.20%	11.10%	12x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Dossier	Yes	IV/III/II	V2	Matte: >0.42 Polished: <0.42	7.0	<0.50%	>475 lbs	Resistant	3.00%	N/A	24x24 = 9.5 mm 12x24 = 9.5 mm	1/8"
Elements	No	II	V1	<0.42	5.0	<0.50%	>275 lbs	Resistant	21.44%	N/A	6.0 mm	3/16"
Ellum	Yes	IV/III/II	V2	>0.42	8.0	<0.50%	>600 lbs	Resistant	3.00%	N/A	24x24 = 10.3 mm 12x24 = 10.3 mm	1/8"
Elysium	Yes	IV/III	V2	>0.42	6.5	<3.00%	>500 lbs	Resistant	18.20%	11.10%	12x24 = 10.8 mm 16x16 = 8.8 mm 13x13 = 8.2 mm	3/16"
Encierro	Yes	IV/III	V4	>0.42	6.5	<3.00%	>450 lbs	Resistant	19.20%	11.40%	12x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Forester	No	IV/III	V4	>0.42	7.0	<3.00%	>550 lbs	Resistant	19.40%	11.10%	10.8 mm	3/16"
Form	No	IV/III/II	V2	>0.42	6.5	<3.00%	>300 lbs	Resistant	18.20%	16.40%	8x8 = 7.6 mm	3/16"
Formation	Yes	IV/III	V2	>0.42	8.0	<0.50%	>480 lbs	Resistant	3.00%	N/A	24x24 = 10.3 mm 12x24 = 10.3 mm	1/8"
FortyEight	No	IV/III	V3	>0.42	5.0-7.0	<0.50%	>550 lbs	Resistant			24x48 = 11.3 mm	1/8"
Framework	Yes	IV/III	V2	>0.42	8.0	<0.50%	>510 lbs	Resistant	3.00%	N/A	24x24 = 10.3 mm 12x24 = 10.3 mm	1/8"
Function	Yes	IV/III/II	V2	>0.42	6.5	<3.00%	>500 lbs	Resistant	19.40%	5.00%	12x24 = 10.8 mm 16x16 = 8.8 mm 13x13 = 8.2 mm	3/16"
Gala	Yes	IV/III	V2	Matte: >0.42 Polished: <0.42	8.0	<0.50%	>450 lbs	Resistant	3.00%	N/A	24x24 = 9.5 mm 12x24 = 9.5 mm	1/8"
Gosford Park	No	IV/III	V3	>0.42	8.0	<0.50%	>400 lbs	Resistant	5.00%	16.00%	8x40 = 9.0 mm	1/8"
Habitat	Yes	IV/III	V2	>0.42	7.5	<3.00%	>300 lbs	Resistant	20%		24x24 = 10.8 mm 16x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Industry	Yes	IV/III	V3	>0.42	7.5	<0.50%	>450 lbs	Resistant	12.50%	23.70%	24x24 = 11.2 mm 12x24 = 11.2 mm	3/16"
Intertech	Yes	N/A	V1	>0.42	6.0	<0.25%	>400 lbs	Resistant			12x24 = 8.7 mm 12x12 = 8.7 mm	3/16"
Lakemont	Yes	IV	V2	>0.42	5.5	<3.00%	>500 lbs	Resistant	18.20%	11.10%	12x24 = 10.8 mm 16x16 = 8.8 mm 13x13 = 8.2 mm	3/16"
Linen	Yes	IV/III	V2	>0.42	6.5	<3.00%	>300 lbs	Resistant	20%		16x24 = 10.8 mm	3/16"
Manitoba	No	IV/III	V3	>0.42	9.0	<3.00%	>400 lbs	Resistant	31.70%	5.00%	10.8 mm	3/16"
Milan	Yes	IV	V2	<0.42	5.0	<3.00%	>300 lbs	Resistant	N/A		8.8 mm	3/16"

All tiles meet or exceed ASTM standards for chemical resistance (ASTM C650), crazing resistance (ASTM C424), and thermal shock (ASTM C484) unless otherwise noted.
NOTE: Due to the inherent nature of fired ceramic tile, it is important to note that the coefficient of friction may vary within and between product runs

TILE TECHNICAL DATA

FLOOR TILE



Series	Trim Available	Wear Rating/ PEI	Shade/ Texture Spectrum (STS) Rating	DCOF ACU Test	Scratch Hardness	Water Absorption	Breaking Strength	Frost Resistance	Recycle Content		Tile Thickness	Rec. Grout Joints*
									Pre-Consumer	Post-Consumer		
ANSI Designation					MOHS Scale	ASTM C373	ASTMC648	ASTM C1026				
ANSI Standard					N/A	≤3%	≥250 lbs	Resistant			± 0.3 mm	
Modulor	Yes	IV/III	V2	>0.42	6.0	<0.50%	>600 lbs	Resistant	3.00%	N/A	18x36 = 11.0 mm 9x36 = 11.0 mm 12x24 = 9.5 mm	1/8"
Montpellier 🍀 - Durabody	Yes	IV	V2	>0.42	7.0	<3.00%	>350 lbs	Resistant	21%		16x24 = 10.8 mm 13x13 = 8.2 mm	3/16"
Montpellier 🍀 - Porcelain	Yes	IV/III	V2	>0.42	8.0	<0.50%	>500 lbs	Resistant	5.00%	16.00%	20x20 = 10.5 mm 12x24 = 11.2 mm	3/16"
Montreaux	Yes	IV	V3	>0.42	6.5	<3.00%	>350 lbs	Resistant	20%		20x20 = 10.0 mm 13x13 = 8.2 mm	3/16"
Norway 🍀 - Durabody	No	IV/III	V3	>0.42	7.5	<3.00%	>400 lbs	Resistant	19.20%	11.40%	10.8 mm	3/16"
Norway 🍀 - Porcelain	No	IV/III	V3	>0.42	7.5	<0.50%	>450 lbs	Resistant	5.00%	16.00%	9.0 mm	3/16"
Oxide	Yes	IV/III	V3	<0.42	6.0	<0.50%	>350 lbs	Resistant	12%		11.15 mm	1/8"
Pinot	Yes	IV/III	V2	>0.42	7.0	<3.00%	>450 lbs	Resistant	20%		20x20 = 10.0 mm 16x24 = 10.8 mm 16x16 = 8.8 mm 13x13 = 8.2 mm	3/16"
Pulse	Yes	IV/III/II	V2	Matte: >0.42 Polished: <0.42	7.0	<0.50%	>475 lbs	Resistant	18.00%	N/A	24x24 = 9.5 mm 12x24 = 9.5 mm	1/8"
QuarryBasics	Yes	N/A	V2	>0.42	7.0	<3.00%	400 lbs	Resistant	9.5%		12.7 mm	3/16"
QuarryBasics Abrasive	Yes	N/A	V2	>0.42	7.0	<3.00%	400 lbs	Resistant	4-9.5%		12.7 mm	3/16"
QuarryBasics Metro Tread	Yes	N/A	V2	>0.42	7.0	<3.00%	400 lbs	Resistant	4-7.8%		12.7 mm	3/16"
Quartzite	Yes	IV/III	V3	>0.42	9.0	<3.00%	>650 lbs	Resistant	19.20%	11.40%	18x36 = 11.3 mm 12x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Railwood	No	IV/II	V3	>0.42	6.0	<3.00%	>600 lbs	Resistant	31.70%	5.00%	8x24 = 10.8 mm	3/16"
Rainforest	No	IV/III	V2	>0.42	8.0	<3.00%	>600 lbs	Resistant	31.70%	5.00%	8x24 = 10.8 mm	3/16"
Retro	Yes	IV/III	V2	>0.42	6.0-6.5	<3.00%	450 lbs	Resistant	20%		12x12 = 8.2 mm 8x8 = 7.6 mm	3/16"
Rock Island	Yes	IV/III	V2	>0.42	8.0	<3.00%	>500 lbs	Resistant	18.20%	11.10%	12x24 = 10.8 mm 16x16 = 8.8 mm 13x13 = 8.2 mm	3/16"
Ruidoso 🍀 - Durabody	No	IV/III	V3	>0.42	5.0	<3.00%	>550 lbs	Resistant	N/A	N/A	10.8 mm	3/16"
Ruidoso 🍀 - Porcelain	No	III	V3	>0.42	5.0	<0.50%	>450 lbs	Resistant	N/A	N/A	10.8 mm	3/16"
San Giulio	Yes	IV	V2	>0.42	7.5	<3.00%	>400 lbs	Resistant	19.40%	11.10%	12x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Spa	Yes	IV	V1	<0.42	7.0	<3.00%	>300 lbs	Resistant	20%		20x20 = 10.8 mm	3/16"
Spatial	Yes	130m³	V2	Matte: >0.42 Polished: <0.42	7.0	<0.50%	>540 lbs	Resistant	10.00%	N/A	24x24 = 9.8 mm 12x24 = 9.6 mm	1/8"
Strata 🍀 - Durabody	Yes	IV/III	V2	>0.42	6.0	<3.00%	>350 lbs	Resistant	19.40%	11.10%	12x24 = 10.8 mm 13x13 = 8.2 mm	3/16"
Strata 🍀 - Porcelain	Yes	IV/III	V2	>0.42	8.0	<0.50%	>500 lbs	Resistant	5.00%	16.00%	20x20 = 10.5 mm 12x24 = 11.2 mm	3/16"
Sunwood Pro	No	IV	V3	>0.42	7.5	<3.00%	>400 lbs	Resistant	19.20%	11.40%	10.8 mm	3/16"
Southerleigh	Yes	IV	V3	>0.42	8.0	<3.00%	>350 lbs	Resistant	19.20%	11.40%	12x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Sussex	Yes	IV/III/II	V2	>0.42	7.5	<0.50%	>600 lbs	Resistant	18.00%	N/A	18x36 = 11.0 mm 9x36 = 11.0 mm 12x24 = 9.5 mm	1/8"
Tessuto	Yes	IV	V2	>0.42	8.0	<0.50%	>400 lbs	Resistant	20%		11 mm	3/16"
Thassos Travertine	Yes	IV	V3	>0.42	8.0	<3.00%	>350 lbs	Resistant	20%		10.8 mm	3/16"
Timberwood	No	IV/III/II	V4	>0.42	8.0	<3.00%	>600 lbs	Resistant	5.00%	16.00%	7.5x39 = 8x40 = 9.0 mm	1/8"
Tirreni	Yes	IV	V3	>0.42	7.0	<3.00%	>400 lbs	Resistant			8.8 mm	3/16"
Travertino Royal	Yes	IV	V4	<0.42	7.5	<3.00%	>300 lbs	Resistant	26%		24x24 = 10.8 mm 16x24 = 10.8 mm 16x16 = 8.8 mm 13x13 = 8.2 mm	3/16"
Trazzo	Yes	IV/III	V2	>0.42	8.0	<0.50%	>480 lbs	Resistant	3.00%	N/A	24x24 = 9.5 mm 12x24 = 9.5 mm	1/8"
Union Square	No	IV	V2	<0.42	5.0	<3.00%	>400 lbs	Resistant	19.40%	11.10%	7.4 mm	3/16"
Vintage Brick	No	IV	V4	>0.42	6.5	<0.10%	>450 lbs	Resistant	20.00%	N/A	3x12 = 8.5 mm 8½x10 = 8.5 mm	3/16"
Vintage Cement	Yes	IV/III	V2	>0.42	8.0	<0.50%	>600 lbs	Resistant	3.00%	N/A	24x24 = 10.3 mm 12x24 = 10.3 mm	1/8"
Walker	No	IV/III	V3	>0.42	9.0	<0.50%	>700 lbs	Resistant	N/A	N/A	9.0 mm	1/8"
Wheelhouse	Yes	III	V4	>0.42	8.0	<3.00%	>350 lbs	Resistant	19.20%	11.40%	12x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Wildwood	No	IV/III	V3	>0.42	6.5	<0.50%	>650 lbs	Resistant	N/A	N/A	9.0 mm	1/8"
Wilshire	Yes	IV/III/II	V2	Matte: >0.42 Polished: <0.42	7.0	<0.50%	>475 lbs	Resistant	18.00%	N/A	24x24 = 9.5 mm 12x24 = 9.5 mm	1/8"
Windrose	Yes	IV/III	V2	>0.42	7.0	<3.00%	>500 lbs	Resistant	18.20%	11.10%	13x13 = 8.2 mm 12x24 = 10.8 mm 16x16 = 8.8 mm	3/16"
Wood Trails	No	III	V2	<0.42	7.0	<3.00%	>350 lbs	Resistant	21%		9.7-10.0 mm	3/16"

*Minimum size and related allowances are provided in ANSI A108.02. Refer to "Grout Joint Size, Layouts, and Patterns" in the Tile Council of North America's "Handbook for Ceramic, Glass, and Stone Tile Installation."



Series	Trim Available	Shade/Texture Spectrum (STS) Rating	Water Absorption	Breaking Strength	Bonding Strength	Crazing Resistance	Recycle Content	Wall Tile Thickness
							Pre-Consumer	
ANSI Designation			ASTM C373	ASTM C482	ASTM C482	ASTM C424		
ANSI Standard			<20%	≥90 lbs	≥50 psi	Resistant		
Aquarelle	Yes	V2	<20%	>150 lbs	>50 psi	Resistant	10%	8.15 mm
Brick	Yes	V1	<20%	>150 lbs	>50 psi	Resistant	N/A	7.3-7.7 mm
Bruselas	Yes	V2	<20%	>150 lbs	>50 psi	Resistant	10%	7.45 mm
Dots	No	V2	<20%	>150 lbs	>50 psi	Resistant	15%	10.5-11 mm
Emma	Yes	V2	<20%	>150 lbs	>50 psi	Resistant	21.44%	7.5 mm
Encierro	Yes	V4	<20%	>150 lbs	>50 psi	Resistant	18%	7.3-7.7 mm
Essentials	Yes	V1	<20%	>150 lbs	>50 psi	Resistant	17%	9.1-9.3 mm
Impression	No	V1	<20%	>150 lbs	>50 psi	Resistant	N/A	10.5 mm
Kaleido	No	V2	<20%	>150 lbs	>50 psi	Resistant	15%	12x24 = 10.5 mm 24x24 = 10.8 mm
Lipstick (Exterior)	Yes	V1	<3.00%	>450 lbs	>50 psi	Resistant	35.2%	7.3-7.9 mm
Lipstick (Interior)	Yes	V1	<20%	>150 lbs	N/A	N/A	41.6%	6x6 = 7.1-7.3 mm 4¼x4¼ = 7.3-7.5 mm
Milan	Yes	V2	<20%	>150 lbs	>50 psi	Resistant	N/A	7.1-7.6 mm
Montreaux	Yes	V3	<20%	>150 lbs	>50 psi	Resistant	10%	7.45 mm
Oxide	Yes	V2	<20%	>150 lbs	>50 psi	Resistant	10%	7.45 mm
Pinot	Yes	V2	<20%	>150 lbs	>50 psi	Resistant	17%	7.3-7.7 mm
Profile	No	V2	<20%	>140 lbs	>50 psi	Resistant	18.00%	7.3 mm
Ripple	Yes	V1	<20%	>140 lbs	>50 psi	Resistant	21.44%	8.6-8.9 mm
Seaside	Yes	V1	<20%	>140 lbs	>50 psi	Resistant	21.44%	8.6-8.9 mm
Southerleigh	Yes	V3	<20%	>150 lbs	>50 psi	Resistant	18%	7.3-7.7 mm
Spa	Yes	V1	<20%	>150 lbs	>50 psi	Resistant	10%	8.15 mm
Tessuto	Yes	V2	<20%	>150 lbs	>50 psi	Resistant	17%	7.3-7.7 mm
Up & Down	Yes	V1	<20%	>150 lbs	>50 psi	Resistant	N/A	Up= 9.9 mm Down = 7.1 mm
Vesubio	Yes	V3	<20%	>150 lbs	>50 psi	Resistant	15%	8.8-9.1 mm
Wall Tile Collection	Yes	V1	<20%	>150 lbs	>50 psi	Resistant	10%	7.45 mm



	STANDARD WALL TILE	Aquarelle	Brick	Bruselas	Emma	Encierro	Essentials	Lipstick	Milan	Montreaux	Oxide	Pinot	Ripple	Seaside	Southerleigh	Spa	Tessuto	Up & Down	Vesubio	Group 1		Group 2			Group 3	
																				Wall Tile Collection Brite	Wall Tile Collection Matte	Wall Tile Collection Brite	Wall Tile Collection Matte	Wall Tile Collection Bold Tones	Wall Tile Collection Bold Tones	Wall Tile Collection Matte
Field Tile Sizes																										
	10" x 20"	•														•			•							
	10" x 16"								•																	
	8" x 12"											•					•									
	8" x 8"							•																		
	6" x 6"			•	•			•		•	•						•			•	•	•	•	•	•	
	3"x12"												•	•												
	3" x 6"			•	•		•					•	•	•			•			•		•	•	•	•	
	4¼" x 4¼"	•	•					•		•										•	•	•	•	•	•	
	4¼" x 12¾"	•													•				•	•	•	•	•	•		
	4¼" x 8½"	•			•							•					•		•	•	•	•	•	•		
	2½" x 8½"																		•	•	•	•	•	•		
Surface Trim																										
	2" x 6" S4269			•						•	•							•		•	•	•	•	•		
	2" x 2" SN4269			•						•	•							•		•	•	•	•	•		
	2" x 2" SM4269																	•		•	•					
	2½" x 10" Bullnose	•																								
	2½" x 8" Bullnose											•					•									
	2½" x 2½" Bullnose Corner	•										•					•									
	2⅛" x 8½" S4289																			•	•	•	•	•		
	2⅛" x 8½" S4829																			•	•	•	•	•		
	2¼" x 2⅛" SN4289																			•	•	•	•	•		
	3" x 3" Bullnose Corner								•										•							
	3" x 3" Double Edge Glazed					•																				
	3" x 6" Corner (Left/Right)					•																				
	3" x 6" S4369			•														•		•	•	•	•	•	•	
	3" x 6" S4639																	•		•	•	•	•	•	•	
	3" x 3" SN4369																	•		•	•	•	•	•	•	
	3" x 10" Bullnose								•										•							
	3" x 24" Bullnose															•										
	4¼" x 8½" S4489				•															•	•	•	•	•		
	4¼" x 8½" S4849				•																					
	4¼" x 12¾" S4C49														•					•	•	•	•	•	•	
	4¼" x 12¾" S44C9 Bullnose														•					•	•	•	•	•	•	
	4¼" x 4¼" S4449		•					•		•										•	•	•	•	•	•	
	4¼" x 4¼" SN4449		•					•		•										•	•	•	•	•	•	
	6" x 6" S4669						•			•	•							•		•	•					
	6" x 6" SN4669						•			•	•						•		•	•						
	4¼" x 8½" SN4849 R				•																					
	4¼" x 8½" SN4849 L				•																					
	4¼" x 12¾" SN44C9 R														•											
	4¼" x 12¾" SN44C9 L														•											
	8" x 8" Bullnose							•																		
	8" x 8" Bullnose Corner							•																		
	½"x12" Pencil											•	•													

✕ - Available in select colors

	WALL TILE	Aquarelle	Brick	Bruselas	Emma	Encierro	Essentials	Lipstick	Milan	Montreaux	Oxide	Pinot	Ripple	Seaside	Southernleigh	Spa	Taberna	Up & Down	Vesubio	Group 1		Group 2			Group 3	
																				Wall Tile Collection IC Brites	Wall Tile Collection IC Mattes	Wall Tile Collection IC Brites	Wall Tile Collection IC Mattes	Wall Tile Collection Bold Tones	Wall Tile Collection Bold Tones	
Radius Trim																										
	2' x 6\"/>			•						•	•	•							✕		•	•				
	2' x 2\"/>									•	•	•							✕		•	•				
	2' x 2\"/>																		✕		•	•				
	1' x 6\"/>			•						•	•		•	•												
	3' x 3\"/>																									
Cove Base Trim																										
	4 1/4\"/>																				•	•	✕	✕	✕	
	4 1/4\"/>																				•	•	✕	✕	✕	
	4 1/4\"/>																		✕		•	•	✕	✕	✕	
	4 1/4\"/>																		✕		•	•	✕	✕	✕	
	6\"/>																		✕		•	•				
	6\"/>																		✕		•	•				
Counter & Decorative Trim																										
	3\"/>													•												

✕ - Available in select colors





Product Description	Country of Origin	Shade Variation				Durability		Suggested Application			Suitable for Exterior Applications
		Low	Moderate	High	Random	Commercial	Residential	Floor	Wall	Counter	
Granite											
Absolute Black	India	•				•	•	•	•	•	•
Absolute Black Flamed	India	•				•	•	•	•	•	•
Black Galaxy	India	•				•	•	•	•	•	•
Blue Pearl	Italy	•				•	•	•	•	•	•
Moon White	India		•			•	•	•	•	•	•
Tan Brown	India	•				•	•	•	•	•	•
Limestone											
Basalt Black	Turkey	•				•	•	•	•		•
Blue Lagos	Portugal		•			•	•	•	•	•	
Blue Lagos Blend	Portugal				•	•	•	•	•		•
Chihuahua	Mexico		•			•	•	•	•	•	•
Foussana Gray	Egypt		•			•	•	•	•	•	•
Gascogne Blue	Portugal		•			•	•	•	•	•	•
Gascogne Blue Blend	Portugal				•	•	•	•	•		•
Golden Beach	Portugal		•			•	•	•	•	•	•
Golden Beach Blend	Portugal				•	•	•	•	•		•
Imun Cream	Egypt		•			•	•	•	•	•	•
Mediterranean Blue	Egypt		•			•	•	•	•	•	•
Thala Gray	Egypt		•			•	•	•	•	•	•
Tut Pond	Egypt			•		•	•	•	•	•	•
Marble											
African Arabescato	Namibia			•		•	•	•	•	•	•
Artemis White	Turkey		•			•	•	•	•	•	•
Astoria Gray	Turkey	•					•	•	•	•	•
Bardiglio Nuvolato	Italy			•		•	•	•	•	•	•
Calacatta Gold	Italy			•		•	•	•	•	•	•
Calacatta Select	Italy		•			•	•	•	•	•	•
Crema Light	Turkey	•				•	•	•	•	•	•
Crema Marfil Standard/Select	Spain	•				•	•	•	•		
Crema Marfil Classic	Spain		•			•	•	•	•		
Dark Emperador	Spain		•			•	•	•	•		
Dolomite White	Turkey	•				•	•	•	•	•	•
Emperador Brown	Turkey			•		•	•	•	•	•	•
Emerador Marron	Turkey			•		•	•	•	•	•	•
Empress Black	China		•			•	•	•	•		
Euro White	Portugal		•			•	•	•	•	•	•
Ice White	Turkey		•			•	•	•	•	•	•



Product Description	Country of Origin	Shade Variation				Durability		Suggested Application			Suitable for Exterior Applications
		Low	Moderate	High	Random	Commercial	Residential	Floor	Wall	Counter	
Marble Cont.											
Iceberg	Turkey		•			•	•	•	•	•	•
Ivory Select	Turkey	•				•	•	•	•	•	•
Light Emperador Turkish	Turkey		•				•	•	•	•	
Madera White	China		•			•	•	•	•	•	•
Marmara	Turkey		•			•	•	•	•	•	•
Polar Grey	Turkey		•			•	•	•	•	•	•
Shadow Gray	Turkey			•		•	•	•	•	•	•
Silver Waves	China			•		•	•	•	•	•	•
Snow Frost	China		•			•	•	•	•	•	•
White Carrara	Italy		•			•	•	•	•	•	•
White Thassos	Greece	•				•	•	•	•	•	•
Mexican Travertine											
Crema Imperial Classic	Mexico		•			•	•	•	•	•	•
Crema Imperial Select	Mexico		•			•	•	•	•	•	•
Crema Venato Vein-Cut	Mexico		•			•	•	•	•	•	•
Travertino Caramel	Mexico		•			•	•	•	•	•	•
Travertino Caramel Vein-Cut	Mexico		•			•	•	•	•	•	•
Natural Slate											
Autumn Mist	India				•	•	•	•	•		
Indian Black	India		•			•	•	•	•		•
Kota Bluestone	India		•			•	•	•	•		•
Primrose	India				•	•	•	•	•		•
Rustic Gold	India			•		•	•	•	•		•
Peruvian Travertine											
Andean Cream	Peru			•		•	•	•	•	•	•
Cusco Storm	Peru			•		•	•	•	•	•	•
Alpaca Fleece	Peru			•		•	•	•	•	•	•
Turkish Travertine											
Autumn Leaves	Turkey				•	•	•	•	•		•
Classic	Turkey		•			•	•	•	•	•	•
Desert Travonya	Turkey		•			•	•	•	•	•	•
La Travonya	Turkey			•		•	•	•	•	•	•
Noce Toros	Turkey		•			•	•	•	•	•	•
Silver	Turkey			•		•	•	•	•	•	•
Tuscany Ivory	Turkey		•				•	•	•	•	•
Tuscany Walnut	Turkey		•				•	•	•	•	•



Headquarters

1950 Parker Rd.
Carrollton, TX 75010

1.800.688.5671
info@interceramic.com



interceramicusa.com