



DISCONTINUED

2277

Towel Dispenser/Waste Receptacle

Model 2277 — Recessed *Bradex*®

Model 2277-10 — Semi-Recessed
(recesses 3½"; projects 7")

Model 2277-11 — Surface-Mounted
(projects 10½")

☒ **Contemporary Series — Satin Finish**

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

DOOR: 18 gauge stainless steel, ½" return for maximum rigidity. Concealed full length stainless steel piano hinge and 2 tumbler locks keyed like other Bradley units.

TOWEL DISPENSER: Furnished (manufactured by others). Rolled edge on dispenser opening.

WASTE RECEPTACLE INSERT: Leakproof molded plastic.

Capacity

Towel Dispenser — one standard core 8" or 9"W x 800'L roll paper towel
Waste Receptacle Insert — 10.5 gal. (1.4 cu. ft.)

Operation

Towel dispenser delivers preset length of towel (2½", 4" or 5" per stroke).
Waste receptacle insert removable by unlocking cabinet door. Operates with less than 5 lbs. of force.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 15¾"W x 39½"H x 10¼"D (Semi-recessed unit only 3½" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required. Surface-mounted units must have holes drilled by installer.

Guide Specification

Recessed combination towel dispenser and waste receptacle shall be fabricated of heavy gauge stainless steel with exposed surfaces in satin finish. Cabinet door of 18 gauge stainless steel with full length concealed piano hinge and secured by 2 tumbler locks. Towel dispenser shall be activated with less than 5 lbs. of force and have the capacity to hold one standard core 8" or 9"W x 800'L roll paper towel. Removable 10.5 gal. leakproof molded plastic insert for waste receptacle.

Overall dimensions: 17¾"W x 41¼"H x 10½"D.



ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.

Orders composed of products indicated as **BradEX**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 2
This information is subject to change without notice.
Bradley_CombiDispenser_2277_10_11

6/19/2023

© 2023 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com




DISCONTINUED

2277

Towel Dispenser/Waste Receptacle

Dimensions

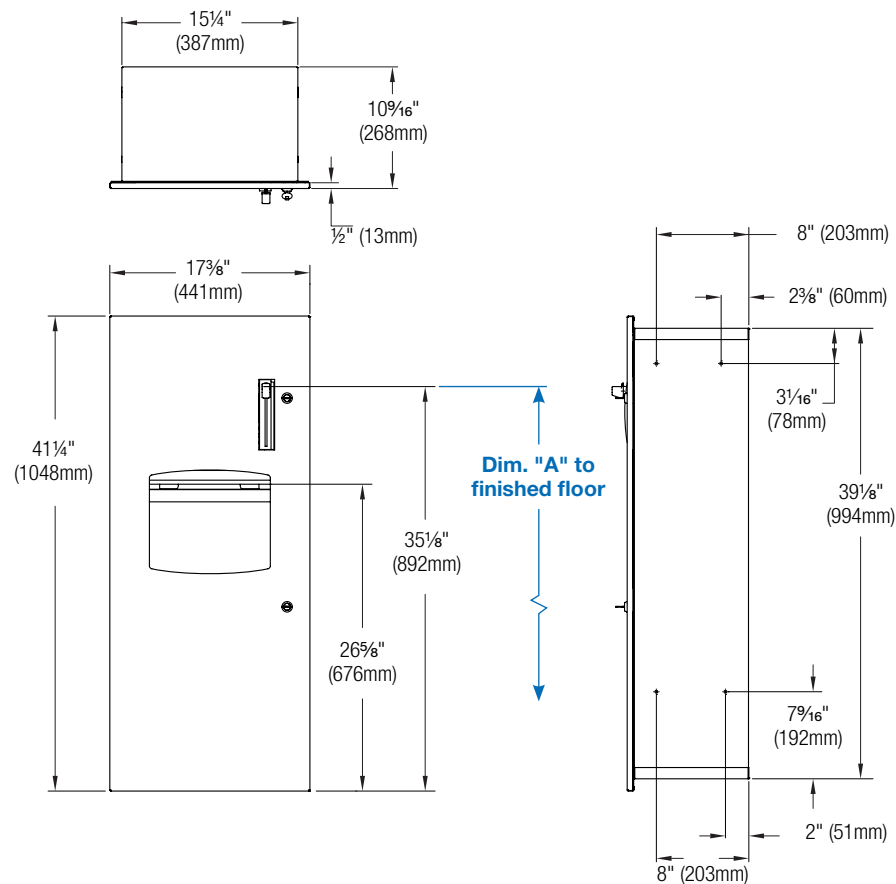

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Actuator top to finished floor	48" (1219mm)	52 1/2" (1334mm)	13" (330mm)
	45" (1143mm)	49 1/2" (1257mm)	10" (254mm)
	42" (1067mm)	46 1/2" (1181mm)	7" (178mm)
	40" (1016mm)	44 1/2" (1130mm)	5" (127mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	15 3/4" (401mm) Wide x 39 1/2" (1004mm) High x 10 1/4" (261mm) Deep		
Recessed:	15 3/4" (401mm) Wide x 39 1/2" (1004mm) High x 3 1/2" (89mm) Deep		

Orders composed of products indicated as **BradEX®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.