

# SUBMITTAL SHEET

## COMBI-LINE

Project Name \_\_\_\_\_

Specification Section \_\_\_\_\_

Ceiling Type \_\_\_\_\_

### SUBSTRATES

HeartFelt®: Non-woven PES Fibers (Felt); Tavola™ Panels: Aluminum

### PROFILE

- HeartFelt® Linear: ☐ 40HL55 1-9/16" x 2-3/16" (40mm x 55mm)  
☐ 40HL80 1-9/16" x 3-1/8" (40mm x 80mm)  
☐ 40HL105 1-9/16" x 4-1/8" (40mm x 105mm)
- HeartFelt® Round: ☐ 40HR64 1-9/16" x 2-1/2" (40mm x 64mm)
- Tavola™ Linear: ☐ 40TL55 1-9/16" x 2-3/16" (40mm x 55mm)  
☐ 40TL80 1-9/16" x 3-1/8" (40mm x 80mm)  
☐ 40TL105 1-9/16" x 4-1/8" (40mm x 105mm)

### PANEL COLOR/FINISH

- HeartFelt® - Greys: ☐ White - #7593F ☐ Dark Grey - #7598F  
☐ Light Grey - #7596F ☐ Black - #7594F  
☐ Medium Grey - #7597F
- HeartFelt® - Earth Tones: ☐ Creme - #7575F ☐ Light Brown - #7576F  
(40HL55 only) ☐ Medium Brown - #7577F ☐ Dark Brown - #7578F  
☐ Umber - #7579F
- Tavola™ Panels: ☐ Cotton White - #0280 ☐ Other \_\_\_\_\_  
☐ Natural - #7163

### PANEL DEPTH

- ☐ 55mm ☐ 64mm (HeartFelt Round only)  
☐ 80mm ☐ 105mm

### STANDARD PATTERNS

- ☐ DUNES ☐ ESPRESSO ☐ BARK ☐ PEBBLES

### CARRIER SPACING (Standard Carrier)

- ☐ 60mm 2-3/8" o.c. module, 13/16" reveal  
☐ 80mm 3-1/8" o.c. module, 1-9/16" reveal  
☐ 100mm 3-15/16" o.c. module, 2-3/8" reveal

### PERFORATION PATTERN

(Tavola Panels only)

- ☐ #106 ☐ #115 ☐ #119 ☐ Non-Perforated

### NUMBER OF SIDES PERFORATED

(Tavola Panels only)

- ☐ Two Sides ☐ Three Sides

### END PLUGS

- ☐ Yes ☐ No

### CARRIERS COLOR/FINISH

- ☐ Natural - #7163  
☐ Black - #1883  
☐ Other \_\_\_\_\_

HeartFelt® is a registered trademark of Hunter Douglas, Inc. used with permission.

### To Contact Us:


5015 Oakbrook Parkway, Suite 100  
Norcross, GA 30093  
phone: 800.366.4327  
fax: 770.806.0214  
www.certainteed.com/architectural

ARCHITECTURAL

**CertainTeed**  
SAINT-GOBAIN

**PERFORATIONS (Tavola Panels only)**

Perforated panels improve acoustical performance as well as create aesthetic effects.  
Perforations not available on HeartFelt.

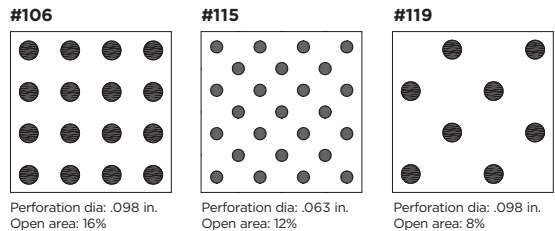

Acoustical test results available upon request

**PHYSICAL DATA**

- Substrates:** HeartFelt®: Non-woven PES Fibers (Felt); Tavola™ Panels: Aluminum
- Warranty:** 1 year Limited Warranty
- Seismic rating:** Zones A,B,C,D,E,F
- Fire rating:** Class A Fire Rated per ASTM E1264 (HeartFelt) and ASTM E84 (Tavola Panels) and CAN/ULC-S102
- Weight:** Varies
- Wind load:** N/A
- Recycled content:** Up to 85%
- Light reflectance (LR):**
  - Varies with color

Given the unique and special nature of our HeartFelt® ceiling product, steps should be taken (before and during installation, as well as over the lifetime of the ceiling) to avoid or minimize static and the accumulation of dust, lint, dirt or airborne particles on or around the felt. Manufacturer does not warrant against or take responsibility for any such static or accumulation.