


# FINE FISSURED FINE FISSURED HIGH NRC FINE FISSURED CUSTOMLINE®

## MINERAL FIBER FISSURED

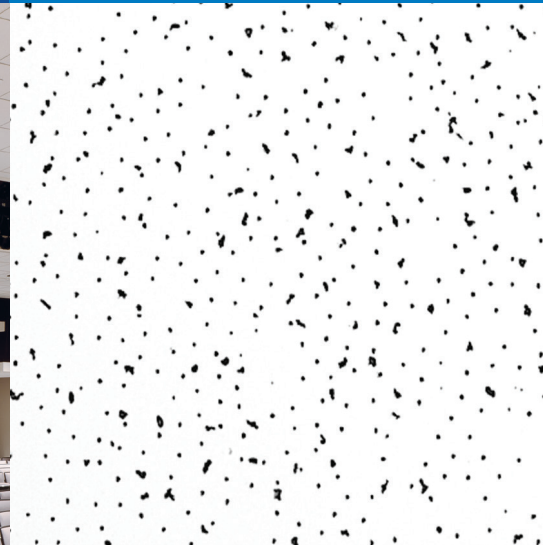

A non-directional mineral fiber panel for all-around workability, affordability and great-looking installations.

### FEATURES AND BENEFITS

- Non-directional fissured pattern
- High NRC panels comply with LEED v4 for School classroom acoustics prerequisite
- Customline options provide three dramatic geometric designs with discreet small-scale fissure pattern
- High humidity and sag resistant
- USDA Certified Biobased content at 98%
- Available in 6 standard colors for item numbers HHF-154, HHF-157, HHF-197, FFCL-224

### ATTRIBUTES



NRC  
UP TO 0.75



SAG RESISTANT



BIOSHIELD®  
MOLD/MILDEW  
RESISTANT



LOW  
VOC  
EMISSION  
COMPLIANT  
CERTIFIED



LR 0.83/0.84

## LEED® v4

RECYCLED CONTENT		
FINE FISSURED	33%	
	PRE: 28%	POST: 5%
PROTECTONE	44%	
	PRE: 42%	POST: 2%
FINE FISSURED HIGH NRC	70%	
	PRE: 68%	POST: 2%

- ✓ MR: PBT Source Reduction (Healthcare)
- ✓ EQ: Acoustic Performance
- ✓ EQ: Prereq. Min. Acoustic Performance (Schools)
- ✓ EQ: Low-Emitting Materials
- ✓ EQ: Daylight
- ✓ MR: Material Ingredients (HPDs)
- ✓ MR: Sourcing Raw Materials
- ✓ MR: Environmental Product Declarations (EPDs)
- ✓ MR: Construction and Demolition Waste Management Planning

LEED® is a registered trademark of the U.S. Green Building Council.

### CERTIFICATIONS & PRODUCT DECLARATIONS



EPD AVAILABLE


HPD AVAILABLE

ARCHITECTURAL


**CertainTeed**  
SAINT-GOBAIN

# FINE FISSURED | FINE FISSURED HIGH NRC

## FINE FISSURED CUSTOMLINE®



### CUSTOMLINE SCORING OPTIONS



### FINE FISSURED HIGH NRC

			FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	LR	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
TRIM													
	NRC .75	HHF-457 HNRCX	Panels	24 x 24 x 3/4	0.75	35	70%	—	0.83	14	56	55	16
		HHF-497 HNRCX	Panels	24 x 48 x 3/4	0.75	35	70%	—	0.83	8	64	62	16

REVEAL													
	NRC .75	HHF-454 HNRCX	Panels	24 x 24 x 3/4	0.75	35	70%	—	0.83	14	56	55	16
		HHF-494 HNRCX	Panels	24 x 48 x 3/4	0.75	35	70%	—	0.83	8	64	62	16

### FINE FISSURED

			FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	LR	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
TRIM													
	NRC .55	HHF-157	Panels	24 x 24 x 5/8	0.55	33	33%	—	0.84	16	64	50	20
		PFF-157	Panels	24 x 24 x 5/8	0.55	35	44%	YES*	0.84	16	64	70	20
		HHF-197	Panels	24 x 48 x 5/8	0.55	35	33%	—	0.84	8	64	45	20
		PFF-197	Panels	24 x 48 x 5/8	0.55	40	44%	YES*	0.84	8	64	70	20
		HHF-177	Panels	24 x 60 x 5/8	0.55	35	33%	—	0.84	8	80	51	20
		HHF-2067	Panels	20 x 60 x 5/8	0.55	35	33%	—	0.84	8	66.7	52	16

REVEAL													
	NRC .55	HHF-154	Panels	24 x 24 x 5/8	0.55	33	33%	—	0.84	16	64	45	20
		PFF-154	Panels	24 x 24 x 5/8	0.55	35	44%	YES*	0.84	16	64	70	20
		HHF-194	Panels	24 x 48 x 5/8	0.55	35	33%	—	0.84	8	64	45	20

NARROW REVEAL													
	NRC .55	HHF-150	Panels	24 x 24 x 5/8	0.55	35	33%	—	0.84	16	64	45	20

### FINE FISSURED METRIC

			FORMAT	DIMENSIONS (MM)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	LR	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
METRIC TRIM													
	NRC .55	HHF-2067M	Panels	500 x 1500 x 15	0.55	35	33%	—	0.84	8	6	52	20

\* Protectone®: A fire-resistive ceiling when used in applicable UL/ULC assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.

To specify color other than white, order by item number followed by color code. Example: HHF-154 BEB. Color List: Beige Breeze – BEB, Blondewood – BLW, Silver Lining – SIL, Wet Clay – WEC, White Wash – WIW. Only available for HHF-154, HHF-157, HHF-197, and FFCL-224 products.

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

# FINE FISSURED | FINE FISSURED HIGH NRC

## FINE FISSURED CUSTOMLINE®

### FINE FISSURED CUSTOMLINE

			FORMAT	DIMENSIONS (IN.)	NRC	CAC	RECYCLED CONTENT	UL FIRE-RATED	LR	PIECES/CARTON	SQ. FT./CARTON	LBS./CARTON	CARTONS/PALLET
REVEAL													
	NRC .55	FFCL-224	Panels	24 x 48 x 3/4	0.55	38	33%	—	0.84	8	64	64	16
	NRC .50	FFCL-448	Panels	24 x 48 x 3/4	0.50	38	33%	—	0.84	8	64	60	16
		FFCL-812	Panels	24 x 48 x 3/4	0.50	38	33%	—	0.84	8	64	64	16
		PFFCL-224	Panels	24 x 48 x 3/4	0.50	40	33%	YES*	0.84	8	64	75	16


NARROW REVEAL													
	NRC .55	FFCLN-224	Panels	24 x 48 x 3/4	0.55	38	33%	—	0.84	8	64	64	16
	NRC .50	FFCLN-448	Panels	24 x 48 x 3/4	0.50	38	33%	—	0.84	8	64	60	16
		FFCLN-812	Panels	24 x 48 x 3/4	0.50	38	33%	—	0.84	8	64	64	16

\* Protectone®: A fire-resistive ceiling when used in applicable UL assemblies. Protectone product is indicated by a Yes in the UL Fire-Rated column.


To specify color other than white, order by item number followed by color code. Example: HHF-154 BEB. Color List: Beige Breeze – BEB, Blondewood – BLW, Silver Lining – SIL, Wet Clay – WEC, White Wash – WIW. Only available for HHF-154, HHF-157, HHF-197, and FFCL-224 products.

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990


### EDGE DETAILS




Trim  
9/16" EZ Stab  
Elite Narrow




Trim -  
15/16" EZ Stab  
Classic




Reveal Beveled  
15/16" EZ Stab  
Classic




Narrow Reveal  
Corner Bevel  
9/16" EZ Stab  
Elite Narrow



Narrow Reveal  
Corner Bevel  
9/16" EZ Stab  
Bolt Slot



Narrow Reveal  
Beveled (Customline)  
9/16" EZ Stab  
Elite Narrow



Narrow Reveal  
Corner Bevel  
9/16" EZ Stab  
Tier Drop

Color-coordinated suspension systems available

### PHYSICAL DATA

#### MATERIAL

Mineral Fiber

#### FIRE CLASS

All are Class A per ASTM E84 & CAN S102  
Flame Spread: 25 or less  
Smoke Developed: 50 or less

#### ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C E  
(Standard & High NRC)  
Type III, Form 2, Pattern C E K (Customline)

#### VOC EMISSIONS

Independently certified compliant with  
California Department of Public Health  
CDPH/EHLB/Standard Method  
Version 1.2, 2017.

#### INSTALLATION CONSIDERATION

Customline & Colors Note: Product is lot sensitive.  
Differing manufacturing dates should not be mixed  
in a single ceiling or unbroken area.

#### MAINTENANCE

Wipe with a soft cloth or vacuum  
with brush attachment.

#### MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold  
and mildew resistance.

#### WARRANTY

10-year 104/90 Limited Warranty increases  
to 15 years when installed with CertainTeed  
suspension systems. Full warranty information  
can be found at [certainteed.com/warranty](http://certainteed.com/warranty).



### CertainTeed ARCHITECTURAL

METAL • WOOD • FELT • FIBERGLASS & MINERAL FIBER • GYPSUM • SUSPENSION & INTEGRATED SYSTEMS  
20 Moores Road, Malvern, PA 19355 800-233-8990 [certainteed.com/architectural](http://certainteed.com/architectural)

©10/22 CertainTeed, Printed in the USA, Code No. 11-11-666-US-EN