



The Portland Project

Mannington
COMMERCIAL



Cover: Ridgeline (Modular) - Compass 14904; **Installation** - 3-Step Vertical Ashlar
Above: Switchback (Modular) - Compass 14904; **Installation** - 3-Step Vertical Ashlar



Summit (Modular) - Compass 14904
Installation - 3-Step Vertical Ashlar




Summit, Ridgeline (Modular) - Compass 14904
Installation - 3-Step Vertical Ashlar



Make your own path. Wander and wonder.

Substrate must be sound, clean and free of loose dust, dirt, Sand after the installation. The installation temperature and relative humidity must be controlled between 65°F (18°C) and 90°F (32°C)

Inspired by Oregon's wild and rugged coast, secluded ridge lines and meandering trails. This collection started with a road trip, with opening ourselves up to the world we share in full confidence that new patterns would be revealed, unearthed, created. The result is luxurious textures. Sharp linear striations that emphasize movement from one plank to the next. Colors that were born on the coastline: from the richly saturated to neutral, nature-inspired grays and browns.

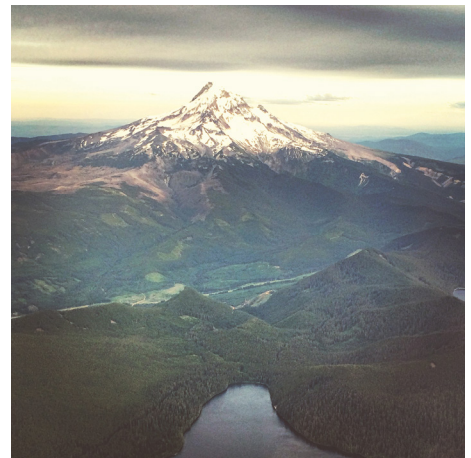

Crafted with Purpose.

The Portland Project

Style	Ridgeline (Moduar)	Summit (Modular)	Switchback (Modular)
Construction	Patterned Loop	Patterned Loop	Tip-Sheared Patterned Loop
Face Fiber	Type 6,6 Nylon	Type 6,6 Nylon	Type 6,6 Nylon
Dye Method	Solution Dyed	Solution Dyed	Solution Dyed
Gauge	1/10	1/10	1/10
Stitches Per Inch	12 (47.24 per 10 cm)	14.16 (55.75 per 10 cm)	13.5 (53.15 per 10cm)
Density	5,600 (208.08 kg/m³)	6,236 (231.72 kg/m³)	6,912 (256.84 kg/m³)
Pile Thickness	0.180" (4.57 mm)	0.127" (3.23 mm)	0.125" (3.18 mm)
Weight	28 oz/yd² (949 g/m²)	22 oz/yd² (746 g/m²)	24 oz/yd² (814 g/m²)
Backing Type	Infinity® 2 Modular	Infinity® 2 Modular	Infinity® 2 Modular
Size	12" x 48" (30.48 x 121.92 cm)	12" x 48" (30.48 x 121.92 cm)	12" x 48" (30.48 x 121.92 cm)
Colors	8	8	8
Packaging	8 yd² / 18 Tiles	8 yd² / 18 Tiles	8 yd² / 18 Tiles
Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive	Infinity 2 Adhesive
Installation Method	3-Step Vertical Ashlar	3-Step Vertical Ashlar	3-Step Vertical Ashlar
Testing			
Dimensional Stability (Aachen Test)	Passes	Passes	Passes
Electrostatic Propensity (AATCC 134)	Less than 3.0 kV	Less than 3.0 kV	Less than 3.0 kV
Flooring Radiant Panel (ASTM E648)	Passes - Class 1 ≥ 0.45 watts/cm²	Passes - Class 1 ≥ 0.45 watts/cm²	Passes - Class 1 ≥ 0.45 watts/cm²
Smoke Density (ASTM E662)	Passes ≤ 450	Passes ≤ 450	Passes ≤ 450
Methenamine Pill Test (ASTM D2859)	Passes	Passes	Passes
Hexapod (ASTM D5252) TARR	3.5 - severe	3.5 - severe	4.0 - severe
Environmental Data			
NSF/ANSI 140 Certification	Infinity® 2 Modular - Gold		
Recycled Content	Contains recycled content		
Indoor Air Quality	CRI Green Label Plus Certified		
Product Declarations	Third Party Verified EPD, HPD		
Carbon Offset	105% Cradle to Gate (A1 - A3), visit website for more information		
LEED	May contribute to LEED credits: Building Product Disclosure & Optimization - EPDs; Building Product Disclosure & Optimization - Sourcing Raw Materials; Building Product Disclosure & Optimization - Material Ingredients; IEQc2 -Low Emitting Materials		
mindful MATERIALS	Visit mindfulmaterials.com for current transparency information		
Manufacturing	Calhoun, GA (USA) - ISO 14001 Registered		
Warranty			
	Limited Lifetime Wear & Backing Warranty		
	Limited 15-Year XGUARD® Stain Resistant Warranty		
	Limited 15-Year ColorSafe® Bleach Resistant Warranty		

- Specifications are based on averages from normal manufacturing tolerances. Such variations do not affect product performance.
- Protective chair pads are recommended under office chairs with roller casters to preserve appearance and avoid premature wear.
- As with all quality carpets, slight variation in color may occur from dye lot to dye lot.
- Backing or other materials may be changed without prior notice when shortages occur or when technological advancements provide improved product performance.
- This product is intended solely for use as an indoor floor covering and is not recommended or sold for any other purpose.
- The inherent characteristics of geometric linear patterns can result in double-dark or double-light lines at the seam and to some extent pattern run-off or bias. This is not a manufacturing defect, and as such, should be considered when selecting a modular carpet installation method.
- Please make your final selection from an actual swatch. To order samples, go to manningtoncommercial.com or call 800.241.2262 ext. 6913.