

IMO Washstand fitting with electronic opening and closing function without pop-up waste - Brushed Chrome

IMO

44 511 670



- Infrared sensor technology
- 130mm projection
- height of mixer 135 mm
- height up to aerator 74 mm
- hole diameter 35 mm
- fixed spout
- max. flow 5.7 l/min
- rectangular, air-enriched flow
- suitable for thermal disinfection
- Automatic shut-off after pre-set time is reached
- Direct temperature control at faucet
- Plug-in power supply included
- lead-free
- 2x screw-in M 8 x 1 pressure hose, leak-tested
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB


	Brushed Chrome	44 511 670-93
	Chrome	44 511 670-00
	Brushed Platinum	44 511 670-06
	Platinum	44 511 670-08
	Brushed Durabronze (23kt Gold)	44 511 670-28
	Matte Black	44 511 670-33
	Brushed Dark Platinum	44 511 670-99

IMO Washstand fitting with electronic opening and closing function without pop-up waste - Brushed Chrome


IMO

44 511 670

mm [inches]

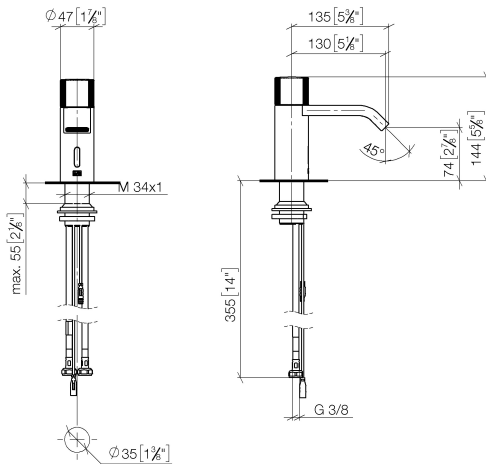

Flow rate chart

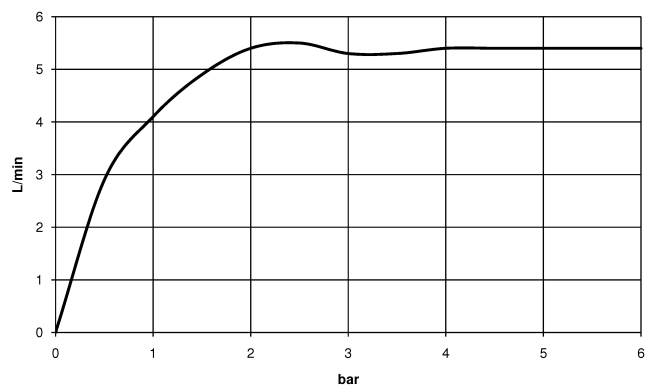

Certificates


LGA_38244.

WRAS_2212021.

IMO Washstand fitting with electronic opening and closing function without pop-up waste - Brushed Chrome

IMO

44 511 670
Parts for other
finishes can be found
here: [Chrome](#)

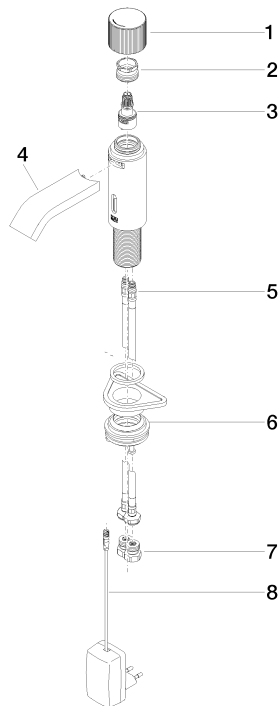

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 20 66 122 00-93	handle	1	20
2	09 24 04 565 90	nut	1	60
3	90 90 03 173 00 90	top	1	-
Spare part can no longer be ordered, please order the replacement item				
4	90 28 22 239 00-93	spout	1	20
5	04 30 04 100 00 90	hose	2	2
6	04 23 10 044 08 90	fixing set	1	2
7	90 24 03 314 00 90	nipple set	2	2
8	90 10 01 251 00 90	power supply	1	2