Occasion®

KOHLER Faucets Bathroom sink faucet spout with Cane design, 1.2 gpm K-27008

Features

- 6" (152 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Laminar flow delivers a graceful stream of water
- Metal pop-up drain with lift rod and 1-1/4" tailpiece
- Part of the Occasion bathroom faucet and accessory collection

Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

Installation

- For 8" 16" (203 406 mm) centers
- Deck-mount

or

Required Products/Accessories

K-27010-3 Cross bathroom sink faucet handles or

K-27010-4 Lever bathroom sink faucet handles

K-27010-9 Knob bathroom sink faucet handles

Recommended Products/Accessories

K-23723 Faucet cleaner

K-27060 18" towel bar

K-27061 24" towel bar

K-27062 24" double towel bar

K-27063 Towel ring

K-27064 Vertical toilet paper holder

K-27065 Pivoting toilet paper holder

K-27069 Robe hook

K-27128 Toilet paper holder with tray





Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

IAPMO Certification

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|-----------------------------------|
| | SN | Vibrant® Polished Nickel |
| | BL | Matte Black |
| | 2MB | Vibrant® Brushed Moderne Brass |



Occasion®

KOHLER. Faucets Bathroom sink faucet spout with Cane design, 1.2 gpm K-27008

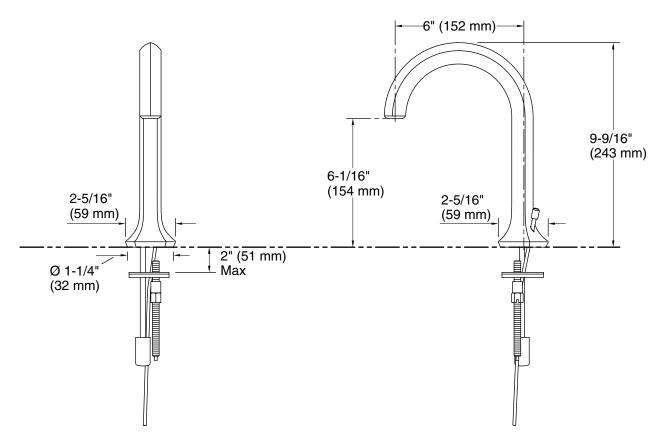

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes Drain with overflow:

Spout:

Spout reach: 6" (152 mm)

Notes

Install this product according to the installation instructions.

