











TARA Wall-mounted valve cold water without pop-up waste - Brushed Durabronz (23kt Gold)

TARA


30 010 892




- 140mm projection
- fixed spout
- circular, air-enriched flow
- adapter with male thread 3/4"
- hole diameter 32 mm
- rosette Ø 55 mm
- max. flow 5.7 l/min
- lead-free
- This product can help a building to meet requirements of Green Building Rating Systems, e.g. LEED®, BREEAM®, DGNB

	Brushed Durabronz (23kt Gold)	30 010 892-28
	Chrome	30 010 892-00
	Brushed Platinum	30 010 892-06
	Platinum	30 010 892-08
	Dark Chrome	30 010 892-19
	Matte Black	30 010 892-33
	Brushed Champagne (22kt Gold)	30 010 892-46
	Champagne (22kt Gold)	30 010 892-47
	Brushed Chrome	30 010 892-93
	Brushed Dark Platinum	30 010 892-99

30 010 892
mm [inches]



Flow rate chart

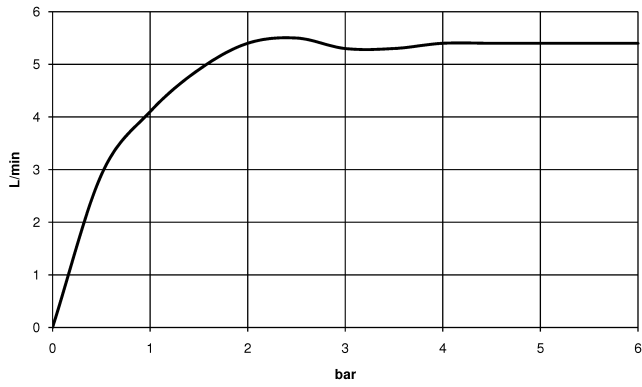

Certificates

LGA_18902.

TARA Wall-mounted valve cold water without pop-up waste - Brushed
Durabronz (23kt Gold)

TARA

30 010 892

Parts for other
finishes can be found
here: [Chrome](#)

