USB plugs for
CHARGING USE ONLY.

6-21/32" X
2-5/16"

3/4" MIN.
1-1/2" MAX.
TABLE THICKNESS

3/32"

4-3/8"

6 ft. CORD

6-5/16"
X 1-15/16"
CUT OUT

RIGHT VIEW

1

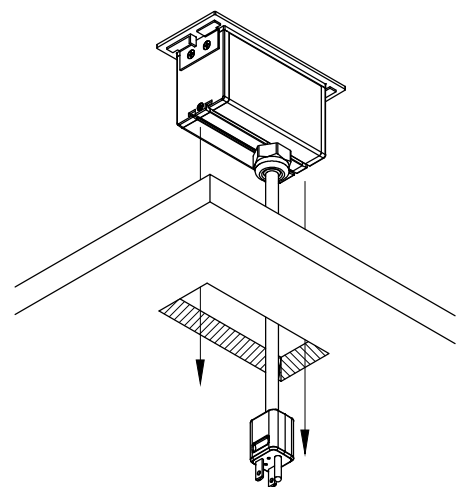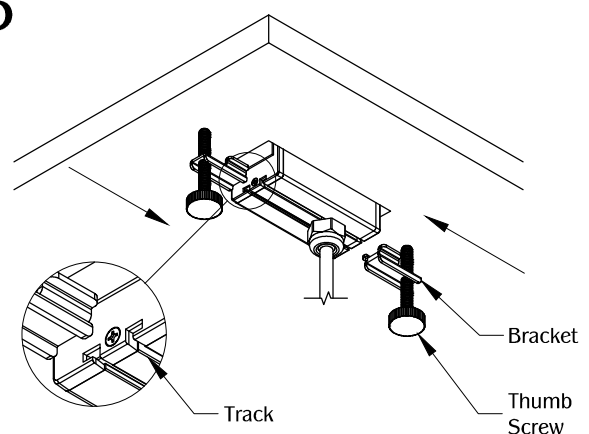6-5/16"

1-15/16"
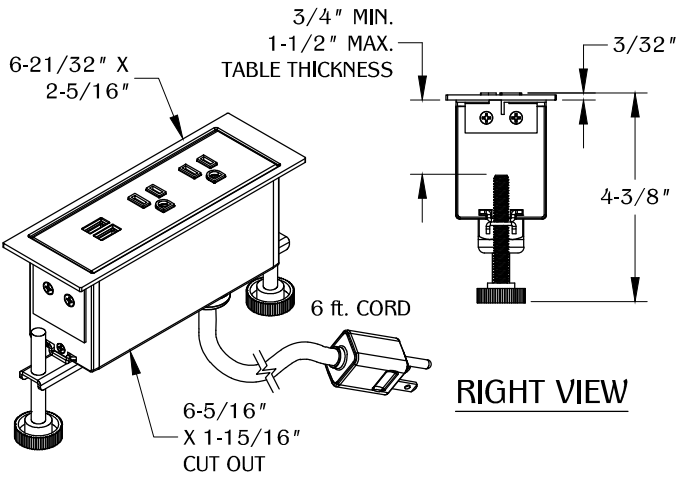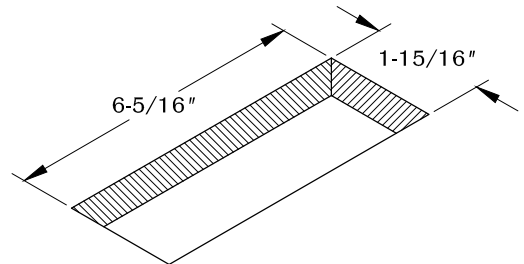
Make a cutout in the desired location on your work surface. Allow enough clearance for unit operation. DO NOT place unit where the cable is strained or trapped.
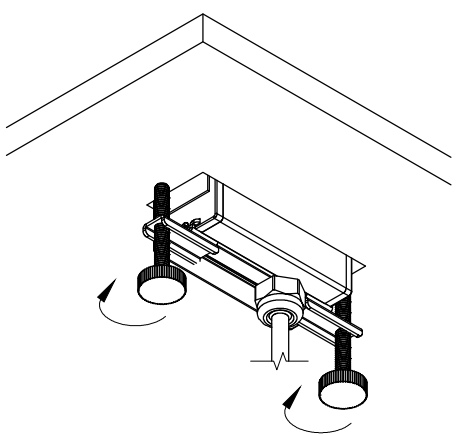
2

Guide the cord through the cut out. Install the unit into the cutout and make sure it is fully level on the surface.

3

Bracket

Thumb Screw

Track

Slide the (2) mounting bracket on to the track at the bottom of the unit. Secure the part by using the (2) thumb screws.

4

Hand-tighten the thumb screws until the unit is secure. Plug the unit into nearby outlet and unit is ready for use.

TABLE OF CONTENTS:

....................1 X PCS85B/USB
(2 POWER &
1 DUAL USB)

...................2 X Mounting Bracket

.................2 X Thumb screws