

HAWORTH

Height Adjustable Tables and Benching

North America Price List – February 2024

Includes Upside, Planes, Planes LT and Height Adjustable Tables and Benching





Price List Overview

The following overview explains how information is organized within the Height Adjustable Tables price list (includes Upside®, Planes® and Jive®).

1 Front Cover

- Includes the price book title and pricing effectivity date.

2 Canadian Conversion / Update Page

- Pricing conversion information for converting US pricing into the equivalent Canadian pricing is located on the footer of this page.
- All Price Book updates will be listed on this page including the date, page number and description of the update.

3 Price List Table of Contents

- Price List table of contents with page numbers.

4 Statement of Line

- Provides a pictorial outline of the entire product offering.

5 Price List

Each price list page contains the following:

- Product Illustration
- Catalog Number
- To Order Specify – sequencing for ordering product options and finishes
- List Prices
- Product Specification Dimensions
- Features
- Specification Tips
- Class, Discount Group Number (used for discounting) and GSA information

6 Finishes, Fabrics and COM

- Lists information for material finishes and availability.
- Provides COM information and requirements (if applicable).

7 Index

- Products are listed alphabetically by alpha-numeric catalog numbers with price list page number.

8 Warranty Policy and Terms of Sale

- Provides information about the Haworth policy for non-obsolescence, warranty and Terms-of-Sale.

Additional Information and Resources

Prices are subject to change without notice or approval. Haworth dealers should always submit proposals through Lynx before presenting to customers. See North American Terms of Sale for more information.


Online Resources

haworth.com

- Haworth's corporate website provides access to price books and a variety of other resources and publications.

surfaces.haworth.com

- Website provides access to the most current fabrics and finishes offered across Haworth's various product lines.

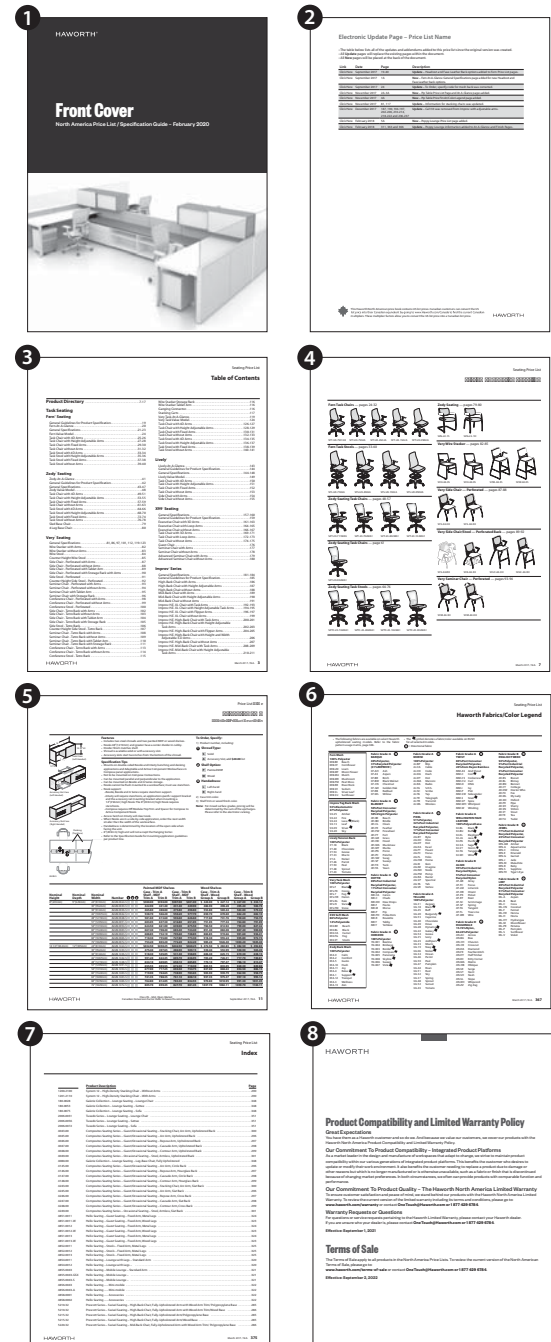

Height Adjustable Tables and Benching Price List

Includes pricing, catalog numbers, finish codes/availability, specification requirements, line art, dimensions, and specification tips for Height Adjustable Tables and Benching.

Planes Height Adjustable Tables

Bases for Planes Height Adjustable Tables

Planes LT Height Adjustable Tables

Bases for Planes LT Height Adjustable Tables

Upside Height Adjustable Tables

Bases for Upside Height Adjustable Tables

Worksurfaces for Upside Height Adjustable Tables

Planes Height Adjustable Benching

Planes LT Height Adjustable Benching

Bases for Planes Height Adjustable Benching

Bases for Planes LT Height Adjustable Benching

Accessories

Electrical Components and Covers

Table of Contents

Price List

Statement of Line	7-10
--------------------------------	------

Planes

Catalog Logic	11
Rectangular — Incremental or Crank Adjustment	12
Rectangular — Electric Adjustment	15
Catalog Logic	18
90° Equal Corner — Straight— Electric Adjustment	19
90° Equal Corner — Wrap Around— Electric Adjustment	21
90° Equal Corner — Notched— Electric Adjustment	24
90° Extended Corner — Wrap-Around — Incremental or Crank Adjustment	26
90° Extended Corner — Wrap-Around — Electric Adjustment	29
90° Extended Corner — Notched— Electric Adjustment	32
120° Corner — Wrap-Around— Electric Adjustment	35

Planes Base

Base for Rectangular Table — Incremental or Crank Adjustment	37
Base for Rectangular Table — Electric Adjustment	39
Base for 90° Equal Corner Table— Electric Adjustment	41
Base for 90° Extended Corner Table— Electric Adjustment	43
Base for 120° Corner Table— Electric Adjustment	45

Planes LT

Catalog Logic	46
Rectangular— Electric Adjustment	47
Catalog Logic	49
90° Equal Corner — Notched— Electric Adjustment	50
90° Equal Corner — Wrap-Around— Electric Adjustment	52
90° Equal Corner — Notched Extended— Electric Adjustment	54
90° Equal Corner — Wrap-Around Extended— Electric Adjustment	56
120° Corner — Wrap-Around— Electric Adjustment	58

Planes LT Base

Base for Rectangular Table— Electric Adjustment	59
Base for 90° Equal Corner Table— Electric Adjustment	61
Base for 90° Extended Corner Table— Electric Adjustment	63
Base for 120° Corner Table— Electric Adjustment	65

Upside

Catalog Logic	66
Rectangular — Electric Adjustment	67

Upside Base

Base for Rectangular Table — Electric	69
Base for 90° or 120° Table — Electric Adjustment	71

Upside Worksurface

Worksurface 90° Equal Corner — Wrap-Around — Laminate	72
Worksurface 90° Extended Corner — Wrap-Around — Laminate	73
Worksurface 90° Transitional Extended Corner — Wrap-Around — Laminate	75
Worksurface 120° Corner — Wrap-Around — Laminate	77

Planes Benching

Height Adjustable Benching — Catalog Logic	78
Two-Sided Benching — Rectangular — Electric Adjustment	79
Single-Sided Benching — Rectangular — Electric Adjustment	82
Height Adjustable 120° Benching — Catalog Logic	84
Three-Sided Benching — 120° — Electric Adjustment	85

Planes LT Benching

Benching — Catalog Logic	87
Two-Sided Benching — Rectangular — Electric Adjustment	88
Single-Sided Benching — Rectangular — Electric Adjustment	90
Benching — Catalog Logic	92
Three-Sided Benching — 120° — Electric Adjustment	93

Planes Base Benching

Base for Two-Sided Benching — Electric Adjustment	95
---	----

Planes LT Benching

Base for Two-Sided Benching — Electric Adjustment	97
Base for Single-Sided Benching — Electric Adjustment	99
Base for Three-Sided 120° Benching — Electric Adjustment	101

Accessories

Caster Kit	103
Collision Sensor	103
Cable Chain	104

Electrical Components and Covers

Transition Tray	105
Transition Tray — For use with Middle-of-Run, Top Feed	105
Transition Tray — For use with Fixed Screens and Middle-of-Run, Top Feed	106
Transition Tray — Asymmetrical	106
Top Feed Pole, End-of-Run	107
Top Feed Pole, Middle-of-Run	107
Hardwire Kit	108
Base Feed Cover — Vertical	108
Power/Data Cover	109
Triplex Receptacle — 15 Amp	110
Triplex Receptacle — 20 Amp	111
Utility Tray Power Retrofit Kit	112
Jumper	112
Infeed Harness	113
Base Feed Module — Concealed Hardwire Connection	113
Wall Feed Field Wired 1 Port	114
Internal Power Base™ AI Base Feed	114
Single Circuit Base Feed — Receptacle Connection with Power Cord — 3-Circuit and 4-Circuit	115
Single Circuit Base Feed — Receptacle Connection — 3-Circuit and 4-Circuit	115

Fabrics and Finishes

Finish/Color Legend	117
Fabrics/Color Legend	120


Index

Lifetime Product Warranty	Inside Back Cover
--	-------------------


Statement of Line

Planes

Pages 12-35



Rectangular Incremental or Crank




Rectangular Electric Adjustment




90° Straight Electric Adjustment




90° Wrap Around Electric Adjustment




Corner, 90° Wrap-Around Electric Adjustment




Corner, 90° Wrap-Around Electric Adjustment




90° Notched Electric Adjustment




Corner, 90° Notched Electric Adjustment




Corner, 90° Notched Electric Adjustment




Corner, 90° Wrap-Around Extended Incremental or Crank Adjustment




Corner, 90° Wrap-Around Extended Incremental or Crank Adjustment



Corner, 90° Wrap-Around Extended Electric Adjustment




Corner, 90° Wrap-Around Extended Electric Adjustment



Corner, 90° Notched Extended Electric Adjustment




Corner, 90° Notched Extended Electric Adjustment




Corner, 120° Wrap-Around Electric Adjustment

Planes Base

Pages 37-45




Rectangular Tops Incremental or Crank Adjustment




Rectangular Tops Electric Adjustment




Corner, 90° Electric Adjustment




Corner, 90° Electric Adjustment




Corner, 90° Electric Adjustment



Corner, 90° Extended Electric Adjustment




Corner, 90° Extended Electric Adjustment




Corner, 120° Electric Adjustment

Planes LT


Pages 47-58




Rectangular Electric Adjustment




Rectangular Electric Adjustment




Corner, 90° Notched Electric Adjustment




Corner, 90° Notched Electric Adjustment




Corner, 90° Wrap-Around Electric Adjustment




Corner, 90° Wrap-Around Electric Adjustment




Corner, 90° Notched Extended Electric Adjustment




Corner, 90° Notched Extended Electric Adjustment



Corner, 90° Wrap-Around Electric Adjustment



Corner, 90° Wrap-Around Electric Adjustment




Corner, 120° Wrap-Around Electric Adjustment


Statement of Line

Planes LT Base


Pages 59-65




Rectangular Tops
Electric Adjustment




Rectangular Tops
Electric Adjustment




Corner, 90° Electric
Adjustment




Corner, 90° Electric
Adjustment



Corner, 90° Extended
Electric Adjustment



Corner, 90° Extended
Electric Adjustment



Corner, 120° Electric
Adjustment

Upside


Page 67




Rectangular Electric Adjustment




Rectangular Electric Adjustment



Rectangular Electric



Rectangular Electric




Base Only for 90° or 120° Top
Electric Adjustment

Upside Base


Pages 69-71

Upside Worksurface


Page 72-77




90° Corner Wrap-Around Top Only




90° Corner Wrap-Around Top Only (Left-hand
Orientation)




90° Corner Wrap-Around Extended Top Only
(Right-hand Orientation)




90° Corner Wrap-Around Extended Top Only
(Left-hand Orientation)



90° Corner Wrap-Around Transitional
Extended Top Only (Right-hand Orientation)




90° Corner Wrap-Around Transitional
Extended Top Only (Left-hand Orientation)




120° Corner Wrap-Around Top Only

Planes Benching


Pages 79-85



Rectangular Electric Adjustment



Single-Sided — Rectangular Electric
Adjustment




Three-Sided — 120° Bench Electric
Adjustment


Statement of Line

Planes LT Benching


Pages 88-93



Rectangular Electric Adjustment




Single-Sided — Rectangular Electric Adjustment



120° Bench Electric Adjustment

Planes Base Benching


Page 95




Two Sided — Electric Adjustment

Planes LT Base Benching


Pages 97-101



Two Sided — Electric Adjustment




Single-Sided — Electric Adjustment




Three-Sided 120° — Electric Adjustment

Accessories

Pages 103-104




(2) Non-Locking




(2) Locking

Upside Caster Kit




(2) Non-Locking




(2) Locking

Planes and Planes LT Caster Kit




Collision Sensor




Cable Chain

Electrical Components and Covers


Pages 105-115




Benching — Transition Tray



Benching — Transition Tray — For use with Middle-of-Run, Top Feed




Benching — Transition Tray - For use with Fixed Screens and Middle-of-Run, Top Feed




Benching — Transition Tray - Asymmetrical


Statement of Line




Benching — Top Feed Pole, End-of-Run




Benching — Top Feed Pole, Middle-of-Run





Benching — Hardwire Kit






Benching — Base Feed Cover - Vertical




Power/Data Cover




Benching — Triplex Receptacles - 15 AMP




Benching — Triplex Receptacles - 20 AMP




Benching — Utility Tray Power Retrofit Kit




Benching — Jumper




Benching — Infeed Harness




Benching — Base Feed Module - Concealed Hardwire Connection




Benching — Wall Feed Field Wired Port



Benching — Internal Power Base™ All Base Feed



Benching — Single Circuit Base Feed - Receptacle Connection with Power Cord — 3-Circuit and 4-Circuit




Benching — Single Circuit Base Feed - Receptacle Connection — 3-Circuit and 4-Circuit

Planes


Catalog Logic

TA RA - 23 46 - L J S N C E

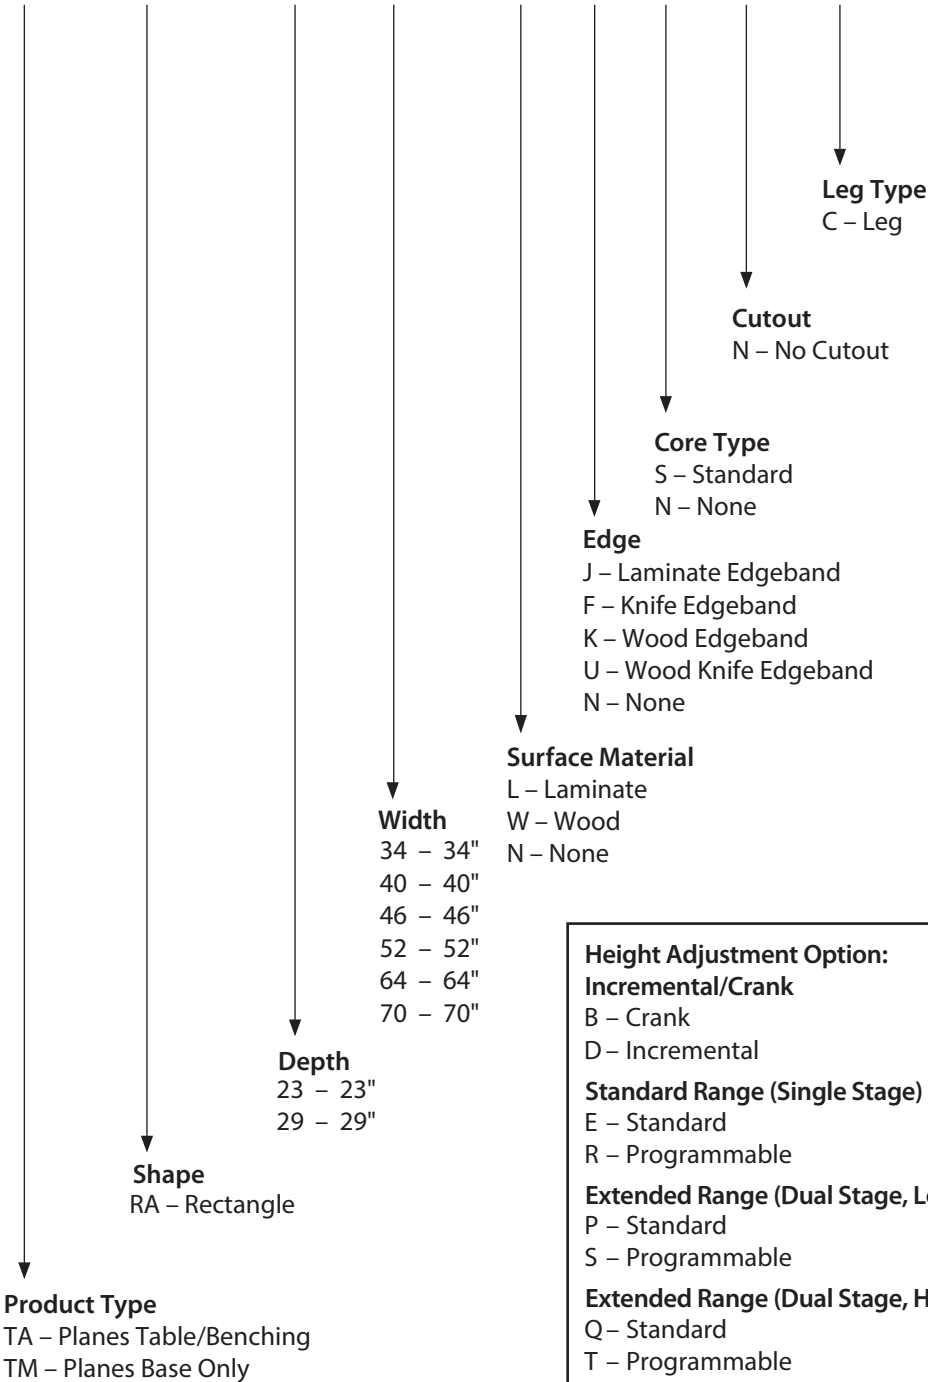

Planes — Rectangular

Incremental or Crank Adjustment



TARA

Class TA - SIN 33721; Discount Group X



Incremental Adjustment
Height Adjustment
22"(559mm) to
35" (889mm)



Crank Adjustment
Height Adjustment
27"(686mm) to
45"(1143mm)

**Height range includes 1.18" (20mm) work surface*

Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - Incremental or hand crank height adjustment mechanism
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
- Worksurface:
 - Laminate with knife edge or 3mm edgeband option
 - Veneer with 3mm wood edgeband or knife edge option
 - Edgeband is 3mm on user edge and 1mm on remaining edges
- Incremental Height adjustment:
 - Telescoping columns feature 13"(330mm) of adjustment set in 1"(25mm) increments.
 - Button head screws are standard in bright zinc.
 - Thumbscrew replacement for button head screw is available; separately specified.
- Hand Crank adjustment:
 - Telescoping columns feature 18"(457mm) of adjustment.
 - 1"(25mm) of vertical movement for every 6 turns
 - Hand crank is field installed on left or right side and retracts under worksurface.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for pinch point clearance and cable accommodation; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 150 lbs. including surface; applied weight should be evenly distributed.
- For application guidelines with attached worktools (monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available. See Specification Guide for application.

To Order, Specify:

1) Product number, including:

1 Surface Option:

L Laminate

W Wood

2 Edge Option:

Laminate:

J Edgeband

F Knife

Wood:

K Wood Edgeband

U Knife

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.

Planes — Rectangular

Incremental or Crank Adjustment

Depth	Width	Number ①②	Laminate A		Laminate B		Laminate E		
			J	F	J	F	J	F	
Incremental Adjustment									
23"(584mm)	34"(864mm)	TARA-2334-  SNCD	\$ 1672.89	\$ 1931.22	\$ 1690.54	\$ 1948.87	\$ 1846.67	\$ 2105.00	
	40"(1016mm)	TARA-2340-  SNCD	1743.62	2022.95	1764.38	2043.71	1948.06	2227.39	
	46"(1168mm)	TARA-2346-  SNCD	1814.35	2114.68	1838.23	2138.56	2049.46	2349.79	
	52"(1321mm)	TARA-2352-  SNCD	1885.09	2206.42	1912.08	2233.41	2150.87	2472.20	
	58"(1473mm)	TARA-2358-  SNCD	1955.82	2298.15	1985.93	2328.26	2252.27	2594.60	
	64"(1626mm)	TARA-2364-  SNCD	2026.55	2389.88	2059.77	2423.10	2353.66	2716.99	
	70"(1778mm)	TARA-2370-  SNCD	2097.28	2481.61	2133.62	2517.95	2455.06	2839.39	
29"(737mm)	34"(864mm)	TARA-2934-  SNCD	\$ 1748.01	\$ 2027.34	\$ 1770.27	\$ 2049.60	\$ 1967.13	\$ 2246.46	
	40"(1016mm)	TARA-2940-  SNCD	1828.88	2129.21	1855.06	2155.39	2086.66	2386.99	
	46"(1168mm)	TARA-2946-  SNCD	1909.75	2231.08	1939.86	2261.19	2206.20	2527.53	
	52"(1321mm)	TARA-2952-  SNCD	1990.62	2332.95	2024.65	2366.98	2325.73	2668.06	
	58"(1473mm)	TARA-2958-  SNCD	2071.50	2434.83	2109.46	2472.79	2445.27	2808.60	
	64"(1626mm)	TARA-2964-  SNCD	2152.36	2536.69	2194.25	2578.58	2564.81	2949.14	
	70"(1778mm)	TARA-2970-  SNCD	2233.23	2638.56	2279.05	2684.38	2684.34	3089.67	
Crank Adjustment									
23"(584mm)	34"(864mm)	TARA-2334-  SNCB	\$ 2226.56	\$ 2484.89	\$ 2244.21	\$ 2502.54	\$ 2400.34	\$ 2658.67	
	40"(1016mm)	TARA-2340-  SNCB	2308.37	2587.70	2329.13	2608.46	2512.81	2792.14	
	46"(1168mm)	TARA-2346-  SNCB	2390.17	2690.50	2414.05	2714.38	2625.28	2925.61	
	52"(1321mm)	TARA-2352-  SNCB	2471.98	2793.31	2498.97	2820.30	2737.76	3059.09	
	58"(1473mm)	TARA-2358-  SNCB	2553.78	2896.11	2583.89	2926.22	2850.23	3192.56	
	64"(1626mm)	TARA-2364-  SNCB	2635.59	2998.92	2668.81	3032.14	2962.70	3326.03	
	70"(1778mm)	TARA-2370-  SNCB	2717.39	3101.72	2753.73	3138.06	3075.17	3459.50	
29"(737mm)	34"(864mm)	TARA-2934-  SNCB	\$ 2307.21	\$ 2586.54	\$ 2329.47	\$ 2608.80	\$ 2526.33	\$ 2805.66	
	40"(1016mm)	TARA-2940-  SNCB	2399.16	2699.49	2425.34	2725.67	2656.94	2957.27	
	46"(1168mm)	TARA-2946-  SNCB	2491.10	2812.43	2521.21	2842.54	2787.55	3108.88	
	52"(1321mm)	TARA-2952-  SNCB	2583.05	2925.38	2617.08	2959.41	2918.16	3260.49	
	58"(1473mm)	TARA-2958-  SNCB	2675.00	3038.33	2712.96	3076.29	3048.77	3412.10	
	64"(1626mm)	TARA-2964-  SNCB	2766.93	3151.26	2808.82	3193.15	3179.38	3563.71	
	70"(1778mm)	TARA-2970-  SNCB	2858.88	3264.21	2904.70	3310.03	3309.99	3715.32	


Planes — Rectangular

Incremental or Crank Adjustment


			Wood A		Wood B	
Depth	Width	Number ①②	K	U	K	U
Incremental Adjustment						
23"(584mm)	34"(864mm)	TARA-2334-  SNCD	\$ 2092.41	\$ 2375.82	\$ 2105.66	\$ 2389.07
	40"(1016mm)	TARA-2340-  SNCD	2207.30	2514.35	2222.89	2529.94
	46"(1168mm)	TARA-2346-  SNCD	2322.19	2652.88	2340.12	2670.81
	52"(1321mm)	TARA-2352-  SNCD	2437.09	2791.42	2457.36	2811.69
	58"(1473mm)	TARA-2358-  SNCD	2551.98	2929.95	2574.58	2952.55
	64"(1626mm)	TARA-2364-  SNCD	2666.87	3068.48	2691.81	3093.42
	70"(1778mm)	TARA-2370-  SNCD	2781.76	3207.01	2809.04	3234.29
29"(737mm)	34"(864mm)	TARA-2934-  SNCD	\$ 2211.69	\$ 2518.74	\$ 2228.40	\$ 2535.45
	40"(1016mm)	TARA-2940-  SNCD	2336.72	2667.41	2356.38	2687.07
	46"(1168mm)	TARA-2946-  SNCD	2461.75	2816.08	2484.35	2838.68
	52"(1321mm)	TARA-2952-  SNCD	2586.78	2964.75	2612.33	2990.30
	58"(1473mm)	TARA-2958-  SNCD	2711.82	3113.43	2740.32	3141.93
	64"(1626mm)	TARA-2964-  SNCD	2836.84	3262.09	2868.29	3293.54
	70"(1778mm)	TARA-2970-  SNCD	2961.87	3410.76	2996.27	3445.16
Crank Adjustment						
23"(584mm)	34"(864mm)	TARA-2334-  SNCB	\$2646.08	\$2929.49	\$ 2659.33	\$ 2942.74
	40"(1016mm)	TARA-2340-  SNCB	2772.05	3079.10	2787.64	3094.69
	46"(1168mm)	TARA-2346-  SNCB	2898.01	3228.70	2915.94	3246.63
	52"(1321mm)	TARA-2352-  SNCB	3023.98	3378.31	3044.25	3398.58
	58"(1473mm)	TARA-2358-  SNCB	3149.94	3527.91	3172.54	3550.51
	64"(1626mm)	TARA-2364-  SNCB	3275.91	3677.52	3300.85	3702.46
	70"(1778mm)	TARA-2370-  SNCB	3401.87	3827.12	3429.15	3854.40
29"(737mm)	34"(864mm)	TARA-2934-  SNCB	\$ 2770.89	\$ 3077.94	\$ 2787.60	\$3094.65
	40"(1016mm)	TARA-2940-  SNCB	2907.00	3237.69	2926.66	3257.35
	46"(1168mm)	TARA-2946-  SNCB	3043.10	3397.43	3065.70	3420.03
	52"(1321mm)	TARA-2952-  SNCB	3179.21	3557.18	3204.76	3582.73
	58"(1473mm)	TARA-2958-  SNCB	3315.32	3716.93	3343.82	3745.43
	64"(1626mm)	TARA-2964-  SNCB	3451.41	3876.66	3482.86	3908.11
	70"(1778mm)	TARA-2970-  SNCB	3587.52	4036.41	3621.92	4070.81

Planes — Rectangular

Electric Adjustment



TARA
Class TA – SIN 33721; Discount Group X



*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P Plug to the building
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for pinch point clearance and cable accommodation; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 250 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Option:

- L** Laminate
- W** Wood

2 Edge Option:

Laminate:

- J** Edgeband
- F** Knife

Wood:

- K** Wood Edgeband
- U** Knife

3 Height Adjustment Actuator Options:

Standard Range
(Single Stage):

- E** Standard
- R** Programmable
(add **\$202.15** list)

Extended Range
(Dual Stage, Low):

- P** Standard
- S** Programmable
(add **\$202.15** list)

(Dual Stage, High):

- Q** Standard
- T** Programmable
(add **\$202.15** list)

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.

Planes — Rectangular

Electric Adjustment

Depth	Width	Number	①②	③	Laminate A		Laminate B		Laminate E	
					J	F	J	F	J	F
Standard Range (Single Stage)										
23"(584mm)	34"(864mm)	TARA-2334-		SNC	\$ 3187.26	\$3445.59	\$ 3204.91	\$3463.24	\$ 3361.04	\$ 3619.37
	40"(1016mm)	TARA-2340-		SNC	3288.28	3567.61	3309.04	3588.37	3492.72	3772.05
	46"(1168mm)	TARA-2346-		SNC	3389.30	3689.63	3413.18	3713.51	3624.41	3924.74
	52"(1321mm)	TARA-2352-		SNC	3490.32	3811.65	3517.31	3838.64	3756.10	4077.43
	58"(1473mm)	TARA-2358-		SNC	3591.34	3933.67	3621.45	3963.78	3887.79	4230.12
	64"(1626mm)	TARA-2364-		SNC	3692.36	4055.69	3725.58	4088.91	4019.47	4382.80
	70"(1778mm)	TARA-2370-		SNC	3793.38	4177.71	3829.72	4214.05	4151.16	4535.49
29"(737mm)	34"(864mm)	TARA-2934-		SNC	\$ 3277.52	\$3556.85	\$ 3299.78	\$ 3579.11	\$3496.64	\$ 3775.97
	40"(1016mm)	TARA-2940-		SNC	3388.68	3689.01	3414.86	3715.19	3646.46	3946.79
	46"(1168mm)	TARA-2946-		SNC	3499.84	3821.17	3529.95	3851.28	3796.29	4117.62
	52"(1321mm)	TARA-2952-		SNC	3611.00	3953.33	3645.03	3987.36	3946.11	4288.44
	58"(1473mm)	TARA-2958-		SNC	3722.16	4085.49	3760.12	4123.45	4095.93	4459.26
	64"(1626mm)	TARA-2964-		SNC	3833.31	4217.64	3875.20	4259.53	4245.76	4630.09
	70"(1778mm)	TARA-2970-		SNC	3944.47	4349.80	3990.29	4395.62	4395.58	4800.91
Extended Range (Dual Stage)										
23"(584mm)	34"(864mm)	TARA-2334-		SNC	\$4044.26	\$4302.59	\$ 4061.91	\$4320.24	\$ 4218.04	\$ 4476.37
	40"(1016mm)	TARA-2340-		SNC	4162.42	4441.75	4183.18	4462.51	4366.86	4646.19
	46"(1168mm)	TARA-2346-		SNC	4280.58	4580.91	4304.46	4604.79	4515.69	4816.02
	52"(1321mm)	TARA-2352-		SNC	4398.74	4720.07	4425.73	4747.06	4664.52	4985.85
	58"(1473mm)	TARA-2358-		SNC	4516.90	4859.23	4547.01	4889.34	4813.35	5155.68
	64"(1626mm)	TARA-2364-		SNC	4635.06	4998.39	4668.28	5031.61	4962.17	5325.50
	70"(1778mm)	TARA-2370-		SNC	4753.22	5137.55	4789.56	5173.89	5111.00	5495.33
29"(737mm)	34"(864mm)	TARA-2934-		SNC	\$ 4143.09	\$4422.42	\$ 4165.35	\$4444.68	\$ 4362.21	\$ 4641.54
	40"(1016mm)	TARA-2940-		SNC	4271.39	4571.72	4297.57	4597.90	4529.17	4829.50
	46"(1168mm)	TARA-2946-		SNC	4399.69	4721.02	4429.80	4751.13	4696.14	5017.47
	52"(1321mm)	TARA-2952-		SNC	4527.99	4870.32	4562.02	4904.35	4863.10	5205.43
	58"(1473mm)	TARA-2958-		SNC	4656.29	5019.62	4694.25	5057.58	5030.06	5393.39
	64"(1626mm)	TARA-2964-		SNC	4784.58	5168.91	4826.47	5210.80	5197.03	5581.36
	70"(1778mm)	TARA-2970-		SNC	4912.88	5318.21	4958.70	5364.03	5363.99	5769.32


Planes — Rectangular

Electric Adjustment

					Wood A		Wood B		
Depth	Width	Number	①	②	K	U	K	U	
Standard Range (Single Stage)									
23"(584mm)	34"(864mm)	TARA-2334-		SNC		\$ 3606.78	\$ 3890.19	\$3620.03	\$3903.44
	40"(1016mm)	TARA-2340-		SNC		3751.96	4059.01	3767.55	4074.60
	46"(1168mm)	TARA-2346-		SNC		3897.14	4227.83	3915.07	4245.76
	52"(1321mm)	TARA-2352-		SNC		4042.32	4396.65	4062.59	4416.92
	58"(1473mm)	TARA-2358-		SNC		4187.50	4565.47	4210.10	4588.07
	64"(1626mm)	TARA-2364-		SNC		4332.68	4734.29	4357.62	4759.23
	70"(1778mm)	TARA-2370-		SNC		4477.86	4903.11	4505.14	4930.39
29"(737mm)	34"(864mm)	TARA-2934-		SNC		\$ 3741.20	\$4048.25	\$ 3757.91	\$4064.96
	40"(1016mm)	TARA-2940-		SNC		3896.52	4227.21	3916.18	4246.87
	46"(1168mm)	TARA-2946-		SNC		4051.84	4406.17	4074.44	4428.77
	52"(1321mm)	TARA-2952-		SNC		4207.16	4585.13	4232.71	4610.68
	58"(1473mm)	TARA-2958-		SNC		4362.48	4764.09	4390.98	4792.59
	64"(1626mm)	TARA-2964-		SNC		4517.79	4943.04	4549.24	4974.49
	70"(1778mm)	TARA-2970-		SNC		4673.11	5122.00	4707.51	5156.40
Extended Range (Dual Stage)									
23"(584mm)	34"(864mm)	TARA-2334-		SNC		\$ 4463.78	\$ 4747.19	\$ 4477.03	\$ 4760.44
	40"(1016mm)	TARA-2340-		SNC		4626.10	4933.15	4641.69	4948.74
	46"(1168mm)	TARA-2346-		SNC		4788.42	5119.11	4806.35	5137.04
	52"(1321mm)	TARA-2352-		SNC		4950.74	5305.07	4971.01	5325.34
	58"(1473mm)	TARA-2358-		SNC		5113.06	5491.03	5135.66	5513.63
	64"(1626mm)	TARA-2364-		SNC		5275.38	5676.99	5300.32	5701.93
	70"(1778mm)	TARA-2370-		SNC		5437.70	5862.95	5464.98	5890.23
29"(737mm)	34"(864mm)	TARA-2934-		SNC		\$ 4606.77	\$ 4913.82	\$ 4623.48	\$ 4930.53
	40"(1016mm)	TARA-2940-		SNC		4779.23	5109.92	4798.89	5129.58
	46"(1168mm)	TARA-2946-		SNC		4951.69	5306.02	4974.29	5328.62
	52"(1321mm)	TARA-2952-		SNC		5124.15	5502.12	5149.70	5527.67
	58"(1473mm)	TARA-2958-		SNC		5296.61	5698.22	5325.11	5726.72
	64"(1626mm)	TARA-2964-		SNC		5469.06	5894.31	5500.51	5925.76
	70"(1778mm)	TARA-2970-		SNC		5641.52	6090.41	5675.92	6124.81

Planes Corners

Catalog Logic

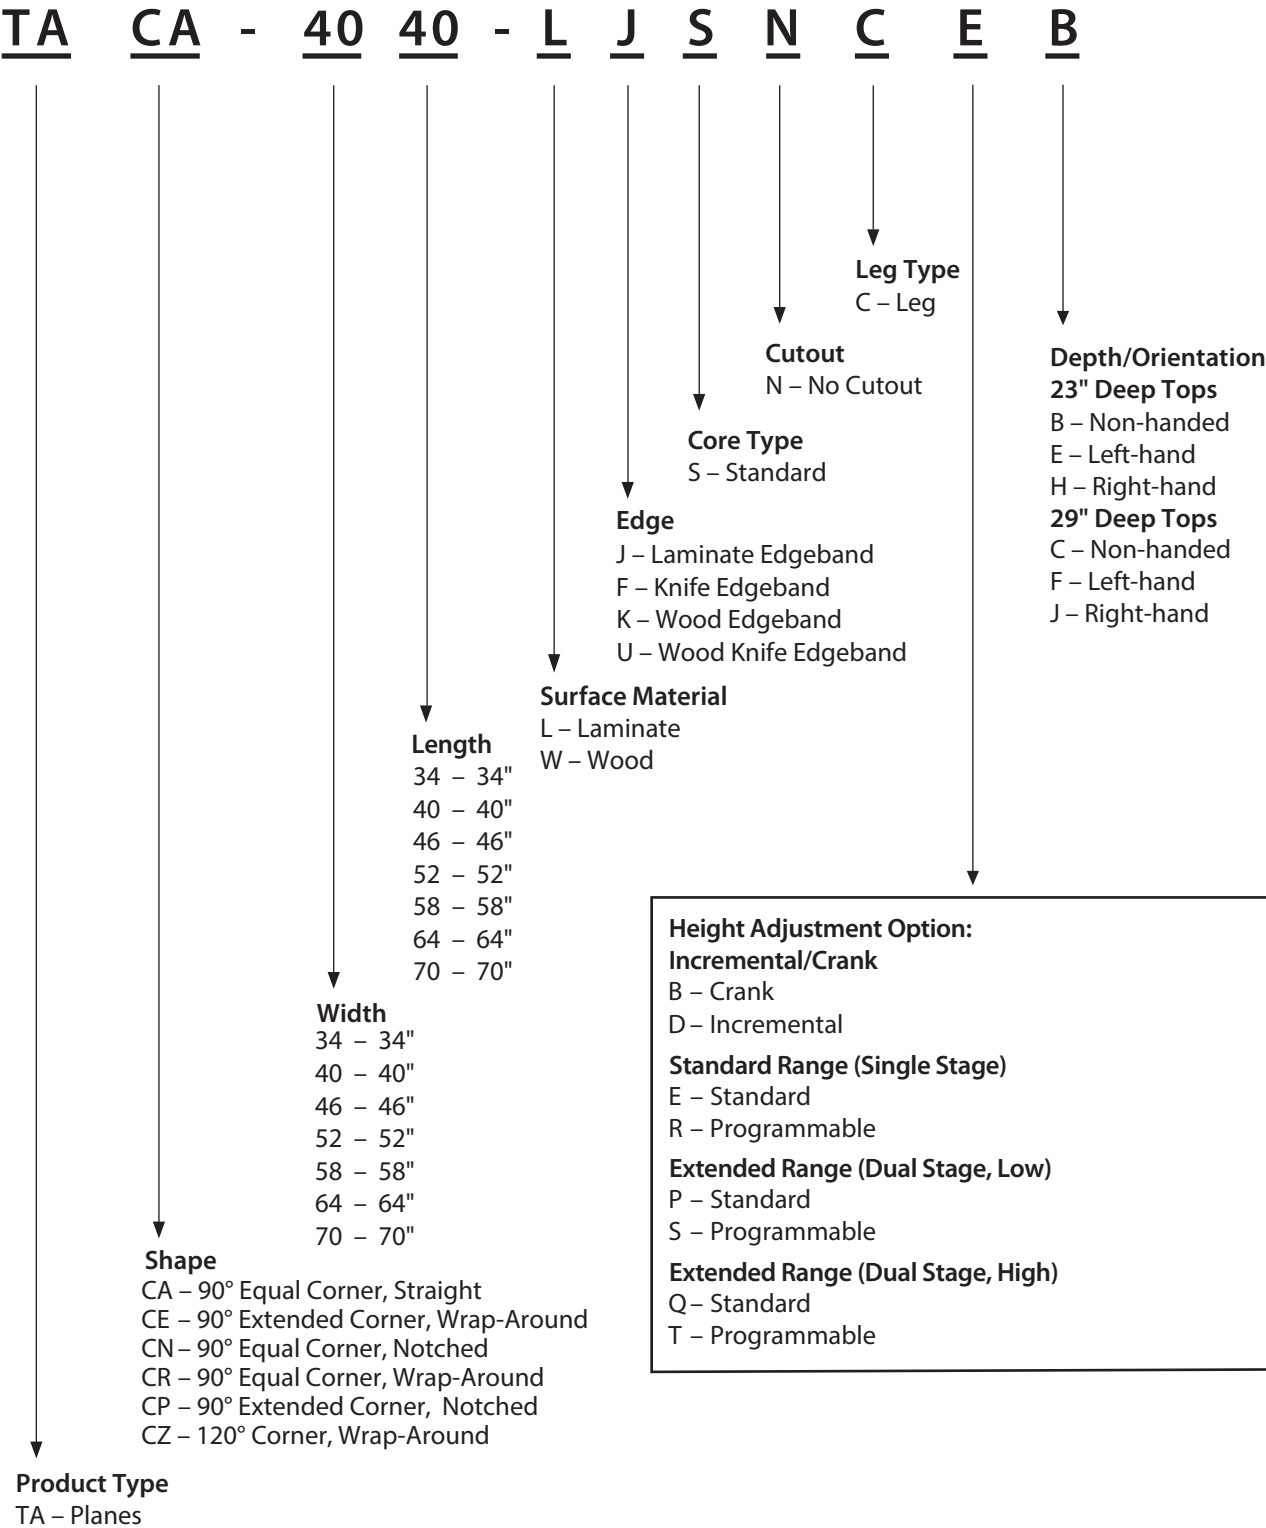


Planes 90° Equal Corner — Straight

Electric Adjustment



TACA
Class TA – SIN 33721; Discount Group X



*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P Plug to the building
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- Worksurfaces are dimensioned to allow for pinch point clearance and cable accommodation; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 250 lbs including surface; applied weight should be evenly distributed. For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Option:

- L** Laminate
- W** Wood

2 Edge Option:

Laminate:

- J** Edgeband
- F** Knife

Wood:

- K** Wood Edgeband
- U** Knife

3 Height Adjustment Actuator Options:

Standard Range
(Single Stage):

- E** Standard
- R** Programmable
(add **\$202.15** list)

Extended Range
(Dual Stage, Low):

- P** Standard
- S** Programmable
(add **\$202.15** list)

(Dual Stage, High):

- Q** Standard
- T** Programmable
(add **\$202.15** list)

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.

Planes 90° Equal Corner — Straight

Electric Adjustment

Left/Right Depth	Width	Number ①②	③	Laminate A		Laminate B	
				J	F	J	F
Standard Range (Single Stage)							
23"(584mm)/23"(584mm)	34"(864mm)	TACA-3434-		SNC		B	\$ 3315.19 \$3462.88 \$ 3413.49 \$ 3561.18
	40"(1016mm)	TACA-4040-		SNC		B	3404.02 3565.78 3511.56 3673.32
	46"(1168mm)	TACA-4646-		SNC		B	3513.12 3688.28 3632.21 3807.37
Extended Range (Dual Stage)							
23"(584mm)/23"(584mm)	34"(864mm)	TACA-3434-		SNC		B	\$ 4216.93 \$4364.62 \$ 4315.23 \$4462.92
	40"(1016mm)	TACA-4040-		SNC		B	4305.76 4467.52 4413.30 4575.06
	46"(1168mm)	TACA-4646-		SNC		B	4414.86 4590.02 4533.95 4709.11


Left/Right Depth	Width	Number ①②	③	Wood A		Wood B	
				K	U	K	U
Standard Range (Single Stage)							
23"(584mm)/23"(584mm)	34"(864mm)	TACA-3434-	SNC B	\$3543.85	\$ 3742.24	\$ 3577.06	\$ 3770.25
	40"(1016mm)	TACA-4040-	SNC B	3664.09	3884.74	3710.29	3924.90
	46"(1168mm)	TACA-4646-	SNC B	3811.14	4052.99	3872.89	4107.90
Extended Range (Dual Stage)							
23"(584mm)/23"(584mm)	34"(864mm)	TACA-3434-	SNC B	\$4445.59	\$4643.98	\$4478.80	\$ 4671.99
	40"(1016mm)	TACA-4040-	SNC B	4565.83	4786.48	4612.03	4826.64
	46"(1168mm)	TACA-4646-	SNC B	4712.88	4954.73	4774.63	5009.64

Planes 90° Equal Corner — Wrap Around


Electric Adjustment



TACR




TACR-5858-NCEB



TACR-7070-NCEE
(Left-hand Orientation)

Class TA – SIN 33721; Discount Group X



*Height range includes
1.18" (20mm) worksurface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - One center post leg (with top widths 52"(1321mm) or greater)
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension (with top width 52"(1321mm) or greater)
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Size of worksurface will determine whether top comes in 1 or 2 pieces. 64"(1626mm) wide and greater will default to 2 pieces.
 - 64"(1626mm) wide 2-piece top includes a 46"(1168mm) corner and 18"(457mm) rectangle extension.
 - 70"(1778mm) wide 2-piece top includes a 52"(1321mm) corner and 18"(457mm) rectangle extension.
 - Two-piece tops are available with edgeband ONLY.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- One-piece tops are non-handed; two-piece tops are handed.
- The "seamless" primary user side of the table (side without rectangle extension) determines the handedness from a seated position.
- Total lifting capacity of table is 250 lbs (2-leg) or 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available for 2-leg models ONLY.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Option:

L Laminate

W Wood

2 Edge Option:

Laminate:

J Edgeband

F Knife

Wood:

K Edgeband

U Knife

3 Height Adjustment Actuator Options:

Standard Range

(Single Stage):

E Standard

R Programmable
(add **\$202.15** list)

Extended Range

(Dual Stage, Low):

P Standard

S Programmable
(add **\$202.15** list)

(Dual Stage, High):

Q Standard

T Programmable
(add **\$202.15** list)

4 Depth and Orientation:

23" deep tops:

E LH (64" and 70" widths)
two-piece top

H RH (64" and 70" widths)
two-piece top

29" deep tops:

F LH (64" and 70" widths)
two-piece top

J RH (64" and 70" widths)
two-piece top

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: **\$63.50** upcharge list for Grade B trim colors.

Planes 90° Equal Corner — Wrap Around

Electric Adjustment

Left/Right Depth	Width	Leg Columns	Top Pieces	Number	①②	③④	Laminate A		Laminate B			
							J	F	J	F		
Standard Range (Single Stage)												
23"(584mm)/23"(584mm)	34"(864mm)	2	1	TACR-3434-	■	SNC	■	B	\$ 3248.93	\$ 3309.52	\$ 3346.75	\$ 3407.34
	40"(1016mm)	2	1	TACR-4040-	■	SNC	■	B	3308.45	3369.04	3411.31	3471.90
	46"(1168mm)	2	1	TACR-4646-	■	SNC	■	B	3382.85	3443.44	3492.01	3552.60
	52"(1321mm)	3	1	TACR-5252-	■	SNC	■	B	\$ 7960.97	\$ 8021.56	\$ 8076.85	\$ 8137.44
	58"(1473mm)	3	1	TACR-5858-	■	SNC	■	B	8050.25	8110.84	8173.69	8234.28
	64"(1626mm)	3	2	TACR-6464-	■	SNC	■		8154.41	8215.00	8286.67	8347.26
	70"(1778mm)	3	2	TACR-7070-	■	SNC	■		8263.53	8324.12	8405.03	8465.62
29"(737mm)/29"(737mm)	52"(1321mm)	3	1	TACR-5252-	■	SNC	■	C	\$ 8035.43	\$ 8096.02	\$ 8151.31	\$ 8211.90
	58"(1473mm)	3	1	TACR-5858-	■	SNC	■	C	8124.71	8185.30	8248.15	8308.74
	64"(1626mm)	3	2	TACR-6464-	■	SNC	■		8228.87	8289.46	8361.13	8421.72
	70"(1778mm)	3	2	TACR-7070-	■	SNC	■		8337.99	8398.58	8479.49	8540.08
Extended Range (Dual Stage)												
23"(584mm)/23"(584mm)	34"(864mm)	2	1	TACR-3434-	■	SNC	■	B	\$ 4153.04	\$ 4213.63	\$ 4250.86	\$ 4311.45
	40"(1016mm)	2	1	TACR-4040-	■	SNC	■	B	4212.56	4273.15	4315.42	4376.01
	46"(1168mm)	2	1	TACR-4646-	■	SNC	■	B	4286.96	4347.55	4396.12	4456.71
	52"(1321mm)	3	1	TACR-5252-	■	SNC	■	B	\$ 10652.15	\$ 10712.74	\$10768.03	\$10828.62
	58"(1473mm)	3	1	TACR-5858-	■	SNC	■	B	10741.43	10802.02	10864.87	10925.46
	64"(1626mm)	3	2	TACR-6464-	■	SNC	■		10845.59	10906.18	10977.85	11038.44
	70"(1778mm)	3	2	TACR-7070-	■	SNC	■		10954.71	11015.30	11096.21	11156.80
	70"(1778mm)	3	2	TACR-7070-	■	SNC	■		11029.17	11089.76	11170.67	11231.26
29"(737mm)/29"(737mm)	52"(1321mm)	3	1	TACR-5252-	■	SNC	■	C	\$ 10726.61	\$ 10787.20	\$10842.49	\$10903.08
	58"(1473mm)	3	1	TACR-5858-	■	SNC	■	C	10815.89	10876.48	10939.33	10999.92
	64"(1626mm)	3	2	TACR-6464-	■	SNC	■		10920.05	10980.64	11052.31	11112.90
	70"(1778mm)	3	2	TACR-7070-	■	SNC	■		11029.17	11089.76	11170.67	11231.26


Planes 90° Equal Corner — Wrap Around

Electric Adjustment


Left/Right Depth	Width	Leg Columns	Top Pieces	Number				Wood A		Wood B	
					①②	③④	K	U	K	U	
Standard Range (Single Stage)											
23"(584mm)/23"(584mm)	34"(864mm)	2	1	TACR-3434-		SNC	B	\$ 3332.79	\$ 3393.38	\$ 3337.84	\$ 3398.43
	40"(1016mm)	2	1	TACR-4040-		SNC	B	3391.83	3452.42	3400.96	3461.55
	46"(1168mm)	2	1	TACR-4646-		SNC	B	3465.63	3526.22	3479.86	3540.45
	52"(1321mm)	3	1	TACR-5252-		SNC	B	\$ 8043.11	\$ 8103.70	\$ 8062.78	\$ 8123.37
	58"(1473mm)	3	1	TACR-5858-		SNC	B	8131.67	8192.26	8157.46	8218.05
	64"(1626mm)	3	2	TACR-6464-		SNC		8234.99	8295.58	8267.92	8328.51
	70"(1778mm)	3	2	TACR-7070-		SNC		8343.23	8403.82	8383.64	8444.23
29"(737mm)/29"(737mm)	52"(1321mm)	3	1	TACR-5252-		SNC	C	\$ 8117.57	\$ 8178.16	\$ 8137.24	\$ 8197.83
	58"(1473mm)	3	1	TACR-5858-		SNC	C	8206.13	8266.72	8231.92	8292.51
	64"(1626mm)	3	2	TACR-6464-		SNC		8309.45	8370.04	8342.38	8402.97
	70"(1778mm)	3	2	TACR-7070-		SNC		8417.69	8478.28	8458.10	8518.69
Extended Range (Dual Stage)											
23"(584mm)/23"(584mm)	34"(864mm)	2	1	TACR-3434-		SNC	B	\$ 4236.90	\$ 4297.49	\$ 4241.95	\$ 4302.54
	40"(1016mm)	2	1	TACR-4040-		SNC	B	4295.94	4356.53	4305.07	4365.66
	46"(1168mm)	2	1	TACR-4646-		SNC	B	4369.74	4430.33	4383.97	4444.56
	52"(1321mm)	3	1	TACR-5252-		SNC	B	\$10734.29	\$10794.88	\$10753.96	\$ 10814.55
	58"(1473mm)	3	1	TACR-5858-		SNC	B	10822.85	10883.44	10848.64	10909.23
	64"(1626mm)	3	2	TACR-6464-		SNC		10926.17	10986.76	10959.10	11019.69
	70"(1778mm)	3	2	TACR-7070-		SNC		11034.41	11095.00	11074.82	11135.41
29"(737mm)/29"(737mm)	52"(1321mm)	3	1	TACR-5252-		SNC	C	\$10808.75	\$10869.34	\$10828.42	\$ 10889.01
	58"(1473mm)	3	1	TACR-5858-		SNC	C	10897.31	10957.90	10923.10	10983.69
	64"(1626mm)	3	2	TACR-6464-		SNC		11000.63	11061.22	11033.56	11094.15
	70"(1778mm)	3	2	TACR-7070-		SNC		11108.87	11169.46	11149.28	11209.87

Planes 90° Equal Corner — Notched


Electric Adjustment



TACN




TACN-5858-NOEB



TACN-6464-NOEE
(Left-hand Orientation)

Class TA – SIN 33721; Discount Group X



*Height range includes
1.18" (20mm) worksurface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - One center post leg (with top widths 52"(1321mm) or greater)
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension (with top width 52"(1321mm) or greater)
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Size of worksurface will determine whether top comes in 1 or 2 pieces. 64"(1626mm) wide and greater will default to 2 pieces.
 - 64"(1626mm) wide 2-piece top includes a 46"(1168mm) corner and 18"(457mm) rectangle extension.
 - 70"(1778mm) wide 2-piece top includes a 52"(1321mm) corner and 18"(457mm) rectangle extension.
 - Two-piece tops are available with edgeband ONLY.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- One-piece tops are non-handed; two-piece tops are handed.
- The "seamless" primary user side of the table (side without rectangle extension) determines the handedness from a seated position.
- Total lifting capacity of table is 250 lbs (2-leg) or 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available for 2-leg models ONLY.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Option:

L Laminate

W Wood

2 Edge Option:

Laminate:

J Edgeband

F Knife

Wood:

K Edgeband

U Knife

3 Height Adjustment Actuator Options:

Standard Range

(Single Stage):

E Standard

R Programmable
(add \$202.15 list)

Extended Range

(Dual Stage, Low):

P Standard

S Programmable
(add \$202.15 list)

(Dual Stage, High):

Q Standard

T Programmable
(add \$202.15 list)

4 Depth and Orientation:

23" deep tops:

E LH (64" and 70" widths)
two-piece top

H RH (64" and 70" widths)
two-piece top

29" deep tops:

F LH (64" and 70" widths)
two-piece top

J RH (64" and 70" widths)
two-piece top

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.

Planes 90° Equal Corner — Notched


Electric Adjustment

Left/Right Depth	Width	Leg Columns	Top Pieces	Number	①②	③④	Laminate A		Laminate B			
							J	F	J	F		
Standard Range (Single Stage)												
23"(584mm)/23"(584mm)	34"(864mm)	2	1	TACN-3434-		SNC		B	\$ 3300.02	\$3602.52	\$ 3300.02	\$3602.52
	40"(1016mm)	2	1	TACN-4040-		SNC		B	3394.29	3723.68	3394.29	3723.68
	46"(1168mm)	2	1	TACN-4646-		SNC		B	3488.56	3844.84	3488.56	3844.84
	52"(1321mm)	3	1	TACN-5252-		SNC		B	\$ 8081.59	\$8464.76	\$ 8081.59	\$8464.76
	58"(1473mm)	3	1	TACN-5858-		SNC		B	8175.86	8585.92	8175.86	8585.92
	64"(1626mm)	3	2	TACN-6464-		SNC			8270.13	8707.08	8270.13	8707.08
	70"(1778mm)	3	2	TACN-7070-		SNC			8364.40	8828.24	8364.40	8828.24
29"(737mm)/29"(737mm)	52"(1321mm)	3	1	TACN-5252-		SNC		C	\$ 8156.05	\$8539.22	\$ 8156.05	\$8539.22
	58"(1473mm)	3	1	TACN-5858-		SNC		C	8250.32	8660.38	8250.32	8660.38
	64"(1626mm)	3	2	TACN-6464-		SNC			8344.59	8781.54	8344.59	8781.54
	70"(1778mm)	3	2	TACN-7070-		SNC			8438.86	8902.70	8438.86	8902.70
Extended Range (Dual Stage)												
23"(584mm)/23"(584mm)	34"(864mm)	2	1	TACN-3434-		SNC		B	\$ 4210.98	\$ 4513.48	\$ 4210.98	\$ 4513.48
	40"(1016mm)	2	1	TACN-4040-		SNC		B	4305.25	4634.64	4305.25	4634.64
	46"(1168mm)	2	1	TACN-4646-		SNC		B	4399.52	4755.80	4399.52	4755.80
	52"(1321mm)	3	1	TACN-5252-		SNC		B	\$ 10779.62	\$ 11162.79	\$ 10779.62	\$ 11162.79
	58"(1473mm)	3	1	TACN-5858-		SNC		B	10873.89	11283.95	10873.89	11283.95
	64"(1626mm)	3	2	TACN-6464-		SNC			10968.16	11405.11	10968.16	11405.11
	70"(1778mm)	3	2	TACN-7070-		SNC			11062.43	11526.27	11062.43	11526.27
29"(737mm)/29"(737mm)	52"(1321mm)	3	1	TACN-5252-		SNC		C	\$10854.08	\$ 11237.25	\$10854.08	\$ 11237.25
	58"(1473mm)	3	1	TACN-5858-		SNC		C	10948.35	11358.41	10948.35	11358.41
	64"(1626mm)	3	2	TACN-6464-		SNC			11042.62	11479.57	11042.62	11479.57
	70"(1778mm)	3	2	TACN-7070-		SNC			11136.89	11600.73	11136.89	11600.73


Left/Right Depth	Width	Leg Columns	Top Pieces	Number	①②	③④	Wood A		Wood B		
							K	U	K	U	
Standard Range (Single Stage)											
23"(584mm)/23"(584mm)	34"(864mm)	2	1	TACN-3434-		SNC	B	\$ 3528.23	\$ 3588.82	\$ 3544.51	\$ 3605.10
	40"(1016mm)	2	1	TACN-4040-		SNC	B	3677.45	3866.80	3702.49	3891.84
	46"(1168mm)	2	1	TACN-4646-		SNC	B	3826.67	4144.78	3860.47	4178.58
	52"(1321mm)	3	1	TACN-5252-		SNC	B	\$ 8474.65	\$ 8921.52	\$ 8517.21	\$ 8964.08
	58"(1473mm)	3	1	TACN-5858-		SNC	B	8623.87	9199.50	8675.19	9250.82
	64"(1626mm)	3	2	TACN-6464-		SNC		8773.09	9477.48	8833.17	9537.56
	70"(1778mm)	3	2	TACN-7070-		SNC		8922.31	9755.46	8991.15	9824.30
29"(737mm)/29"(737mm)	52"(1321mm)	3	1	TACN-5252-		SNC	C	\$ 8549.11	\$ 8995.98	\$ 8591.67	\$ 9038.54
	58"(1473mm)	3	1	TACN-5858-		SNC	C	8698.33	9273.96	8749.65	9325.28
	64"(1626mm)	3	2	TACN-6464-		SNC		8847.55	9551.94	8907.63	9612.02
	70"(1778mm)	3	2	TACN-7070-		SNC		8996.77	9829.92	9065.61	9898.76
Extended Range (Dual Stage)											
23"(584mm)/23"(584mm)	34"(864mm)	2	1	TACN-3434-		SNC	B	\$ 4439.19	\$ 4499.78	\$ 4455.47	\$ 4516.06
	40"(1016mm)	2	1	TACN-4040-		SNC	B	4588.41	4777.76	4613.45	4802.80
	46"(1168mm)	2	1	TACN-4646-		SNC	B	4737.63	5055.74	4771.43	5089.54
	52"(1321mm)	3	1	TACN-5252-		SNC	B	\$ 11172.68	\$ 11619.55	\$ 11215.24	\$ 11662.11
	58"(1473mm)	3	1	TACN-5858-		SNC	B	11321.90	11897.53	11373.22	11948.85
	64"(1626mm)	3	2	TACN-6464-		SNC		11471.12	12175.51	11531.20	12235.59
	70"(1778mm)	3	2	TACN-7070-		SNC		11620.34	12453.49	11689.18	12522.33
29"(737mm)/29"(737mm)	52"(1321mm)	3	1	TACN-5252-		SNC	C	\$ 11247.14	\$ 11694.01	\$ 11289.70	\$ 11736.57
	58"(1473mm)	3	1	TACN-5858-		SNC	C	11396.36	11971.99	11447.68	12023.31
	64"(1626mm)	3	2	TACN-6464-		SNC		11545.58	12249.97	11605.66	12310.05
	70"(1778mm)	3	2	TACN-7070-		SNC		11694.80	12527.95	11763.64	12596.79

Planes 90° Extended Corner — Wrap-Around

Incremental or Crank Adjustment




TACE-4064-NCDB
(Left-hand Orientation)



TACE-6470-NODE
(Left-hand Orientation)
Class TA - SIN 33721; Discount Group X



Incremental Adjustment
Height Adjustment
22"(559mm) to
35" (889mm)



Crank Adjustment
Height Adjustment
27"(686mm) to
45"(1143mm)

**Height range includes 1.18" (20mm) work surface*

Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Top sizes 64x70 and larger will default to 2-pieces.
 - A 64"(1626mm) x 70"(1778mm) worksurface will include a 46"(1168mm) corner and 18"(457mm) rectangle extension.
 - Two-piece tops are available with edgeband ONLY.
- Incremental Height adjustment:
 - Telescoping columns feature 13"(330mm) of adjustment set in 1"(25mm) increments.
 - Button head screws are standard in bright zinc.
 - Thumbscrew replacement for button head screw is available; separately specified.
- Hand Crank adjustment:
 - Telescoping columns feature 18"(457mm) of adjustment.
 - 1"(25mm) of vertical movement for every 6 turns
 - Hand crank is field installed on left or right side and retracts under worksurface.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and Width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for pinch point clearance and cable accommodation; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- User orientation or "handedness" is determined by longest side of worksurface from seated position.
- Total lifting capacity of table is 200 lbs including surface; applied weight should be evenly distributed.
- For application guidelines with attached Worktools (monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed for use with Casters.

To Order, Specify:

1) Product number, including:

1 Surface Options:

L Laminate

W Wood

2 Edge Options:

Laminate:

J Edgeband

F Knife

Wood:

K Edgeband

U Knife

3 Depth and Orientation:

23" deep tops:

E Left-hand

H Right-hand

29" deep tops:

F Left-hand

J Right-hand

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.

Planes 90° Extended Corner — Wrap-Around

Incremental or Crank Adjustment

Left/Right Depth	Width	Length	Top Pieces	Number	①②	③	Laminate A		Laminate B		
							J	F	J	F	
Incremental Adjustment											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACE-4046-	SNCD		\$ 3767.26	\$ 4118.49	\$ 3868.51	\$ 4219.74	
		52"(1321mm)	1	TACE-4052-	SNCD		3805.22	4184.13	3909.13	4288.04	
		58"(1473mm)	1	TACE-4058-	SNCD		3838.13	4242.99	3944.32	4349.18	
		64"(1626mm)	1	TACE-4064-	SNCD		3875.80	4306.61	3984.65	4415.46	
	46"(1168mm)	52"(1321mm)	1	TACE-4652-	SNCD		\$3845.04	\$ 4234.33	\$ 3951.99	\$ 4341.28	
		58"(1473mm)	1	TACE-4658-	SNCD		3887.47	4302.71	3997.46	4412.70	
		64"(1626mm)	1	TACE-4664-	SNCD		3929.90	4371.09	4042.93	4484.12	
		70"(1778mm)	1	TACE-4670-	SNCD		3967.86	4436.73	4083.55	4552.42	
	52"(1321mm)	64"(1626mm)	1	TACE-5264-	SNCD		\$ 3979.24	\$ 4430.81	\$4096.07	\$ 4547.64	
		70"(1778mm)	1	TACE-5270-	SNCD		4026.72	4505.97	4146.97	4626.22	
	58"(1473mm)	64"(1626mm)	1	TACE-5864-	SNCD		\$4033.34	\$4495.29	\$ 4154.35	\$ 4616.30	
		70"(1778mm)	1	TACE-5870-	SNCD		4085.58	4575.21	4210.39	4700.02	
	64"(1626mm)	70"(1778mm)	2	TACE-6470-	SNCD		\$ 4139.68	\$4639.69	\$ 4268.67	\$ 4768.68	
29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACE-4652-	SNCD		\$ 3917.14	\$4309.89	\$4024.09	\$ 4416.84	
		58"(1473mm)	1	TACE-4658-	SNCD		3959.86	4380.29	4069.85	4490.28	
		64"(1626mm)	1	TACE-4664-	SNCD		4002.29	4448.67	4115.32	4561.70	
		70"(1778mm)	1	TACE-4670-	SNCD		4039.96	4512.29	4155.65	4627.98	
	52"(1321mm)	64"(1626mm)	1	TACE-5264-	SNCD		\$ 4051.63	\$4508.39	\$ 4168.46	\$ 4625.22	
		70"(1778mm)	1	TACE-5270-	SNCD		4098.82	4581.53	4219.07	4701.78	
	58"(1473mm)	64"(1626mm)	1	TACE-5864-	SNCD		\$ 4105.73	\$ 4572.87	\$ 4226.74	\$4693.88	
		70"(1778mm)	1	TACE-5870-	SNCD		4157.68	4650.77	4282.49	4775.58	
	64"(1626mm)	70"(1778mm)	2	TACE-6470-	SNCD		\$ 4211.78	\$ 4715.25	\$ 4340.77	\$4844.24	
	Crank Adjustment										
	23"(584mm)/23"(584mm)	40"(1016mm)	52"(1321mm)	1	TACE-4052-	SNCB		\$ 4256.68	\$4635.59	\$4360.59	\$ 4739.50
			58"(1473mm)	1	TACE-4058-	SNCB		4289.59	4694.45	4395.78	4800.64
			64"(1626mm)	1	TACE-4064-	SNCB		4327.26	4758.07	4436.11	4866.92
46"(1168mm)		52"(1321mm)	1	TACE-4652-	SNCB		\$4296.50	\$ 4685.79	\$4403.45	\$ 4792.74	
		58"(1473mm)	1	TACE-4658-	SNCB		4338.93	4754.17	4448.92	4864.16	
		64"(1626mm)	1	TACE-4664-	SNCB		4381.36	4822.55	4494.39	4935.58	
		70"(1778mm)	1	TACE-4670-	SNCB		4419.32	4888.19	4535.01	5003.88	
52"(1321mm)		64"(1626mm)	1	TACE-5264-	SNCB		\$4430.70	\$ 4882.27	\$ 4547.53	\$ 4999.10	
		70"(1778mm)	1	TACE-5270-	SNCB		4478.18	4957.43	4598.43	5077.68	
58"(1473mm)		64"(1626mm)	1	TACE-5864-	SNCB		\$4484.80	\$ 4946.75	\$ 4605.81	\$ 5067.76	
		70"(1778mm)	1	TACE-5870-	SNCB		4537.04	5026.67	4661.85	5151.48	
64"(1626mm)		70"(1778mm)	2	TACE-6470-	SNCB		\$ 4591.14	\$ 5091.15	\$ 4720.13	\$ 5220.14	
29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACE-4652-	SNCB		\$4368.60	\$ 4761.35	\$ 4475.55	\$4868.30	
		58"(1473mm)	1	TACE-4658-	SNCB		4411.32	4831.75	4521.31	4941.74	
		64"(1626mm)	1	TACE-4664-	SNCB		4453.75	4900.13	4566.78	5013.16	
		70"(1778mm)	1	TACE-4670-	SNCB		4491.42	4963.75	4607.11	5079.44	
	52"(1321mm)	64"(1626mm)	1	TACE-5264-	SNCB		\$4503.09	\$4959.85	\$ 4619.92	\$ 5076.68	
		70"(1778mm)	1	TACE-5270-	SNCB		4550.28	5032.99	4670.53	5153.24	
	58"(1473mm)	64"(1626mm)	1	TACE-5864-	SNCB		\$ 4557.19	\$5024.33	\$4678.20	\$ 5145.34	
		70"(1778mm)	1	TACE-5870-	SNCB		4609.14	5102.23	4733.95	5227.04	
	64"(1626mm)	70"(1778mm)	2	TACE-6470-	SNCB		\$4663.24	\$ 5166.71	\$ 4792.23	\$ 5295.70	


Planes 90° Extended Corner — Wrap-Around

Incremental or Crank Adjustment


Left/Right Depth	Width	Length	Top Pieces	Number	①②	③	Wood A		Wood B	
							K	U	K	U
Incremental Adjustment										
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACE-4046-		SNCD	\$ 4086.21	\$ 4640.72	\$ 4096.97	\$ 4680.04
		52"(1321mm)	1	TACE-4052-		SNCD	4119.39	4720.94	4132.39	4765.22
		58"(1473mm)	1	TACE-4058-		SNCD	4147.83	4793.48	4162.75	4842.23
		64"(1626mm)	1	TACE-4064-		SNCD	4181.01	4870.76	4198.17	4924.30
	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNCD	\$ 4157.31	\$ 4776.50	\$ 4172.87	\$ 4824.33
		58"(1473mm)	1	TACE-4658-		SNCD	4195.23	4858.52	4213.35	4911.49
		64"(1626mm)	1	TACE-4664-		SNCD	4233.15	4940.54	4253.83	4998.62
		70"(1778mm)	1	TACE-4670-		SNCD	4266.33	5020.76	4289.25	5083.80
	52"(1321mm)	64"(1626mm)	1	TACE-5264-		SNCD	\$ 4280.55	\$ 5005.58	\$ 4304.43	\$ 5067.88
		70"(1778mm)	1	TACE-5270-		SNCD	4323.21	5095.28	4349.97	5163.18
	58"(1473mm)	64"(1626mm)	1	TACE-5864-		SNCD	\$ 4332.69	\$ 5075.36	\$ 4360.09	\$ 5142.20
		70"(1778mm)	1	TACE-5870-		SNCD	4380.09	5169.80	4410.69	5242.56
	64"(1626mm)	70"(1778mm)	2	TACE-6470-		SNCD	\$ 4432.23	\$ 5239.58	\$ 4466.35	\$ 5316.88
29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNCD	\$ 4228.83	\$ 4853.90	\$ 4244.39	\$ 4902.10
		58"(1473mm)	1	TACE-4658-		SNCD	4266.75	4938.86	4284.87	4992.34
		64"(1626mm)	1	TACE-4664-		SNCD	4304.67	5020.88	4325.35	5079.47
		70"(1778mm)	1	TACE-4670-		SNCD	4337.85	5098.16	4360.77	5161.54
	52"(1321mm)	64"(1626mm)	1	TACE-5264-		SNCD	\$ 4352.07	\$ 5085.92	\$ 4375.95	\$ 5148.73
		70"(1778mm)	1	TACE-5270-		SNCD	4394.73	5172.68	4421.49	5240.92
	58"(1473mm)	64"(1626mm)	1	TACE-5864-		SNCD	\$ 4404.21	\$ 5155.70	\$ 4431.61	\$ 5223.05
		70"(1778mm)	1	TACE-5870-		SNCD	4451.61	5247.20	4482.21	5320.30
	64"(1626mm)	70"(1778mm)	2	TACE-6470-		SNCD	\$ 4503.75	\$ 5316.98	\$ 4537.87	\$ 5394.62
Crank Adjustment										
23"(584mm)/23"(584mm)	40"(1016mm)	52"(1321mm)	1	TACE-4052-		SNCB	\$ 4570.85	\$ 5172.40	\$ 4583.85	\$ 5216.68
		58"(1473mm)	1	TACE-4058-		SNCB	4599.29	5244.94	4614.21	5293.69
		64"(1626mm)	1	TACE-4064-		SNCB	4632.47	5322.22	4649.63	5375.76
	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNCB	\$ 4608.77	\$ 5227.96	\$ 4624.33	\$ 5275.82
		58"(1473mm)	1	TACE-4658-		SNCB	4646.69	5309.98	4664.81	5362.95
		64"(1626mm)	1	TACE-4664-		SNCB	4684.61	5392.00	4705.29	5450.08
		70"(1778mm)	1	TACE-4670-		SNCB	4717.79	5472.22	4740.71	5535.26
	52"(1321mm)	64"(1626mm)	1	TACE-5264-		SNCB	\$ 4732.01	\$ 5457.04	\$ 4755.89	\$ 5519.34
		70"(1778mm)	1	TACE-5270-		SNCB	4774.67	5546.74	4801.43	5614.64
	58"(1473mm)	64"(1626mm)	1	TACE-5864-		SNCB	\$ 4784.15	\$ 5526.82	\$ 4811.55	\$ 5593.66
		70"(1778mm)	1	TACE-5870-		SNCB	4831.55	5621.26	4862.15	5694.02
	64"(1626mm)	70"(1778mm)	2	TACE-6470-		SNCB	\$ 4883.69	\$ 5691.04	\$ 4917.81	\$ 5768.34
29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNCB	\$ 4680.29	\$ 5305.36	\$ 4695.85	\$ 5353.56
		58"(1473mm)	1	TACE-4658-		SNCB	4718.21	5390.32	4736.33	5443.80
		64"(1626mm)	1	TACE-4664-		SNCB	4756.13	5472.34	4776.81	5530.93
		70"(1778mm)	1	TACE-4670-		SNCB	4789.31	5549.62	4812.23	5613.00
	52"(1321mm)	64"(1626mm)	1	TACE-5264-		SNCB	\$ 4803.53	\$ 5537.38	\$ 4827.41	\$ 5600.19
		70"(1778mm)	1	TACE-5270-		SNCB	4846.19	5624.14	4872.95	5692.38
	58"(1473mm)	64"(1626mm)	1	TACE-5864-		SNCB	\$ 4855.67	\$ 5607.16	\$ 4883.07	\$ 5674.51
		70"(1778mm)	1	TACE-5870-		SNCB	4903.07	5698.66	4933.67	5771.76
	64"(1626mm)	70"(1778mm)	2	TACE-6470-		SNCB	\$ 4955.21	\$ 5768.44	\$ 4989.33	\$ 5846.08

Planes 90° Extended Corner — Wrap-Around


Electric Adjustment



TACE-4064-NOEB
(Left-hand Orientation)



TACE-6470-NOEE
(Left-hand Orientation)
Class TA – SIN 33721; Discount Group X



*Height range includes
1.18" (20mm) worksurface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Top sizes 64"(1626mm) x 70"(1778mm) and larger will default to 2-pieces.
 - A 64"(1626mm) x 70"(1778mm) worksurface will include a 46"(1168mm) corner and 18"(457mm) rectangle extension.
 - Two-piece tops are available with edgeband ONLY.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(457mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- User orientation or "handedness" is determined by longest side of worksurface from seated position.
- Total lifting capacity of table is 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not design for use with casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Options:

- L** Laminate
- W** Wood

2 Edge Options:

Laminate:

- J** Edgeband
- F** Knife

Wood:

- K** Edgeband
- U** Knife

3 Height Adjustment Actuator:

Standard Range
(Single Stage):

- E** Standard
- R** Programmable
(add **\$202.15** list)

Extended Range
(Dual Stage, Low):

- P** Standard
- S** Programmable
(add **\$202.15** list)

(Dual Stage, High):

- Q** Standard
- T** Programmable
(add **\$202.15** list)

4 Depth and Orientation: Left-hand

23" deep tops:

- E** Left-hand
- H** Right-hand

29" deep tops:

- F** Left-hand
- J** Right-hand

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.

Planes 90° Extended Corner — Wrap-Around

Electric Adjustment

Left/Right Depth	Width	Length	Top Pieces	Number	①②	③④	Laminate A		Laminate B		
							J	F	J	F	
Standard Range (Single Stage)											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACE-4046-		SNC		\$ 6287.11	\$6638.34	\$ 6388.36	\$ 6739.59
		52"(1321mm)	1	TACE-4052-		SNC		6325.07	6703.98	6428.98	6807.89
		58"(1473mm)	1	TACE-4058-		SNC		6357.98	6762.84	6464.17	6869.03
		64"(1626mm)	1	TACE-4064-		SNC		6395.65	6826.46	6504.50	6935.31
	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNC		\$6364.89	\$ 6754.18	\$ 6471.84	\$ 6861.13
		58"(1473mm)	1	TACE-4658-		SNC		6407.32	6822.56	6517.31	6932.55
		64"(1626mm)	1	TACE-4664-		SNC		6449.75	6890.94	6562.78	7003.97
		70"(1778mm)	1	TACE-4670-		SNC		6487.71	6956.58	6603.40	7072.27
	52"(1321mm)	58"(1473mm)	1	TACE-5258-		SNC		\$6456.66	\$6882.28	\$ 6570.45	\$ 6996.07
		64"(1626mm)	1	TACE-5264-		SNC		6499.09	6950.66	6615.92	7067.49
		70"(1778mm)	1	TACE-5270-		SNC		6546.57	7025.82	6666.82	7146.07
	58"(1473mm)	64"(1626mm)	1	TACE-5864-		SNC		\$ 6553.19	\$ 7015.14	\$ 6674.20	\$ 7136.15
		70"(1778mm)	1	TACE-5870-		SNC		6605.43	7095.06	6730.24	7219.87
	64"(1626mm)	70"(1778mm)	2	TACE-6470-		SNC		\$ 6659.53	\$ 7159.54	\$ 6788.52	\$ 7288.53
	29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNC		\$6436.99	\$ 6829.74	\$6543.94
58"(1473mm)			1	TACE-4658-		SNC		6479.71	6900.14	6589.70	7010.13
64"(1626mm)			1	TACE-4664-		SNC		6522.14	6968.52	6635.17	7081.55
70"(1778mm)			1	TACE-4670-		SNC		6559.81	7032.14	6675.50	7147.83
52"(1321mm)		58"(1473mm)	1	TACE-5258-		SNC		\$6529.05	\$6959.86	\$6642.84	\$ 7073.65
		64"(1626mm)	1	TACE-5264-		SNC		6571.48	7028.24	6688.31	7145.07
		70"(1778mm)	1	TACE-5270-		SNC		6618.67	7101.38	6738.92	7221.63
58"(1473mm)		64"(1626mm)	1	TACE-5864-		SNC		\$ 6625.58	\$ 7092.72	\$ 6746.59	\$ 7213.73
		70"(1778mm)	1	TACE-5870-		SNC		6677.53	7170.62	6802.34	7295.43
64"(1626mm)		70"(1778mm)	2	TACE-6470-		SNC		\$ 6731.63	\$ 7235.10	\$6860.62	\$ 7364.09
Extended Range (Dual Stage)											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACE-4046-		SNC		\$8005.50	\$ 8356.73	\$ 8106.75	\$ 8457.98
		52"(1321mm)	1	TACE-4052-		SNC		8043.46	8422.37	8147.37	8526.28
		58"(1473mm)	1	TACE-4058-		SNC		8076.37	8481.23	8182.56	8587.42
		64"(1626mm)	1	TACE-4064-		SNC		8114.04	8544.85	8222.89	8653.70
	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNC		\$8083.28	\$ 8472.57	\$ 8190.23	\$ 8579.52
		58"(1473mm)	1	TACE-4658-		SNC		8125.71	8540.95	8235.70	8650.94
		64"(1626mm)	1	TACE-4664-		SNC		8168.14	8609.33	8281.17	8722.36
		70"(1778mm)	1	TACE-4670-		SNC		8206.10	8674.97	8321.79	8790.66
	52"(1321mm)	58"(1473mm)	1	TACE-5258-		SNC		\$ 8175.05	\$8600.67	\$8288.84	\$ 8714.46
		64"(1626mm)	1	TACE-5264-		SNC		8217.48	8669.05	8334.31	8785.88
		70"(1778mm)	1	TACE-5270-		SNC		8264.96	8744.21	8385.21	8864.46
	58"(1473mm)	64"(1626mm)	1	TACE-5864-		SNC		\$ 8271.58	\$ 8733.53	\$8392.59	\$ 8854.54
		70"(1778mm)	1	TACE-5870-		SNC		8323.82	8813.45	8448.63	8938.26
	64"(1626mm)	70"(1778mm)	2	TACE-6470-		SNC		\$ 8377.92	\$ 8877.93	\$ 8506.91	\$9006.92
	29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNC		\$ 8155.38	\$ 8548.13	\$ 8262.33
58"(1473mm)			1	TACE-4658-		SNC		8198.10	8618.53	8308.09	8728.52
64"(1626mm)			1	TACE-4664-		SNC		8240.53	8686.91	8353.56	8799.94
70"(1778mm)			1	TACE-4670-		SNC		8278.20	8750.53	8393.89	8866.22
52"(1321mm)		58"(1473mm)	1	TACE-5258-		SNC		\$ 8247.44	\$ 8678.25	\$ 8361.23	\$ 8792.04
		64"(1626mm)	1	TACE-5264-		SNC		8289.87	8746.63	8406.70	8863.46
		70"(1778mm)	1	TACE-5270-		SNC		8337.06	8819.77	8457.31	8940.02
58"(1473mm)		64"(1626mm)	1	TACE-5864-		SNC		\$ 8343.97	\$ 8811.11	\$8464.98	\$ 8932.12
		70"(1778mm)	1	TACE-5870-		SNC		8395.92	8889.01	8520.73	9013.82
64"(1626mm)		70"(1778mm)	2	TACE-6470-		SNC		\$8450.02	\$8953.49	\$ 8579.01	\$9082.48


Planes 90° Extended Corner — Wrap-Around

Electric Adjustment


Left/Right Depth	Width	Length	Top Pieces	Number	①②	③④	Wood A		Wood B		
							K	U	K	U	
Standard Range (Single Stage)											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACE-4046-		SNC		\$ 6606.06	\$ 7160.57	\$ 6616.82	\$ 7199.89
		52"(1321mm)	1	TACE-4052-		SNC		6639.24	7240.79	6652.24	7285.07
		58"(1473mm)	1	TACE-4058-		SNC		6667.68	7313.33	6682.60	7362.08
		64"(1626mm)	1	TACE-4064-		SNC		6700.86	7390.61	6718.02	7444.15
	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNC		\$ 6677.16	\$ 7296.35	\$ 6692.72	\$ 7344.21
		58"(1473mm)	1	TACE-4658-		SNC		6715.08	7378.37	6733.20	7431.34
		64"(1626mm)	1	TACE-4664-		SNC		6753.00	7460.39	6773.68	7518.47
		70"(1778mm)	1	TACE-4670-		SNC		6786.18	7540.61	6809.10	7603.65
	52"(1321mm)	58"(1473mm)	1	TACE-5258-		SNC		\$ 6762.48	\$ 7443.41	\$ 6783.80	\$ 7500.60
		64"(1626mm)	1	TACE-5264-		SNC		6800.40	7525.43	6824.28	7587.73
		70"(1778mm)	1	TACE-5270-		SNC		6843.06	7615.13	6869.82	7683.03
	58"(1473mm)	64"(1626mm)	1	TACE-5864-		SNC		\$ 6852.54	\$ 7595.21	\$ 6879.94	\$ 7662.05
		70"(1778mm)	1	TACE-5870-		SNC		6899.94	7689.65	6930.54	7762.41
	64"(1626mm)	70"(1778mm)	2	TACE-6470-		SNC		\$ 6952.08	\$ 7759.43	\$ 6986.20	\$ 7836.73
	29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNC		\$ 6748.68	\$ 7373.75	\$ 6764.24
58"(1473mm)			1	TACE-4658-		SNC		6786.60	7458.71	6804.72	7512.19
64"(1626mm)			1	TACE-4664-		SNC		6824.52	7540.73	6845.20	7599.32
70"(1778mm)			1	TACE-4670-		SNC		6857.70	7618.01	6880.62	7681.39
52"(1321mm)		58"(1473mm)	1	TACE-5258-		SNC		\$ 6834.00	\$ 7523.75	\$ 6855.32	\$ 7581.45
		64"(1626mm)	1	TACE-5264-		SNC		6871.92	7605.77	6895.80	7668.58
		70"(1778mm)	1	TACE-5270-		SNC		6914.58	7692.53	6941.34	7760.77
58"(1473mm)		64"(1626mm)	1	TACE-5864-		SNC		\$ 6924.06	\$ 7675.55	\$ 6951.46	\$ 7742.90
		70"(1778mm)	1	TACE-5870-		SNC		6971.46	7767.05	7002.06	7840.15
64"(1626mm)		70"(1778mm)	2	TACE-6470-		SNC		\$ 7023.60	\$ 7836.83	\$ 7057.72	\$ 7914.47
Extended Range (Dual Stage)											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACE-4046-		SNC		\$ 8324.45	\$ 8878.96	\$ 8335.21	\$ 8918.28
		52"(1321mm)	1	TACE-4052-		SNC		8357.63	8959.18	8370.63	9003.46
		58"(1473mm)	1	TACE-4058-		SNC		8386.07	9031.72	8400.99	9080.47
		64"(1626mm)	1	TACE-4064-		SNC		8419.25	9109.00	8436.41	9162.54
	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNC		\$ 8395.55	\$ 9014.74	\$ 8411.11	\$ 9062.60
		58"(1473mm)	1	TACE-4658-		SNC		8433.47	9096.76	8451.59	9149.73
		64"(1626mm)	1	TACE-4664-		SNC		8471.39	9178.78	8492.07	9236.86
		70"(1778mm)	1	TACE-4670-		SNC		8504.57	9259.00	8527.49	9322.04
	52"(1321mm)	58"(1473mm)	1	TACE-5258-		SNC		\$ 8480.87	\$ 9161.80	\$ 8502.19	\$ 9218.99
		64"(1626mm)	1	TACE-5264-		SNC		8518.79	9243.82	8542.67	9306.12
		70"(1778mm)	1	TACE-5270-		SNC		8561.45	9333.52	8588.21	9401.42
	58"(1473mm)	64"(1626mm)	1	TACE-5864-		SNC		\$ 8570.93	\$ 9313.60	\$ 8598.33	\$ 9380.44
		70"(1778mm)	1	TACE-5870-		SNC		8618.33	9408.04	8648.93	9480.80
	64"(1626mm)	70"(1778mm)	2	TACE-6470-		SNC		\$ 8670.47	\$ 9477.82	\$ 8704.59	\$ 9555.12
	29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACE-4652-		SNC		\$ 8467.07	\$ 9092.14	\$ 8482.63
58"(1473mm)			1	TACE-4658-		SNC		8504.99	9177.10	8523.11	9230.58
64"(1626mm)			1	TACE-4664-		SNC		8542.91	9259.12	8563.59	9317.71
70"(1778mm)			1	TACE-4670-		SNC		8576.09	9336.40	8599.01	9399.78
52"(1321mm)		58"(1473mm)	1	TACE-5258-		SNC		\$ 8552.39	\$ 9242.14	\$ 8573.71	\$ 9299.84
		64"(1626mm)	1	TACE-5264-		SNC		8590.31	9324.16	8614.19	9386.97
		70"(1778mm)	1	TACE-5270-		SNC		8632.97	9410.92	8659.73	9479.16
58"(1473mm)		64"(1626mm)	1	TACE-5864-		SNC		\$ 8642.45	\$ 9393.94	\$ 8669.85	\$ 9461.29
		70"(1778mm)	1	TACE-5870-		SNC		8689.85	9485.44	8720.45	9558.54
64"(1626mm)		70"(1778mm)	2	TACE-6470-		SNC		\$ 8741.99	\$ 9555.22	\$ 8776.11	\$ 9632.86

Planes 90° Extended Corner — Notched


Electric Adjustment



TAOP-4070-NCEB
(Left-hand Orientation)



TAOP-5270-NCEB
(Left-hand Orientation)
Class TA - SIN 3372; Discount Group X



*Height range includes 1.18" (20mm) work surface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Top sizes 64"(1626mm) x 70"(1778mm) and larger will default to 2-pieces.
 - A 64"(1626mm) x 70"(1778mm) worksurface will include a 46"(1168mm) corner and 18"(457mm) rectangle extension.
 - Two-piece tops are available with edgeband ONLY.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- User orientation or "handedness" is determined by longest side of worksurface from seated position.
- Total lifting capacity of table is 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not design for use with casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Options:

L Laminate

W Wood

2 Edge Options:

Laminate:

J Edgeband

F Knife

Wood:

K Edgeband

U Knife

3 Height Adjustment Actuator:

Standard Range

(Single Stage):

E Standard

R Programmable

(add **\$202.15** list)

Extended Range

(Dual Stage, Low):

P Standard

S Programmable

(add **\$202.15** list)

(Dual Stage, High):

Q Standard

T Programmable

(add **\$202.15** list)

4 Depth and Orientation:

23" deep tops:

E Left-hand

H Right-hand

29" deep tops:

F Left-hand

J Right-hand

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.

Planes 90° Extended Corner — Notched

Electric Adjustment

Left/Right Depth	Width	Length	Top Pieces	Number	12	34	Laminate A		Laminate B		
							J	F	J	F	
Standard Range (Single Stage)											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACP-4046-		SNC		\$ 6270.89	\$ 6622.12	\$ 6372.14	\$ 6723.37
		52"(1321mm)	1	TACP-4052-		SNC		6308.85	6687.76	6412.76	6791.67
		58"(1473mm)	1	TACP-4058-		SNC		6341.76	6746.62	6447.95	6852.81
		64"(1626mm)	1	TACP-4064-		SNC		6379.43	6810.24	6488.28	6919.09
	46"(1168mm)	52"(1321mm)	1	TACP-4652-		SNC		\$ 6348.67	\$ 6737.96	\$ 6455.62	\$ 6844.91
		58"(1473mm)	1	TACP-4658-		SNC		6391.10	6806.34	6501.09	6916.33
		64"(1626mm)	1	TACP-4664-		SNC		6433.53	6874.72	6546.56	6987.75
		70"(1778mm)	1	TACP-4670-		SNC		6471.49	6940.36	6587.18	7056.05
	52"(1321mm)	58"(1473mm)	1	TACP-5258-		SNC		\$ 6440.44	\$ 6866.06	\$ 6554.23	\$ 6979.85
		64"(1626mm)	1	TACP-5264-		SNC		6482.87	6934.44	6599.70	7051.27
		70"(1778mm)	1	TACP-5270-		SNC		6530.35	7009.60	6650.60	7129.85
		58"(1473mm)	64"(1626mm)	1	TACP-5864-		SNC		\$ 6536.97	\$ 6998.92	\$ 6657.98
	70"(1778mm)	1	TACP-5870-		SNC		6589.21	7078.84	6714.02	7203.65	
		64"(1626mm)	70"(1778mm)	2	TACP-6470-		SNC		\$ 6643.31	\$ 7143.32	\$ 6772.30
29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACP-4652-		SNC		\$ 6420.77	\$ 6813.52	\$ 6527.72	\$ 6920.47
		58"(1473mm)	1	TACP-4658-		SNC		6463.49	6883.92	6573.48	6993.91
		64"(1626mm)	1	TACP-4664-		SNC		6505.92	6952.30	6618.95	7065.33
		70"(1778mm)	1	TACP-4670-		SNC		6543.59	7015.92	6659.28	7131.61
	52"(1321mm)	58"(1473mm)	1	TACP-5258-		SNC		\$ 6512.83	\$ 6943.64	\$ 6626.62	\$ 7057.43
		64"(1626mm)	1	TACP-5264-		SNC		6555.26	7012.02	6672.09	7128.85
		70"(1778mm)	1	TACP-5270-		SNC		6602.45	7085.16	6722.70	7205.41
	58"(1473mm)	64"(1626mm)	1	TACP-5864-		SNC		\$ 6609.36	\$ 7076.50	\$ 6730.37	\$ 7197.51
		70"(1778mm)	1	TACP-5870-		SNC		6661.31	7154.40	6786.12	7279.21
	64"(1626mm)	70"(1778mm)	2	TACP-6470-		SNC		\$ 6715.41	\$ 7218.88	\$ 6844.40	\$ 7347.87
Extended Range (Dual Stage)											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACP-4046-		SNC		\$ 7989.28	\$ 8340.51	\$ 8090.53	\$ 8441.76
		52"(1321mm)	1	TACP-4052-		SNC		8027.24	8406.15	8131.15	8510.06
		58"(1473mm)	1	TACP-4058-		SNC		8060.15	8465.01	8166.34	8571.20
		64"(1626mm)	1	TACP-4064-		SNC		8097.82	8528.63	8206.67	8637.48
	46"(1168mm)	52"(1321mm)	1	TACP-4652-		SNC		\$ 8067.06	\$ 8456.35	\$ 8174.01	\$ 8563.30
		58"(1473mm)	1	TACP-4658-		SNC		8109.49	8524.73	8219.48	8634.72
		64"(1626mm)	1	TACP-4664-		SNC		8151.92	8593.11	8264.95	8706.14
		70"(1778mm)	1	TACP-4670-		SNC		8189.88	8658.75	8305.57	8774.44
	52"(1321mm)	58"(1473mm)	1	TACP-5258-		SNC		\$ 8158.83	\$ 8584.45	\$ 8272.62	\$ 8698.24
		64"(1626mm)	1	TACP-5264-		SNC		8201.26	8652.83	8318.09	8769.66
		70"(1778mm)	1	TACP-5270-		SNC		8248.74	8727.99	8368.99	8848.24
	58"(1473mm)	64"(1626mm)	1	TACP-5864-		SNC		\$ 8255.36	\$ 8717.31	\$ 8376.37	\$ 8838.32
		70"(1778mm)	1	TACP-5870-		SNC		8307.60	8797.23	8432.41	8922.04
	64"(1626mm)	70"(1778mm)	2	TACP-6470-		SNC		\$ 8361.70	\$ 8861.71	\$ 8490.69	\$ 8990.70
29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACP-4652-		SNC		\$ 8139.16	\$ 8531.91	\$ 8246.11	\$ 8638.86
		58"(1473mm)	1	TACP-4658-		SNC		8181.88	8602.31	8291.87	8712.30
		64"(1626mm)	1	TACP-4664-		SNC		8224.31	8670.69	8337.34	8783.72
		70"(1778mm)	1	TACP-4670-		SNC		8261.98	8734.31	8377.67	8850.00
	52"(1321mm)	58"(1473mm)	1	TACP-5258-		SNC		\$ 8231.22	\$ 8662.03	\$ 8345.01	\$ 8775.82
		64"(1626mm)	1	TACP-5264-		SNC		8273.65	8730.41	8390.48	8847.24
		70"(1778mm)	1	TACP-5270-		SNC		8320.84	8803.55	8441.09	8923.80
	58"(1473mm)	64"(1626mm)	1	TACP-5864-		SNC		\$ 8327.75	\$ 8794.89	\$ 8448.76	\$ 8915.90
		70"(1778mm)	1	TACP-5870-		SNC		8379.70	8872.79	8504.51	8997.60
	64"(1626mm)	70"(1778mm)	2	TACP-6470-		SNC		\$ 8433.80	\$ 8937.27	\$ 8562.79	\$ 9066.26


Planes 90° Extended Corner — Notched

Electric Adjustment

Left/Right Depth	Width	Length	Top Pieces	Number	12	34	Wood A		Wood B		
							K	U	K	U	
Standard Range (Single Stage)											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACP-4046-		SNC		\$ 6302.42	\$ 6856.93	\$ 6313.36	\$ 6896.43
		52"(1321mm)	1	TACP-4052-		SNC		6335.60	6937.15	6348.78	6981.61
		58"(1473mm)	1	TACP-4058-		SNC		6364.04	7009.69	6379.14	7058.62
		64"(1626mm)	1	TACP-4064-		SNC		6397.22	7086.97	6414.56	7140.69
	46"(1168mm)	52"(1321mm)	1	TACP-4652-		SNC		\$ 6373.52	\$ 6992.71	\$ 6389.26	\$ 7040.75
		58"(1473mm)	1	TACP-4658-		SNC		6411.44	7074.73	6429.74	7127.88
		64"(1626mm)	1	TACP-4664-		SNC		6449.36	7156.75	6470.22	7215.01
		70"(1778mm)	1	TACP-4670-		SNC		6482.54	7236.97	6505.64	7300.19
	52"(1321mm)	58"(1473mm)	1	TACP-5258-		SNC		\$ 6458.84	\$ 7139.77	\$ 6480.34	\$ 7197.14
		64"(1626mm)	1	TACP-5264-		SNC		6496.76	7221.79	6520.82	7284.27
		70"(1778mm)	1	TACP-5270-		SNC		6539.42	7311.49	6566.36	7379.57
	58"(1473mm)	64"(1626mm)	1	TACP-5864-		SNC		\$ 6548.90	\$ 7291.57	\$ 6576.48	\$ 7358.59
		70"(1778mm)	1	TACP-5870-		SNC		6596.30	7386.01	6627.08	7458.95
	64"(1626mm)	70"(1778mm)	2	TACP-6470-		SNC		\$ 6648.44	\$ 7455.79	\$ 6682.74	\$ 7533.27
	29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACP-4652-		SNC		\$ 6445.04	\$ 7070.11	\$ 6460.78
58"(1473mm)			1	TACP-4658-		SNC		6482.96	7155.07	6501.26	7208.73
64"(1626mm)			1	TACP-4664-		SNC		6520.88	7237.09	6541.74	7295.86
70"(1778mm)			1	TACP-4670-		SNC		6554.06	7314.37	6577.16	7377.93
52"(1321mm)		58"(1473mm)	1	TACP-5258-		SNC		\$ 6530.36	\$ 7220.11	\$ 6551.86	\$ 7277.99
		64"(1626mm)	1	TACP-5264-		SNC		6568.28	7302.13	6592.34	7365.12
		70"(1778mm)	1	TACP-5270-		SNC		6610.94	7388.89	6637.88	7457.31
58"(1473mm)		64"(1626mm)	1	TACP-5864-		SNC		\$ 6620.42	\$ 7371.91	\$ 6648.00	\$ 7439.44
		70"(1778mm)	1	TACP-5870-		SNC		6667.82	7463.41	6698.60	7536.69
64"(1626mm)		70"(1778mm)	2	TACP-6470-		SNC		\$ 6719.96	\$ 7533.19	\$ 6754.26	\$ 7611.01
Extended Range (Dual Stage)											
23"(584mm)/23"(584mm)	40"(1016mm)	46"(1168mm)	1	TACP-4046-		SNC		\$ 8020.81	\$ 8575.32	\$ 8031.75	\$ 8614.82
		52"(1321mm)	1	TACP-4052-		SNC		8053.99	8655.54	8067.17	8700.00
		58"(1473mm)	1	TACP-4058-		SNC		8082.43	8728.08	8097.53	8777.01
		64"(1626mm)	1	TACP-4064-		SNC		8115.61	8805.36	8132.95	8859.08
	46"(1168mm)	52"(1321mm)	1	TACP-4652-		SNC		\$ 8091.91	\$ 8711.10	\$ 8107.65	\$ 8759.14
		58"(1473mm)	1	TACP-4658-		SNC		8129.83	8793.12	8148.13	8846.27
		64"(1626mm)	1	TACP-4664-		SNC		8167.75	8875.14	8188.61	8933.40
		70"(1778mm)	1	TACP-4670-		SNC		8200.93	8955.36	8224.03	9018.58
	52"(1321mm)	58"(1473mm)	1	TACP-5258-		SNC		\$ 8177.23	\$ 8858.16	\$ 8198.73	\$ 8915.53
		64"(1626mm)	1	TACP-5264-		SNC		8215.15	8940.18	8239.21	9002.66
		70"(1778mm)	1	TACP-5270-		SNC		8257.81	9029.88	8284.75	9097.96
	58"(1473mm)	64"(1626mm)	1	TACP-5864-		SNC		\$ 8267.29	\$ 9009.96	\$ 8294.87	\$ 9076.98
		70"(1778mm)	1	TACP-5870-		SNC		8314.69	9104.40	8345.47	9177.34
	64"(1626mm)	70"(1778mm)	2	TACP-6470-		SNC		\$ 8366.83	\$ 9174.18	\$ 8401.13	\$ 9251.66
	29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TACP-4652-		SNC		\$ 8163.43	\$ 8788.50	\$ 8179.17
58"(1473mm)			1	TACP-4658-		SNC		8201.35	8873.46	8219.65	8927.12
64"(1626mm)			1	TACP-4664-		SNC		8239.27	8955.48	8260.13	9014.25
70"(1778mm)			1	TACP-4670-		SNC		8272.45	9032.76	8295.55	9096.32
52"(1321mm)		58"(1473mm)	1	TACP-5258-		SNC		\$ 8248.75	\$ 8938.50	\$ 8270.25	\$ 8996.38
		64"(1626mm)	1	TACP-5264-		SNC		8286.67	9020.52	8310.73	9083.51
		70"(1778mm)	1	TACP-5270-		SNC		8329.33	9107.28	8356.27	9175.70
58"(1473mm)		64"(1626mm)	1	TACP-5864-		SNC		\$ 8338.81	\$ 9090.30	\$ 8366.39	\$ 9157.83
		70"(1778mm)	1	TACP-5870-		SNC		8386.21	9181.80	8416.99	9255.08
64"(1626mm)		70"(1778mm)	2	TACP-6470-		SNC		\$ 8438.35	\$ 9251.58	\$ 8472.65	\$ 9329.40


Planes 120° Corner — Wrap-Around

Electric Adjustment



TACZ-5858-NCEB

Class TA – SIN 3372I; Discount Group X



*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - C-leg telescoping base assembly with fixed J-Rail frame system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- Total lifting capacity of table is 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not design for use with casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Options:

L Laminate

W Wood

2 Edge Options:

Laminate:

J Edgeband

F Knife

Wood:

K Edgeband

U Knife

3 Height Adjustment Actuator:

Standard Range
(Single Stage):

E Standard

R Programmable
(add **\$202.15** list)

Extended Range
(Dual Stage, Low):

P Standard

S Programmable
(add **\$202.15** list)

(Dual Stage, High):

Q Standard

T Programmable
(add **\$202.15** list)

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.

Planes 120° Corner — Wrap-Around


Electric Adjustment

Left/Right Depth	Width	Length	Top Pieces	Number	①②	③	Laminate A		Laminate B		
							J	F	J	F	
Standard Range (Single Stage)											
23"(584mm)/23"(584mm)	52"(1321mm)	52"(1321mm)	1	TACZ-5252-		SNC	B	\$ 6518.91	\$6600.00	\$ 6518.91	\$6600.00
	58"(1473mm)	58"(1473mm)	1	TACZ-5858-		SNC	B	6647.97	6643.68	6647.97	6643.68
29"(737mm)/29"(737mm)	52"(1321mm)	52"(1321mm)	1	TACZ-5252-		SNC	C	\$6590.43	\$ 6675.68	\$6590.43	\$ 6675.68
	58"(1473mm)	58"(1473mm)	1	TACZ-5858-		SNC	C	6719.49	6721.44	6719.49	6721.44
Extended Range (Dual Stage)											
23"(584mm)/23"(584mm)	52"(1321mm)	52"(1321mm)	1	TACZ-5252-		SNC	B	\$ 8237.30	\$ 8318.39	\$ 8237.30	\$ 8318.39
	58"(1473mm)	58"(1473mm)	1	TACZ-5858-		SNC	B	8366.36	8362.07	8366.36	8362.07
29"(737mm)/29"(737mm)	52"(1321mm)	52"(1321mm)	1	TACZ-5252-		SNC	C	\$8308.82	\$ 8394.07	\$8308.82	\$ 8394.07
	58"(1473mm)	58"(1473mm)	1	TACZ-5858-		SNC	C	8437.88	8439.83	8437.88	8439.83

Left/Right Depth	Width	Length	Top Pieces	Number	①②	③	Wood A		Wood B			
							K	U	K	U		
Standard Range (Single Stage)												
23"(584mm)/23"(584mm)	52"(1321mm)	52"(1321mm)	1	TACZ-5252-		SNC		B	\$ 6827.13	\$ 7658.79	\$6868.04	\$ 7674.44
	58"(1473mm)	58"(1473mm)	1	TACZ-5858-		SNC		B	6970.60	7787.52	7019.93	7803.17
29"(737mm)/29"(737mm)	52"(1321mm)	52"(1321mm)	1	TACZ-5252-		SNC		C	\$6898.65	\$ 7742.57	\$6939.56	\$ 7758.22
	58"(1473mm)	58"(1473mm)	1	TACZ-5858-		SNC		C	7042.12	7877.43	7091.45	7893.08
Extended Range (Dual Stage)												
23"(584mm)/23"(584mm)	52"(1321mm)	52"(1321mm)	1	TACZ-5252-		SNC		B	\$8545.52	\$ 9377.18	\$8586.43	\$9392.83
	58"(1473mm)	58"(1473mm)	1	TACZ-5858-		SNC		B	8688.99	9505.91	8738.32	9521.56
29"(737mm)/29"(737mm)	52"(1321mm)	52"(1321mm)	1	TACZ-5252-		SNC		C	\$ 8617.04	\$9460.96	\$ 8657.95	\$ 9476.61
	58"(1473mm)	58"(1473mm)	1	TACZ-5858-		SNC		C	8760.51	9595.82	8809.84	9611.47

Planes Base for Rectangular Table

Incremental or Crank Adjustment



TMRA
Class TA - GSA; Open Market



Incremental Adjustment
Height Adjustment
22"(559mm) to
35" (889mm)



Crank Adjustment
Height Adjustment
27"(686mm) to
45"(1143mm)

**Height range includes 1.18" (20mm) worksurface*

Features

- Includes:
 - Two telescoping columns
 - Pair of steel feet (C-leg)
 - Fixed J-Rail frame system
 - Two End Brackets
 - Incremental or hand crank height adjustment mechanism
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
- Incremental Height adjustment:
 - Telescoping columns feature 13"(330mm) of adjustment set in 1"(25mm) increments.
 - Button head screws are standard in bright zinc.
 - Thumbscrew replacement for button head screw is available; separately specified.
- Hand Crank adjustment:
 - Telescoping columns feature 18"(457mm) of adjustment.
 - 1"(25mm) of vertical movement for every 6 turns
 - Hand crank is field installed on left or right side and retracts under worksurface.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- **Maximum work top width overhang allowed is 6"(152mm) on each side.**
- **Refer to Planes Height Adjustable Table for each work surface top weight.**
- Not designed to be used with casters.
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 150 lbs including surface; applied weight should be evenly distributed.
- For applications using attached worktools (monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Base Only Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
- 2) Base trim color.


Planes Base for Rectangular Table

Incremental or Crank Adjustment


Top Depth	Minimum Top Width	Maximum Top Width	Number	Trim A	B
Incremental Adjustment					
23"(584mm)	34"(864mm)	39"(991mm)	TMRA-2334-NNNNCD	\$ 1564.33	\$ 1627.83
	40"(1016mm)	45"(1143mm)	TMRA-2340-NNNNCD	1628.59	1692.09
	46"(1168mm)	51"(1295mm)	TMRA-2346-NNNNCD	1692.85	1756.35
	52"(1321mm)	57"(1448mm)	TMRA-2352-NNNNCD	1757.11	1820.61
	58"(1473mm)	63"(1600mm)	TMRA-2358-NNNNCD	1821.37	1884.87
	64"(1626mm)	67"(1702mm)	TMRA-2364-NNNNCD	1885.63	1949.13
	70"(1778mm)	77"(1956mm)	TMRA-2370-NNNNCD	1949.89	2013.39
29"(737mm)	34"(864mm)	39"(991mm)	TMRA-2934-NNNNCD	\$ 1594.93	\$ 1658.43
	40"(1016mm)	45"(1143mm)	TMRA-2940-NNNNCD	1659.19	1722.69
	46"(1168mm)	51"(1295mm)	TMRA-2946-NNNNCD	1723.45	1786.95
	52"(1321mm)	57"(1448mm)	TMRA-2952-NNNNCD	1787.71	1851.21
	58"(1473mm)	63"(1600mm)	TMRA-2958-NNNNCD	1851.97	1915.47
	64"(1626mm)	67"(1702mm)	TMRA-2964-NNNNCD	1916.23	1979.73
	70"(1778mm)	77"(1956mm)	TMRA-2970-NNNNCD	1980.49	2043.99
Crank Adjustment					
23"(584mm)	34"(864mm)	39"(991mm)	TMRA-2334-NNNNCB	\$2362.87	\$ 2426.37
	40"(1016mm)	45"(1143mm)	TMRA-2340-NNNNCB	2427.13	2490.63
	46"(1168mm)	51"(1295mm)	TMRA-2346-NNNNCB	2491.39	2554.89
	52"(1321mm)	57"(1448mm)	TMRA-2352-NNNNCB	2555.65	2619.15
	58"(1473mm)	63"(1600mm)	TMRA-2358-NNNNCB	2619.91	2683.41
	64"(1626mm)	67"(1702mm)	TMRA-2364-NNNNCB	2684.17	2747.67
	70"(1778mm)	77"(1956mm)	TMRA-2370-NNNNCB	2748.43	2811.93
29"(737mm)	34"(864mm)	39"(991mm)	TMRA-2934-NNNNCB	\$2393.47	\$ 2456.97
	40"(1016mm)	45"(1143mm)	TMRA-2940-NNNNCB	2457.73	2521.23
	46"(1168mm)	51"(1295mm)	TMRA-2946-NNNNCB	2521.99	2585.49
	52"(1321mm)	57"(1448mm)	TMRA-2952-NNNNCB	2586.25	2649.75
	58"(1473mm)	63"(1600mm)	TMRA-2958-NNNNCB	2650.51	2714.01
	64"(1626mm)	67"(1702mm)	TMRA-2964-NNNNCB	2714.77	2778.27
	70"(1778mm)	77"(1956mm)	TMRA-2970-NNNNCB	2779.03	2842.53

Planes Base for Rectangular Table

Electric Adjustment



TMRA
Class TA - GSA; Open Market



*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - Two telescoping columns
 - Pair of steel feet (C-leg)
 - Fixed J-Rail frame system
 - Two End Brackets
 - Control Box
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P Plug to the building
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- Maximum work top width overhang allowed is 6"(152mm) on each side.**
- Refer to specification guide for work surface weight.**
- Select a work surface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other work surfaces.
- Total lifting capacity of table is 250 lbs including surface; applied weight should be evenly distributed.
- For applications using attached worktools (monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available.
- Base Only Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Actuator Options:

Standard Range

(Single Stage):

E Standard

R Programmable
(add **\$202.15** list)

Extended Range

(Dual Stage, Low):

S Programmable
(add **\$202.15** list)

(Dual Stage, High):

Q Standard

T Programmable
(add **\$202.15** list)

2) Base trim color.



Planes Base for Rectangular Table

Electric Adjustment


Top Depth	Minimum Top Width	Maximum Top Width	Number	①	Trim A	B
Standard Range (Single Stage)						
23"(584mm)	34"(864mm)	39"(991mm)	TMRA-2334-NNNNC		\$ 3164.36	\$ 3227.86
	40"(1016mm)	45"(1143mm)	TMRA-2340-NNNNC		3228.62	3292.12
	46"(1168mm)	51"(1295mm)	TMRA-2346-NNNNC		3292.88	3356.38
	52"(1321mm)	57"(1448mm)	TMRA-2352-NNNNC		3357.14	3420.64
	58"(1473mm)	63"(1600mm)	TMRA-2358-NNNNC		3421.40	3484.90
	64"(1626mm)	69"(1753mm)	TMRA-2364-NNNNC		3485.66	3549.16
	70"(1778mm)	75"(1905mm)	TMRA-2370-NNNNC		3549.92	3613.42
29"(737mm)	34"(864mm)	39"(991mm)	TMRA-2934-NNNNC		\$ 3194.96	\$ 3258.46
	40"(1016mm)	45"(1143mm)	TMRA-2940-NNNNC		3259.22	3322.72
	46"(1168mm)	51"(1295mm)	TMRA-2946-NNNNC		3323.48	3386.98
	52"(1321mm)	57"(1448mm)	TMRA-2952-NNNNC		3387.74	3451.24
	58"(1473mm)	63"(1600mm)	TMRA-2958-NNNNC		3452.00	3515.50
	64"(1626mm)	69"(1753mm)	TMRA-2964-NNNNC		3516.26	3579.76
	70"(1778mm)	75"(1905mm)	TMRA-2970-NNNNC		3580.52	3644.02
Extended Range (Dual Stage)						
23"(584mm)	34"(864mm)	39"(991mm)	TMRA-2334-NNNNC		\$4395.00	\$4458.50
	40"(1016mm)	45"(1143mm)	TMRA-2340-NNNNC		4459.26	4522.76
	46"(1168mm)	51"(1295mm)	TMRA-2346-NNNNC		4523.52	4587.02
	52"(1321mm)	57"(1448mm)	TMRA-2352-NNNNC		4587.78	4651.28
	58"(1473mm)	63"(1600mm)	TMRA-2358-NNNNC		4652.04	4715.54
	64"(1626mm)	69"(1753mm)	TMRA-2364-NNNNC		4716.30	4779.80
	70"(1778mm)	75"(1905mm)	TMRA-2370-NNNNC		4780.56	4844.06
29"(737mm)	34"(864mm)	39"(991mm)	TMRA-2934-NNNNC		\$4425.60	\$ 4489.10
	40"(1016mm)	45"(1143mm)	TMRA-2940-NNNNC		4489.86	4553.36
	46"(1168mm)	51"(1295mm)	TMRA-2946-NNNNC		4554.12	4617.62
	52"(1321mm)	57"(1448mm)	TMRA-2952-NNNNC		4618.38	4681.88
	58"(1473mm)	63"(1600mm)	TMRA-2958-NNNNC		4682.64	4746.14
	64"(1626mm)	69"(1753mm)	TMRA-2964-NNNNC		4746.90	4810.40
	70"(1778mm)	75"(1905mm)	TMRA-2970-NNNNC		4811.16	4874.66

Planes Base for 90° Equal Corner Table

Electric Adjustment





TMCR-5858-NCEBT



TMCR-6464-NCEE
(Left-hand Orientation)

Class TA - GSA; Open Market

Touch Pads	Columns
 Standard	 Standard Range (Single Stage) Height Adjustment 27.1" (689mm) to 46.0" (1169mm)
 Programmable (Height display will show in whole number format)	 Extended Range (Dual Stage) Height Adjustment
	Low: 22.4" (569mm) to 48.3" (1227mm) High: 23.3" (592mm) to 50.0" (1270mm)

*Height range includes
1.18" (20mm) workspace



Features

- Includes:
 - Two telescoping columns
 - One center post leg (with top widths 52"(1321mm) or greater)
 - Pair of steel feet (C-leg)
 - Fixed J-Rail frame system
 - Two End Brackets
 - Control Box
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P Plug and 5'(1524mm) cable extension (with top width 52"(1321mm) or greater)
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(457mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- Maximum work top width overhang allowed is 6"(152mm) on each side.**
- Refer to specification guide for work surface weight.**
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 250 lbs (2-leg) or 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available for 2-leg models ONLY.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Actuator Options:

Standard Range

(Single Stage):

E Standard

R Programmable
(add **\$202.15** list)

Extended Range

(Dual Stage, Low):

P Standard

S Programmable
(add **\$202.15** list)

(Dual Stage, High):

Q Standard

T Programmable
(add **\$202.15** list)

2) Base trim color.


Planes Base for 90° Equal Corner Table

Electric Adjustment


Top Left/Right Depth	Minimum Top Width	Maximum Top Width	Leg Column	Number	①	Trim A	B
Standard Range (Single Stage)							
23"(584mm)/23"(584mm)	34"(864mm)	39"(991mm)	1	TMCR-3434-NNNNC	B	\$ 3133.48	\$ 3196.98
	40"(1016mm)	45"(1143mm)	1	TMCR-4040-NNNNC	B	3197.74	3261.24
	46"(1168mm)	51"(1295mm)	1	TMCR-4646-NNNNC	B	3262.00	3325.50
	52"(1321mm)	57"(1448mm)	1	TMCR-5252-NNNNC	B	7361.12	7424.62
	58"(1473mm)	63"(1600mm)	1	TMCR-5858-NNNNC	B	7425.38	7488.88
	64"(1626mm)	69"(1753mm)	1	TMCR-6464-NNNNC	B	7489.64	7553.14
	70"(1778mm)	75"(1905mm)	1	TMCR-7070-NNNNC	B	7553.90	7617.40
29"(737mm)/29"(737mm)	52"(1321mm)	57"(1448mm)	1	TMCR-5252-NNNNC	C	\$ 7391.72	\$ 7455.22
	58"(1473mm)	63"(1600mm)	1	TMCR-5858-NNNNC	C	7455.98	7519.48
	64"(1626mm)	69"(1753mm)	1	TMCR-6464-NNNNC	C	7520.24	7583.74
	70"(1778mm)	75"(1905mm)	1	TMCR-7070-NNNNC	C	7584.50	7648.00
Extended Range (Dual Stage)							
23"(584mm)/23"(584mm)	34"(864mm)	39"(991mm)	1	TMCR-3434-NNNNC	B	\$ 4061.12	\$ 4124.62
	40"(1016mm)	45"(1143mm)	1	TMCR-4040-NNNNC	B	4125.38	4188.88
	46"(1168mm)	51"(1295mm)	1	TMCR-4646-NNNNC	B	4189.64	4253.14
	52"(1321mm)	57"(1448mm)	1	TMCR-5252-NNNNC	B	10439.04	10502.54
	58"(1473mm)	63"(1600mm)	1	TMCR-5858-NNNNC	B	10503.30	10566.80
	64"(1626mm)	69"(1753mm)	1	TMCR-6464-NNNNC	B	10567.56	10631.06
	70"(1778mm)	75"(1905mm)	1	TMCR-7070-NNNNC	B	10631.82	10695.32
29"(737mm)/29"(737mm)	52"(1321mm)	57"(1448mm)	1	TMCR-5252-NNNNC	C	\$10469.64	\$ 10533.14
	58"(1473mm)	63"(1600mm)	1	TMCR-5858-NNNNC	C	10533.90	10597.40
	64"(1626mm)	69"(1753mm)	1	TMCR-6464-NNNNC	C	10598.16	10661.66
	70"(1778mm)	75"(1905mm)	1	TMCR-7070-NNNNC	C	10662.42	10725.92

Planes Base for 90° Extended Corner Table



Electric Adjustment



TMCE-4064-NCEB
(Left-hand Orientation)



TMCE-6470-NCEE
(Left-hand Orientation)
Class TA - GSA; Open Market

Touch Pads	Columns
 Standard	 Standard Range (Single Stage) Height Adjustment 27.1" (689mm) to 46.0" (1169mm)
 Programmable (Height display will show in whole number format)	 Extended Range (Dual Stage) Height Adjustment Low: 22.4" (569mm) to 48.3" (1227mm) High: 23.3" (592mm) to 50.0" (1270mm)

*Height range includes
1.18" (20mm) worksurface



Features

- Includes:
 - Two telescoping columns
 - One center post leg
 - Pair of steel feet (C-leg)
 - Fixed J-Rail frame system
 - Two End Brackets
 - Control Box
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5" (13mm) of adjustment
 - 9' (2743mm) long black power cord with NEMA 5-15P Plug and 5' (1524mm) cable extension (with top width 52" (1321mm) or greater)
- Electric Height Adjustment:
 - Speed: 1.4" (36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9" (480mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9" (658mm) - 26.7" (678mm) of continuous adjustment.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- Maximum work top width overhang allowed is 6" (152mm) on each side.**
- Refer to specification guide for work surface weight.**
- Select a worksurface that accommodates 1" (25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 300 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed to be used with casters
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Actuator Options:

Standard Range

(Single Stage):

E Standard

R Programmable
(add **\$202.15** list)

Extended Range

(Dual Stage, Low):

P Standard

S Programmable
(add **\$202.15** list)

(Dual Stage, High):

Q Standard

T Programmable
(add **\$202.15** list)

2) Base trim color.


Planes Base for 90° Extended Corner Table

Electric Adjustment

Top Left/Right Depth	Minimum Top Width	Maximum Top Width	Length	Number	①	Trim A	B
Standard Range (Single Stage)							
23"(584mm)/23"(584mm)	40"(1016mm)	51"(1295mm)	46"(1168mm)	TMCE-4046-NNNNC	B	\$ 5780.19	\$ 5843.69
		57"(1448mm)	52"(1321mm)	TMCE-4052-NNNNC	B	5812.29	5875.79
		63"(1600mm)	58"(1473mm)	TMCE-4058-NNNNC	B	5844.39	5907.89
		69"(1753mm)	64"(1626mm)	TMCE-4064-NNNNC	B	5876.49	5939.99
	46"(1168mm)	57"(1448mm)	52"(1321mm)	TMCE-4652-NNNNC	B	\$ 5844.39	\$ 5907.89
		63"(1600mm)	58"(1473mm)	TMCE-4658-NNNNC	B	5876.49	5939.99
		69"(1753mm)	64"(1626mm)	TMCE-4664-NNNNC	B	5908.59	5972.09
		75"(1905mm)	70"(1778mm)	TMCE-4670-NNNNC	B	5940.69	6004.19
	52"(1321mm)	63"(1600mm)	58"(1473mm)	TMCE-5258-NNNNC	B	\$ 5908.59	\$ 5972.09
		69"(1753mm)	64"(1626mm)	TMCE-5264-NNNNC	B	5940.69	6004.19
		75"(1905mm)	70"(1778mm)	TMCE-5270-NNNNC	B	5972.79	6036.29
		58"(1473mm)	69"(1753mm)	64"(1626mm)	TMCE-5864-NNNNC	B	\$ 5972.79
75"(1905mm)	70"(1778mm)		TMCE-5870-NNNNC	B	6004.89	6068.39	
	64"(1626mm)	75"(1905mm)	70"(1778mm)	TMCE-6470-NNNNC	B	\$ 6036.99	\$ 6100.49
29"(737mm)/29"(737mm)	46"(1168mm)	57"(1448mm)	52"(1321mm)	TMCE-4652-NNNNC	C	\$ 5874.99	\$ 5938.49
		63"(1600mm)	58"(1473mm)	TMCE-4658-NNNNC	C	5907.09	5970.59
		69"(1753mm)	64"(1626mm)	TMCE-4664-NNNNC	C	5939.19	6002.69
		75"(1905mm)	70"(1778mm)	TMCE-4670-NNNNC	C	5971.29	6034.79
	52"(1321mm)	63"(1600mm)	58"(1473mm)	TMCE-5258-NNNNC	C	\$ 5939.19	\$ 6002.69
		69"(1753mm)	64"(1626mm)	TMCE-5264-NNNNC	C	5971.29	6034.79
		75"(1905mm)	70"(1778mm)	TMCE-5270-NNNNC	C	6003.39	6066.89
		58"(1473mm)	69"(1753mm)	64"(1626mm)	TMCE-5864-NNNNC	C	\$ 6003.39
75"(1905mm)	70"(1778mm)		TMCE-5870-NNNNC	C	6035.49	6098.99	
	64"(1626mm)	75"(1905mm)	70"(1778mm)	TMCE-6470-NNNNC	C	\$ 6067.59	\$ 6131.09
Extended Range (Dual Stage)							
23"(584mm)/23"(584mm)	40"(1016mm)	51"(1295mm)	46"(1168mm)	TMCE-4046-NNNNC	B	\$ 7491.84	\$ 7555.34
		57"(1448mm)	52"(1321mm)	TMCE-4052-NNNNC	B	7523.94	7587.44
		63"(1600mm)	58"(1473mm)	TMCE-4058-NNNNC	B	7556.04	7619.54
		69"(1753mm)	64"(1626mm)	TMCE-4064-NNNNC	B	7588.14	7651.64
	46"(1168mm)	57"(1448mm)	52"(1321mm)	TMCE-4652-NNNNC	B	\$ 7556.04	\$ 7619.54
		63"(1600mm)	58"(1473mm)	TMCE-4658-NNNNC	B	7588.14	7651.64
		69"(1753mm)	64"(1626mm)	TMCE-4664-NNNNC	B	7620.24	7683.74
		75"(1905mm)	70"(1778mm)	TMCE-4670-NNNNC	B	7652.34	7715.84
	52"(1321mm)	63"(1600mm)	58"(1473mm)	TMCE-5258-NNNNC	B	\$ 7620.24	\$ 7683.74
		69"(1753mm)	64"(1626mm)	TMCE-5264-NNNNC	B	7652.34	7715.84
		75"(1905mm)	70"(1778mm)	TMCE-5270-NNNNC	B	7684.44	7747.94
		58"(1473mm)	69"(1753mm)	64"(1626mm)	TMCE-5864-NNNNC	B	\$ 7684.44
75"(1905mm)	70"(1778mm)		TMCE-5870-NNNNC	B	7716.54	7780.04	
	64"(1626mm)	75"(1905mm)	70"(1778mm)	TMCE-6470-NNNNC	B	\$ 7748.64	\$ 7812.14
29"(737mm)/29"(737mm)	46"(1168mm)	57"(1448mm)	52"(1321mm)	TMCE-4652-NNNNC	C	\$ 7586.64	\$ 7650.14
		63"(1600mm)	58"(1473mm)	TMCE-4658-NNNNC	C	7618.74	7682.24
		69"(1753mm)	64"(1626mm)	TMCE-4664-NNNNC	C	7650.84	7714.34
		75"(1905mm)	70"(1778mm)	TMCE-4670-NNNNC	C	7682.94	7746.44
	52"(1321mm)	63"(1600mm)	58"(1473mm)	TMCE-5258-NNNNC	C	\$ 7650.84	\$ 7714.34
		69"(1753mm)	64"(1626mm)	TMCE-5264-NNNNC	C	7682.94	7746.44
		75"(1905mm)	70"(1778mm)	TMCE-5270-NNNNC	C	7715.04	7778.54
		58"(1473mm)	69"(1753mm)	64"(1626mm)	TMCE-5864-NNNNC	C	\$ 7715.04
75"(1905mm)	70"(1778mm)		TMCE-5870-NNNNC	C	7747.14	7810.64	
	64"(1626mm)	75"(1905mm)	70"(1778mm)	TMCE-6470-NNNNC	C	\$ 7779.24	\$ 7842.74


Planes Base for 120° Corner Table

Electric Adjustment



TMCZ-5858-NCEB

Class TA - GAS; Open Market



*Height range includes 1.18" (20mm) work surface



Features

- Includes:
 - Two telescoping columns
 - One center post leg
 - Pair of steel feet (O-leg)
 - Fixed J-Rail frame system
 - Two End Brackets
 - Control Box
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5" (13mm) of adjustment
 - 9' (2743mm) long black power cord with NEMA 5-15P Plug and 5' (1524mm) cable extension (with top width 52" (1321mm) or greater)
- Electric Height Adjustment:
 - Speed: 1.4" (36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9" (480mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9" (658mm) - 26.7" (678mm) of continuous adjustment.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- **Maximum work top width overhang allowed is 6" (152mm) on each side.**
- **Refer to specification guide for work surface weight.**
- Select a worksurface that accommodates 1" (25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 300 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed to be used with casters
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

① Height Adjustment Actuator Options:

Standard Range

(Single Stage):

E Standard**R** Programmable
(add **\$202.15** list)

Extended Range

(Dual Stage, Low):

P Standard**S** Programmable
(add **\$202.15** list)

(Dual Stage, High):

Q Standard**T** Programmable
(add **\$202.15** list)

2) Base trim color.

Top
Left/Right
Depth

Minimum
Top Width

Maximum
Top Width

Length

Number

①

Trim
A B

Standard Range (Single Stage)

23"(584mm)/23"(584mm)	52"(1321mm)	57"(1448mm)	52"(1321mm)	TMCZ-5252-NNNNC	B	\$6068.04	\$ 6130.92
	58"(1473mm)	63"(1600mm)	58"(1473mm)	TMCZ-5858-NNNNC	B	6132.30	6195.18
29"(737mm)/29"(737mm)	52"(1321mm)	57"(1448mm)	52"(1321mm)	TMCZ-5252-NNNNC	C	\$6098.64	\$ 6161.52
	58"(1473mm)	63"(1600mm)	58"(1473mm)	TMCZ-5858-NNNNC	C	6162.90	6225.78


Extended Range (Dual Stage)

23"(584mm)/23"(584mm)	52"(1321mm)	57"(1448mm)	52"(1321mm)	TMCZ-5252-NNNNC	B	\$ 7703.96	\$7766.84
	58"(1473mm)	63"(1600mm)	58"(1473mm)	TMCZ-5858-NNNNC	B	7768.22	7831.10
29"(737mm)/29"(737mm)	52"(1321mm)	57"(1448mm)	52"(1321mm)	TMCZ-5252-NNNNC	C	\$ 7734.56	\$7797.44
	58"(1473mm)	63"(1600mm)	58"(1473mm)	TMCZ-5858-NNNNC	C	7798.82	7861.70

Planes LT


Catalog Logic

TL RA - 23 46 - L J S N C E

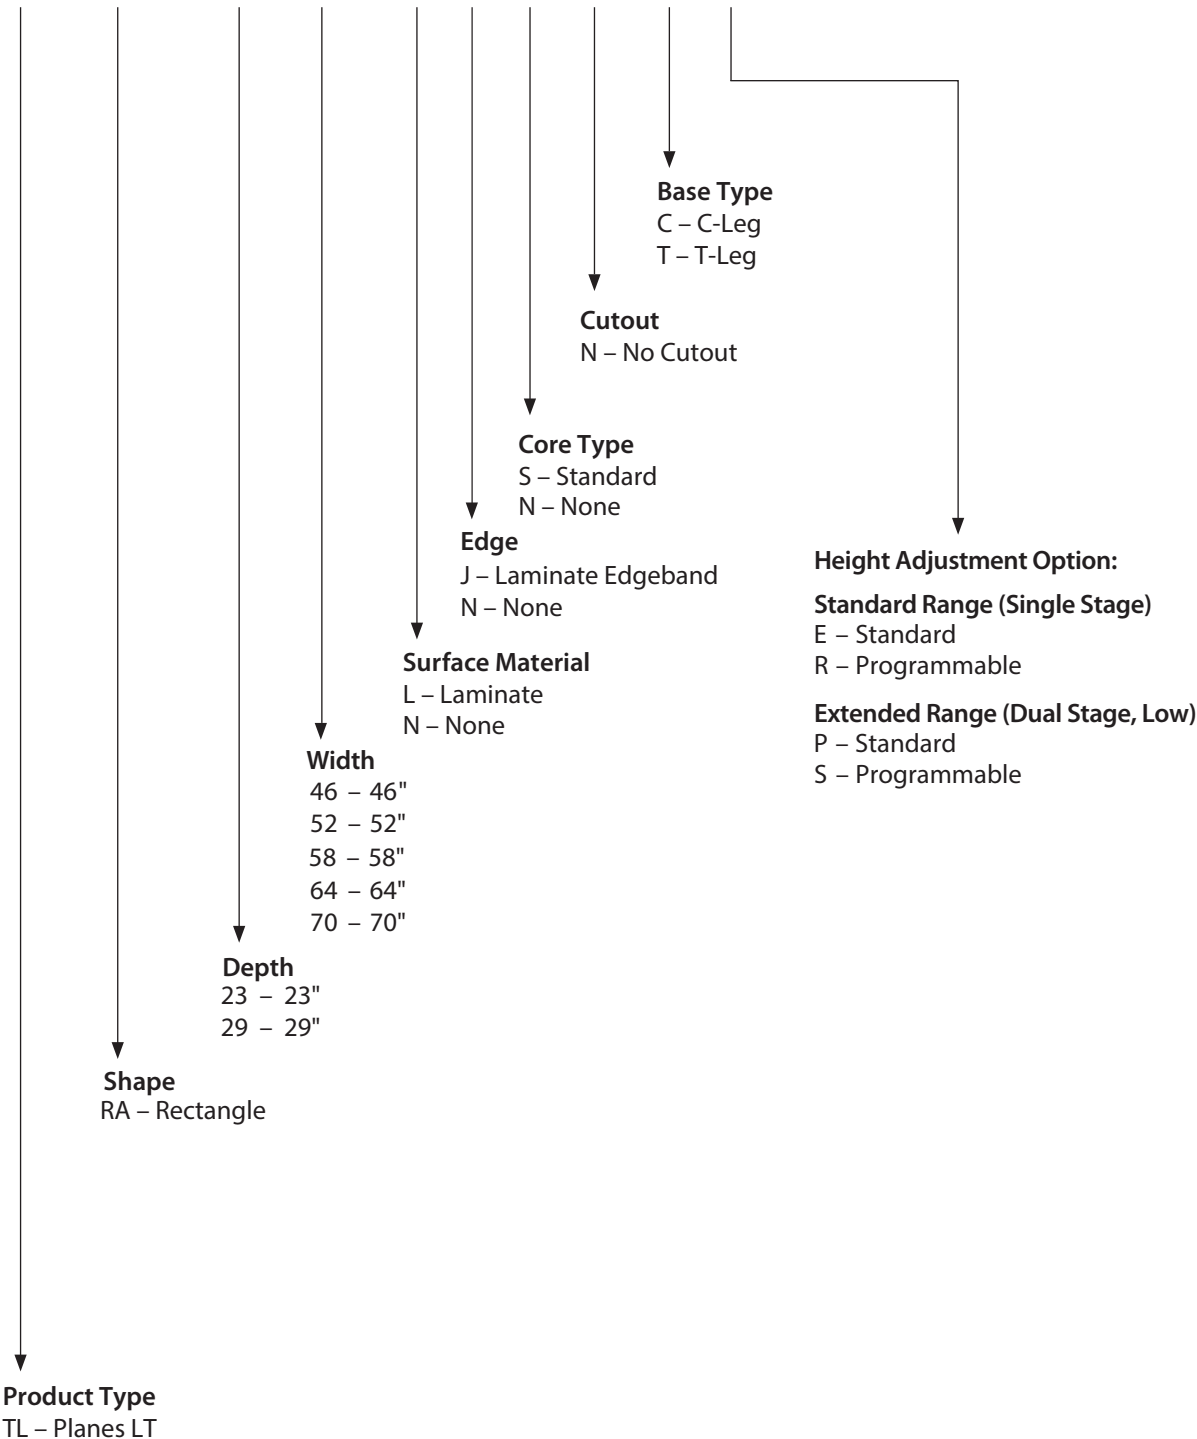

Planes LT — Rectangular


Electric Adjustment




C-Leg

TLRA-2358-LJSNCP

Class TA - SIN 33721; Discount Group XXVIII



T-Leg



*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - Frameless C-leg and T-leg telescoping base assembly system
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P Plug to the building
- Worksurface:
 - Laminate worksurface with 3mm edgeband
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for pinch point clearance and cable accommodation; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 250 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Base Option:

C C-leg

T T-leg

2 Height Adjustment Actuator Options:

Standard Range (Single Stage):

E Standard

R Programmable
(add **\$201.74** list)

Extended Range (Dual Stage):

P Standard

S Programmable
(add **\$201.74** list)

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$59.95 upcharge list for Grade B trim colors.


Planes LT — Rectangular

Electric Adjustment

Depth	Width	Number	①②	Laminate		
				A	B	E
Standard Range (Single Stage)						
23"(584mm)	46"(1168mm)	TLRA-2346-LJSN		\$2093.45	\$ 2139.11	\$ 2301.99
	52"(1321mm)	TLRA-2352-LJSN		2125.43	2176.88	2360.65
	58"(1473mm)	TLRA-2358-LJSN		2157.42	2214.65	2419.31
	64"(1626mm)	TLRA-2364-LJSN		2189.40	2252.42	2477.97
	70"(1778mm)	TLRA-2370-LJSN		2221.38	2290.19	2536.64
29"(737mm)	46"(1168mm)	TLRA-2946-LJSN		\$ 2183.15	\$2240.38	\$2445.04
	52"(1321mm)	TLRA-2952-LJSN		2223.16	2287.69	2518.69
	58"(1473mm)	TLRA-2958-LJSN		2263.17	2335.00	2592.35
	64"(1626mm)	TLRA-2964-LJSN		2303.18	2382.31	2666.00
	70"(1778mm)	TLRA-2970-LJSN		2343.19	2429.62	2739.65
Extended Range (Dual Stage)						
23"(584mm)	46"(1168mm)	TLRA-2346-LJSN		\$ 2470.54	\$ 2516.20	\$ 2679.08
	52"(1321mm)	TLRA-2352-LJSN		2502.52	2553.97	2737.74
	58"(1473mm)	TLRA-2358-LJSN		2534.51	2591.74	2796.40
	64"(1626mm)	TLRA-2364-LJSN		2566.49	2629.51	2855.06
	70"(1778mm)	TLRA-2370-LJSN		2598.47	2667.28	2913.73
29"(737mm)	46"(1168mm)	TLRA-2946-LJSN		\$2560.24	\$ 2617.47	\$ 2822.13
	52"(1321mm)	TLRA-2952-LJSN		2600.25	2664.78	2895.78
	58"(1473mm)	TLRA-2958-LJSN		2640.26	2712.09	2969.44
	64"(1626mm)	TLRA-2964-LJSN		2680.27	2759.40	3043.09
	70"(1778mm)	TLRA-2970-LJSN		2720.28	2806.71	3116.74


Planes LT Corners

Catalog Logic

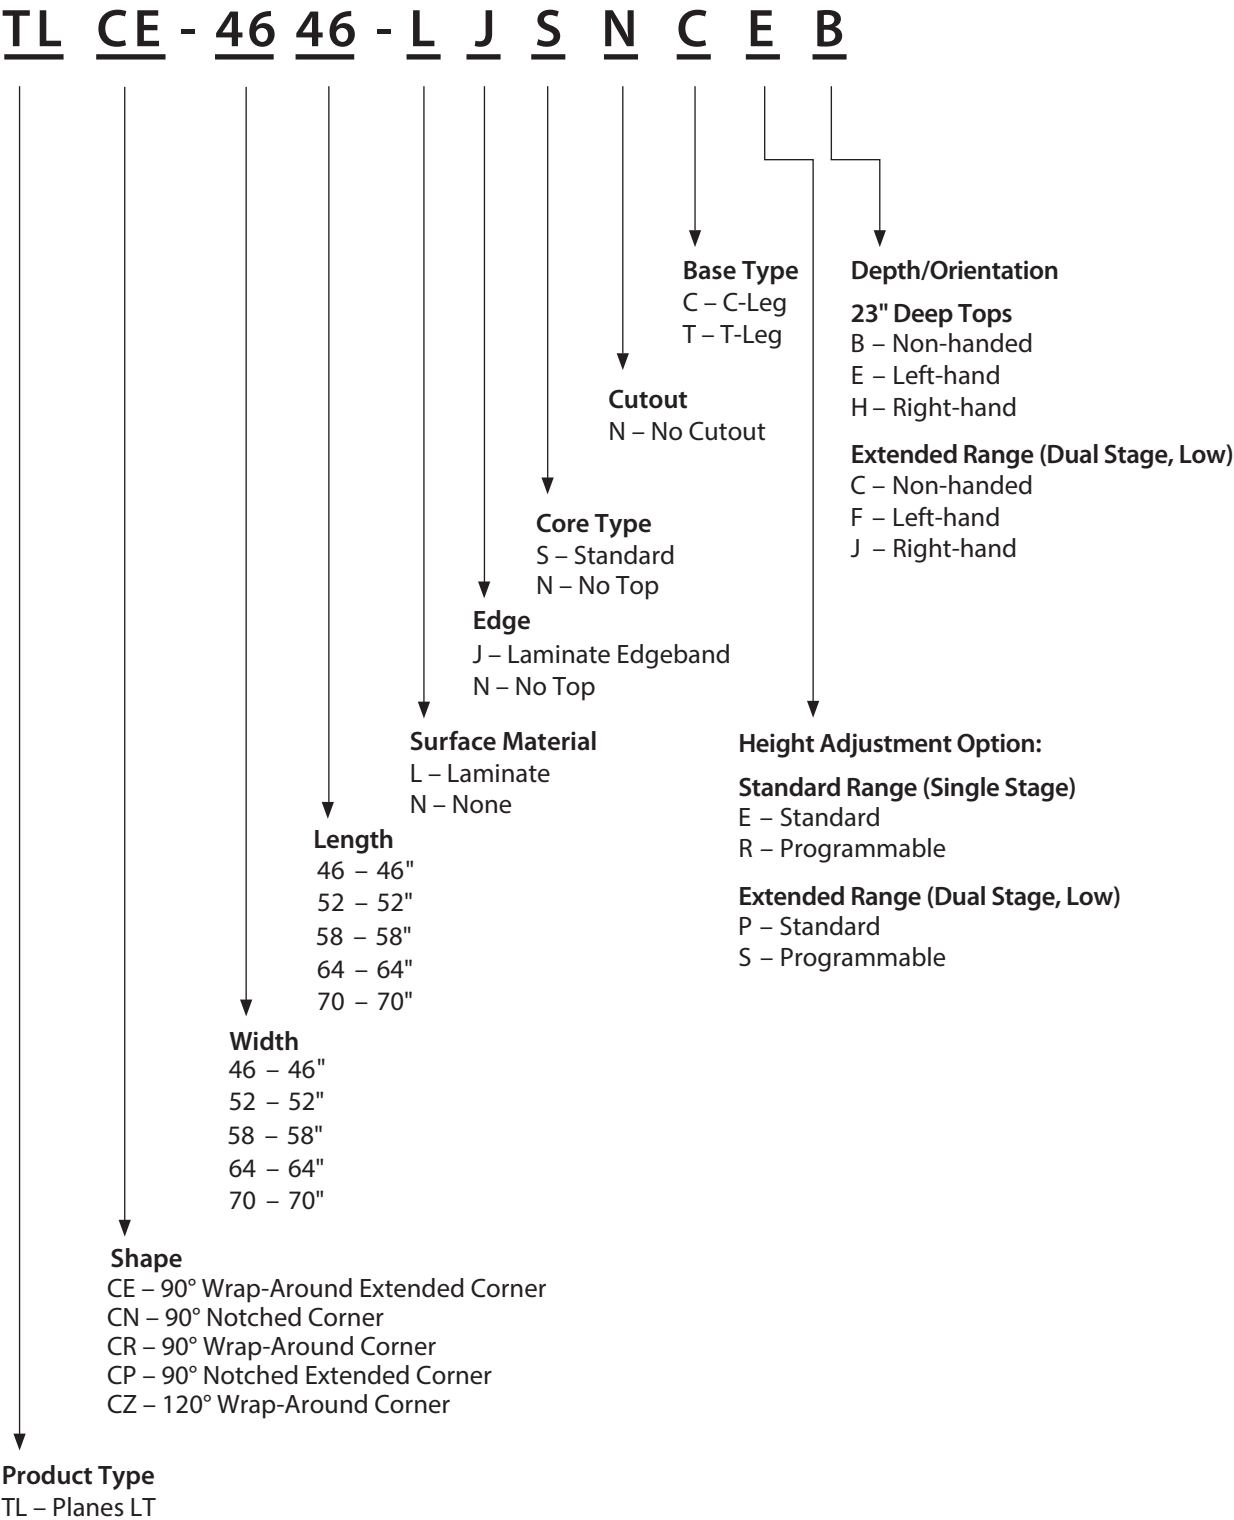


Planes LT 90° Equal Corner — Notched

Electric Adjustment



C-Leg


TLON-5858-LJSNCPB



C-Leg

TLON-6464-LJSNOPE
(Left-hand Orientation)

Class TA – SIN 3372; Discount Group X



*Height range includes
1.18" (20mm) worksurface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - Frameless C-leg telescoping base assembly system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension (with top widths 52"(1321mm) or greater)
- Worksurface:
 - Laminate worksurface with 3mm edgeband
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Size of worksurface will determine whether top comes in 1 or 2 pieces.
 - 64"(1626mm) wide and greater will default to 2 pieces.
 - 64"(1626mm) 2-piece top includes a 46"(1168mm) corner and 18"(457mm) rectangular top.
 - 70"(1778mm) includes a 52"(1321mm) corner and 18"(457mm) rectangular top.
 - Two-piece top includes L rail and connection plates.
 - Two-piece tops are available with edgeband ONLY.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- One-piece tops are non-handed; two-piece tops are handed.
- The "seamless" primary user side of the table (side without rectangle extension) determines the handedness from a seated position.
- Total lifting capacity of table is 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed for use with Casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Actuator Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add \$201.74 list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add \$201.74 list)

2 Depth and Orientation:

23" deep tops:

- B** Non-handed (52" and 58" widths)
- E** LH (64" and 70" widths) two-piece top
- H** RH (64" and 70" widths) two-piece top

29" deep tops:

- C** Non-handed (52" and 58" widths)
- F** LH (64" and 70" widths) two-piece top
- J** RH (64" and 70" widths) two-piece top

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$59.95 upcharge list for Grade B trim colors.


Planes LT 90° Equal Corner — Notched

Electric Adjustment


Left/Right Depth	Width	Length	Top Pieces	Number	12	Laminate	
						A	B
Standard Range (Single Stage)							
23"(584mm)/23"(584mm)	52"(1321mm)	52"(1321mm)	1	TLON-5252-LJSNC	B	\$ 3701.65	\$ 3836.65
	58"(1473mm)	58"(1473mm)	1	TLON-5858-LJSNC	B	3782.95	3930.67
	64"(1626mm)	64"(1626mm)	2	TLON-6464-LJSNC		4116.43	4276.87
	70"(1778mm)	70"(1778mm)	2	TLON-7070-LJSNC		4197.73	4370.89
29"(737mm)/29"(737mm)	52"(1321mm)	52"(1321mm)	1	TLON-5252-LJSNC	C	\$ 3751.78	\$ 3886.78
	58"(1473mm)	58"(1473mm)	1	TLON-5858-LJSNC	C	3833.08	3980.80
	64"(1626mm)	64"(1626mm)	2	TLON-6464-LJSNC		4166.56	4327.00
	70"(1778mm)	70"(1778mm)	2	TLON-7070-LJSNC		4247.86	4421.02
Extended Range (Dual Stage)							
23"(584mm)/23"(584mm)	52"(1321mm)	52"(1321mm)	1	TLON-5252-LJSNC	B	\$ 4161.33	\$ 4296.33
	58"(1473mm)	58"(1473mm)	1	TLON-5858-LJSNC	B	4242.63	4390.35
	64"(1626mm)	64"(1626mm)	2	TLON-6464-LJSNC		4576.11	4736.55
	70"(1778mm)	70"(1778mm)	2	TLON-7070-LJSNC		4657.41	4830.57
29"(737mm)/29"(737mm)	52"(1321mm)	52"(1321mm)	1	TLON-5252-LJSNC	C	\$ 4211.46	\$ 4346.46
	58"(1473mm)	58"(1473mm)	1	TLON-5858-LJSNC	C	4292.76	4440.48
	64"(1626mm)	64"(1626mm)	2	TLON-6464-LJSNC		4626.24	4786.68
	70"(1778mm)	70"(1778mm)	2	TLON-7070-LJSNC		4707.54	4880.70

Planes LT 90° Equal Corner — Wrap-Around

Electric Adjustment




TLOR-6858-LJSNCPB



TLOR-6464-LJSNOPE
(Left-hand Orientation)

Class TA – SIN 33721; Discount Group X



*Height range includes
1.18" (20mm) worksurface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - Frameless C-leg telescoping base assembly system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension (with top widths 52"(1321mm) or greater)
- Worksurface
 - Laminate worksurface with 3mm edgeband
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Size of worksurface will determine whether top comes in 1 or 2 pieces. 64"(1626mm) wide and greater will default to 2 pieces.
 - 64"(1626mm)64"(1626mm) 2-piece top includes a 46"(1168mm) corner and 18"(457mm) rectangular top.
 - 70"(1778mm) includes a 52"(1321mm) corner and 18"(457mm) rectangular top.
 - Two-piece top includes L rail and connection plates.
 - Two-piece tops are available with edgeband ONLY.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- One-piece tops are non-handed; two-piece tops are handed.
- The "seamless" primary user side of the table (side without rectangle extension) determines the handedness from a seated position.
- Total lifting capacity of table is 300 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed for use with Casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Actuator Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add \$201.74 list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add \$201.74 list)

2 Depth and Orientation:

23" deep tops:

- B** Non-handed (52" and 58" widths)
- E** LH (64" and 70" widths) two-piece top
- H** RH (64" and 70" widths) two-piece top

29" deep tops:

- C** Non-handed (52" and 58" widths)
- F** LH (64" and 70" widths) two-piece top
- J** RH (64" and 70" widths) two-piece top

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$59.95 upcharge list for Grade B trim colors.


Planes LT 90° Equal Corner — Wrap-Around

Electric Adjustment


Left/Right Depth	Width	Length	Top Pieces	Number	①②	Laminate A	B
Standard Range (Single Stage)							
23"(584mm)/23"(584mm)	52"(1321mm)	52"(1321mm)	1	TLOR-5252-LJSNC	B	\$3644.02	\$3779.02
	58"(1473mm)	58"(1473mm)	1	TLOR-5858-LJSNC	B	3725.32	3873.04
	64"(1626mm)	64"(1626mm)	2	TLOR-6464-LJSNC		4058.80	4219.24
	70"(1778mm)	70"(1778mm)	2	TLOR-7070-LJSNC		4140.10	4313.26
29"(737mm)/29"(737mm)	52"(1321mm)	52"(1321mm)	1	TLOR-5252-LJSNC	C	\$ 3694.15	\$ 3829.15
	58"(1473mm)	58"(1473mm)	1	TLOR-5858-LJSNC	C	3775.45	3923.17
	64"(1626mm)	64"(1626mm)	2	TLOR-6464-LJSNC		4108.93	4269.37
	70"(1778mm)	70"(1778mm)	2	TLOR-7070-LJSNC		4190.23	4363.39
Extended Range (Dual Stage)							
23"(584mm)/23"(584mm)	52"(1321mm)	52"(1321mm)	1	TLOR-5252-LJSNC	B	\$ 4103.70	\$4238.70
	58"(1473mm)	58"(1473mm)	1	TLOR-5858-LJSNC	B	4185.00	4332.72
	64"(1626mm)	64"(1626mm)	2	TLOR-6464-LJSNC		4518.48	4678.92
	70"(1778mm)	70"(1778mm)	2	TLOR-7070-LJSNC		4599.78	4772.94
29"(737mm)/29"(737mm)	52"(1321mm)	52"(1321mm)	1	TLOR-5252-LJSNC	C	\$ 4153.83	\$4288.83
	58"(1473mm)	58"(1473mm)	1	TLOR-5858-LJSNC	C	4235.13	4382.85
	64"(1626mm)	64"(1626mm)	2	TLOR-6464-LJSNC		4568.61	4729.05
	70"(1778mm)	70"(1778mm)	2	TLOR-7070-LJSNC		4649.91	4823.07

Planes LT 90° Equal Corner — Notched Extended


Electric Adjustment



TLCP-4670-LJSNOPE
(Left-hand Orientation)



TLCP-5270-LJSNOPE
(Left-hand Orientation)
Class TA – SIN 3372i; Discount Group X



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - Frameless C-leg telescoping base assembly system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15 plug and 5'(1524mm) cable extension (with top widths 52"(1321mm) or greater)
- Worksurface:
 - Laminate worksurface with 3mm edgeband
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Top sizes 64"(1626mm) x 70"(1778mm) and larger will default to 2-pieces.
 - A 64"(1626mm) x 70"(1778mm) worksurface will include a 46"(1168mm) corner and 18"(457mm) rectangle extension.
 - Two-piece top includes L rail and connection plates.
 - Two-piece tops are available with edgeband ONLY.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- One-piece tops are non-handed; two-piece tops are handed.
- The "seamless" primary user side of the table (side without rectangle extension) determines the handedness from a seated position.
- Total lifting capacity of table is 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed for use with Casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Actuator Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add \$201.74 list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add \$201.74 list)

2 Depth and Orientation:

23" deep tops:

- E** Left-hand
- H** Right-hand

29" deep tops:

- F** Left-hand
- J** Right-hand

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$59.95 upcharge list for Grade B trim colors.


Planes LT 90° Equal Corner — Notched Extended

Electric Adjustment


Left/Right Depth	Width	Length	Top Pieces	Number	12	Laminate		
						A	B	
Standard Range (Single Stage)								
23"(584mm)/23"(584mm)	46"(1168mm)	52"(1321mm)	1	TLOP-4652-LJSNC	■ ■	\$ 3661.00	\$ 3789.64	
		58"(1473mm)	1	TLOP-4658-LJSNC	■ ■	3701.65	3836.65	
		64"(1626mm)	1	TLOP-4664-LJSNC	■ ■	3742.30	3883.66	
		70"(1778mm)	1	TLOP-4670-LJSNC	■ ■	3782.95	3930.67	
	52"(1321mm)	58"(1473mm)	1	TLOP-5258-LJSNC	■ ■	\$ 3742.30	\$ 3883.66	
		64"(1626mm)	1	TLOP-5264-LJSNC	■ ■	3782.95	3930.67	
		70"(1778mm)	1	TLOP-5270-LJSNC	■ ■	3823.60	3977.68	
		58"(1473mm)	64"(1626mm)	1	TLOP-5864-LJSNC	■ ■	\$ 3823.60	\$ 3977.68
	58"(1473mm)	70"(1778mm)	1	TLOP-5870-LJSNC	■ ■	3864.25	4024.69	
		64"(1626mm)	70"(1778mm)	2	TLOP-6470-LJSNC	■ ■	\$ 4157.08	\$ 4323.88
	29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TLOP-4652-LJSNC	■ ■	\$ 3711.13	\$ 3839.77
			58"(1473mm)	1	TLOP-4658-LJSNC	■ ■	3751.78	3886.78
64"(1626mm)			1	TLOP-4664-LJSNC	■ ■	3792.43	3933.79	
70"(1778mm)			1	TLOP-4670-LJSNC	■ ■	3833.08	3980.80	
52"(1321mm)		58"(1473mm)	1	TLOP-5258-LJSNC	■ ■	\$ 3792.43	\$ 3933.79	
		64"(1626mm)	1	TLOP-5264-LJSNC	■ ■	3833.08	3980.80	
		70"(1778mm)	1	TLOP-5270-LJSNC	■ ■	3873.73	4027.81	
		58"(1473mm)	64"(1626mm)	1	TLOP-5864-LJSNC	■ ■	\$ 3873.73	\$ 4027.81
58"(1473mm)		70"(1778mm)	1	TLOP-5870-LJSNC	■ ■	3914.38	4074.82	
		64"(1626mm)	70"(1778mm)	2	TLOP-6470-LJSNC	■ ■	\$ 4207.21	\$ 4374.01
Extended Range (Dual Stage)								
23"(584mm)/23"(584mm)		46"(1168mm)	52"(1321mm)	1	TLOP-4652-LJSNC	■ ■	\$ 4120.68	\$ 4249.32
	58"(1473mm)		1	TLOP-4658-LJSNC	■ ■	4161.33	4296.33	
	64"(1626mm)		1	TLOP-4664-LJSNC	■ ■	4201.98	4343.34	
	70"(1778mm)		1	TLOP-4670-LJSNC	■ ■	4242.63	4390.35	
	52"(1321mm)	58"(1473mm)	1	TLOP-5258-LJSNC	■ ■	\$ 4201.98	\$ 4343.34	
		64"(1626mm)	1	TLOP-5264-LJSNC	■ ■	4242.63	4390.35	
		70"(1778mm)	1	TLOP-5270-LJSNC	■ ■	4283.28	4437.36	
		58"(1473mm)	64"(1626mm)	1	TLOP-5864-LJSNC	■ ■	\$ 4283.28	\$ 4437.36
	58"(1473mm)	70"(1778mm)	1	TLOP-5870-LJSNC	■ ■	4323.93	4484.37	
		64"(1626mm)	70"(1778mm)	2	TLOP-6470-LJSNC	■ ■	\$ 4616.76	\$ 4783.56
	29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TLOP-4652-LJSNC	■ ■	\$ 4170.81	\$ 4299.45
			58"(1473mm)	1	TLOP-4658-LJSNC	■ ■	4211.46	4346.46
64"(1626mm)			1	TLOP-4664-LJSNC	■ ■	4252.11	4393.47	
70"(1778mm)			1	TLOP-4670-LJSNC	■ ■	4292.76	4440.48	
52"(1321mm)		58"(1473mm)	1	TLOP-5258-LJSNC	■ ■	\$ 4252.11	\$ 4393.47	
		64"(1626mm)	1	TLOP-5264-LJSNC	■ ■	4292.76	4440.48	
		70"(1778mm)	1	TLOP-5270-LJSNC	■ ■	4333.41	4487.49	
		58"(1473mm)	64"(1626mm)	1	TLOP-5864-LJSNC	■ ■	\$ 4333.41	\$ 4487.49
58"(1473mm)		70"(1778mm)	1	TLOP-5870-LJSNC	■ ■	4374.06	4534.50	
		64"(1626mm)	70"(1778mm)	2	TLOP-6470-LJSNC	■ ■	\$4666.89	\$ 4833.69

Planes LT 90° Equal Corner — Wrap-Around Extended


Electric Adjustment



TLCE-4664-LJSNOPE
(Left-hand Orientation)

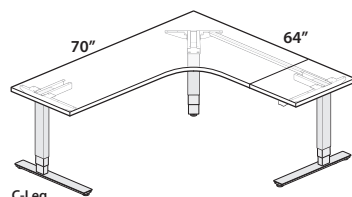

TLCE-6470-LJSNOPE
(Left-hand Orientation)
Class TA – SIN 3372; Discount Group X



*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - Frameless C-leg telescoping base assembly system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension (with top widths 52"(1321mm) or greater)
- Worksurface:
 - Laminate worksurface with 3mm edgeband
 - 3mm Edgeband on user edge and 1mm on remaining edges
 - Top sizes 64"(1626mm) x and larger will default to 2-pieces.
 - A 64"(1626mm) x 70"(1778mm) worksurface will include a 46"(1168mm) corner and 18"(457mm) rectangle extension.
 - Two-piece top includes L rail and connection plates.
 - Two-piece tops are available with edgeband ONLY.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second.
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- One-piece tops are non-handed; two-piece tops are handed.
- The "seamless" primary user side of the table (side without rectangle extension) determines the handedness from a seated position.
- Total lifting capacity of table is 300 lbs (3-leg) including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed for use with Casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Actuator Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add \$201.74 list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add \$201.74 list)

2 Depth and Orientation:

23" deep tops:

- E** Left-hand
- H** Right-hand

29" deep tops:

- F** Left-hand
- J** Right-hand

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$59.95 upcharge list for Grade B trim colors.


Planes LT 90° Equal Corner — Wrap-Around Extended

Electric Adjustment

Left/Right Depth	Width	Length	Top Pieces	Number	①②	Laminate A	B		
Standard Range (Single Stage)									
23"(584mm)/23"(584mm)	46"(1168mm)	52"(1321mm)	1	TLCE-4652-LJSNC	■ ■	\$ 3603.37	\$ 3732.01		
		58"(1473mm)	1	TLCE-4658-LJSNC	■ ■	3644.02	3779.02		
		64"(1626mm)	1	TLCE-4664-LJSNC	■ ■	3684.67	3826.03		
		70"(1778mm)	1	TLCE-4670-LJSNC	■ ■	3725.32	3873.04		
	52"(1321mm)	58"(1473mm)	1	TLCE-5258-LJSNC	■ ■	\$ 3684.67	\$ 3826.03		
		64"(1626mm)	1	TLCE-5264-LJSNC	■ ■	3725.32	3873.04		
		70"(1778mm)	1	TLCE-5270-LJSNC	■ ■	3765.97	3920.05		
		58"(1473mm)	64"(1626mm)	1	TLCE-5864-LJSNC	■ ■	\$ 3765.97	\$ 3920.05	
		70"(1778mm)	1	TLCE-5870-LJSNC	■ ■	3806.62	3967.06		
		64"(1626mm)	70"(1778mm)	2	TLCE-6470-LJSNC	■ ■	\$ 4099.45	\$ 4266.25	
		29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TLCE-4652-LJSNC	■ ■	\$ 3653.50	\$ 3782.14
				58"(1473mm)	1	TLCE-4658-LJSNC	■ ■	3694.15	3829.15
64"(1626mm)	1			TLCE-4664-LJSNC	■ ■	3734.80	3876.16		
70"(1778mm)	1			TLCE-4670-LJSNC	■ ■	3775.45	3923.17		
	52"(1321mm)	58"(1473mm)	1	TLCE-5258-LJSNC	■ ■	\$ 3734.80	\$ 3876.16		
		64"(1626mm)	1	TLCE-5264-LJSNC	■ ■	3775.45	3923.17		
		70"(1778mm)	1	TLCE-5270-LJSNC	■ ■	3816.10	3970.18		
		58"(1473mm)	64"(1626mm)	1	TLCE-5864-LJSNC	■ ■	\$ 3816.10	\$ 3970.18	
		70"(1778mm)	1	TLCE-5870-LJSNC	■ ■	3856.75	4017.19		
		64"(1626mm)	70"(1778mm)	2	TLCE-6470-LJSNC	■ ■	\$ 4149.58	\$ 4316.38	
		Extended Range (Dual Stage)							
		23"(584mm)/23"(584mm)	46"(1168mm)	52"(1321mm)	1	TLCE-4652-LJSNC	■ ■	\$ 4063.05	\$ 4191.69
58"(1473mm)	1			TLCE-4658-LJSNC	■ ■	4103.70	4238.70		
64"(1626mm)	1			TLCE-4664-LJSNC	■ ■	4144.35	4285.71		
70"(1778mm)	1			TLCE-4670-LJSNC	■ ■	4185.00	4332.72		
	52"(1321mm)	58"(1473mm)	1	TLCE-5258-LJSNC	■ ■	\$ 4144.35	\$ 4285.71		
		64"(1626mm)	1	TLCE-5264-LJSNC	■ ■	4185.00	4332.72		
		70"(1778mm)	1	TLCE-5270-LJSNC	■ ■	4225.65	4379.73		
		58"(1473mm)	64"(1626mm)	1	TLCE-5864-LJSNC	■ ■	\$ 4225.65	\$ 4379.73	
		70"(1778mm)	1	TLCE-5870-LJSNC	■ ■	4266.30	4426.74		
		64"(1626mm)	70"(1778mm)	2	TLCE-6470-LJSNC	■ ■	\$ 4559.13	\$ 4725.93	
		29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TLCE-4652-LJSNC	■ ■	\$ 4113.18	\$ 4241.82
				58"(1473mm)	1	TLCE-4658-LJSNC	■ ■	4153.83	4288.83
64"(1626mm)	1			TLCE-4664-LJSNC	■ ■	4194.48	4335.84		
70"(1778mm)	1			TLCE-4670-LJSNC	■ ■	4235.13	4382.85		
	52"(1321mm)	58"(1473mm)	1	TLCE-5258-LJSNC	■ ■	\$ 4194.48	\$ 4335.84		
		64"(1626mm)	1	TLCE-5264-LJSNC	■ ■	4235.13	4382.85		
		70"(1778mm)	1	TLCE-5270-LJSNC	■ ■	4275.78	4429.86		
		58"(1473mm)	64"(1626mm)	1	TLCE-5864-LJSNC	■ ■	\$ 4275.78	\$ 4429.86	
		70"(1778mm)	1	TLCE-5870-LJSNC	■ ■	4316.43	4476.87		
		64"(1626mm)	70"(1778mm)	2	TLCE-6470-LJSNC	■ ■	\$ 4609.26	\$ 4776.06	

Planes LT 120° Corner — Wrap-Around


Electric Adjustment



C-Leg

TLCZ-5858-LJSNCPB

Class TA - SIN 33721; Discount Group X



Features

- Includes:
 - 1.18"(30mm) thick work surface
 - Frameless C-leg telescoping base assembly system
 - One center post leg
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension (with top widths 52"(1321mm) or greater)
- Worksurface
 - Laminate worksurface with 3mm edgeband
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Worksurfaces are dimensioned to allow for 2"(51mm) pinch point clearance and cable accommodation. (e.g. 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- Total lifting capacity of table is 300 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not design for use with casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

① Height Adjustment Actuator Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add **\$201.74** list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add **\$201.74** list)

2) Laminate surface color.

3) Edge trim color.


4) Base trim color.

Note: \$59.95 upcharge list for Grade B trim colors.

Left/Right Depth	Width	Length	Top Pieces	Number	①	Laminate A	B
Standard Range (Single Stage)							
23"(584mm)/23"(584mm)	46"(1168mm)	46"(1168mm)	1	TLCZ-4646-LJSNC	B	\$3995.00	\$ 4117.28
	52"(1321mm)	52"(1321mm)	1	TLCZ-5252-LJSNC	B	4076.30	4211.30
	58"(1473mm)	58"(1473mm)	1	TLCZ-5858-LJSNC	B	4157.60	4305.32
29"(737mm)/29"(737mm)	46"(1168mm)	46"(1168mm)		TLCZ-4646-LJSNC	C	\$ 4045.13	\$ 4167.41
	52"(1321mm)	52"(1321mm)	1	TLCZ-5252-LJSNC	C	4126.43	4261.43
	58"(1473mm)	58"(1473mm)	1	TLCZ-5858-LJSNC	C	4207.73	4355.45
Extended Range (Dual Stage)							
23"(584mm)/23"(584mm)	46"(1168mm)	46"(1168mm)		TLCZ-4646-LJSNC	B	\$4454.68	\$4576.96
	52"(1321mm)	52"(1321mm)	1	TLCZ-5252-LJSNC	B	4535.98	4670.98
	58"(1473mm)	58"(1473mm)	1	TLCZ-5858-LJSNC	B	4617.28	4765.00
29"(737mm)/29"(737mm)	46"(1168mm)	46"(1168mm)		TLCZ-4646-LJSNC	C	\$ 4504.81	\$4627.09
	52"(1321mm)	52"(1321mm)	1	TLCZ-5252-LJSNC	C	4586.11	4721.11
	58"(1473mm)	58"(1473mm)	1	TLCZ-5858-LJSNC	C	4667.41	4815.13


Planes LT Base for Rectangular Table

Electric Adjustment



C-Leg


TLRA-2946-NNNNTP



T-Leg

TLRA-2946-NNNNTP

Class TA - SIN 3372; Discount Group XXVIII



*Height range includes 1.18" (20mm) work surface



Features

- Includes:
 - Two telescoping columns with steel motor housing enclosure
 - Pair of steel feet (C-leg or T-leg)
 - Two End Brackets
 - Control Box
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P Plug to the building
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.

Specification Tips

- **Maximum work top width overhang allowed is 6"(152mm) on each side.**
- **Refer to specification guide for work surface weight.**
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 250 lbs including surface; applied weight should be evenly distributed.
- For applications using attached worktools (monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Separately specified caster kit available.
- Base Only Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Base Options:

C C-leg

T T-leg

2 Height Adjustment Options:

Standard Range (Single Stage):

E Standard

R Programmable
(add **\$201.74** list)

Extended Range (Dual Stage):

P Standard

S Programmable
(add **\$201.74** list)

2) Base trim color.


Planes LT Base for Rectangular Table

Electric Adjustment


Depth	Minimum Top Width	Maximum Top Width	Number	①②	Trim A	B
Standard Range (Single Stage)						
23"(584mm)	46"(1168mm)	51"(1295mm)	TLRA-2346-NNNN	■ ■	\$ 1972.71	\$2032.66
	52"(1321mm)	57"(1448mm)	TLRA-2352-NNNN	■ ■	1972.71	2032.66
	58"(1473mm)	63"(1600mm)	TLRA-2358-NNNN	■ ■	1972.71	2032.66
	64"(1626mm)	69"(1753mm)	TLRA-2364-NNNN	■ ■	1972.71	2032.66
	70"(1778mm)	75"(1905mm)	TLRA-2370-NNNN	■ ■	1972.71	2032.66
29"(737mm)	46"(1168mm)	51"(1295mm)	TLRA-2946-NNNN	■ ■	\$ 2001.53	\$ 2061.48
	52"(1321mm)	57"(1448mm)	TLRA-2952-NNNN	■ ■	2001.53	2061.48
	58"(1473mm)	63"(1600mm)	TLRA-2958-NNNN	■ ■	2001.53	2061.48
	64"(1626mm)	69"(1753mm)	TLRA-2964-NNNN	■ ■	2001.53	2061.48
	70"(1778mm)	75"(1905mm)	TLRA-2970-NNNN	■ ■	2001.53	2061.48
Extended Range (Dual Stage)						
23"(584mm)	46"(1168mm)	51"(1295mm)	TLRA-2346-NNNN	■ ■	\$2376.20	\$ 2436.15
	52"(1321mm)	57"(1448mm)	TLRA-2352-NNNN	■ ■	2376.20	2436.15
	58"(1473mm)	63"(1600mm)	TLRA-2358-NNNN	■ ■	2376.20	2436.15
	64"(1626mm)	69"(1753mm)	TLRA-2364-NNNN	■ ■	2376.20	2436.15
	70"(1778mm)	75"(1905mm)	TLRA-2370-NNNN	■ ■	2376.20	2436.15
29"(737mm)	46"(1168mm)	51"(1295mm)	TLRA-2946-NNNN	■ ■	\$2405.02	\$2464.97
	52"(1321mm)	57"(1448mm)	TLRA-2952-NNNN	■ ■	2405.02	2464.97
	58"(1473mm)	63"(1600mm)	TLRA-2958-NNNN	■ ■	2405.02	2464.97
	64"(1626mm)	69"(1753mm)	TLRA-2964-NNNN	■ ■	2405.02	2464.97
	70"(1778mm)	75"(1905mm)	TLRA-2970-NNNN	■ ■	2405.02	2464.97

Planes LT Base for 90° Equal Corner Table


Electric Adjustment



TLOR-6858-NNNNOPB



TLOR-6464-NNNNOPB
(Left-hand Orientation)
Class TA - SIN 33721



*Height range includes
1.18" (20mm) workspace



Features

- Includes:
 - Two telescoping columns with steel motor housing enclosure
 - One center post leg with steel motor housing enclosure
 - Pair of steel feet (C-leg)
 - Three End Brackets
 - Control Box
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(0mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P Plug to the building and 5'(1524mm) cable extension (with top widths 52"(1321mm) or greater)
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.

Specification Tips

- **Maximum work top width overhang allowed is 6"(152mm) on each side.**
- **Refer to specification guide for work surface weight.**
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 300 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed to be used with casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Options:

Standard Range (Single Stage):

E Standard

R Programmable
(add **\$201.74** list)

Extended Range (Dual Stage):

P Standard

S Programmable
(add **\$201.74** list)

2) Base trim color.


Planes LT Base for 90° Equal Corner Table

Electric Adjustment


Top Left/Right Depth	Minimum Top Width	Maximum Top Width	Number	①	Trim A	B
Standard Range (Single Stage)						
23"(584mm)/23"(584mm)	52"(1321mm)	57"(1448mm)	TLCR-5252-NNNNC	B	\$ 2929.53	\$2989.48
	58"(1473mm)	63"(1600mm)	TLCR-5858-NNNNC	B	2929.53	2989.48
	64"(1626mm)	69"(1753mm)	TLCR-6464-NNNNC	B	3181.71	3241.66
	70"(1778mm)	75"(1905mm)	TLCR-7070-NNNNC	B	3181.71	3241.66
29"(737mm)/29"(737mm)	52"(1321mm)	57"(1448mm)	TLCR-5252-NNNNC	C	\$ 2977.08	\$3037.03
	58"(1473mm)	63"(1600mm)	TLCR-5858-NNNNC	C	2977.08	3037.03
	64"(1626mm)	69"(1753mm)	TLCR-6464-NNNNC	C	3229.26	3289.21
	70"(1778mm)	75"(1905mm)	TLCR-7070-NNNNC	C	3229.26	3289.21
Extended Range (Dual Stage)						
23"(584mm)/23"(584mm)	52"(1321mm)	57"(1448mm)	TLCR-5252-NNNNC	B	\$ 3389.21	\$ 3449.16
	58"(1473mm)	63"(1600mm)	TLCR-5858-NNNNC	B	3389.21	3449.16
	64"(1626mm)	69"(1753mm)	TLCR-6464-NNNNC	B	3641.39	3701.34
	70"(1778mm)	75"(1905mm)	TLCR-7070-NNNNC	B	3641.39	3701.34
29"(737mm)/29"(737mm)	52"(1321mm)	57"(1448mm)	TLCR-5252-NNNNC	C	\$ 3436.76	\$ 3496.71
	58"(1473mm)	63"(1600mm)	TLCR-5858-NNNNC	C	3436.76	3496.71
	64"(1626mm)	69"(1753mm)	TLCR-6464-NNNNC	C	3688.94	3748.89
	70"(1778mm)	75"(1905mm)	TLCR-7070-NNNNC	C	3688.94	3748.89

Planes LT Base for 90° Extended Corner Table


Electric Adjustment



TLCE-4670-NNNNCPB
(Left-hand Orientation)



TLCE-5270-NNNNCPB
(Left-hand Orientation)
Class TA - SIN 33721; Discount Group X



*Height range includes
1.18" (20mm) worksurface



Features

- Includes:
 - Two telescoping columns with steel motor housing enclosure
 - One center post leg with steel motor housing enclosure
 - Pair of steel feet
 - Three End Brackets
 - Control Box
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment
 - 9'(2743mm) long black power cord with NEMA 5-15P Plug to the building and 5'(1524mm) cable extension (with top widths 52"(1321mm) or greater)
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8"(655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.

Specification Tips

- **Maximum work top width overhang allowed is 6"(152mm) on each side.**
- **Refer to specification guide for work surface weight.**
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 300 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed to be used with casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Options:

Standard Range (Single Stage):

E Standard

R Programmable
(add **\$201.74** list)

Extended Range (Dual Stage):

P Standard

S Programmable
(add **\$201.74** list)

2) Base trim color.


Planes LT Base for 90° Extended Corner Table

Electric Adjustment

Left/Right Depth	Minimum Top Width	Maximum Top Width	Length	Number	①	Trim A	B	
Standard Range (Single Stage)								
23"(584mm)/23"(584mm)	46"(1168mm)	57"(1448mm)	52"(1321mm)	TLCE-4652-NNNNC	B	\$ 2929.53	\$2989.48	
		63"(1600mm)	58"(1473mm)	TLCE-4658-NNNNC	B	2929.53	2989.48	
		69"(1753mm)	64"(1626mm)	TLCE-4664-NNNNC	B	2929.53	2989.48	
		75"(1905mm)	70"(1778mm)	TLCE-4670-NNNNC	B	2929.53	2989.48	
	52"(1321mm)	63"(1600mm)	58"(1473mm)	TLCE-5258-NNNNC	B	\$ 2929.53	\$2989.48	
		69"(1753mm)	64"(1626mm)	TLCE-5264-NNNNC	B	2929.53	2989.48	
		75"(1905mm)	70"(1778mm)	TLCE-5270-NNNNC	B	2929.53	2989.48	
		58"(1473mm)	69"(1753mm)	64"(1626mm)	TLCE-5864-NNNNC	B	\$ 2929.53	\$2989.48
	58"(1473mm)	75"(1905mm)	70"(1778mm)	TLCE-5870-NNNNC	B	2929.53	2989.48	
		64"(1626mm)	75"(1905mm)	70"(1778mm)	TLCE-6470-NNNNC	B	\$ 3181.71	\$ 3241.66
29"(737mm)/29"(737mm)	46"(1168mm)	57"(1448mm)	52"(1321mm)	TLCE-4652-NNNNC	C	\$ 2977.08	\$3037.03	
		63"(1600mm)	58"(1473mm)	TLCE-4658-NNNNC	C	2977.08	3037.03	
		69"(1753mm)	64"(1626mm)	TLCE-4664-NNNNC	C	2977.08	3037.03	
		75"(1905mm)	70"(1778mm)	TLCE-4670-NNNNC	C	2977.08	3037.03	
	52"(1321mm)	63"(1600mm)	58"(1473mm)	TLCE-5258-NNNNC	C	\$ 2977.08	\$3037.03	
		69"(1753mm)	64"(1626mm)	TLCE-5264-NNNNC	C	2977.08	3037.03	
		75"(1905mm)	70"(1778mm)	TLCE-5270-NNNNC	C	2977.08	3037.03	
		58"(1473mm)	69"(1753mm)	64"(1626mm)	TLCE-5864-NNNNC	C	\$ 2977.08	\$3037.03
	58"(1473mm)	75"(1905mm)	70"(1778mm)	TLCE-5870-NNNNC	C	2977.08	3037.03	
		64"(1626mm)	75"(1905mm)	70"(1778mm)	TLCE-6470-NNNNC	C	\$ 3229.26	\$ 3289.21
Extended Range (Dual Stage)								
23"(584mm)/23"(584mm)	46"(1168mm)	57"(1448mm)	52"(1321mm)	TLCE-4652-NNNNC	B	\$ 3389.21	\$ 3449.16	
		63"(1600mm)	58"(1473mm)	TLCE-4658-NNNNC	B	3389.21	3449.16	
		69"(1753mm)	64"(1626mm)	TLCE-4664-NNNNC	B	3389.21	3449.16	
		75"(1905mm)	70"(1778mm)	TLCE-4670-NNNNC	B	3389.21	3449.16	
	52"(1321mm)	63"(1600mm)	58"(1473mm)	TLCE-5258-NNNNC	B	\$ 3389.21	\$ 3449.16	
		69"(1753mm)	64"(1626mm)	TLCE-5264-NNNNC	B	3389.21	3449.16	
		75"(1905mm)	64"(1626mm)	TLCE-5270-NNNNC	B	3389.21	3449.16	
		58"(1473mm)	69"(1753mm)	64"(1626mm)	TLCE-5864-NNNNC	B	\$ 3389.21	\$ 3449.16
	58"(1473mm)	75"(1905mm)	70"(1778mm)	TLCE-5870-NNNNC	B	3389.21	3449.16	
		64"(1626mm)	75"(1905mm)	70"(1778mm)	TLCE-6470-NNNNC	B	\$ 3641.39	\$ 3701.34
29"(737mm)/29"(737mm)	46"(1168mm)	57"(1448mm)	52"(1321mm)	TLCE-4652-NNNNC	C	\$ 3436.76	\$ 3496.71	
		63"(1600mm)	58"(1473mm)	TLCE-4658-NNNNC	C	3436.76	3496.71	
		69"(1753mm)	64"(1626mm)	TLCE-4664-NNNNC	C	3436.76	3496.71	
		75"(1905mm)	70"(1778mm)	TLCE-4670-NNNNC	C	3436.76	3496.71	
	52"(1321mm)	63"(1600mm)	58"(1473mm)	TLCE-5258-NNNNC	C	\$ 3436.76	\$ 3496.71	
		69"(1753mm)	64"(1626mm)	TLCE-5264-NNNNC	C	3436.76	3496.71	
		75"(1905mm)	70"(1778mm)	TLCE-5270-NNNNC	C	3436.76	3496.71	
		58"(1473mm)	69"(1753mm)	70"(1778mm)	TLCE-5864-NNNNC	C	\$ 3436.76	\$ 3496.71
	58"(1473mm)	75"(1905mm)	70"(1778mm)	TLCE-5870-NNNNC	C	3436.76	3496.71	
		64"(1626mm)	75"(1905mm)	70"(1778mm)	TLCE-6470-NNNNC	C	\$ 3688.94	\$ 3748.89


Planes LT Base for 120° Corner Table

Electric Adjustment



C-Leg

TLCZ-5858-NNNNCPB
Class TA - SIN 33721; Discount Group X



Features

- Includes:
 - Two telescoping columns with steel motor housing enclosure
 - One center post leg with steel motor housing enclosure
 - Pair of steel feet (C-leg)
 - Three End Brackets
 - Standard or programmable touch pad switch
 - Wire management clips
 - Adjustable glides and hardware standard in black with 0.5" (13mm) of adjustment
 - 9' (2743mm) long black power cord with NEMA 5-15P Plug to the building and 5' (1524mm) cable extension (with top widths 52" (1321mm) or greater)
- Electric Height Adjustment:
 - Speed: 1.4" (36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7" (475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.8" (655mm) of continuous height adjustment.
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.

Specification Tips

- **Maximum work top width overhang allowed is 6" (152mm) on each side.**
- **Refer to specification guide for work surface weight.**
- Select a worksurface that accommodates 1" (25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines when surrounded by walls, panels or other worksurfaces.
- Total lifting capacity of table is 300 lbs including surface; applied weight should be evenly distributed.
- For use with attached Worktools (e.g. monitor arms, screens, storage, wire management, etc.), see Product Application guidelines.
- Not designed to be used with casters.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

① Height Adjustment Options:

Standard Range (Single Stage):

E Standard

R Programmable
(add **\$201.74** list)

Extended Range (Dual Stage):

P Standard

S Programmable
(add **\$201.74** list)


2) Base trim color.

Note: \$56.03 upcharge list for Grade B trim colors.

Left/Right Depth	Minimum Top Width	Maximum Top Width	Length	Number	①	Price
Standard Range (Single Stage)						
23" (584mm) / 23" (584mm)	46" (1168mm)	46" (1168mm)	46" (1168mm)	TLCZ-4646-NNNNC	B	\$2929.53
	52" (1321mm)	57" (1448mm)	52" (1321mm)	TLCZ-5252-NNNNC	B	2929.53
	58" (1473mm)	63" (1600mm)	58" (1473mm)	TLCZ-5858-NNNNC	B	2929.53
29" (737mm) / 29" (737mm)	46" (1168mm)	46" (1168mm)	46" (1168mm)	TLCZ-4646-NNNNC	C	\$2977.08
	52" (1321mm)	57" (1448mm)	52" (1321mm)	TLCZ-5252-NNNNC	C	2977.08
	58" (1473mm)	63" (1600mm)	58" (1473mm)	TLCZ-5858-NNNNC	C	2977.08
Extended Range (Dual Stage)						
23" (584mm) / 23" (584mm)	46" (1168mm)	46" (1168mm)	46" (1168mm)	TLCZ-4646-NNNNC	B	\$ 3389.21
	52" (1321mm)	57" (1448mm)	52" (1321mm)	TLCZ-5252-NNNNC	B	3389.21
	58" (1473mm)	63" (1600mm)	58" (1473mm)	TLCZ-5858-NNNNC	B	3389.21
29" (737mm) / 29" (737mm)	46" (1168mm)	46" (1168mm)	46" (1168mm)	TLCZ-4646-NNNNC	C	\$3436.76
	52" (1321mm)	57" (1448mm)	52" (1321mm)	TLCZ-5252-NNNNC	C	3436.76
	58" (1473mm)	63" (1600mm)	58" (1473mm)	TLCZ-5858-NNNNC	C	3436.76




Upside

Catalog Logic

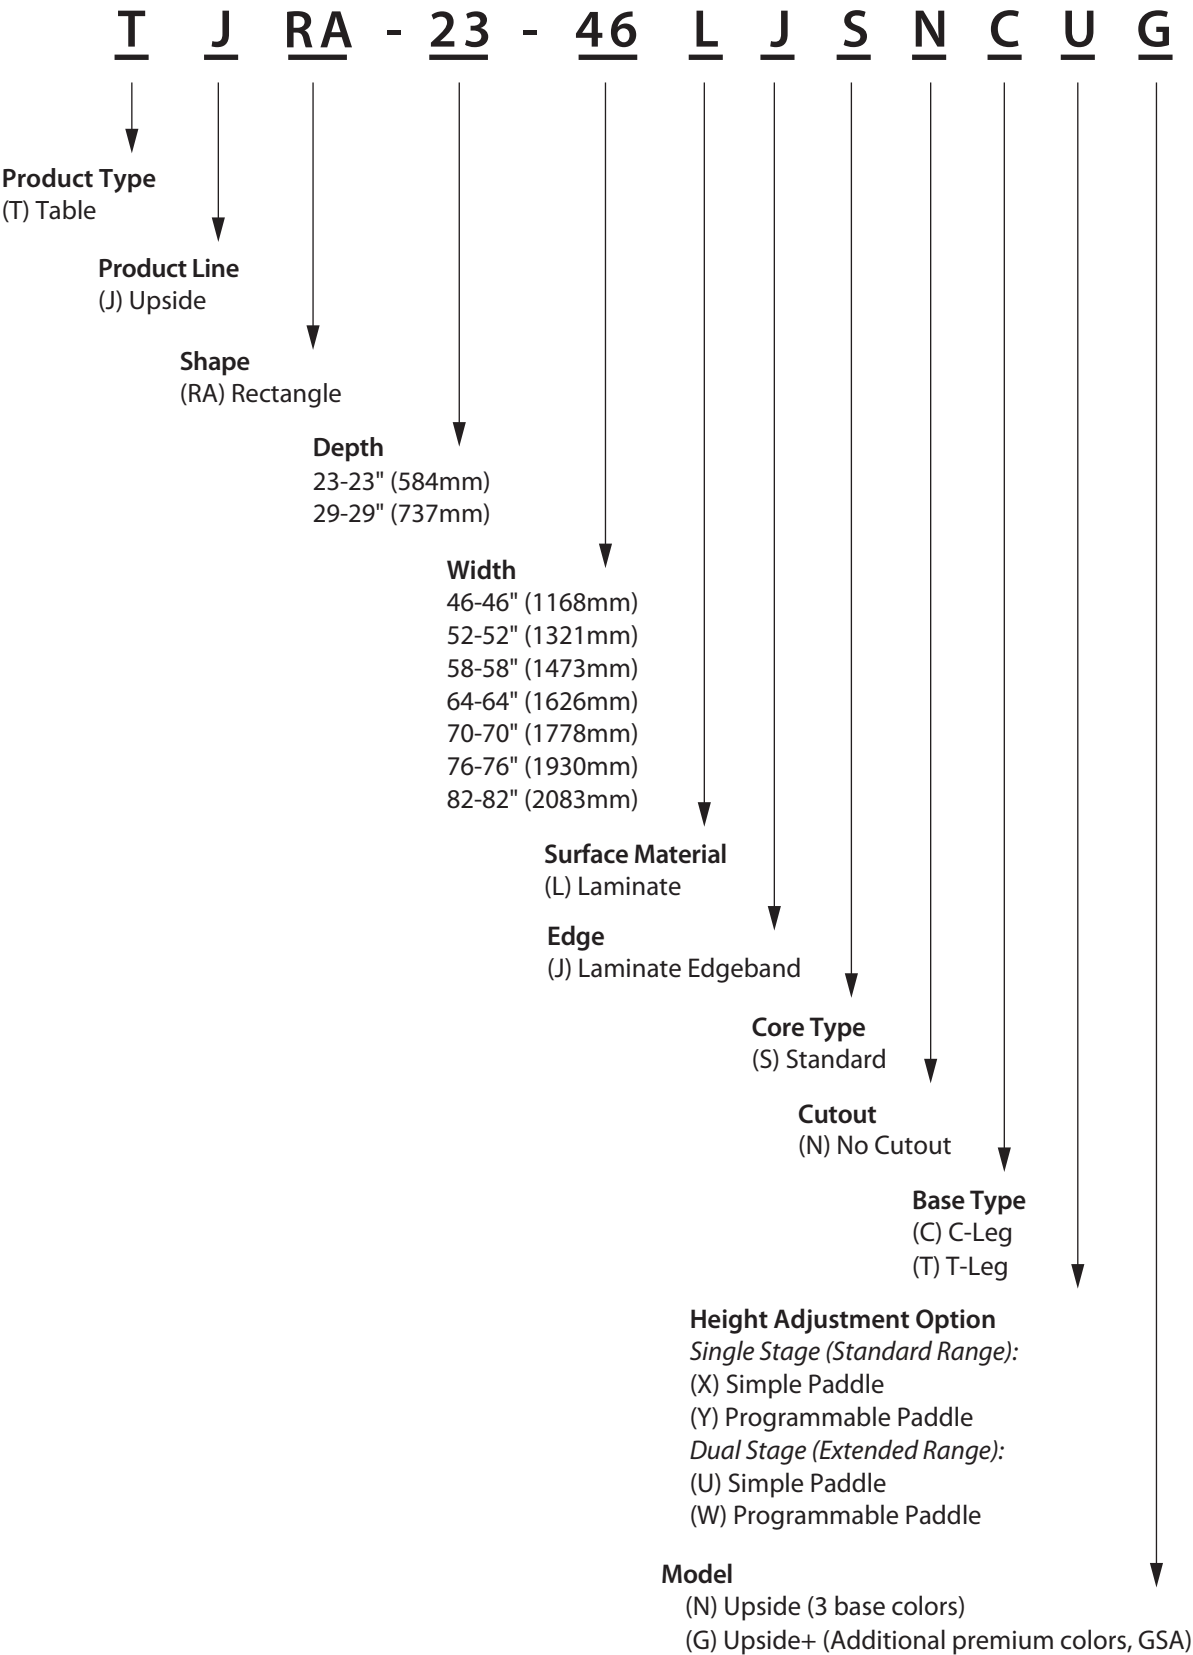

Upside — Rectangular

Electric Adjustment



TJRA
Upside Class US – GSA: Open Market
Upside+ Class US – SIN 33721; Discount Group VII



Features

- Includes:
 - 1.18"(30mm) thick laminate top.
 - C-leg or T-leg telescoping base assembly.
 - Simple or programmable paddle.
 - Wire management clips.
 - Adjustable glides and hardware.
- Laminate top with 3mm edgeband edge on user side and 1mm on remaining edges.
- Electric Height adjustment:
 - Speed is 1.4"(25mm) per second.
 - Standard Range (Single Stage) telescoping columns feature 19.2"(488mm) continuous adjustment range.
 - Extended Range (Dual Stage) telescoping columns feature a 26.1"(663mm) continuous adjustment range.
- Base Assembly:
 - Telescoping inner columns are standard with matching or coordinating paint colors. See Finish pages for details.
 - Available in three standard colors.
 - Additional premium colors available with Upside+ specification.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Maximum work top overhang allowed is 12"(305mm) overhang on one or both sides of the frame legs. *(Do not mount suspended storage to the overhang).*
- See Product Application pages for guidelines on pinch points when Height Adjustable Table is surrounded by walls, panels and/or other worksurfaces.
- Total lifting capacity of table is 250 lbs. including surface; applied weight should be evenly distributed.
- Refer to Specification Guide/Product Application for guidelines to attach monitor arms, screens and other worktools.
- Separately specified caster kit available. See Specification Guide for application.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Base:

C C-leg

T T-leg

2 Paddle Options:

Standard Range (Single Stage):

X Simple

Y Programmable (add **\$99.17** list)

Extended Range (Dual Stage):

U Simple

W Programmable (add **\$99.17** list)

3 Model (colors):

N Upside (3 base colors) **(M)**

G Upside+ (additional premium colors, GSA), add **\$297.51** list)

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$55.00 upcharge list for Grade B trim colors.

(M) Items marked with this symbol available as GSA open market.





Upside — Rectangular

Electric Adjustment

Depth	Width	Number	①②③	Laminate		
				A	B	E
Standard Range (Single Stage)						
23"(584mm)	46"(1168mm)	TJRA-2346-LJSN	■ ■ ■	\$ 1362.22	\$ 1381.71	\$ 1439.07
	52"(1321mm)	TJRA-2352-LJSN	■ ■ ■	1395.40	1416.87	1480.11
	58"(1473mm)	TJRA-2358-LJSN	■ ■ ■	1428.58	1452.03	1521.15
	64"(1626mm)	TJRA-2364-LJSN	■ ■ ■	1461.76	1487.19	1562.19
	70"(1778mm)	TJRA-2370-LJSN	■ ■ ■	1494.94	1522.35	1603.23
	76"(1930mm)	TJRA-2376-LJSN	■ ■ ■	1528.12	1557.51	1644.27
	82"(2083mm)	TJRA-2382-LJSN	■ ■ ■	1561.30	1592.67	1685.31
29"(737mm)	46"(1168mm)	TJRA-2946-LJSN	■ ■ ■	\$ 1415.11	\$ 1434.60	\$ 1491.96
	52"(1321mm)	TJRA-2952-LJSN	■ ■ ■	1448.29	1469.76	1533.00
	58"(1473mm)	TJRA-2958-LJSN	■ ■ ■	1481.47	1504.92	1574.04
	64"(1626mm)	TJRA-2964-LJSN	■ ■ ■	1514.65	1540.08	1615.08
	70"(1778mm)	TJRA-2970-LJSN	■ ■ ■	1547.83	1575.24	1656.12
	76"(1930mm)	TJRA-2976-LJSN	■ ■ ■	1581.01	1610.40	1697.16
	82"(2083mm)	TJRA-2982-LJSN	■ ■ ■	1614.19	1645.56	1738.20
Extended Range (Dual Stage)						
23"(584mm)	46"(1168mm)	TJRA-2346-LJSN	■ ■ ■	\$ 1531.42	\$ 1550.91	\$ 1608.27
	52"(1321mm)	TJRA-2352-LJSN	■ ■ ■	1564.60	1586.07	1649.31
	58"(1473mm)	TJRA-2358-LJSN	■ ■ ■	1597.78	1621.23	1690.35
	64"(1626mm)	TJRA-2364-LJSN	■ ■ ■	1630.96	1656.39	1731.39
	70"(1778mm)	TJRA-2370-LJSN	■ ■ ■	1664.14	1691.55	1772.43
	76"(1930mm)	TJRA-2376-LJSN	■ ■ ■	1697.32	1726.71	1813.47
	82"(2083mm)	TJRA-2382-LJSN	■ ■ ■	1730.50	1761.87	1854.51
29"(737mm)	46"(1168mm)	TJRA-2946-LJSN	■ ■ ■	\$ 1584.31	\$ 1603.80	\$ 1661.16
	52"(1321mm)	TJRA-2952-LJSN	■ ■ ■	1617.49	1638.96	1702.20
	58"(1473mm)	TJRA-2958-LJSN	■ ■ ■	1650.67	1674.12	1743.24
	64"(1626mm)	TJRA-2964-LJSN	■ ■ ■	1683.85	1709.28	1784.28
	70"(1778mm)	TJRA-2970-LJSN	■ ■ ■	1717.03	1744.44	1825.32
	76"(1930mm)	TJRA-2976-LJSN	■ ■ ■	1750.21	1779.60	1866.36
	82"(2083mm)	TJRA-2982-LJSN	■ ■ ■	1783.39	1814.76	1907.40

Upside Base for Rectangular Table

Electric



*Height range includes
1.18" (20mm) worksurface

TJBA

Upside Class US – GSA: Open Market
Upside+ Class US – SIN 33721; Discount Group VII



Features

- Includes:
 - Control box containing built-in collision detection system.
 - Two telescoping columns.
 - Simple or Programmable adjustment paddle.
 - Expandable frame (40.18"(1021mm) to 71.7"(1821mm)).
 - End brackets.
 - Flat steel feet (T or C) with mitered edge.
 - Adjustable glides and hardware standard in black with 0.5"(13mm) of adjustment.
 - 9'(2743mm) long black power cord with NEMA 5-15P plug.
- Electric Height adjustment:
 - Speed is 1.4"(36mm) per second.
 - Standard Range (Single Stage) telescoping columns feature 19.2"(488mm) continuous adjustment range.
 - Extended Range (Dual Stage) telescoping columns feature 26.1"(663mm) continuous adjustment range.
- Available in three standard colors.
- Additional premium colors available with Upside+ specification.
- Telescoping inner columns will default to matching or coordinating paint finish based on specified trim color. See Finish pages for details.
- Depth and width shown in nominal dimensions.
- Ships unassembled.

Specification Tips

- Base can support worksurface sizes from 22"(559mm) to 30"(762mm) in depth and 46"(1168mm) to 94"(2388mm) in width.
- Maximum work top overhang allowed is 12"(305mm) on one or both sides of the frame legs.
- When attaching suspended storage to work surface, do not mount to overhang.
- Total lifting capacity of table is 250 lbs. including surface; applied weight should be evenly distributed.
- Select a work surface that accommodates 1"(25mm) pinch point clearance on all sides and meets at least a NFPA class C flammability rating.
- See Product Application pages for guidelines on pinch points when Height Adjustable Table is surrounded by walls, panels and/or other worksurfaces.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.
- Refer to Specification Guide/Product Application for guidelines to attach monitor arms, screens and other worktools.

To Order, Specify:

1) Product number, including:

1 Model (colors):

N Upside (3 base colors) **(M)**

G Upside+ (additional premium colors, GSA) (add **\$297.51** list)

2) Base trim color.

Note: \$55.00 upcharge list for Grade B trim colors.

(M) Items marked with this symbol available as GSA open market.



Upside Base for Rectangular Table

Electric

Description	Depth	Number ①	Trim A
2-Leg Base			
Standard Range (Single Stage) – Simple Paddle			
T Base	23"(584mm)	TJBA-2TXB- 	\$ 1143.74
	29"(737mm)	TJBA-2TXC- 	1143.74
C Base	23"(584mm)	TJBA-2CXB- 	\$ 1143.74
	29"(737mm)	TJBA-2CXC- 	1143.74
Standard Range (Single Stage) – Programmable Paddle			
T Base	23"(584mm)	TJBA-2TYB- 	\$ 1242.91
	29"(737mm)	TJBA-2TYC- 	1242.91
C Base	23"(584mm)	TJBA-2CYB- 	\$ 1242.91
	29"(737mm)	TJBA-2CYC- 	1242.91
Extended Range (Dual Stage) – Simple Paddle			
T Base	23"(584mm)	TJBA-2TUB- 	\$1295.80
	29"(737mm)	TJBA-2TUC- 	1295.80
C Base	23"(584mm)	TJBA-2CUB- 	\$1295.80
	29"(737mm)	TJBA-2CUC- 	1295.80
Extended Range (Dual Stage) – Programmable Paddle			
T Base	23"(584mm)	TJBA-2TWB- 	\$1394.96
	29"(737mm)	TJBA-2TWC- 	1394.96
C Base	23"(584mm)	TJBA-2CWB- 	\$1394.96
	29"(737mm)	TJBA-2CWC- 	1394.96

Upside Base for 90° or 120° Table

Electric Adjustment



TJBA-3CXB-G

Upside Class US - GSA: Open Market
Upside+ Class US - SIN 33721; Discount Group VII

Features

- Includes:
 - Two C-leg telescoping columns with 23"(584mm)D feet.
 - One center post leg.
 - Expandable frame system.
 - Two End brackets.
 - Control box with built-in collision detection system.
 - Simple or Programmable paddle adjustment.
 - Wire management clips.
 - Adjustable glides standard in black (0.5"(13mm) adjustment range).
 - 9'(2743mm) long black power cord with NEMA 5-15P plug and 5'(1524mm) cable extension.
- Electric Height adjustment:
 - Speed is 1.5"(38mm) per second.
 - Standard Range (Single Stage) telescoping columns feature 19.2"(488mm) continuous adjustment range.
 - Extended Range (Dual Stage) telescoping columns feature a 26.1"(663mm) continuous adjustment range.
- Available in a variety of paint trim colors.
- Telescoping inner columns will default to matching or coordinating paint finish based on specified trim color. See Finish pages for details.
- Depth shown in nominal dimensions.
- Ships unassembled.

Specification Tips

- Base can support corner worksurface sizes from 23"(584mm) to 29"(737mm) in depth and 46"(1168mm) to 88"(2235mm) in width per side.

Note: Total area of surface must not exceed 3741 inches.

- Maximum work top overhang allowed is 6"(152mm).
- Not designed to be used with casters.
- Total lifting capacity of table is 330 lbs. including surface; applied weight should be evenly distributed.
- Select any corner worksurface from the standard Upside offering to pair with 3-leg base assembly.
- Verify any user provided worksurface accommodates 1"(25mm) pinch point clearance on all sides, meets at least a NFPA class C Flammability rating, and is compatible with all attached components.
- For a proper and safe work application, worksurfaces should be sized to prevent pinch points, collisions, and cable shearing.
- Base Only application (with user-provided worksurface) may require approval of local authority having jurisdiction AHJ; ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Paddle Options:

Standard Range (Single Stage):

- ☒ Simple
- ☐ Programmable (add
\$105.00 list)


Extended Range (Dual Stage):

- ☐ Simple
- ☐ Programmable (add
\$105.00 list)


2) Base trim color.

Description/ Base Depth	Minimum Top Depth	Maximum Top Depth	Minimum Top Width	Maximum Top Width	Number ①	Trim A	B
3-leg Base for use with 90° and 120° tops:							
Single Stage (Standard Range)							
C-Leg/23"(584mm)	23"(584mm)	29"(737mm)	46"(1168mm)	82"(2083mm)	TJBA-3C B-G	\$2060.00	\$ 2120.00
Dual Stage (Extended Range)							
C-Leg/23"(584mm)	23"(584mm)	29"(737mm)	46"(1168mm)	82"(2083mm)	TJBA-3C B-G	\$2260.00	\$2320.00

Upside Worksurface 90° Equal Corner – Wrap-Around Laminate



TRCR-5252

TRCR-7070
(Left-hand Orientation)Upside Class US – GSA: Open Market
Upside+ Class US – SIN 33721; Discount Group VII

Features

- Includes 1.18" (30mm) thick laminate top with predrilled holes for attachment to Upside+ 3-leg base assembly (separately specified).
- Laminate top with 3mm edgeband on user edge and 1mm on remaining edges.
- Worksurface will default to a 1-pc or 2-pc top based on size.
- Equal Corner worksurfaces 64" (1626mm) and greater will default to 2-pcs.
 - A 64" (1626mm) 2-piece top includes a 46" (1168mm) corner and 18" (457mm) rectangular extender.
 - A 70" (1778mm) includes a 52" (1321mm) corner and 18" (457mm) rectangular extender.
- Depth and width shown in nominal dimensions.

Specification Tips

- One-piece tops are non-handed; two-piece tops are handed.
- The seamless primary user side of the table (side without rectangular top) determines the handedness from a seated position.
- Size of the corner top is reflected in the catalog logic which allows for a 2" (51mm) pinch point in space planning; 58" (1473mm) corner may be space planned as a 60" (1524mm) corner for modular planning purposes.
- Separately specified screens must be smaller than the table width.
- Refer to Specification Guide/Product Application for guidelines to attach monitor arms, screens and other worktools.

To Order, Specify:

1) Product number, including:

① Depth and Orientation:

23" deep tops:

E LH (64" and 70" widths)
two-piece top

H RH (64" and 70" widths)
two-piece top

29" deep tops:

F LH (64" and 70" widths)
two-piece top


J RH (64" and 70" widths)
two-piece top

2) Laminate surface color.


3) Edge trim color.

Left/Right Depth	Width	No. of Pieces	Number	①	Laminate	
					A	B
23"(584mm)/23"(584mm)	52"(1321mm)	1	TRCR-5252-LJSNCBN		\$ 748.50	\$ 825.30
	58"(1473mm)	1	TRCR-5858-LJSNCBN		803.00	887.60
	64"(1626mm)	2	TRCR-6464-LJSNC	N	917.00	1009.40
	70"(1778mm)	2	TRCR-7070-LJSNC	N	970.50	1070.70
29"(737mm)/29"(737mm)	52"(1321mm)	1	TRCR-5252-LJSNCCN		\$ 770.00	\$ 849.20
	58"(1473mm)	1	TRCR-5858-LJSNCCN		824.00	911.00
	64"(1626mm)	2	TRCR-6464-LJSNC	N	937.50	1032.30
	70"(1778mm)	2	TRCR-7070-LJSNC	N	991.50	1094.10

Upside Worksurface 90° Extended Corner – Wrap-Around Laminate



TRCE-4662
(Right-hand Orientation)



TRCE-6470
(Left-hand Orientation)
Upside Class US – GSA: Open Market
Upside+ Class US – SIN 33721; Discount Group VII

Features

- Includes 1.18"(30mm) thick laminate top with predrilled holes for attachment to Upside 3-leg base assembly (separately specified).
- Laminate top with 3mm edgeband on user side and 1mm on remaining edges.
- Worksurface will default to a 1-pc or 2-pc top based on size (see chart below).
- Depth and width shown in nominal dimensions.

Specification Tips

- Handedness determined by length side of table from seated position.
- Size of the corner top is reflected in the catalog logic which allows for a 2"(51mm) pinch point in space planning; 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- Separately specified screens must be smaller than the table width.
- For application guidelines with attached worktools (monitor arms, screens, storage, wire management, etc.), see product application pages.

Two Piece Top	Corner	Rectangle
64" x 70"(1626mm x 1778mm)	46" x 70"(1168mm x 1778mm)	18"(457mm)
64" x 76"(1626mm x 1930mm)	46" x 76"(1168mm x 1930mm)	18"(457mm)
64" x 82"(1626mm x 2083mm)	46" x 82"(1168mm x 2083mm)	18"(457mm)
70" x 76"(1778mm x 1930mm)	52" x 76"(1321mm x 1930mm)	18"(457mm)
70" x 82"(1778mm x 2083mm)	52" x 82"(1321mm x 2083mm)	18"(457mm)
76" x 82"(1930mm x 2083mm)	58" x 82"(1473mm x 2083mm)	18"(457mm)

To Order, Specify:

- Product number, including:
 - Depth and Orientation:**


23" deep tops:
E LH (64" and 82" widths) two-piece top
H RH (64" and 82" widths) two-piece top

29" deep tops:
F LH (64" and 82" widths) two-piece top
J RH (64" and 82" widths) two-piece top
- Laminate surface color.
- Edge trim color.


Upside Worksurface 90° Extended Corner – Wrap-Around Laminate

Left/Right Depth	Width	Length	No. of Pieces	Number	①	Laminate	
						A	B
23"(584mm)/23"(584mm)	46"(1168mm)	52"(1321mm)	1	TRCE-4652-LJSNC	N	\$ 621.50	\$ 694.40
		58"(1473mm)	1	TRCE-4658-LJSNC	N	649.00	725.80
		64"(1626mm)	1	TRCE-4664-LJSNC	N	675.50	756.20
		70"(1778mm)	1	TRCE-4670-LJSNC	N	703.00	787.60
		76"(1930mm)	1	TRCE-4676-LJSNC	N	730.00	818.50
		82"(2083mm)	1	TRCE-4682-LJSNC	N	757.00	849.40
	52"(1321mm)	58"(1473mm)	1	TRCE-5258-LJSNC	N	\$ 775.50	\$ 856.20
		64"(1626mm)	1	TRCE-5264-LJSNC	N	802.50	887.10
		70"(1778mm)	1	TRCE-5270-LJSNC	N	830.00	918.50
		76"(1930mm)	1	TRCE-5276-LJSNC	N	857.00	949.40
		82"(2083mm)	1	TRCE-5282-LJSNC	N	883.50	979.80
	58"(1473mm)	64"(1626mm)	1	TRCE-5864-LJSNC	N	\$ 830.00	\$ 918.50
		70"(1778mm)	1	TRCE-5870-LJSNC	N	857.00	949.40
		76"(1930mm)	1	TRCE-5876-LJSNC	N	883.50	979.80
		82"(2083mm)	1	TRCE-5882-LJSNC	N	910.50	1010.70
	64"(1626mm)	70"(1778mm)	2	TRCE-6470-LJSNC	N	\$ 943.50	\$1039.80
		76"(1930mm)	2	TRCE-6476-LJSNC	N	970.50	1070.70
		82"(2083mm)	2	TRCE-6482-LJSNC	N	998.00	1102.10
	70"(1778mm)	76"(1930mm)	2	TRCE-7076-LJSNC	N	\$ 998.00	\$ 1102.10
		82"(2083mm)	2	TRCE-7082-LJSNC	N	1025.00	1133.00
	76"(1930mm)	82"(2083mm)	2	TRCE-7682-LJSNC	N	\$1052.00	\$ 1163.90
29"(737mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TRCE-4652-LJSNC	N	\$ 642.50	\$ 717.80
		58"(1473mm)	1	TRCE-4658-LJSNC	N	670.00	749.20
		64"(1626mm)	1	TRCE-4664-LJSNC	N	696.50	779.60
		70"(1778mm)	1	TRCE-4670-LJSNC	N	724.00	811.00
		76"(1930mm)	1	TRCE-4676-LJSNC	N	750.50	841.40
		82"(2083mm)	1	TRCE-4682-LJSNC	N	778.00	872.80
	52"(1321mm)	58"(1473mm)	1	TRCE-5258-LJSNC	N	\$ 796.50	\$ 879.60
		64"(1626mm)	1	TRCE-5264-LJSNC	N	823.50	910.50
		70"(1778mm)	1	TRCE-5270-LJSNC	N	850.50	941.40
		76"(1930mm)	1	TRCE-5276-LJSNC	N	877.50	972.30
		82"(2083mm)	1	TRCE-5282-LJSNC	N	905.00	1003.70
	58"(1473mm)	64"(1626mm)	1	TRCE-5864-LJSNC	N	\$ 850.50	\$ 941.40
		70"(1778mm)	1	TRCE-5870-LJSNC	N	877.50	972.30
		76"(1930mm)	1	TRCE-5876-LJSNC	N	905.00	1003.70
		82"(2083mm)	1	TRCE-5882-LJSNC	N	931.50	1034.10
	64"(1626mm)	70"(1778mm)	2	TRCE-6470-LJSNC	N	\$ 965.00	\$1063.70
		76"(1930mm)	2	TRCE-6476-LJSNC	N	991.50	1094.10
		82"(2083mm)	2	TRCE-6482-LJSNC	N	1019.00	1125.50
	70"(1778mm)	76"(1930mm)	2	TRCE-7076-LJSNC	N	\$ 1019.00	\$ 1125.50
		82"(2083mm)	2	TRCE-7082-LJSNC	N	1045.50	1155.90
	76"(1930mm)	82"(2083mm)	2	TRCE-7682-LJSNC	N	\$1073.00	\$ 1187.30

Upside Worksurface 90° Transitional Extended Corner – Wrap-Around Laminate



TRCE-4652
(Right-hand Orientation)



TRCE-4652
(Left-hand Orientation)
Upside Class US – GSA: Open Market
Upside+ Class US – SIN 33721; Discount Group VII

Features

- Includes 1.18"(30mm) thick laminate top with predrilled holes for attachment to Upside 3-leg base assembly (separately specified).
- Laminate top with 3mm edgeband on user side and 1mm on remaining edges.
- Worksurface will default to a 1-pc or 2-pc top based on size (see chart below).
- Depth and width shown in nominal dimensions.

Specification Tips

- Depth orientation is listed from left to right (e.g. "R" = 23" depth on left side from seated position and 29" depth on right side from seated position).
- One-piece tops are non-handed; two-piece tops are handed.
- Handedness determined by length side of table from seated position.
- Size of the corner top is reflected in the catalog logic which allows for a 2"(51mm) pinch point in space planning; 58"(1473mm) corner may be space planned as a 60"(1524mm) corner for modular planning purposes.
- Separately specified screens must be smaller than the table width.
- Refer to Specification Guide/Product Application for guidelines to attach monitor arms, screens and other worktools.

To Order, Specify:


- 1) Product number, including:
 - 1 Orientation (as seated):
 - R** 23"(584mm)/29"(737mm) Right-Hand
 - K** 29"(737mm)/23"(584mm) Right-Hand
 - M** 23"(584mm)/29"(737mm) Left-Hand
 - A** 29"(737mm)/23"(584mm) Left-Hand
- 2) Laminate surface color.
- 3) Edge trim color.

Two Piece Top	Corner	Rectangle
64" x 70"(1626mm x 1778mm)	46" x 70"(1168mm x 1778mm)	18"(457mm)
64" x 76"(1626mm x 1930mm)	46" x 76"(1168mm x 1930mm)	18"(457mm)
64" x 82"(1626mm x 2083mm)	46" x 82"(1168mm x 2083mm)	18"(457mm)
70" x 76"(1778mm x 1930mm)	52" x 76"(1321mm x 1930mm)	18"(457mm)
70" x 82"(1778mm x 2083mm)	52" x 82"(1321mm x 2083mm)	18"(457mm)
76" x 82"(1930mm x 2083mm)	58" x 82"(1473mm x 2083mm)	18"(457mm)

Upside Worksurface 90° Transitional Extended Corner – Wrap-Around Laminate

Left/Right Depth	Width	Length	No. of Pieces	Number	①	Laminate	
						A	B
23"(584mm)/29"(737mm)	46"(1168mm)	52"(1321mm)	1	TRCE-4652-LJSNC	N	\$ 632.00	\$ 706.10
		58"(1473mm)	1	TRCE-4658-LJSNC	N	659.50	737.50
		64"(1626mm)	1	TRCE-4664-LJSNC	N	686.50	768.40
		70"(1778mm)	1	TRCE-4670-LJSNC	N	713.50	799.30
		76"(1930mm)	1	TRCE-4676-LJSNC	N	740.50	830.20
		82"(2083mm)	1	TRCE-4682-LJSNC	N	767.00	860.60
	52"(1321mm)	58"(1473mm)	1	TRCE-5258-LJSNC	N	\$ 786.50	\$ 868.40
		64"(1626mm)	1	TRCE-5264-LJSNC	N	813.00	898.80
		70"(1778mm)	1	TRCE-5270-LJSNC	N	840.50	930.20
		76"(1930mm)	1	TRCE-5276-LJSNC	N	867.00	960.60
		82"(2083mm)	1	TRCE-5282-LJSNC	N	894.50	992.00
	58"(1473mm)	64"(1626mm)	1	TRCE-5864-LJSNC	N	\$ 840.50	\$ 930.20
		70"(1778mm)	1	TRCE-5870-LJSNC	N	867.00	960.60
		76"(1930mm)	1	TRCE-5876-LJSNC	N	894.50	992.00
		82"(2083mm)	1	TRCE-5882-LJSNC	N	921.50	1022.90
	64"(1626mm)	70"(1778mm)	2	TRCE-6470-LJSNC	N	\$ 954.00	\$ 1051.50
		76"(1930mm)	2	TRCE-6476-LJSNC	N	981.50	1082.90
		82"(2083mm)	2	TRCE-6482-LJSNC	N	1008.50	1113.80
	70"(1778mm)	76"(1930mm)	2	TRCE-7076-LJSNC	N	\$1008.50	\$ 1113.80
		82"(2083mm)	2	TRCE-7082-LJSNC	N	1035.50	1144.70
	76"(1930mm)	82"(2083mm)	2	TRCE-7682-LJSNC	N	\$1062.00	\$ 1175.10
29"(737mm)/23"(584mm)	46"(1168mm)	52"(1321mm)	1	TRCE-4652-LJSNC	N	\$ 632.00	\$ 706.10
		58"(1473mm)	1	TRCE-4658-LJSNC	N	659.50	737.50
		64"(1626mm)	1	TRCE-4664-LJSNC	N	686.50	768.40
		70"(1778mm)	1	TRCE-4670-LJSNC	N	713.50	799.30
		76"(1930mm)	1	TRCE-4676-LJSNC	N	740.50	830.20
		82"(2083mm)	1	TRCE-4682-LJSNC	N	767.00	860.60
	52"(1321mm)	58"(1473mm)	1	TRCE-5258-LJSNC	N	\$ 786.50	\$ 868.40
		64"(1626mm)	1	TRCE-5264-LJSNC	N	813.00	898.80
		70"(1778mm)	1	TRCE-5270-LJSNC	N	840.50	930.20
		76"(1930mm)	1	TRCE-5276-LJSNC	N	867.00	960.60
		82"(2083mm)	1	TRCE-5282-LJSNC	N	894.50	992.00
	58"(1473mm)	64"(1626mm)	1	TRCE-5864-LJSNC	N	\$ 840.50	\$ 930.20
		70"(1778mm)	1	TRCE-5870-LJSNC	N	867.00	960.60
		76"(1930mm)	1	TRCE-5876-LJSNC	N	894.50	992.00
		82"(2083mm)	1	TRCE-5882-LJSNC	N	921.50	1022.90
	64"(1626mm)	70"(1778mm)	2	TRCE-6470-LJSNC	N	\$ 954.00	\$ 1051.50
		76"(1930mm)	2	TRCE-6476-LJSNC	N	981.50	1082.90
		82"(2083mm)	2	TRCE-6482-LJSNC	N	1008.50	1113.80
	70"(1778mm)	76"(1930mm)	2	TRCE-7076-LJSNC	N	\$1008.50	\$ 1113.80
		82"(2083mm)	2	TRCE-7082-LJSNC	N	1035.50	1144.70
	76"(1930mm)	82"(2083mm)	2	TRCE-7682-LJSNC	N	\$1062.00	\$ 1175.10

Upside Worksurface 120° Corner – Wrap-Around Laminate



TRCZ-4646

Upside Class US – GSA: Open Market
Upside+ Class US – SIN 33721; Discount Group VII

Features

- Includes 1.18" (30mm) thick laminate top with predrilled holes for attachment to Upside 3-leg base assembly (separately specified).
- Laminate top with 3mm edgeband on user side and 1mm on remaining edges.
- Depth and width shown in nominal dimensions.

Specification Tips

- Size of the corner top is reflected in the catalog logic which allows for a 2" (51mm) pinch point in space planning; 58" (1473mm) corner may be space planned as a 60" (1524mm) corner for modular planning purposes.
- Separately specified screens must be smaller than the table width.
- Refer to Specification Guide/Product Application for guidelines to attach monitor arms, screens and other worktools.


To Order, Specify:

- Product number.
- Laminate surface color.
- Edge trim color.

Left/Right Depth	Width	Length	No. of Pieces	Number	Laminate	
					A	B
23"(584mm)/23"(584mm)	46"(1168mm)	46"(1168mm)	1	TRCZ-4646-LJSNCBN	\$ 866.00	\$ 971.34
	52"(1321mm)	52"(1321mm)	1	TRCZ-5252-LJSNCBN	950.00	1067.10
	58"(1473mm)	58"(1473mm)	1	TRCZ-5858-LJSNCBN	1034.00	1162.86
29"(737mm)/29"(737mm)	46"(1168mm)	46"(1168mm)	1	TRCZ-4646-LJSNCCN	\$ 890.00	\$ 999.30
	52"(1321mm)	52"(1321mm)	1	TRCZ-5252-LJSNCCN	974.00	1095.06
	58"(1473mm)	58"(1473mm)	1	TRCZ-5858-LJSNCCN	1058.00	1190.82


Planes Height Adjustable Benching

Catalog Logic

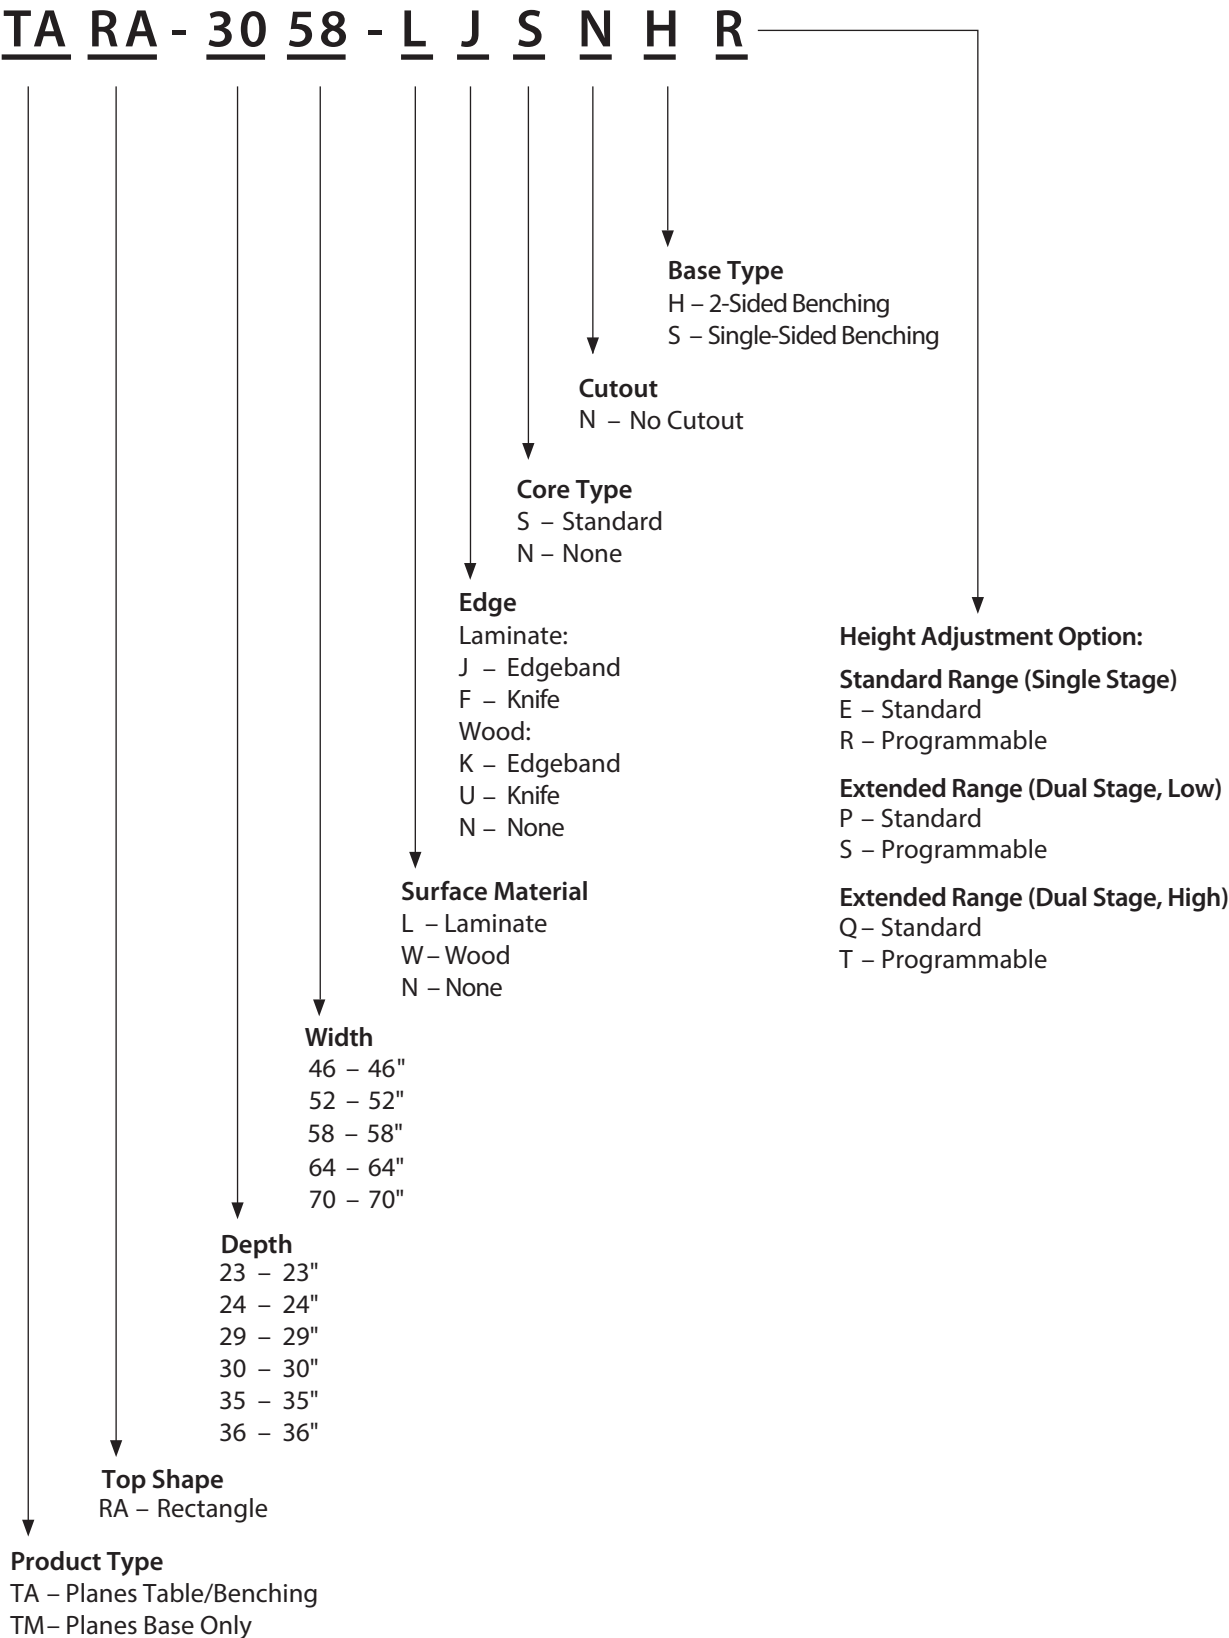


Planes Two-Sided Benching — Rectangular

Electric Adjustment

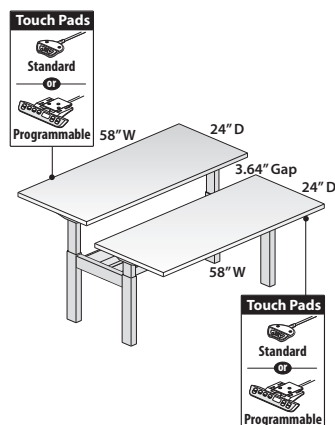

TARA-2458-NH
Class TA – SIN 33721; Discount Group X

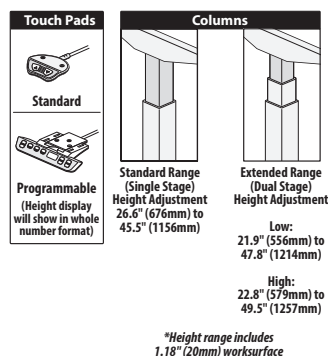

*Height range includes
1.18\" (20mm) worksurface



Features

- Includes:
 - Two 1.18\" (30mm) thick rectangle worksurfaces
 - Two telescoping base assemblies with fixed J-Rail frame system
 - Two crossbeams for back-to-back base connection
 - Power and data channel with troughs
 - Two Standard or programmable touch pad switches
 - Wire management clips
 - Two 9' (2743mm) long black power cord with NEMA 5-15P plug
 - Adjustable glides and hardware standard in black with 1\" (25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4\" (36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9\" (480mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9\" (658mm) - 26.7\" (678mm) of continuous adjustment.
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimension

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered benching run.
- Select a worksurface that accommodates 1\" (25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Total lifting capacity of each table is 250 lbs. including surface; applied weight should be evenly distributed.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Options:

- L** Laminate
- W** Wood

2 Edge Options:

Laminate:

- J** Edgeband
- F** Knife

Wood:

- K** Edgeband
- U** Knife

3 Height Adjustment Options:

Standard Range
(Single Stage):

- E** Standard
- R** Programmable
(add **\$404.31** list)

Extended Range
(Dual Stage, Low):

- P** Standard
- S** Programmable
(add **\$404.31** list)

(Dual Stage, High):

- Q** Standard
- T** Programmable
(add **\$404.31** list)

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$126.99 upcharge list for Grade B trim colors.

Planes Two-Sided Benching — Rectangular

Electric Adjustment

					Laminate A		Laminate B		Laminate E		Wood A		Wood B	
Depth	Width	Number	①②	③	J	F	J	F	J	F	K	U	K	U
Standard Range (Single Stage)														
23"(584mm)	46"(1168mm)	TARA-2346-		SNH	\$ 8596.70	\$ 9133.39	\$ 8643.84	\$ 9180.53	\$ 8935.63	\$ 9472.32	\$ 9599.96	\$ 10201.51	\$ 9635.20	\$ 10236.75
	52"(1321mm)	TARA-2352-		SNH	8788.66	9366.75	8841.95	9420.04	9171.79	9749.88	9879.16	10527.75	9919.00	10567.59
	58"(1473mm)	TARA-2358-		SNH	8980.63	9600.12	9040.07	9659.56	9407.97	10027.46	10158.37	10854.00	10202.81	10898.44
	64"(1626mm)	TARA-2364-		SNH	9172.59	9833.48	9238.18	9899.07	9644.14	10305.03	10437.57	11180.24	10486.61	11229.28
	70"(1778mm)	TARA-2370-		SNH	9364.56	10066.85	9436.29	10138.58	9880.32	10582.61	10716.78	11506.49	10770.41	11560.12
24"(610mm)	46"(1168mm)	TARA-2446-		SNH	\$ 8623.50	\$ 9167.09	\$ 8672.68	\$ 9216.27	\$ 8977.16	\$ 9520.75	\$ 9641.30	\$ 10250.69	\$ 9678.07	\$ 10287.46
	52"(1321mm)	TARA-2452-		SNH	8818.80	9403.79	8874.41	9459.40	9218.59	9803.58	9923.84	10580.27	9965.42	10621.85
	58"(1473mm)	TARA-2458-		SNH	9014.12	9640.51	9076.14	9702.53	9460.04	10086.43	10206.40	10909.87	10252.77	10956.24
	64"(1626mm)	TARA-2464-		SNH	9209.43	9877.22	9277.86	9945.65	9701.48	10369.27	10488.95	11239.46	10540.11	11290.62
	70"(1778mm)	TARA-2470-		SNH	9404.75	10113.94	9479.60	10188.79	9942.93	10652.12	10771.51	11569.06	10827.47	11625.02
29"(737mm)	46"(1168mm)	TARA-2946-		SNH	\$ 8811.56	\$ 9389.65	\$ 8871.00	\$ 9449.09	\$ 9238.90	\$ 9816.99	\$ 9902.06	\$ 10550.65	\$ 9946.50	\$ 10595.09
	52"(1321mm)	TARA-2952-		SNH	9023.60	9643.09	9090.79	9710.28	9506.68	10126.17	10201.34	10896.97	10251.57	10947.20
	58"(1473mm)	TARA-2958-		SNH	9235.65	9896.54	9310.59	9971.48	9774.47	10435.36	10500.63	11243.30	10556.66	11299.33
	64"(1626mm)	TARA-2964-		SNH	9447.69	10149.98	9530.38	10232.67	10042.25	10744.54	10799.91	11589.62	10861.74	11651.45
	70"(1778mm)	TARA-2970-		SNH	9659.74	10403.43	9750.19	10493.88	10310.04	11053.73	11099.20	11935.95	11166.82	12003.57
30"(762mm)	46"(1168mm)	TARA-3046-		SNH	\$ 8838.36	\$ 9423.35	\$ 8899.84	\$ 9484.83	\$ 9280.43	\$ 9865.42	\$ 9943.40	\$ 10599.83	\$ 9989.37	\$ 10645.80
	52"(1321mm)	TARA-3052-		SNH	9053.74	9680.13	9123.25	9749.64	9553.48	10179.87	10246.02	10949.49	10297.99	11001.46
	58"(1473mm)	TARA-3058-		SNH	9269.14	9936.93	9346.67	10014.46	9826.54	10494.33	10548.66	11299.17	10606.62	11357.13
	64"(1626mm)	TARA-3064-		SNH	9484.53	10193.72	9570.07	10279.26	10099.59	10808.78	10851.29	11648.84	10915.25	11712.80
	70"(1778mm)	TARA-3070-		SNH	9699.92	10450.51	9793.49	10544.08	10372.65	11123.24	11153.92	11998.51	11223.88	12068.47
35"(889mm)	46"(1168mm)	TARA-3546-		SNH	\$ 9026.41	\$ 9645.90	\$ 9098.14	\$ 9717.63	\$ 9542.17	\$ 10161.66	\$ 10204.15	\$ 10899.78	\$ 10257.78	\$ 10953.41
	52"(1321mm)	TARA-3552-		SNH	9258.54	9919.43	9339.63	10000.52	9841.57	10502.46	10523.52	11266.19	10584.15	11326.82
	58"(1473mm)	TARA-3558-		SNH	9490.66	10192.95	9581.11	10283.40	10140.96	10843.25	10842.88	11632.59	10910.50	11700.21
	64"(1626mm)	TARA-3564-		SNH	9722.79	10466.48	9822.59	10566.28	10440.36	11184.05	11162.25	11999.00	11236.87	12073.62
	70"(1778mm)	TARA-3570-		SNH	9954.91	10740.00	10064.07	10849.16	10739.76	11524.85	11481.61	12365.40	11563.22	11563.22
36"(914mm)	46"(1168mm)	TARA-3646-		SNH	\$ 9053.21	\$ 9679.60	\$ 9126.99	\$ 9753.38	\$ 9583.70	\$ 10210.09	\$ 10245.49	\$ 10948.96	\$ 10300.65	\$ 11004.12
	52"(1321mm)	TARA-3652-		SNH	9288.69	9956.48	9372.09	10039.88	9888.37	10556.16	10568.21	11318.72	10630.56	11381.07
	58"(1473mm)	TARA-3658-		SNH	9524.15	10233.34	9617.18	10326.37	10193.03	10902.22	10890.91	11688.46	10960.47	11758.02
	64"(1626mm)	TARA-3664-		SNH	9759.63	10510.22	9862.28	10612.87	10497.70	11248.29	11213.63	12058.22	11290.38	12134.97
	70"(1778mm)	TARA-3670-		SNH	9995.09	10787.08	10107.37	10899.36	10802.36	11594.35	11536.33	12427.96	11620.28	12511.91

Note:

- Screens:
 - Specify 24"(610mm), 30"(762mm), and 36"(914mm) depth benches with Center Mounted Screens.
 - Specify 23"(584mm), 29"(737mm), and 35"(889mm) depth benches with Worksurface Mounted Screens.


Planes Two-Sided Benching — Rectangular

Electric Adjustment


Depth	Width	Number	①②	③	Laminate A		Laminate B		Laminate E		Wood A		Wood B	
					J	F	J	F	J	F	K	U	K	U
Extended Range (Dual Stage)														
23"(584mm)	46"(1168mm)	TARA-2346-		SNH	\$10800.23	\$ 11336.92	\$10847.37	\$ 11384.06	\$ 11139.16	\$ 11675.85	\$ 11803.49	\$12405.04	\$ 11838.73	\$ 12440.28
	52"(1321mm)	TARA-2352-		SNH	11034.57	11612.66	11087.86	11665.95	11417.70	11995.79	12125.07	12773.66	12164.91	12813.50
	58"(1473mm)	TARA-2358-		SNH	11268.91	11888.40	11328.35	11947.84	11696.25	12315.74	12446.65	13142.28	12491.09	13186.72
	64"(1626mm)	TARA-2364-		SNH	11503.25	12164.14	11568.84	12229.73	11974.80	12635.69	12768.23	13510.90	12817.27	13559.94
	70"(1778mm)	TARA-2370-		SNH	11737.59	12439.88	11809.32	12511.61	12253.35	12955.64	13089.81	13879.52	13143.44	13933.15
24"(610mm)	46"(1168mm)	TARA-2446-		SNH	\$ 10827.03	\$ 11370.62	\$ 10876.21	\$ 11419.80	\$ 11180.69	\$ 11724.28	\$ 11844.83	\$ 12454.22	\$ 11881.60	\$ 12490.99
	52"(1321mm)	TARA-2452-		SNH	11064.71	11649.70	11120.32	11705.31	11464.50	12049.49	12169.75	12826.18	12211.33	12867.76
	58"(1473mm)	TARA-2458-		SNH	11302.40	11928.79	11364.42	11990.81	11748.32	12374.71	12494.68	13198.15	12541.05	13244.52
	64"(1626mm)	TARA-2464-		SNH	11540.09	12207.88	11608.52	12276.31	12032.14	12699.93	12819.61	13570.12	12870.77	13621.28
	70"(1778mm)	TARA-2470-		SNH	11777.78	12486.97	11852.63	12561.82	12315.96	13025.15	13144.54	13942.09	13200.50	13998.05
29"(737mm)	46"(1168mm)	TARA-2946-		SNH	\$ 11036.28	\$ 11614.37	\$ 11095.72	\$ 11673.81	\$ 11463.62	\$ 12041.71	\$ 12126.78	\$ 12775.37	\$ 12171.22	\$ 12819.81
	52"(1321mm)	TARA-2952-		SNH	11290.70	11910.19	11357.89	11977.38	11773.78	12393.27	12468.44	13164.07	12518.67	13214.30
	58"(1473mm)	TARA-2958-		SNH	11545.12	12206.01	11620.06	12280.95	12083.94	12744.83	12810.10	13552.77	12866.13	13608.80
	64"(1626mm)	TARA-2964-		SNH	11799.54	12501.83	11882.23	12584.52	12394.10	13096.39	13151.76	13941.47	13213.59	14003.30
	70"(1778mm)	TARA-2970-		SNH	12053.96	12797.65	12144.41	12888.10	12704.26	13447.95	13493.42	14330.17	13561.04	14397.79
30"(762mm)	46"(1168mm)	TARA-3046-		SNH	\$ 11063.08	\$ 11648.07	\$ 11124.56	\$ 11709.55	\$ 11505.15	\$ 12090.14	\$ 12168.12	\$ 12824.55	\$ 12214.09	\$ 12870.52
	52"(1321mm)	TARA-3052-		SNH	11320.84	11947.23	11390.35	12016.74	11820.58	12446.97	12513.12	13216.59	12565.09	13268.56
	58"(1473mm)	TARA-3058-		SNH	11578.61	12246.40	11656.14	12323.93	12136.01	12803.80	12858.13	13608.64	12916.09	13666.60
	64"(1626mm)	TARA-3064-		SNH	11836.38	12545.57	11921.92	12631.11	12451.44	13160.63	13203.14	14000.69	13267.10	14064.65
	70"(1778mm)	TARA-3070-		SNH	12094.14	12844.73	12187.71	12938.30	12766.87	13517.46	13548.14	14392.73	13618.10	14462.69
35"(889mm)	46"(1168mm)	TARA-3546-		SNH	\$ 11272.32	\$ 11891.81	\$11344.05	\$ 11963.54	\$ 11788.08	\$ 12407.57	\$12450.06	\$ 13145.69	\$12503.69	\$ 13199.32
	52"(1321mm)	TARA-3552-		SNH	11546.82	12207.71	11627.91	12288.80	12129.85	12790.74	12811.80	13554.47	12872.43	13615.10
	58"(1473mm)	TARA-3558-		SNH	11821.32	12523.61	11911.77	12614.06	12471.62	13173.91	13173.54	13963.25	13241.16	14030.87
	64"(1626mm)	TARA-3564-		SNH	12095.82	12839.51	12195.62	12939.31	12813.39	13557.08	13535.28	14372.03	13609.90	14446.65
	70"(1778mm)	TARA-3570-		SNH	12370.32	13155.41	12479.48	13264.57	13155.17	13940.26	13897.02	14780.81	13978.63	14862.42
36"(914mm)	46"(1168mm)	TARA-3646-		SNH	\$ 11299.12	\$ 11925.51	\$11372.90	\$ 11999.29	\$ 11829.61	\$12456.00	\$ 12491.40	\$ 13194.87	\$12546.56	\$ 13250.03
	52"(1321mm)	TARA-3652-		SNH	11576.97	12244.76	11660.37	12328.16	12176.65	12844.44	12856.49	13607.00	12918.84	13669.35
	58"(1473mm)	TARA-3658-		SNH	11854.81	12564.00	11947.84	12657.03	12523.69	13232.88	13221.57	14019.12	13291.13	14088.68
	64"(1626mm)	TARA-3664-		SNH	12132.66	12883.25	12235.31	12985.90	12870.73	13621.32	13586.66	14431.25	13663.41	14508.00
	70"(1778mm)	TARA-3670-		SNH	12410.50	13202.49	12522.78	13314.77	13217.77	14009.76	13951.74	14843.37	14035.69	14927.32

Planes Single-Sided Benching — Rectangular

Electric Adjustment



TARA-2468-NH
Class TA – SIN 33721; Discount Group X



*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - 1.18"(30mm) thick rectangle work surface
 - Telescoping base assembly with crossbeams
 - Fixed J-Rail frame system
 - Power and data channel with trough
 - Standard or programmable touch pad switch
 - Wire management clips
 - 9'(2743mm) long black power cord with NEMA 5-15P plug
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Work surface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- Not designed for use with casters.
- See Spec Guide Product Applications for instructions on how to specify a powered run of benching.
- Single-sided bench unit cannot be used as a freestanding table. It MUST be attached to another bench of equal or greater size.
- Select a work surface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Total lifting capacity of each table is 250 lbs. including surface; applied weight should be evenly distributed.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Options:

- L** Laminate
- W** Wood

2 Edge Options:

Laminate:

- J** Edgeband
- F** Knife

Wood:

- K** Edgeband
- U** Knife

3 Height Adjustment Options:

Standard Range
(Single Stage):

- E** Standard
- R** Programmable
(add **\$202.15** list)

Extended Range
(Dual Stage, Low):

- P** Standard
- S** Programmable
(add **\$202.15** list)

(Dual Stage, High):

- Q** Standard
- T** Programmable
(add **\$202.15** list)

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$63.50 upcharge list for Grade B trim colors.


Planes Single-Sided Benching — Rectangular

Electric Adjustment

Depth	Width	Number	①②	③	Laminate A		Laminate B		Laminate E		Wood A		Wood B	
					J	F	J	F	J	F	K	U	K	U
					Standard Range (Single Stage)									
23"(584mm)	46"(1168mm)	TARA-2346-		SNS	\$ 4330.13	\$4806.23	\$ 4377.30	\$ 4853.40	\$ 4669.28	\$ 5145.38	\$ 5333.39	\$ 5874.35	\$ 5368.65	\$ 5909.61
	52"(1321mm)	TARA-2352-		SNS	4474.43	4991.93	4527.75	5045.25	4857.81	5375.31	5564.93	6152.93	5604.79	6192.79
	58"(1473mm)	TARA-2358-		SNS	4618.73	5177.63	4678.20	5237.10	5046.35	5605.25	5796.47	6431.51	5840.94	6475.98
	64"(1626mm)	TARA-2364-		SNS	4763.03	5363.33	4828.66	5428.96	5234.89	5835.19	6028.01	6710.09	6077.08	6759.16
	70"(1778mm)	TARA-2370-		SNS	4907.33	5549.03	4979.11	5620.81	5423.43	6065.13	6259.55	6988.67	6313.22	7042.34
24"(610mm)	46"(1168mm)	TARA-2446-		SNS	\$4356.94	\$4839.94	\$ 4406.16	\$ 4889.16	\$ 4710.83	\$ 5193.83	\$ 5374.74	\$ 5923.54	\$ 5411.54	\$ 5960.34
	52"(1321mm)	TARA-2452-		SNS	4504.59	5028.99	4560.23	5084.63	4904.64	5429.04	5609.63	6205.47	5651.23	6247.07
	58"(1473mm)	TARA-2458-		SNS	4652.24	5218.04	4714.30	5280.10	5098.45	5664.25	5844.52	6487.40	5890.92	6533.80
	64"(1626mm)	TARA-2464-		SNS	4799.89	5407.09	4868.37	5475.57	5292.26	5899.46	6079.41	6769.33	6130.61	6820.53
	70"(1778mm)	TARA-2470-		SNS	4947.54	5596.14	5022.44	5671.04	5486.07	6134.67	6314.30	7051.26	6370.30	7107.26
29"(737mm)	46"(1168mm)	TARA-2946-		SNS	\$ 4521.23	\$ 5038.73	\$4580.70	\$ 5098.20	\$4948.85	\$ 5466.35	\$ 5611.73	\$ 6199.73	\$5656.20	\$ 6244.20
	52"(1321mm)	TARA-2952-		SNS	4685.62	5244.52	4752.85	5311.75	5169.02	5727.92	5863.36	6498.40	5913.63	6548.67
	58"(1473mm)	TARA-2958-		SNS	4850.02	5450.32	4925.01	5525.31	5389.19	5989.49	6115.00	6797.08	6171.06	6853.14
	64"(1626mm)	TARA-2964-		SNS	5014.41	5656.11	5097.16	5738.86	5609.36	6251.06	6366.63	7095.75	6428.50	7157.62
	70"(1778mm)	TARA-2970-		SNS	5178.80	5861.90	5269.31	5952.41	5829.53	6512.63	6618.26	7394.42	6685.93	7462.09
30"(762mm)	46"(1168mm)	TARA-3046-		SNS	\$4548.04	\$ 5072.44	\$4609.57	\$ 5133.97	\$ 4990.41	\$ 5514.81	\$5653.08	\$ 6248.92	\$5699.08	\$ 6294.92
	52"(1321mm)	TARA-3052-		SNS	4715.79	5281.59	4785.34	5351.14	5215.85	5781.65	5908.07	6550.95	5960.07	6602.95
	58"(1473mm)	TARA-3058-		SNS	4883.53	5490.73	4961.10	5568.30	5441.29	6048.49	6163.05	6852.97	6221.05	6910.97
	64"(1626mm)	TARA-3064-		SNS	5051.27	5699.87	5136.87	5785.47	5666.74	6315.34	6418.03	7154.99	6482.03	7218.99
	70"(1778mm)	TARA-3070-		SNS	5219.01	5909.01	5312.64	6002.64	5892.18	6582.18	6673.01	7457.01	6743.01	7527.01
Extended Range (Dual Stage)														
23"(584mm)	46"(1168mm)	TARA-2346-		SNS	\$ 5248.13	\$ 5724.23	\$5295.30	\$ 5771.40	\$ 5587.28	\$ 6063.38	\$ 6251.39	\$ 6792.35	\$ 6286.65	\$ 6827.61
	52"(1321mm)	TARA-2352-		SNS	5410.08	5927.58	5463.40	5980.90	5793.46	6310.96	6500.58	7088.58	6540.44	7128.44
	58"(1473mm)	TARA-2358-		SNS	5572.04	6130.94	5631.51	6190.41	5999.66	6558.56	6749.78	7384.82	6794.25	7429.29
	64"(1626mm)	TARA-2364-		SNS	5733.99	6334.29	5799.62	6399.92	6205.85	6806.15	6998.97	7681.05	7048.04	7730.12
	70"(1778mm)	TARA-2370-		SNS	5895.95	6537.65	5967.73	6609.43	6412.05	7053.75	7248.17	7977.29	7301.84	8030.96
24"(610mm)	46"(1168mm)	TARA-2446-		SNS	\$ 5274.94	\$ 5757.94	\$ 5324.16	\$ 5807.16	\$ 5628.83	\$ 6111.83	\$ 6292.74	\$ 6841.54	\$ 6329.54	\$ 6878.34
	52"(1321mm)	TARA-2452-		SNS	5440.24	5964.64	5495.88	6020.28	5840.29	6364.69	6545.28	7141.12	6586.88	7182.72
	58"(1473mm)	TARA-2458-		SNS	5605.55	6171.35	5667.61	6233.41	6051.76	6617.56	6797.83	7440.71	6844.23	7487.11
	64"(1626mm)	TARA-2464-		SNS	5770.85	6378.05	5839.33	6446.53	6263.22	6870.42	7050.37	7740.29	7101.57	7791.49
	70"(1778mm)	TARA-2470-		SNS	5936.16	6584.76	6011.06	6659.66	6474.69	7123.29	7302.92	8039.88	7358.92	8095.88
29"(737mm)	46"(1168mm)	TARA-2946-		SNS	\$5448.06	\$ 5965.56	\$ 5507.53	\$ 6025.03	\$ 5875.68	\$ 6393.18	\$ 6538.56	\$ 7126.56	\$ 6583.03	\$ 7171.03
	52"(1321mm)	TARA-2952-		SNS	5630.10	6189.00	5697.33	6256.23	6113.50	6672.40	6807.84	7442.88	6858.11	7493.15
	58"(1473mm)	TARA-2958-		SNS	5812.15	6412.45	5887.14	6487.44	6351.32	6951.62	7077.13	7759.21	7133.19	7815.27
	64"(1626mm)	TARA-2964-		SNS	5994.20	6635.90	6076.95	6718.65	6589.15	7230.85	7346.42	8075.54	7408.29	8137.41
	70"(1778mm)	TARA-2970-		SNS	6176.24	6859.34	6266.75	6949.85	6826.97	7510.07	7615.70	8391.86	7683.37	8459.53
30"(762mm)	46"(1168mm)	TARA-3046-		SNS	\$ 5474.87	\$ 5999.27	\$5536.40	\$ 6060.80	\$ 5917.24	\$ 6441.64	\$ 6579.91	\$ 7175.75	\$ 6625.91	\$ 7221.75
	52"(1321mm)	TARA-3052-		SNS	5660.27	6226.07	5729.82	6295.62	6160.33	6726.13	6852.55	7495.43	6904.55	7547.43
	58"(1473mm)	TARA-3058-		SNS	5845.66	6452.86	5923.23	6530.43	6403.42	7010.62	7125.18	7815.10	7183.18	7873.10
	64"(1626mm)	TARA-3064-		SNS	6031.06	6679.66	6116.66	6765.26	6646.53	7295.13	7397.82	8134.78	7461.82	8198.78
	70"(1778mm)	TARA-3070-		SNS	6216.45	6906.45	6310.08	7000.08	6889.62	7579.62	7670.45	8454.45	7740.45	8524.45


Planes Height Adjustable 120° Benching

Catalog Logic

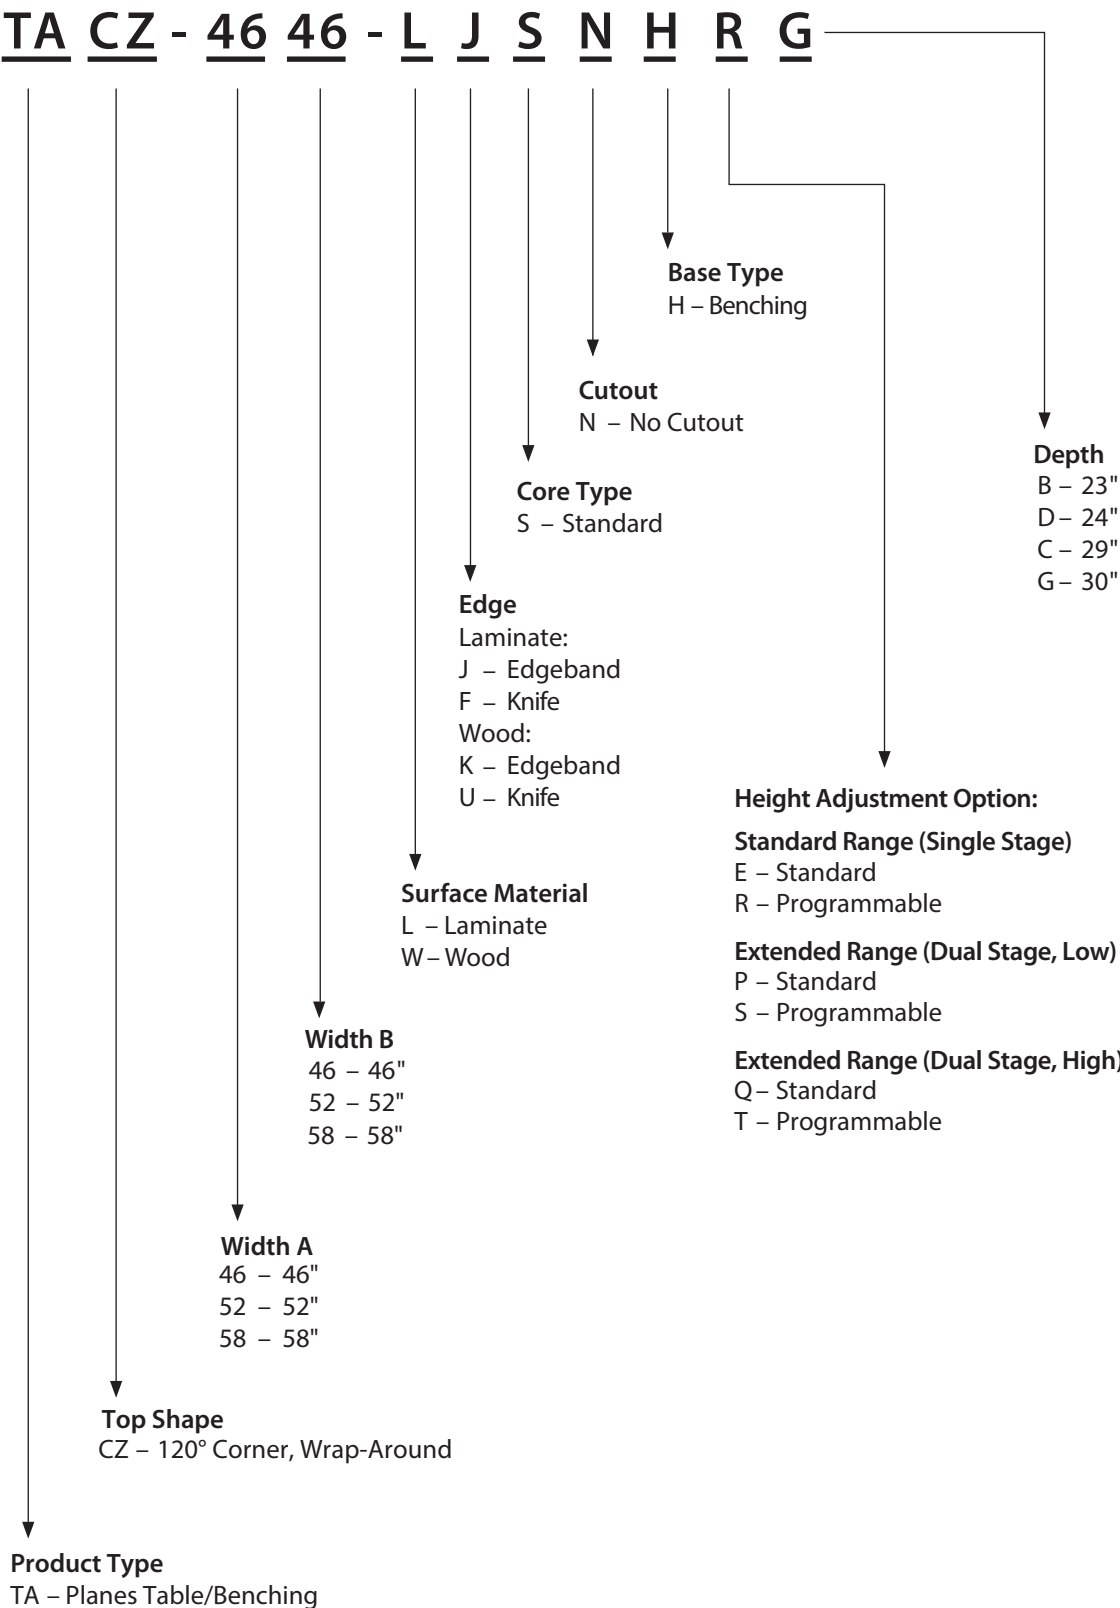


Planes Three-Sided Benching — 120°

Electric Adjustment



TACZ

Class TA - SIN 33721; Discount Group X

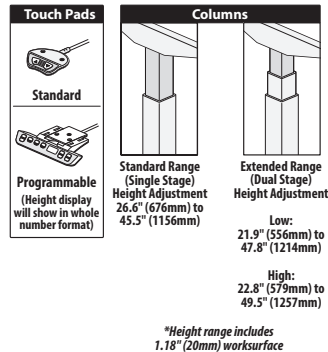

Features

- Includes:
 - Three 1.18" (30mm) thick 120 degree worksurfaces
 - 3 sets of Telescoping base assemblies with crossbeams
 - Fixed J-Rail frame system
 - Three Power and data channels with troughs
 - Center connection tray and triangle cover
 - Three Standard or programmable touch pad switches
 - Wire management clips
 - Three 9'(2743mm) long black power cords with NEMA 5-15P plugs
 - Three cable extensions (for top width 52"(1321mm) or greater)
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Worksurface:
 - Laminate or Veneer with knife edge or 3mm edgeband option
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered run of benching.
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Total lifting capacity of each table is 300 lbs. including surface; applied weight should be evenly distributed.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Surface Options:

L Laminate

W Wood

2 Edge Options:

Laminate:

J Edgeband

F Knife

Wood:

K Edgeband

U Knife

3 Height Adjustment Options:

Standard Range
(Single Stage):

E Standard

R Programmable
(add **\$606.44** list)

Extended Range
(Dual Stage, Low):

P Standard

S Programmable
(add **\$606.44** list)

(Dual Stage, High):

Q Standard

T Programmable
(add **\$606.44** list)

2) Laminate surface color or wood finish color.

3) Edge trim color (laminate only).

4) Base trim color.

Note: \$126.99 upcharge list for Grade B trim colors.

Planes Three-Sided Benching — 120°


Electric Adjustment

Depth	Width	Top Weights (lbs.)	Number	①②	③	Laminate A		Laminate B		Wood A		Wood B		
						F	J	F	J	K	U	K	U	
Standard Range (Single Stage)														
23"(584mm)	46"(1168mm)	68	TACZ-4646-		SNH	B	\$ 25207.72	\$ 25828.90	\$ 25916.51	\$ 26537.69	\$ 30120.15	\$ 32166.39	\$30293.30	\$ 32339.54
	52"(1321mm)	79	TACZ-5252-		SNH	B	25475.70	26175.42	26202.97	26902.69	30868.39	33173.35	31055.34	33360.30
	58"(1473mm)	91	TACZ-5858-		SNH	B	25741.99	26516.68	26487.76	27262.45	31593.11	34145.03	31793.88	34345.80
24"(610mm)	46"(1168mm)	72	TACZ-4646-		SNH	D	\$ 25286.41	\$ 25911.16	\$ 26001.36	\$ 26626.11	\$30220.67	\$ 32278.67	\$ 30398.41	\$ 32456.41
	52"(1321mm)	83	TACZ-5252-		SNH	D	25562.75	26262.47	26296.99	26996.71	30955.44	33260.40	31147.59	33452.55
	58"(1473mm)	96	TACZ-5858-		SNH	D	25839.09	26613.78	26592.62	27367.31	31690.21	34242.13	31896.77	34448.69
29"(737mm)	46"(1168mm)	79	TACZ-4646-		SNH	C	\$ 25674.79	\$ 26306.68	\$26420.56	\$ 27052.45	\$ 30652.71	\$ 32734.23	\$30853.48	\$ 32935.00
	52"(1321mm)	93	TACZ-5252-		SNH	C	26001.36	26708.22	26770.43	27477.29	31437.71	33766.19	31655.88	33984.36
	58"(1473mm)	108	TACZ-5858-		SNH	C	26329.60	27115.00	27121.98	27907.38	32246.21	34833.41	32481.79	35068.99
30"(762mm)	46"(1168mm)	83	TACZ-4646-		SNH	G	\$ 25751.80	\$ 26383.69	\$ 26503.72	\$ 27135.61	\$ 30729.72	\$ 32811.24	\$30935.08	\$ 33016.60
	52"(1321mm)	97	TACZ-5252-		SNH	G	26090.08	26800.51	26866.12	27576.55	31548.26	33888.50	31771.64	34111.88
	58"(1473mm)	113	TACZ-5858-		SNH	G	26426.69	27212.09	27226.84	28012.24	32343.30	34930.50	32584.69	35171.89
Extended Range (Dual Stage)														
23"(584mm)	46"(1168mm)	68	TACZ-4646-		SNH	B	\$ 28093.29	\$ 28714.47	\$28802.08	\$29423.26	\$33005.72	\$ 35051.96	\$ 33178.87	\$ 35225.11
	52"(1321mm)	79	TACZ-5252-		SNH	B	28361.27	29060.99	29088.54	29788.26	33753.96	36058.92	33940.91	36245.87
	58"(1473mm)	91	TACZ-5858-		SNH	B	28627.56	29402.25	29373.33	30148.02	34478.68	37030.60	34679.45	37231.37
24"(610mm)	46"(1168mm)	72	TACZ-4646-		SNH	D	\$ 28171.98	\$ 28796.73	\$28886.93	\$ 29511.68	\$ 33106.24	\$ 35164.24	\$33283.98	\$ 35341.98
	52"(1321mm)	83	TACZ-5252-		SNH	D	28448.32	29148.04	29182.56	29882.28	33841.01	36145.97	34033.16	36338.12
	58"(1473mm)	96	TACZ-5858-		SNH	D	28724.66	29499.35	29478.19	30252.88	34575.78	37127.70	34782.34	37334.26
29"(737mm)	46"(1168mm)	79	TACZ-4646-		SNH	C	\$ 28560.36	\$ 29192.25	\$ 29306.13	\$29938.02	\$33538.28	\$ 35619.80	\$33739.05	\$ 35820.57
	52"(1321mm)	93	TACZ-5252-		SNH	C	28886.93	29593.79	29656.00	30362.86	34323.28	36651.76	34541.45	36869.93
	58"(1473mm)	108	TACZ-5858-		SNH	C	29215.17	30000.57	30007.55	30792.95	35131.78	37718.98	35367.36	37954.56
30"(762mm)	46"(1168mm)	83	TACZ-4646-		SNH	G	\$ 28637.37	\$ 29269.26	\$29389.29	\$ 30021.18	\$ 33615.29	\$ 35696.81	\$33820.65	\$ 35902.17
	52"(1321mm)	97	TACZ-5252-		SNH	G	28975.65	29686.08	29751.69	30462.12	34433.83	36774.07	34657.21	36997.45
	58"(1473mm)	113	TACZ-5858-		SNH	G	29312.26	30097.66	30112.41	30897.81	35228.87	37816.07	35470.26	38057.46

Planes LT Benching


Catalog Logic

TL RA - 30 58 - L J S N H R

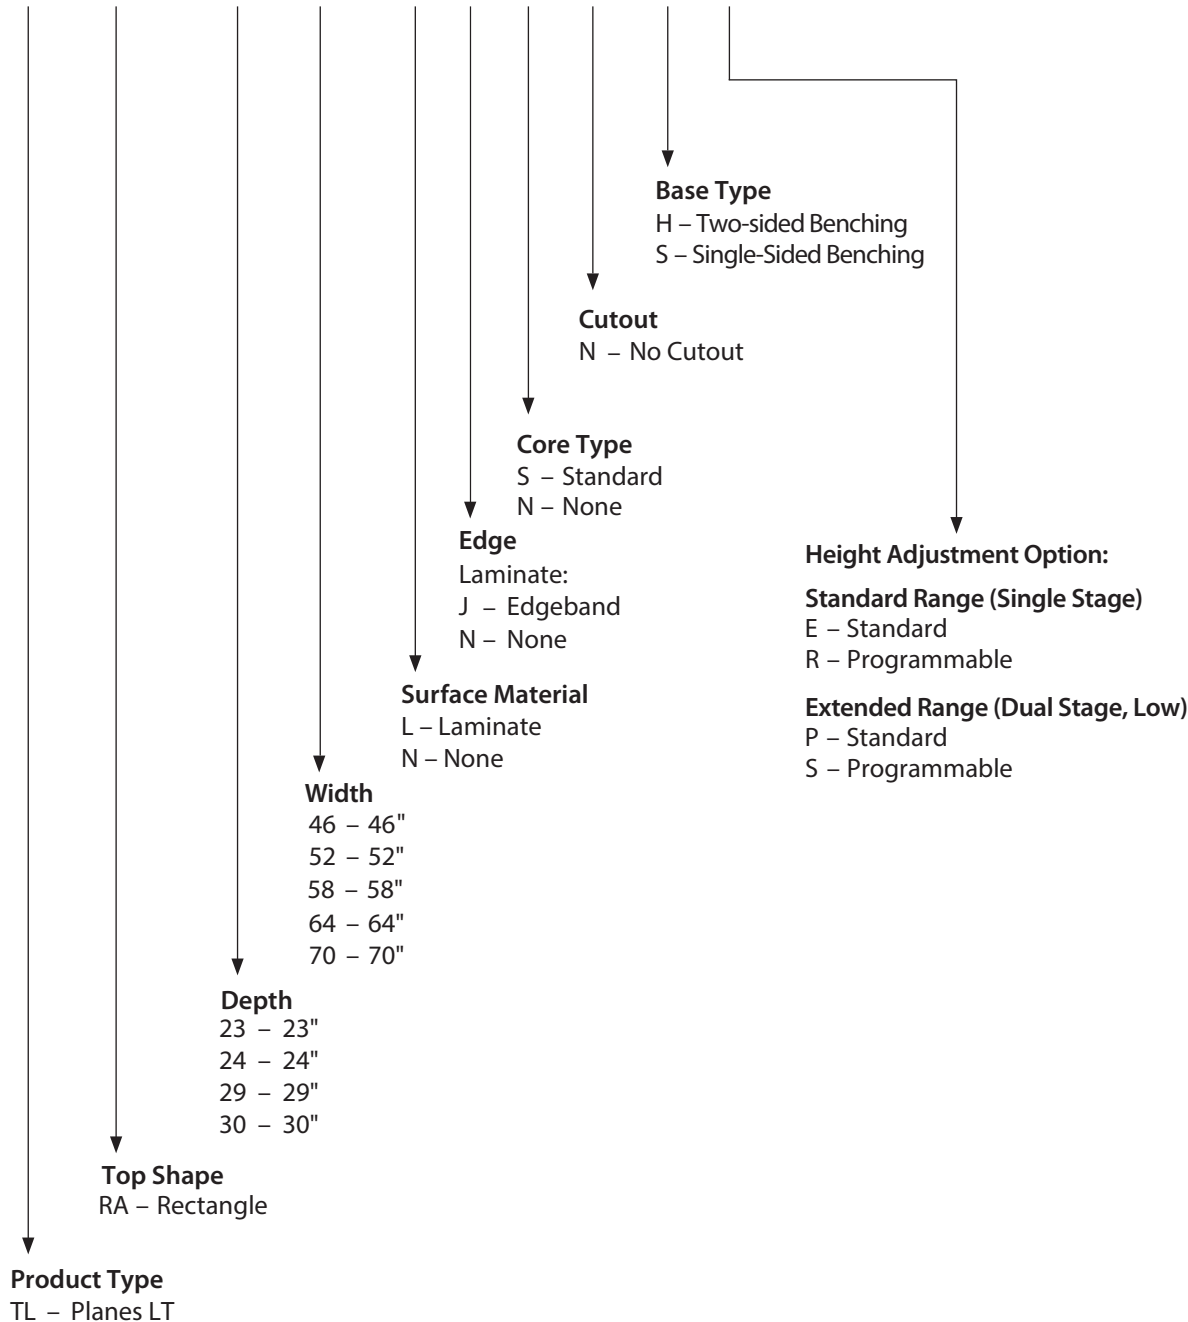


Planes LT Two-Sided Benching — Rectangular

Electric Adjustment

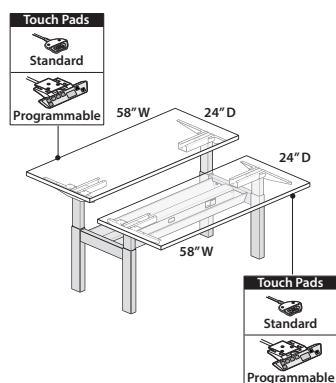

TLRA-2458-LJSNHE
Class TA - SIN 3372; Discount Group XXVIII



Features

- Includes:
 - Two 1.18"(30mm) thick rectangle worksurfaces
 - Two telescoping base assemblies
 - Two Crossbeams for back-to-back base connection
 - Power and data channel with troughs
 - Two Standard or programmable touch pad switches
 - Wire management clips
 - Two 9'(2743mm) long black power cords with NEMA 5-15P plug
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.6"(650mm) of continuous adjustment.
- Worksurface:
 - Laminate worksurface with 3mm edgeband
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered benching run.
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Total lifting capacity of each table is 250 lbs. including surface; applied weight should be evenly distributed.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

① Height Adjustment Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add **\$403.48** list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add **\$403.48** list)

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$119.88 upcharge list for Grade B trim colors.


Planes LT Two-Sided Benching — Rectangular

Electric Adjustment


Depth	Width	Number	①	Laminate		
				A	B	E
Standard Range (Single Stage)						
23"(584mm)	46"(1168mm)	TLRA-2346-LJSNH		\$4860.55	\$ 4967.42	\$5294.40
	52"(1321mm)	TLRA-2352-LJSNH		4922.41	5042.89	5411.80
	58"(1473mm)	TLRA-2358-LJSNH		4984.26	5118.35	5529.20
	64"(1626mm)	TLRA-2364-LJSNH		5046.12	5193.81	5646.60
	70"(1778mm)	TLRA-2370-LJSNH		5107.97	5269.28	5764.00
24"(610mm)	46"(1168mm)	TLRA-2446-LJSNH		\$ 4886.17	\$ 4997.58	\$ 5338.53
	52"(1321mm)	TLRA-2452-LJSNH		4950.61	5076.22	5460.93
	58"(1473mm)	TLRA-2458-LJSNH		5015.05	5154.86	5583.33
	64"(1626mm)	TLRA-2464-LJSNH		5079.49	5233.50	5705.73
	70"(1778mm)	TLRA-2470-LJSNH		5143.93	5312.14	5828.13
29"(737mm)	46"(1168mm)	TLRA-2946-LJSNH		\$ 5014.26	\$ 5148.35	\$5559.20
	52"(1321mm)	TLRA-2952-LJSNH		5091.63	5242.87	5706.60
	58"(1473mm)	TLRA-2958-LJSNH		5168.99	5337.40	5854.00
	64"(1626mm)	TLRA-2964-LJSNH		5246.36	5431.92	6001.40
	70"(1778mm)	TLRA-2970-LJSNH		5323.72	5526.44	6148.80
30"(762mm)	46"(1168mm)	TLRA-3046-LJSNH		\$5039.88	\$ 5178.50	\$5603.33
	52"(1321mm)	TLRA-3052-LJSNH		5119.83	5276.20	5755.73
	58"(1473mm)	TLRA-3058-LJSNH		5199.78	5373.90	5908.13
	64"(1626mm)	TLRA-3064-LJSNH		5279.73	5471.60	6060.53
	70"(1778mm)	TLRA-3070-LJSNH		5359.68	5569.30	6212.93
Extended Range (Dual Stage)						
23"(584mm)	46"(1168mm)	TLRA-2346-LJSNH		\$ 5092.19	\$ 5199.06	\$5526.04
	52"(1321mm)	TLRA-2352-LJSNH		5154.05	5274.53	5643.44
	58"(1473mm)	TLRA-2358-LJSNH		5215.90	5349.99	5760.84
	64"(1626mm)	TLRA-2364-LJSNH		5277.76	5425.45	5878.24
	70"(1778mm)	TLRA-2370-LJSNH		5339.61	5500.92	5995.64
24"(610mm)	46"(1168mm)	TLRA-2446-LJSNH		\$ 5117.81	\$ 5229.22	\$ 5570.17
	52"(1321mm)	TLRA-2452-LJSNH		5182.25	5307.86	5692.57
	58"(1473mm)	TLRA-2458-LJSNH		5246.69	5386.50	5814.97
	64"(1626mm)	TLRA-2464-LJSNH		5311.13	5465.14	5937.37
	70"(1778mm)	TLRA-2470-LJSNH		5375.57	5543.78	6059.77
29"(737mm)	46"(1168mm)	TLRA-2946-LJSNH		\$5245.90	\$ 5379.99	\$5790.84
	52"(1321mm)	TLRA-2952-LJSNH		5323.27	5474.51	5938.24
	58"(1473mm)	TLRA-2958-LJSNH		5400.63	5569.04	6085.64
	64"(1626mm)	TLRA-2964-LJSNH		5478.00	5663.56	6233.04
	70"(1778mm)	TLRA-2970-LJSNH		5555.36	5758.08	6380.44
30"(762mm)	46"(1168mm)	TLRA-3046-LJSNH		\$ 5271.52	\$ 5410.14	\$ 5834.97
	52"(1321mm)	TLRA-3052-LJSNH		5351.47	5507.84	5987.37
	58"(1473mm)	TLRA-3058-LJSNH		5431.42	5605.54	6139.77
	64"(1626mm)	TLRA-3064-LJSNH		5511.37	5703.24	6292.17
	70"(1778mm)	TLRA-3070-LJSNH		5591.32	5800.94	6444.57

Planes Single-Sided Benching — Rectangular

Electric Adjustment



TLRA-2358-LJSNSP
Class TA - SIN 33721; Discount Group XXVIII



Features

- Includes:
 - 1.18"(30mm) thick rectangle worksurfaces
 - Telescoping base assemblies
 - Standard or programmable touch pad switches
 - Wire management clips
 - 9'(2743mm) long black power cord with NEMA 5-15P plug
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Worksurface:
 - Laminate worksurface with 3mm edgeband
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered run of benching.
- Single-sided bench unit cannot be used as a freestanding table. It **MUST** be attached to another bench of equal or greater size.
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Total lifting capacity of each table is 250 lbs. including surface; applied weight should be evenly distributed.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

① Height Adjustment Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add **\$201.74** list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add **\$201.74** list)

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$59.95 upcharge list for Grade B trim colors.


Planes Single-Sided Benching — Rectangular

Electric Adjustment

Depth	Width	Number	①	Laminate		
				A	B	E
Standard Range (Single Stage)						
23"(584mm)	46"(1168mm)	TLRA-2346-LJSNS		\$ 3155.81	\$ 3209.11	\$ 3372.58
	52"(1321mm)	TLRA-2352-LJSNS		3186.75	3246.84	3431.28
	58"(1473mm)	TLRA-2358-LJSNS		3217.70	3284.57	3489.98
	64"(1626mm)	TLRA-2364-LJSNS		3248.65	3322.30	3548.68
	70"(1778mm)	TLRA-2370-LJSNS		3279.59	3360.03	3607.38
24"(610mm)	46"(1168mm)	TLRA-2446-LJSNS		\$ 3175.75	\$ 3231.31	\$ 3401.78
	52"(1321mm)	TLRA-2452-LJSNS		3207.99	3270.63	3462.98
	58"(1473mm)	TLRA-2458-LJSNS		3240.23	3309.95	3524.18
	64"(1626mm)	TLRA-2464-LJSNS		3272.47	3349.27	3585.38
	70"(1778mm)	TLRA-2470-LJSNS		3304.71	3388.59	3646.58
29"(737mm)	46"(1168mm)	TLRA-2946-LJSNS		\$ 3275.48	\$ 3342.35	\$ 3547.76
	52"(1321mm)	TLRA-2952-LJSNS		3314.19	3389.61	3621.46
	58"(1473mm)	TLRA-2958-LJSNS		3352.89	3436.87	3695.16
	64"(1626mm)	TLRA-2964-LJSNS		3391.60	3484.13	3768.86
	70"(1778mm)	TLRA-2970-LJSNS		3430.31	3531.40	3842.56
30"(762mm)	46"(1168mm)	TLRA-3046-LJSNS		\$ 3295.43	\$ 3364.56	\$ 3576.96
	52"(1321mm)	TLRA-3052-LJSNS		3335.43	3413.41	3653.16
	58"(1473mm)	TLRA-3058-LJSNS		3375.43	3462.26	3729.36
	64"(1626mm)	TLRA-3064-LJSNS		3415.43	3511.11	3805.56
	70"(1778mm)	TLRA-3070-LJSNS		3455.43	3559.96	3881.76
Extended Range (Dual Stage)						
23"(584mm)	46"(1168mm)	TLRA-2346-LJSNS		\$ 3312.80	\$ 3366.10	\$ 3529.57
	52"(1321mm)	TLRA-2352-LJSNS		3343.74	3403.83	3588.27
	58"(1473mm)	TLRA-2358-LJSNS		3374.69	3441.56	3646.97
	64"(1626mm)	TLRA-2364-LJSNS		3405.64	3479.29	3705.67
	70"(1778mm)	TLRA-2370-LJSNS		3436.58	3517.02	3764.37
24"(610mm)	46"(1168mm)	TLRA-2446-LJSNS		\$ 3332.74	\$ 3388.30	\$ 3558.77
	52"(1321mm)	TLRA-2452-LJSNS		3364.98	3427.62	3619.97
	58"(1473mm)	TLRA-2458-LJSNS		3397.22	3466.94	3681.17
	64"(1626mm)	TLRA-2464-LJSNS		3429.46	3506.26	3742.37
	70"(1778mm)	TLRA-2470-LJSNS		3461.70	3545.58	3803.57
29"(737mm)	46"(1168mm)	TLRA-2946-LJSNS		\$ 3432.47	\$ 3499.34	\$ 3704.75
	52"(1321mm)	TLRA-2952-LJSNS		3471.18	3546.60	3778.45
	58"(1473mm)	TLRA-2958-LJSNS		3509.88	3593.86	3852.15
	64"(1626mm)	TLRA-2964-LJSNS		3548.59	3641.12	3925.85
	70"(1778mm)	TLRA-2970-LJSNS		3587.30	3688.39	3999.55
30"(762mm)	46"(1168mm)	TLRA-3046-LJSNS		\$ 3452.42	\$ 3521.55	\$ 3733.95
	52"(1321mm)	TLRA-3052-LJSNS		3492.42	3570.40	3810.15
	58"(1473mm)	TLRA-3058-LJSNS		3532.42	3619.25	3886.35
	64"(1626mm)	TLRA-3064-LJSNS		3572.42	3668.10	3962.55
	70"(1778mm)	TLRA-3070-LJSNS		3612.42	3716.95	4038.75


Planes LT Benching

Catalog Logic

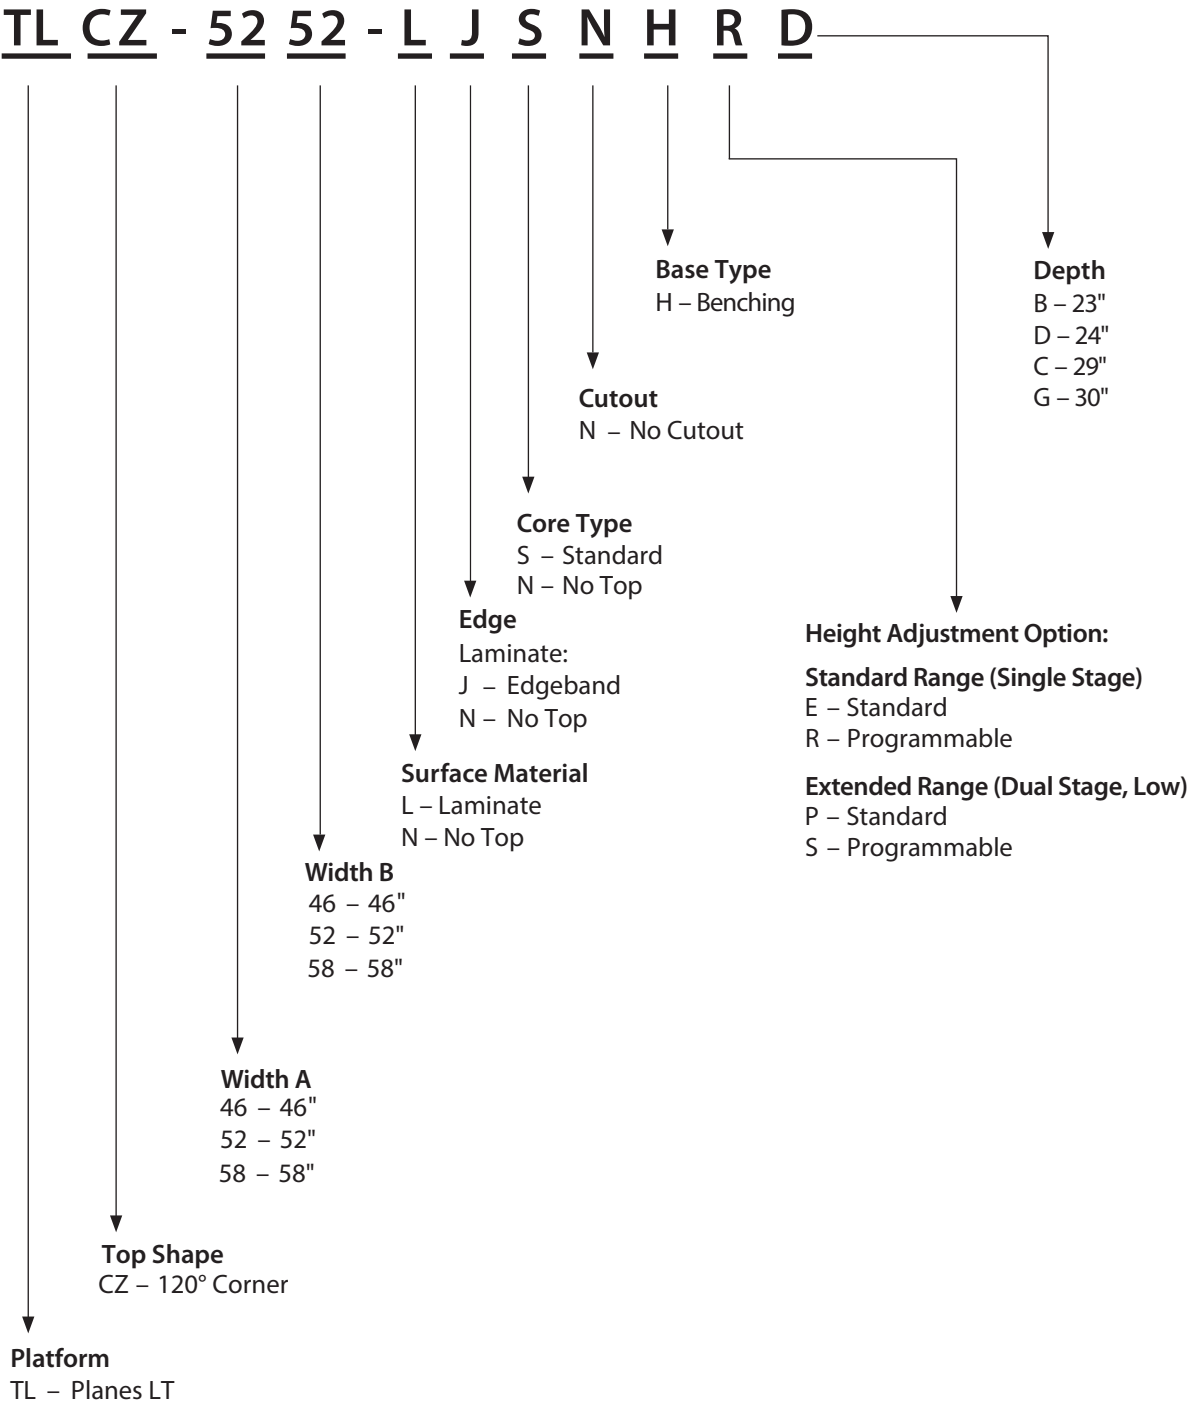


Planes LT Three-Sided Benching — 120°

Electric Adjustment



TLCZ-4646-LJSNHPB

Class TA - SIN 33721; Discount Group X



Features

- Includes:
 - Three 1.18" (30mm) thick 120 degree worksurfaces
 - 3 sets of Telescoping base assemblies
 - Three Power and data channels with troughs
 - Center connection tray and triangle cover
 - Three Standard or programmable touch pad switches
 - Wire management clips
 - Three 9'(2743mm) long black power cords with NEMA 5-15P plugs
 - Three 5'(1524mm) cable extensions (for top widths 52"(1321mm) or greater)
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous height adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.6"(650mm) of continuous adjustment.
- Worksurface:
 - Laminate worksurface with 3mm edgeband
 - 3mm Edgeband on user edge and 1mm on remaining edges
- Base Assembly:
 - Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
 - Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered run of benching.
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Total lifting capacity of each table is 300 lbs. including surface; applied weight should be evenly distributed.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

① Height Adjustment Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add **\$605.22** list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add **\$605.22** list)

2) Laminate surface color.

3) Edge trim color.

4) Base trim color.

Note: \$119.88 upcharge list for Grade B trim colors.


Planes LT Three-Sided Benching — 120°

Electric Adjustment

Depth	Width	Number	①	Laminate	
				A	B
Standard Range (Single Stage)					
23"(584mm)	46"(1168mm)	TLOZ-4646-LJSNH	B	\$ 14519.63	\$15027.68
	52"(1321mm)	TLOZ-5252-LJSNH	B	14923.13	15487.76
	58"(1473mm)	TLOZ-5858-LJSNH	B	15326.63	15947.84
24"(610mm)	46"(1168mm)	TLOZ-4646-LJSNH	D	\$14529.24	\$15037.29
	52"(1321mm)	TLOZ-5252-LJSNH	D	14932.74	15497.37
	58"(1473mm)	TLOZ-5858-LJSNH	D	15336.24	15957.45
29"(737mm)	46"(1168mm)	TLOZ-4646-LJSNH	C	\$ 14836.67	\$15344.72
	52"(1321mm)	TLOZ-5252-LJSNH	C	15240.17	15804.80
	58"(1473mm)	TLOZ-5858-LJSNH	C	15643.67	16264.88
30"(762mm)	46"(1168mm)	TLOZ-4646-LJSNH	G	\$14846.28	\$15354.33
	52"(1321mm)	TLOZ-5252-LJSNH	G	15249.78	15814.41
	58"(1473mm)	TLOZ-5858-LJSNH	G	15653.28	16274.49
Extended Range (Dual Stage)					
23"(584mm)	46"(1168mm)	TLOZ-4646-LJSNH	B	\$15686.84	\$16194.89
	52"(1321mm)	TLOZ-5252-LJSNH	B	16090.34	16654.97
	58"(1473mm)	TLOZ-5858-LJSNH	B	16493.84	17115.05
24"(610mm)	46"(1168mm)	TLOZ-4646-LJSNH	D	\$15696.45	\$16204.50
	52"(1321mm)	TLOZ-5252-LJSNH	D	16099.95	16664.58
	58"(1473mm)	TLOZ-5858-LJSNH	D	16503.45	17124.66
29"(737mm)	46"(1168mm)	TLOZ-4646-LJSNH	C	\$16003.88	\$16511.93
	52"(1321mm)	TLOZ-5252-LJSNH	C	16407.38	16972.01
	58"(1473mm)	TLOZ-5858-LJSNH	C	16810.88	17432.09
30"(762mm)	46"(1168mm)	TLOZ-4646-LJSNH	G	\$ 16013.49	\$16521.54
	52"(1321mm)	TLOZ-5252-LJSNH	G	16416.99	16981.62
	58"(1473mm)	TLOZ-5858-LJSNH	G	16820.49	17441.70



Planes Base for Two-Sided Benching

Electric Adjustment

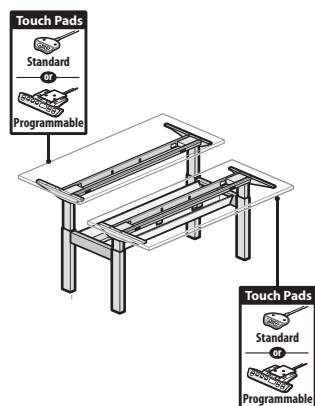

TMRA-2458-NH

Class TA - SIN 33721; Discount Group X

Touch Pads	Columns
 Standard	 Standard Range (Single Stage) Height Adjustment 26.6" (676mm) to 45.5" (1156mm)
 Programmable (Height display will show in whole number format)	 Extended Range (Dual Stage) Height Adjustment
	Low: 21.9" (556mm) to 47.8" (1214mm) High: 22.8" (579mm) to 49.5" (1257mm)

*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - Two sets of telescoping columns
 - Two Crossbeams for back-to-back base connection
 - Fixed J-Rail frame system with End Brackets
 - Power and data channel with trough
 - Two Control Boxes
 - Two Standard or programmable touch pad switches
 - Wire management clips
 - Two 9'(2743mm) long black power cord with NEMA 5-15P plug
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.9"(480mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature a range of 25.9"(658mm) - 26.7"(678mm) of continuous adjustment.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimension.

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered benching run.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Select a work surface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- Total lifting capacity of each table is 250 lbs. including surface; applied weight should be evenly distributed.
- Base Only Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management

To Order, Specify:

1) Product number, including:

1 Height Adjustment Actuator Options:

Standard Range

(Single Stage):

E Standard

R Programmable
(add **\$404.31** list)

Extended Range

(Dual Stage, Low):

P Standard

S Programmable
(add **\$404.31** list)

(Dual Stage, High):

Q Standard

T Programmable
(add **\$404.31** list)

2) Base trim color.


Planes Base for Two-Sided Benching

Electric Adjustment

Top Depth	Minimum Top Width	Maximum Top Width	Number	①	Trim A	B
Standard Range (Single Stage)						
24"(610mm)	46"(1168mm)	51"(1295mm)	TMRA-2446-NNNNH		\$ 8024.51	\$ 8151.50
	52"(1321mm)	57"(1448mm)	TMRA-2452-NNNNH		8183.81	8310.80
	58"(1473mm)	58"(1473mm)	TMRA-2458-NNNNH		8343.11	8470.10
	64"(1626mm)	69"(1753mm)	TMRA-2464-NNNNH		8502.41	8629.40
	70"(1778mm)	75"(1905mm)	TMRA-2470-NNNNH		8661.71	8788.70
30"(762mm)	46"(1168mm)	51"(1295mm)	TMRA-3046-NNNNH		\$ 8202.16	\$ 8329.15
	52"(1321mm)	57"(1448mm)	TMRA-3052-NNNNH		8361.46	8488.45
	58"(1473mm)	58"(1473mm)	TMRA-3058-NNNNH		8520.76	8647.75
	64"(1626mm)	69"(1753mm)	TMRA-3064-NNNNH		8680.06	8807.05
	70"(1778mm)	75"(1905mm)	TMRA-3070-NNNNH		8839.36	8966.35
Extended Range (Dual Stage)						
24"(610mm)	46"(1168mm)	51"(1295mm)	TMRA-2446-NNNNH		\$10330.55	\$10457.54
	52"(1321mm)	57"(1448mm)	TMRA-2452-NNNNH		10489.85	10616.84
	58"(1473mm)	58"(1473mm)	TMRA-2458-NNNNH		10649.15	10776.14
	64"(1626mm)	69"(1753mm)	TMRA-2464-NNNNH		10808.45	10935.44
	70"(1778mm)	75"(1905mm)	TMRA-2470-NNNNH		10967.75	11094.74
30"(762mm)	46"(1168mm)	51"(1295mm)	TMRA-3046-NNNNH		\$10508.20	\$ 10635.19
	52"(1321mm)	57"(1448mm)	TMRA-3052-NNNNH		10667.50	10794.49
	58"(1473mm)	58"(1473mm)	TMRA-3058-NNNNH		10826.80	10953.79
	64"(1626mm)	69"(1753mm)	TMRA-3064-NNNNH		10986.10	11113.09
	70"(1778mm)	75"(1905mm)	TMRA-3070-NNNNH		11145.40	11272.39


Planes LT Base for Two-Sided Benching

Electric Adjustment

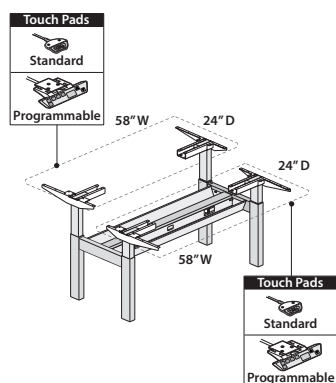

TLRA-2458-NNNNHE

Class TA - SIN 33721; Discount Group XXVIII



*Height range includes 1.18" (20mm) worksurface



Features

- Includes:
 - Two sets of telescoping columns with steel motor housing enclosure
 - Two Crossbeams for back-to-back base connection
 - Two sets of End Brackets
 - Power and data channel with trough
 - Two Control Boxes
 - Two Standard or programmable touch pad switches
 - Wire management clips
 - Two 9'(2743mm) long black power cord with NEMA 5-15P plug
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.6"(650mm) of continuous adjustment.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered benching run.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- Total lifting capacity of each table is 250 lbs. including surface; applied weight should be evenly distributed.
- Base Only Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management

To Order, Specify:

1) Product number, including:

1 Height Adjustment Options:

Standard Range (Single Stage):

- E** Standard
- R** Programmable (add **\$403.48** list)

Extended Range (Dual Stage):

- P** Standard
- S** Programmable (add **\$403.48** list)

2) Base trim color.


Planes LT Base for Two-Sided Benching

Electric Adjustment


Depth	Width	Number	①	Trim	
				A	B
Standard Range (Single Stage)					
23"(584mm)	46"(1168mm)	TLRA-2346-NNNNH		\$4683.57	\$4803.45
	52"(1321mm)	TLRA-2352-NNNNH		4683.57	4803.45
	58"(1473mm)	TLRA-2358-NNNNH		4683.57	4803.45
	64"(1626mm)	TLRA-2364-NNNNH		4683.57	4803.45
	70"(1778mm)	TLRA-2370-NNNNH		4683.57	4803.45
24"(610mm)	46"(1168mm)	TLRA-2446-NNNNH		\$4689.35	\$4809.23
	52"(1321mm)	TLRA-2452-NNNNH		4689.35	4809.23
	58"(1473mm)	TLRA-2458-NNNNH		4689.35	4809.23
	64"(1626mm)	TLRA-2464-NNNNH		4689.35	4809.23
	70"(1778mm)	TLRA-2470-NNNNH		4689.35	4809.23
29"(737mm)	46"(1168mm)	TLRA-2946-NNNNH		\$ 4718.25	\$4838.13
	52"(1321mm)	TLRA-2952-NNNNH		4718.25	4838.13
	58"(1473mm)	TLRA-2958-NNNNH		4718.25	4838.13
	64"(1626mm)	TLRA-2964-NNNNH		4718.25	4838.13
	70"(1778mm)	TLRA-2970-NNNNH		4718.25	4838.13
30"(762mm)	46"(1168mm)	TLRA-3046-NNNNH		\$4724.03	\$4843.91
	52"(1321mm)	TLRA-3052-NNNNH		4724.03	4843.91
	58"(1473mm)	TLRA-3058-NNNNH		4724.03	4843.91
	64"(1626mm)	TLRA-3064-NNNNH		4724.03	4843.91
	70"(1778mm)	TLRA-3070-NNNNH		4724.03	4843.91
Extended Range (Dual Stage)					
23"(584mm)	46"(1168mm)	TLRA-2346-NNNNH		\$ 4931.43	\$5051.31
	52"(1321mm)	TLRA-2352-NNNNH		4931.43	5051.31
	58"(1473mm)	TLRA-2358-NNNNH		4931.43	5051.31
	64"(1626mm)	TLRA-2364-NNNNH		4931.43	5051.31
	70"(1778mm)	TLRA-2370-NNNNH		4931.43	5051.31
24"(610mm)	46"(1168mm)	TLRA-2446-NNNNH		\$ 4937.21	\$5057.09
	52"(1321mm)	TLRA-2452-NNNNH		4937.21	5057.09
	58"(1473mm)	TLRA-2458-NNNNH		4937.21	5057.09
	64"(1626mm)	TLRA-2464-NNNNH		4937.21	5057.09
	70"(1778mm)	TLRA-2470-NNNNH		4937.21	5057.09
29"(737mm)	46"(1168mm)	TLRA-2946-NNNNH		\$ 4966.11	\$5085.99
	52"(1321mm)	TLRA-2952-NNNNH		4966.11	5085.99
	58"(1473mm)	TLRA-2958-NNNNH		4966.11	5085.99
	64"(1626mm)	TLRA-2964-NNNNH		4966.11	5085.99
	70"(1778mm)	TLRA-2970-NNNNH		4966.11	5085.99
30"(762mm)	46"(1168mm)	TLRA-3046-NNNNH		\$ 4971.89	\$5091.77
	52"(1321mm)	TLRA-3052-NNNNH		4971.89	5091.77
	58"(1473mm)	TLRA-3058-NNNNH		4971.89	5091.77
	64"(1626mm)	TLRA-3064-NNNNH		4971.89	5091.77
	70"(1778mm)	TLRA-3070-NNNNH		4971.89	5091.77

Planes LT Base for Single-Sided Benching

Electric Adjustment



TLRA-2958-NNNNSP
Class TA - SIN 33721; Discount Group XXVIII



*Height range includes
1.18" (20mm) work surface



Features

- Includes:
 - Set of telescoping columns with steel motor housing enclosure
 - Set of End Brackets
 - Power and data channel with trough
 - Control Boxes
 - Standard or programmable touch pad switches
 - Wire management clips
 - 9'(2743mm) long black power cord with NEMA 5-15P plug
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.6"(650mm) of continuous adjustment.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered run of benching.
- Select a work surface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Total lifting capacity of each table is 300 lbs. including surface; applied weight should be evenly distributed.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Options:

Standard Range (Single Stage):

E Standard

R Programmable
(add **\$201.74** list)

Extended Range (Dual Stage):

P Standard

S Programmable
(add **\$201.74** list)

2) Base trim color.


Planes LT Base for Single-Sided Benching

Electric Adjustment

Depth	Width	Number	①	Trim	
				A	B
Standard Range (Single Stage)					
23"(584mm)	46"(1168mm)	TLRA-2346-NNNNS		\$ 3117.97	\$3177.92
	52"(1321mm)	TLRA-2352-NNNNS		3117.97	3177.92
	58"(1473mm)	TLRA-2358-NNNNS		3117.97	3177.92
	64"(1626mm)	TLRA-2364-NNNNS		3117.97	3177.92
	70"(1778mm)	TLRA-2370-NNNNS		3117.97	3177.92
24"(610mm)	46"(1168mm)	TLRA-2446-NNNNS		\$ 3128.49	\$3188.44
	52"(1321mm)	TLRA-2452-NNNNS		3128.49	3188.44
	58"(1473mm)	TLRA-2458-NNNNS		3128.49	3188.44
	64"(1626mm)	TLRA-2464-NNNNS		3128.49	3188.44
	70"(1778mm)	TLRA-2470-NNNNS		3128.49	3188.44
29"(737mm)	46"(1168mm)	TLRA-2946-NNNNS		\$ 3181.09	\$3241.04
	52"(1321mm)	TLRA-2952-NNNNS		3181.09	3241.04
	58"(1473mm)	TLRA-2958-NNNNS		3181.09	3241.04
	64"(1626mm)	TLRA-2964-NNNNS		3181.09	3241.04
	70"(1778mm)	TLRA-2970-NNNNS		3181.09	3241.04
30"(762mm)	46"(1168mm)	TLRA-3046-NNNNS		\$ 3191.61	\$3251.56
	52"(1321mm)	TLRA-3052-NNNNS		3191.61	3251.56
	58"(1473mm)	TLRA-3058-NNNNS		3191.61	3251.56
	64"(1626mm)	TLRA-3064-NNNNS		3191.61	3251.56
	70"(1778mm)	TLRA-3070-NNNNS		3191.61	3251.56
Extended Range (Dual Stage)					
23"(584mm)	46"(1168mm)	TLRA-2346-NNNNS		\$3285.95	\$3345.90
	52"(1321mm)	TLRA-2352-NNNNS		3285.95	3345.90
	58"(1473mm)	TLRA-2358-NNNNS		3285.95	3345.90
	64"(1626mm)	TLRA-2364-NNNNS		3285.95	3345.90
	70"(1778mm)	TLRA-2370-NNNNS		3285.95	3345.90
24"(610mm)	46"(1168mm)	TLRA-2446-NNNNS		\$3296.47	\$3356.42
	52"(1321mm)	TLRA-2452-NNNNS		3296.47	3356.42
	58"(1473mm)	TLRA-2458-NNNNS		3296.47	3356.42
	64"(1626mm)	TLRA-2464-NNNNS		3296.47	3356.42
	70"(1778mm)	TLRA-2470-NNNNS		3296.47	3356.42
29"(737mm)	46"(1168mm)	TLRA-2946-NNNNS		\$3349.07	\$3409.02
	52"(1321mm)	TLRA-2952-NNNNS		3349.07	3409.02
	58"(1473mm)	TLRA-2958-NNNNS		3349.07	3409.02
	64"(1626mm)	TLRA-2964-NNNNS		3349.07	3409.02
	70"(1778mm)	TLRA-2970-NNNNS		3349.07	3409.02
30"(762mm)	46"(1168mm)	TLRA-3046-NNNNS		\$3359.59	\$3419.54
	52"(1321mm)	TLRA-3052-NNNNS		3359.59	3419.54
	58"(1473mm)	TLRA-3058-NNNNS		3359.59	3419.54
	64"(1626mm)	TLRA-3064-NNNNS		3359.59	3419.54
	70"(1778mm)	TLRA-3070-NNNNS		3359.59	3419.54


Planes LT Base for Three-Sided 120° Benching

Electric Adjustment



TLCZ-4646-NNNNHPB

Class TA - SIN 33721; Discount Group X



Features

- Includes:
 - Three sets of telescoping columns with steel motor housing enclosure
 - Three Crossbeams for 3-sided connection
 - Three sets of end brackets
 - Three power and data channels with trough
 - Three Control Boxes
 - Three Standard or programmable touch pad switches
 - Center connection tray and triangle cover
 - Wire management clips
 - Three 9'(2743mm) long black power cords with NEMA 5-15P plug
 - Three 5'(1524mm) cable extensions (with top widths 52"(1321mm) or greater).
 - Adjustable glides and hardware standard in black with 1"(25mm) of adjustment.
- Electric Height Adjustment:
 - Speed: 1.4"(36mm) per second
 - Standard Range (Single Stage) telescoping columns feature 18.7"(475mm) of continuous adjustment.
 - Extended Range (Dual Stage) telescoping columns feature 25.6"(650mm) of continuous adjustment.
- Telescoping inner columns default to matching or coordinating paint colors. See Finish pages for details.
- Ships unassembled.
- Depth and width shown in nominal dimensions.

Specification Tips

- Not designed for use with casters.
- See Specification Guide Product Applications for instructions on how to specify a powered run of benching.
- Select a worksurface that accommodates 1"(25mm) of pinch point clearance on all sides and meets at least a NFPA class C flammability rating; refer to Specification Guide for application guidelines.
- 3- or 4-Circuit power In, Thru, and Out distribution options available. See **Electrical Components and Covers**.
- Total lifting capacity of each table is 300 lbs. including surface; applied weight should be evenly distributed.
- See Product Application guidelines for use with attached worktools.
 - Monitor Arms
 - Screens
 - Suspended Storage
 - Horizontal and Vertical Wire management
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

1) Product number, including:

1 Height Adjustment Options:

Standard Range (Single Stage):

E Standard

R Programmable
(add **\$605.22** list)

Extended Range (Dual Stage):

P Standard

S Programmable
(add **\$605.22** list)

2) Base trim color.

Planes LT Base for Three-Sided 120° Benching


Electric Adjustment

Depth	Width	Number	①	Trim	
				A	B
Standard Range (Single Stage)					
23"(584mm)	46"(1168mm)	TLOZ-4646-NNNNH	B	\$ 11189.26	\$11309.14
	52"(1321mm)	TLOZ-5252-NNNNH	B	11189.26	11309.14
	58"(1473mm)	TLOZ-5858-NNNNH	B	11189.26	11309.14
24"(610mm)	46"(1168mm)	TLOZ-4646-NNNNH	D	\$ 11189.26	\$11309.14
	52"(1321mm)	TLOZ-5252-NNNNH	D	11189.26	11309.14
	58"(1473mm)	TLOZ-5858-NNNNH	D	11189.26	11309.14
29"(737mm)	46"(1168mm)	TLOZ-4646-NNNNH	C	\$ 11448.64	\$11568.52
	52"(1321mm)	TLOZ-5252-NNNNH	C	11448.64	11568.52
	58"(1473mm)	TLOZ-5858-NNNNH	C	11448.64	11568.52
30"(762mm)	46"(1168mm)	TLOZ-4646-NNNNH	G	\$ 11448.64	\$11568.52
	52"(1321mm)	TLOZ-5252-NNNNH	G	11448.64	11568.52
	58"(1473mm)	TLOZ-5858-NNNNH	G	11448.64	11568.52
Extended Range (Dual Stage)					
23"(584mm)	46"(1168mm)	TLOZ-4646-NNNNH	B	\$12442.93	\$12562.81
	52"(1321mm)	TLOZ-5252-NNNNH	B	12442.93	12562.81
	58"(1473mm)	TLOZ-5858-NNNNH	B	12442.93	12562.81
24"(610mm)	46"(1168mm)	TLOZ-4646-NNNNH	D	\$12442.93	\$12562.81
	52"(1321mm)	TLOZ-5252-NNNNH	D	12442.93	12562.81
	58"(1473mm)	TLOZ-5858-NNNNH	D	12442.93	12562.81
29"(737mm)	46"(1168mm)	TLOZ-4646-NNNNH	C	\$ 12702.31	\$12822.19
	52"(1321mm)	TLOZ-5252-NNNNH	C	12702.31	12822.19
	58"(1473mm)	TLOZ-5858-NNNNH	C	12702.31	12822.19
30"(762mm)	46"(1168mm)	TLOZ-4646-NNNNH	G	\$ 12702.31	\$12822.19
	52"(1321mm)	TLOZ-5252-NNNNH	G	12702.31	12822.19
	58"(1473mm)	TLOZ-5858-NNNNH	G	12702.31	12822.19


Accessories

Upside, Planes and Planes LT

Caster Kit



(2) Non-Locking



(2) Locking

TJ01-CSTR
Class US – SIN 33721; Discount Group VII

Feature

- Includes four black casters (2-locking and 2 non-locking).

Specification Tips

- For Upside Only.**
- Can replace glides on 23”(584mm) and 29”(737mm) tables.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Number	Price
TJ01-CSTR	\$81.71

Caster Kit



(2) Non-Locking



(2) Locking

TA01-CSTR
Class TA – SIN 33721; Discount Group X

Feature

- Includes four black casters (2-locking and 2 non-locking).

Specification Tips

- Can replace glides on 23”(584mm) and 29”(737mm) C-Leg tables.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Table Depth and Base	Screens	Monitor Arms
23”(584mm) C-leg Caster	No	No
29”(737mm) C-leg Caster	Yes*	Yes*

*Screen or Monitor Arms; not both

Number	Price
TA01-CSTR	\$90.88

Collision Sensor



TA01-CLSN
Class TA – SIN 33721; Discount Group X

Features

- Includes external sensor, sensor unit cord, and either one or two connecting cables and attachment hardware.
- Provides increased pinch point and collision detection.
- Installs on bottom of table to surface and to J-rail.
- Use of sensor does not completely eliminate potential pinch point risks or collisions – user should be properly trained and use caution when operating.

Specification Tips

- Can only be installed on Planes or Planes Value Model Height Adjustable Tables and Benches controller that is newer than 10-2016.
- Surfaces < 60”(1524mm) use one connecting cable.
- Surfaces > 60”(1524mm) use two connecting cables.
- Connection hardware is critical for optimal performance. See installation instructions.
- Very important for connecting cable to be securely fastened for optimal performance.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Description	Number	Price
One Sensor	TA01-CLSN-1	\$290.82
Two Sensors	TA01-CLSN-2	\$333.23

Cable Management

Cable Chain



EAAW-0000-H
Class TA – SIN 33721; Discount Group X

Features

- Includes 36"(914mm) active length cable chain and mounting hardware.
- For use with Planes or Planes LT Height Adjustable Benches only.
- Color black only.
- Mounts to cable trough and underside of worksurface to contain power cords/data cables that are routed from the cable tray to the worksurface.

Specification Tips

- May be used with Planes and Planes LT electric height adjustable benching.
- Holds up to three power cords and two data cables.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Height	Width	Actual Length	Installed Length	Number	Price
0.75"(19mm)	2.25"(57mm)	40"(1016mm)	36"(914mm)	EAAW-0000-H	\$318.20

Electrical Components and Covers

Benching

Transition Tray



TA01-HBTT-M
Class TA – SIN 33721; Discount Group X

Features

- Includes tray, cover and mounting hardware.
- Conceals and routes power and data cables between connecting benching units.
- Mounts to crossbeams between two in-line benching units.
- Creates a 2" (51mm) pinch point clearance between in-line worksurfaces.
- Removable cover provides access to power and data cable pathway.

Specification Tips


- Required to link two or more, two-sided or three-sided 120 benching units together when routing power and data through channel/troughs.
- Separately specified Jumper is required to link power distribution assemblies between benching units.
- For use with Planes or Planes LT Height Adjustable Benching Only.
- Not for use in single-sided benching applications.
- Cannot be used to link Planes to Planes LT benching.
- Cannot be used to link single-sided benching units together.
- **Not for use with Top Feed, Middle-of-Run POWER IN applications.**
- Can be used with Center Screens.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Length	Width	Depth	Number	Trim A	B
14"(356mm)	4"(102mm)	1.5"(38mm)	TA01-HBTT-M	\$194.72	\$210.93

Transition Tray — For use with Middle-of-Run, Top Feed



TA01-HBTT-MT

Features

- Includes tray, cover and mounting hardware.
- Conceals and routes power and data cables between connecting benching units.
- Mounts to crossbeams between two in-line benching units and to bottom of top feed pole in a middle-of-run application.
- Creates a 2" (51mm) pinch point clearance between in-line worksurfaces.
- Top feed fits through hole in tray cover; snap in cover provides access to power and data cable pathway.

Specification Tips

- Required to link two or more, two-sided or three-sided 120 benching units together when routing power and data through channel/troughs.
- Separately specified Jumper is required to link power distribution assemblies between benching units.
- For use with Planes or Planes LT Height Adjustable Benching Only.
- **NOT FOR USE WITH CENTER SCREENS.**
- Cannot be used to link Planes to Planes LT benching.
- Cannot be used to link single-sided benching units together.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:


- 1) Product number.
- 2) Trim color.

Length	Width	Depth	Number	Trim A	B
14"(356mm)	4"(102mm)	1.5"(38mm)	TA01-HBTT-MT	\$194.72	\$210.93

Electrical Components and Covers

Benching

Transition Tray — For use with Fixed Screens and Middle-of-Run, Top Feed



TA01-HBTT-MTS
Class TA - SIN 33721; Discount Group X

Features

- Includes tray, cover and mounting hardware.
- Conceals and routes power and data cables between connecting benching units.
- Mounts to crossbeams between two in-line benching units and to bottom of top feed pole in a middle-of-run application.
- Creates a 2"(51mm) pinch point clearance between in-line worksurfaces.
- For use with Height Adjustable Bench - Middle-of-Run Top Feed.
- Top Feed fits through hole in tray cover; snap in cover products access to power and cable pathway.

Specification Tips


- Required to link two or more, two-sided or three-sided 120 benching units together when routing power and data through channel/troughs.
- Separately specified Jumper is required to link power distribution assemblies between benching units.
- For use with Planes or Planes LT Height Adjustable Benching Only.
- **FOR USE WITH CENTER SCREENS.**
- Cannot be used to link Planes to Planes LT benching.
- Cannot be used to link single-sided benching units together.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Length	Width	Depth	Number	Trim	
				A	B
14"(356mm)	4"(102mm)	1.5"(38mm)	TA01-HBTT-MTS	\$198.89	\$215.10

Transition Tray – Asymmetrical



TA01-HBTT-MA
Class TA - SIN 33721; Discount Group X

Features

- Includes tray, cover and mounting hardware.
- Conceals and routes power and data cables between connecting benching units.
- Mounts to crossbeams between two in-line benching units.
- Creates a 2"(51mm) pinch point clearance between in-line worksurfaces.
- Removable cover provides access to power and data cable pathway.

Specification Tips

- Required to link a single-sided benching unit to another single-sided, two-sided (Planes Only), or 3-sided 120 (Planes Only) benching unit, when routing power and data through channel/troughs.
- Separately specified Jumper is required to link power distribution assemblies between benching units.
- For use with Planes or Planes LT Height Adjustable Benching Only.
- Can be used with Center Screens.
- Cannot be used to link Planes to Planes LT benching.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:


- 1) Product number.
- 2) Trim color.

Length	Width	Depth	Number	Trim	
				A	B
14"(356mm)	4"(102mm)	1.5"(25mm)	TA01-HBTT-MA	\$194.72	\$210.93

Electrical Components and Covers

Benching

Top Feed Pole, End-of-Run



EAET-C000-SC
Class TA – SIN 33721; Discount Group X

Features

- Includes one electrical box, ceiling bezel plate, pole, transition tray for end-of-run and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- Removable cover on poles provides access to pathway.
- End-of-Run Top Feed mounts to the floor and attaches to benching crossbeam and ceiling.
- Top feed pole dimensions: 1.5"(38mm) x 4"(102mm).

Specification Tips


- For use with Planes and Planes LT Height Adjustable Benching only.
- Not for use with power sources other than 120 volt 60 hertz.**
- Hardwire Applications:** Conduit and wiring are field installed.
- Power Infeed Harness is separately specified for Haworth modular power.
- Floor attachment hardware is field supplied.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- Product number.
- Trim color.

Description	Ceiling Height	Pole Length	Pole Pieces	Number	Trim A	B
For Planes (Single Stage)						
	10'(3048mm)	126"(3200mm)	2	EAET-C000-SC	\$433.66	\$468.20
	12'(3658mm)	150"(3810mm)	2	EAET-E400-SC	445.16	479.70
For Planes (Dual Stage) and Planes LT (Single and Dual Stage)						
	10'(3048mm)	126"(3200mm)	2	EAET-C000-DC	\$433.66	\$468.20
	12'(3658mm)	150"(3810mm)	2	EAET-E400-DC	445.16	479.70

Top Feed Pole, Middle-of-Run



EAET-C00C-DC
Class TA – SIN 33721; Discount Group X

Features

- Includes one electrical box, ceiling bezel plate, pole and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- For use with middle-of-run transition trays.
- Removable cover on poles provides access to pathway.
- Middle-of-Run Top Feed mounts to transition tray between connecting benching units and ceiling.
- Top feed pole dimensions: 1.5"(38mm) x 4"(102mm).

Specification Tips

- For use with Planes or Planes LT Height Adjustable Benching in the following applications:
 - Two-Sided Benching
 - 3-Sided 120° Benching
- Do not use with Single-Sided Height Adjustable Benching.
- Not for use with power sources other than 120 volt 60 hertz.**
- See Product Details in Specification Guide for transition tray specification tips.
- Hardwire Applications:** Conduit and wiring are field installed.
- Power Infeed Harness is separately specified for Haworth modular power applications.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:


- Product number.
- Trim color.

Description	Ceiling Height	Pole Length	Pole Pieces	Number	Trim A	B
For Planes and Planes LT Height Adjustable Benching						
	10'(3048mm)	114"(2896mm)	1	EAET-C00C-DC	\$433.66	\$468.20
	12'(3658mm)	138"(3505mm)	2	EAET-E40C-DC	445.16	479.70

Electrical Components and Covers

Benching

Hardwire Kit



EKEP-0000-C
Class TA – SIN 33721; Discount Group X

Features

- Includes one electrical box with 0.5”(13mm) knockouts, two receptacle cover plates, one blank cover plate and mounting hardware.
- Attaches to Center Screen bracket.
- Attaches to PDA bracket.
- Field installed.

Specification Tip


- Conduit, fittings, wiring and receptacles are field supplied.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

	Number	Trim A	B
	EKEP-0000-C	\$205.90	\$205.90

Base Feed Cover — Vertical



BSFD-S
Class TA – SIN 33721; Discount Group X

Features

- Includes two-piece base feed cover and attachment hardware.
- Optional base feed is used to conceal metal conduit and data cables.
- Base feed dimensions: 1.5”(38mm) x 4”(102mm).

Specification Tips

- TA01-BSFD-S for use with Planes Standard Range (Single Stage) Height Adjustable Benching only.
- TA01-BSFD-D for use with Planes Extended Range (Dual Stage) Low/High or Planes LT Extended Range (Dual Stage) or Standard Range (Single Stage) Height Adjustable Benching only.
- Used to route power and data from floor or column to bottom of horizontal surface.
- Mounts under horizontal surface and attaches to floor.
- Floor attachment hardware is field supplied.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.


To Order, Specify:

- 1) Product number.
- 2) Trim color.

Description	Bottom of Surface To Floor	Number	Trim A	B
Single Stage	17.5”-18.5”(445mm-470mm)	TA01-BSFD-S	\$213.75	\$248.29
Dual Stage	11.69”-13.25”(297mm-337mm)	TA01-BSFD-D	213.75	248.29

Electrical Components and Covers

Power/Data Cover



TVBC
Class ED - SIN 33721

Feature

- Includes two covers and mounting hardware.

Specification Tips

- For use with Planes or Planes LT Height Adjustable Benching.
- Optional removable Benching Stretcher Cover provides access to power and data cable trough.

To Order, Specify:





- 1) Product number.
- 2) Trim color.

Application	Number	Price
For use with Rectangle Bench		
	TABC-0046-R	\$ 221.56
	TABC-0052-R	249.58
	TABC-0058-R	277.60
	TABC-0064-R	305.62
	TABC-0070-R	333.64
For use with 120° Bench		
	TABC-0046-Z	\$ 221.56
	TABC-0052-Z	249.58
	TABC-0058-Z	277.60

Electrical Components and Covers

Benching

Triplex Receptacle – 15 Amp



EUER-15

Class YA – SIN 33721; Discount Group XII

Features

- Includes box of six receptacles, each receptacle has three 15 Amp outlets (NEMA 5-15R configuration).
- For use with panels equipped with power components.
- Receptacles are ground type specific.

Specification Tips

- Not for use with power sources other than 120 volt 60 hertz.
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Isolated ground receptacle not for use with single circuit base feed module.
- Triplexes for 3-Circuit are field programmable.
- Triplexes for 4-Circuit have fixed circuit access and are not field programmable. Specify appropriate number of receptacles for each circuit.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
- Controlled receptacles are marked with a permanent symbol and the word CONTROLLED to comply with various energy code requirements including ASHRAE 90.1 and California Building Code Title 24 part 6.**
- Circuit assignment and receptacle placement should be coordinated with a local electrician. Local electrician is responsible for circuit loading and code compliance.**
- Consult with local authority having jurisdiction (AHJ) for requirements regarding controlled receptacles before placing orders and installation.**

Circuit Symbol	Circuit 1	Circuit 2	Circuit 3	Circuit 4
3 Circuit	0	00	000	NA
4 Circuit 2+2	1	2	3	4
4 Circuit 3+1	A	B	C	D

To Order, Specify:





- Product number.

Description	Circuit Access	Receptacle Indicator	Ground Type	Receptacle without Controlled Symbol	Price	Receptacle with Controlled Symbol	Price
3-Circuit							
	Circuit 1-3	N/A	Common	EUER-153P-GSOS	\$ 177.24	EUER-153P-GCOS	\$ 181.68
	Circuit 1-3	N/A	Isolated	EUER-153P-ISOS	188.08	EUER-153P-ICOS	192.79
4-Circuit, 2+2							
	Circuit 1	1	Common	EUER-1521-GSOS	\$ 253.21	EUER-1521-GCOS	\$259.54
	Circuit 2	2		EUER-1522-GSOS	253.21	EUER-1522-GCOS	259.54
	Circuit 3	3		EUER-1523-GSOS	253.21	EUER-1523-GCOS	259.54
	Circuit 4	4		EUER-1524-GSOS	253.21	EUER-1524-GCOS	259.54
	Circuit 1	1	Isolated	EUER-1521-ISOS	\$264.05	EUER-1521-ICOS	\$270.66
	Circuit 2	2		EUER-1522-ISOS	264.05	EUER-1522-ICOS	270.66
	Circuit 3	3		EUER-1523-ISOS	264.05	EUER-1523-ICOS	270.66
	Circuit 4	4		EUER-1524-ISOS	264.05	EUER-1524-ICOS	270.66
4-Circuit, 3+1							
	Circuit 1	A	Common	EUER-1541-GSOS	\$ 253.21	EUER-1541-GCOS	\$259.54
	Circuit 2	B		EUER-1542-GSOS	253.21	EUER-1542-GCOS	259.54
	Circuit 3	C		EUER-1543-GSOS	253.21	EUER-1543-GCOS	259.54
	Circuit 4	D		EUER-1544-GSOS	253.21	EUER-1544-GCOS	259.54
	Circuit 1	A	Isolated	EUER-1541-ISOS	\$264.05	EUER-1541-ICOS	\$270.66
	Circuit 2	B		EUER-1542-ISOS	264.05	EUER-1542-ICOS	270.66
	Circuit 3	C		EUER-1543-ISOS	264.05	EUER-1543-ICOS	270.66
	Circuit 4	D		EUER-1544-ISOS	264.05	EUER-1544-ICOS	270.66

Electrical Components and Covers

Benching

Triplex Receptacle – 20 Amp



EUER-20

Class YA – SIN 33721; Discount Group XIII

Features

- Includes box of six receptacles, each receptacle has three 20 Amp outlets (NEMA 5-20R configuration).
- For use with panels equipped with power components.
- Receptacles are circuit and ground type specific.**

Specification Tips

- Not for use with power sources other than 120 volt 60 hertz.
- Receptacles have fixed circuit access and are not field programmable. Specify appropriate number of receptacles for each circuit.
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Isolated ground receptacle not for use with single circuit base feed module.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
- Controlled receptacles are marked with a permanent symbol and the word CONTROLLED to comply with various energy code requirements including ASHRAE 90.1 and California Building Code Title 24 part 6.**
- Circuit assignment and receptacle placement should be coordinated with a local electrician. Local electrician is responsible for circuit loading and code compliance.**
- Consult with local authority having jurisdiction (AHJ) for requirements regarding controlled receptacles before placing orders and installation.**

Circuit Symbol	Circuit 1	Circuit 2	Circuit 3	Circuit 4
3 Circuit	I	II	III	NA
4 Circuit 2+2	1	2	3	4
4 Circuit 3+1	A	B	C	D

To Order, Specify:


- Product number.

Description	Circuit Access	Receptacle Indicator	Ground Type	Receptacle without Controlled Symbol	Price	Receptacle with Controlled Symbol	Price
3-Circuit							
	Circuit 1	1	Common	EUER-2031-GSOS	\$524.52	EUER-2031-GCOS	\$ 537.61
	Circuit 2	2		EUER-2032-GSOS	524.52	EUER-2032-GCOS	537.61
	Circuit 3	3		EUER-2033-GSOS	524.52	EUER-2033-GCOS	537.61
	Circuit 1	1	Isolated	EUER-2031-ISOS	\$535.35	EUER-2031-ICOS	\$548.72
	Circuit 2	2		EUER-2032-ISOS	535.35	EUER-2032-ICOS	548.72
	Circuit 3	3		EUER-2033-ISOS	535.35	EUER-2033-ICOS	548.72
4-Circuit, 2+2							
	Circuit 1	1	Common	EUER-2021-GSOS	\$524.52	EUER-2021-GCOS	\$ 537.61
	Circuit 2	2		EUER-2022-GSOS	524.52	EUER-2022-GCOS	537.61
	Circuit 3	3		EUER-2023-GSOS	524.52	EUER-2023-GCOS	537.61
	Circuit 4	4		EUER-2024-GSOS	524.52	EUER-2024-GCOS	537.61
	Circuit 1	1	Isolated	EUER-2021-ISOS	\$535.35	EUER-2021-ICOS	\$548.72
	Circuit 2	2		EUER-2022-ISOS	535.35	EUER-2022-ICOS	548.72
	Circuit 3	3		EUER-2023-ISOS	535.35	EUER-2023-ICOS	548.72
	Circuit 4	4		EUER-2024-ISOS	535.35	EUER-2024-ICOS	548.72
4-Circuit, 3+1							
	Circuit 1	A	Common	EUER-2041-GSOS	\$524.52	EUER-2041-GCOS	\$ 537.61
	Circuit 2	B		EUER-2042-GSOS	524.52	EUER-2042-GCOS	537.61
	Circuit 3	C		EUER-2043-GSOS	524.52	EUER-2043-GCOS	537.61
	Circuit 4	D		EUER-2044-GSOS	524.52	EUER-2044-GCOS	537.61
	Circuit 1	A	Isolated	EUER-2041-ISOS	\$535.35	EUER-2041-ICOS	\$548.72
	Circuit 2	B		EUER-2042-ISOS	535.35	EUER-2042-ICOS	548.72
	Circuit 3	C		EUER-2043-ISOS	535.35	EUER-2043-ICOS	548.72
	Circuit 4	D		EUER-2044-ISOS	535.35	EUER-2044-ICOS	548.72

Electrical Components and Covers

Benching

Utility Tray Power Retrofit Kit



EUEK-3S
EUEK-2S
EUEK-4S

Class YA - SIN 33721; Discount Group XIII



Features

- Includes Power Distribution Assembly (PDA).
- Field installed.

Specification Tips


- Used for power distribution. Installs in the power and data channel.
- For use with Planes and Planes LT Benching only
- **Separately Specify:**
 - Receptacles
 - Jumpers
 - Power Infeeds
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Description	Bench Width	Number	Price
3-Circuit			
	46"(1168mm)	EUEK-0042-3S	\$ 78.67
	52"(1321mm)	EUEK-0048-3S	88.06
	58"(1473mm)	EUEK-0054-3S	97.45
	64"(1626mm)	EUEK-0060-3S	106.84
	70"(1778mm)	EUEK-0066-3S	116.23
4-Circuit, 2+2			
	46"(1168mm)	EUEK-0042-2S	\$ 78.67
	52"(1321mm)	EUEK-0048-2S	88.06
	58"(1473mm)	EUEK-0054-2S	97.45
	64"(1626mm)	EUEK-0060-2S	106.84
	70"(1778mm)	EUEK-0066-2S	116.23
4-Circuit, 3+1			
	46"(1168mm)	EUEK-0042-4S	\$ 78.67
	52"(1321mm)	EUEK-0048-4S	88.06
	58"(1473mm)	EUEK-0054-4S	97.45
	64"(1626mm)	EUEK-0060-4S	106.84
	70"(1778mm)	EUEK-0066-4S	116.23

Jumper



EUEJ-0018-3
EUEJ-0024-2
EUEJ-0024-4

Class YA - SIN 33721; Discount Group XIII



Features

- For use with power components.
- Jumpers cannot be coupled together.
- Field installed.

Specification Tips

- **Jumpers are used to connect power distribution assemblies between linked benching units.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).
- Use one 28"(711mm) jumper to connect between two in-line benching units.
- Use two 36"(914mm) jumpers to connect the Power Distribution assemblies within a 120° benching unit.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Description	Actual Length	Number	Price
3-Circuit	28"(711.2mm)	EUEJ-0028-3	\$173.55
4-Circuit, 2+2	28"(711.2mm)	EUEJ-0028-2	\$184.39
4-Circuit, 3+1	28"(711.2mm)	EUEJ-0028-4	\$184.39
3-Circuit	36"(914.4mm)	EUEJ-0036-3	\$187.95
4-Circuit, 2+2	36"(914.4mm)	EUEJ-0036-2	\$198.79
4-Circuit, 3+1	36"(914.4mm)	EUEJ-0036-4	\$198.79

Electrical Components and Covers

Benching

Infeed Harness



EUEH-0087-3
EUEH-0087-2
EUEH-0087-4
Class YA – SIN 33721; Discount Group XII



Features

- Includes electrical harness in galvanized metal conduit.
- Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.
- Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- Can be used to route power from floor to power distribution assembly.
- For use with components equipped with power.
- Attaches at any receptacle site or right-hand jumper location.

Specification Tips


- **Not for use with power sources other than 120 volt 60 hertz.**
- A bench base feed cover is a separately specified option.
- Exposed split tubing may be field supplied separately to cover exposed galvanized metal conduit.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Description	Feed Length	Number	Price
3-Circuit			
	87"(2210mm)	EUEH-0087-3	\$ 276.75
	180"(4572mm)	EUEH-00FO-3	427.66
	300"(7620mm)	EUEH-00WO-3	720.59
4-Circuit, 2+2			
	87"(2210mm)	EUEH-0087-2	\$303.70
	180"(4572mm)	EUEH-00FO-2	454.61
	300"(7620mm)	EUEH-00WO-2	747.54
4-Circuit, 3+1			
	87"(2210mm)	EUEH-0087-4	\$303.70
	180"(4572mm)	EUEH-00FO-4	454.61
	300"(7620mm)	EUEH-00WO-4	747.54

Base Feed Module — Concealed Hardwire Connection



VZEB-0000-Y
Class YA – SIN 33721; Discount Group XII



Features

- Includes one junction box with modular connector.
- For floor, column, or wall hardwire connections.
- Conduit for 3-circuit provides eight 12-gauge wires for up to three 20-amp circuits of power.
- Conduit for 4-circuit provides six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- Conforms to New York City electrical code.
- Junction box has three 0.5"(13mm) knockouts.

Specification Tips

- For use with Planes LT and Planes Height-Adjustable Benching of 52"(1321mm) width or greater equipped with 3-circuit or 4-circuit (2+2 or 3+1) power components.
- Connector plugs into receptacle site on left side of Planes Height-Adjustable Benching.
- Conduit and fittings for connection between building and junction box are supplied by local electricians.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Description	Number	Price
3-Circuit	VZEB-0000-Y	\$708.75
4-Circuit, 2+2	VZEB-0000-YH2	\$708.75
4-Circuit, 3+1	VZEB-0000-YH4	\$708.75

Electrical Components and Covers

Benching

Wall Feed Field Wired 1 Port



FBEW
Class YA – SIN 33721; Discount Group XII



Features

- Includes 4.7”(119mm) junction box cover with one female modular power connector.
- For use with field supplied 4.7”(119mm) square junction box.
- Connector has integral latching system.
- UL listed Manufactured wiring system rated for 20 Amp 120V/208Y or 120/240V 60 Hz and for use in “other air handling spaces” per NEC Article 604.

Specification Tips


- For use with Raised Infeed Base Feed Module and Systems Furniture Power Interface Jumper.
- Provides transition from building power to modular power distribution system. May be used with junction box in wall or column.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=rust and 4-circuit=black).

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Description	Height	Length	Number	Price
3-Circuit	1.5”(38.1mm)	4.7”(119mm)	FBEW-0004-31	\$113.32
4-Circuit	1.5”(38.1mm)	4.7”(119mm)	FBEW-0004-41	\$113.32

Internal Power Base™ AI Base Feed



EUEJ-0064-3WF
EUEJ-0064-2WF
EUEJ-0064-4WF
Class YA – SIN 33721; Discount Group XII



Features

- Includes connector assembly which consists of one Power Base connector head, galvanized 0.5”(13mm) flexible metal conduit, one Power Base AI connector head and a two port splitter.
- Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.
- Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- For use with components equipped with power.
- Attaches at any receptacle site or right-hand jumper location and to a Wall Feed Field Wired 1 port.

Specification Tips

- **Not for use with power sources other than 120 volt 60 hertz.**
- A vertical base feed cover is a separately specified option.
- Exposed split tubing may be field supplied separately to cover exposed galvanized metal conduit.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Description	Bench Feed Length	Number	Price
3-Circuit			
	64”(1626mm)	EUEJ-0064-3WF	\$ 276.75
	144”(3658mm)	EUEJ-0144-3WF	384.57
	300”(7620mm)	EUEJ-0300-3WF	918.29
4-Circuit, 2+2			
	64”(1626mm)	EUEJ-0064-2WF	\$303.70
	144”(3658mm)	EUEJ-0144-2WF	411.52
	300”(7620mm)	EUEJ-0300-2WF	945.24
4-Circuit, 3+1			
	64”(1626mm)	EUEJ-0064-4WF	\$303.70
	144”(3658mm)	EUEJ-0144-4WF	411.52
	300”(7620mm)	EUEJ-0300-4WF	945.24

Electrical Components and Covers

Benching

Single Circuit Base Feed – Receptacle Connection with Power Cord — 3-Circuit and 4-Circuit



4TEB-20
Class TA – SIN 33721; Discount Group X



Features

- Includes one base feed, 24”(610mm) cord, junction box, 53”(1346mm) flexible conduit and 20 amp plug (NEMA 5-20P).
- For use with product equipped with 3-circuit or 4-circuit power components.
- Requires a 20 amp, 125 volt building receptacle (NEMA 5-20R) for plug-in (not included).
- Provides power to circuit #1 only.
- Attaches at any flex/jumper locations on a Power Distribution Assembly (PDA).
- Standard in charcoal trim color only.

Specification Tips


- **Not for use with isolated ground receptacles.**
- Not for use with power sources other than 120 volt 60 hertz.
- Junction box must be secured to furniture or architectural support.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Description	Feed Length	Number	Price
3-Circuit	24”(610mm)	4TEB-20	\$440.92
4-Circuit, 2+2		4TEB-20-2	440.92
4-Circuit, 3+1		4TEB-20-4	440.92

Single Circuit Base Feed – Receptacle Connection — 3-Circuit and 4-Circuit



4TEB-154TEB-15
Class TA – SIN 33721; Discount Group X



Features

- Includes one base feed, 72”(1829mm) cord, junction box, 53”(1346mm) flexible conduit and 15 amp plug (NEMA 5-15P).
- For use with product equipped with 3-circuit or 4-circuit power components.
- Requires a 15 amp, 125 volt building receptacle (NEMA 5-15R) for plug-in (not included).
- Attaches at any flex/jumper locations on a Power Distribution Assembly (PDA).
- Provides power to circuit #1 only.
- Standard in charcoal trim color only.

Specification Tips

- **Not for use in USA due to electrical code restrictions.**
- **Not for use with isolated ground receptacles.**
- Not for use with power sources other than 120 volt 60 hertz.
- Junction box must be secured to furniture or architectural support.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Description	Feed Length	Number	Price
3-Circuit	72”(1829mm) (Canada only)	4TEB-15	\$440.92
4-Circuit, 2+2		4TEB-15-2	440.92
4-Circuit, 3+1		4TEB-15-4	440.92

Height Adjustable Tables Resources

Surfaces Materials

Index

Warranty

Surface Materials — Upside

Finish Color Legend

Laminate Finishes

Grade A

Solid Color

H-34	Beige
H-AK	Chalk
H-8J	Charcoal
H-3J	Graphite
H-62	Gray Tone
H-WL	Linen
H-3P	Platinum
H-AA	Putty
H-3E	Smoke

Patterned

H-P1	Linen Casual
H-P2	Linen Classic
H-P3	Linen Crisp
H-P4	Linen Flax

Wood

H-AE	Maple
H-AD	Medium Cherry

Grade B

Premium Wood Grain

H-KA	Brazilwood
H-KG	Columbian Walnut
H-KP	Field Elm
H-KN	Grey Elm
H-KM	Landmark Wood
H-KL	Neo Walnut
H-KO	New Age Oak
H-KR	Phantom Ecru
H-KS	Phantom Pearl
H-KD	River Cherry
H-KF	Williamsburg Cherry

Grade E

Premium

H-C1	Hay
H-C2	Drift
H-C3	Pecan
H-C4	Molasses
H-C5	Mineral
H-C6	Hatch
H-C7	Tanned

*Grade E laminates available on
Rectangle Tops ONLY

Edgeband

Solid Color

HP-34	Beige
HP-AK	Chalk
HP-8J	Charcoal
HP-3J	Graphite
HP-62	Gray Tone
HP-WL	Linen
HP-3P	Platinum
HP-AA	Putty
HP-3E	Smoke

Patterned

H-P1	Linen Casual
H-P2	Linen Classic
H-P3	Linen Crisp
H-P4	Linen Flax

Wood Grain

HP-KA	Brazilwood
HP-AM	Cherry
HP-KG	Columbian Walnut
HP-KP	Field Elm
HP-KN	Grey Elm
HP-KM	Landmark Wood
HP-AE	Maple
HP-AD	Medium Cherry
HP-KL	Neo Walnut
HP-KC	New Age Oak
HP-KR	Phantom Ecru
HP-KS	Phantom Pearl
HP-KD	River Cherry
HP-KF	Williamsburg Cherry

Ply-Edge

HP-PW	Ply-Edge
-------	----------

Premium

HP-C1	Hay
HP-C2	Drift
HP-C3	Pecan
HP-C4	Molasses
HP-C5	Mineral
HP-C6	Hatch
HP-C7	Tanned

Trim

Grade A

Smooth

*TR-R	Beige
*TR-AK	Chalk
TR-K	Charcoal
*TR-J	Graphite
*TR-G	Gray Tone
*TR-AA	Putty
*TR-E	Smoke
TR-PLS	Smooth Plaster

Textured

*TR-TG	Grout
*TR-TW	Plaster

Grade B

Solid Color

*TR-IR	Brownstone
*TR-IQ	Park
*TR-RR	Rusty Red
*TR-IM	Sable
TR-IJ	Sky Blue

Smooth Metallic

*TR-MC	Metallic Champagne
TR-LE	Metallic Silver

Textured Metallic

*TR-AL	Alloy
--------	-------

NOTE: *Represents additional
Upside+ paint finishes.

ALERT: These materials are current, however they are being considered for future obsolescence due to low volume.

Laminate	
H-AM	Amber Cherry

Trim	
TR-DM	Dark Bronze Metallic

* Select textured and metallic colors will feature coordinating finishes on telescoping table base tube segment. See chart below:

Matrix for Telescoping Column Tube Finishes

Paint Type	Base Trim Color for Column/Foot		Telescoping Base Column Tubes Coordinating Finish	
Smooth Metallic Paint	TR-DM	Dark Bronze Metallic	TR-IR	Brownstone
	TR-MC	Metallic Champagne	TR-E	Smoke
Textured Metallic Paint	TR-AL	Alloy	TR-E	Smoke
Textured Paint	TR-TG	Grout	TR-AA	Putty
	TR-TW	Plaster	TR-PLS	Smooth Plaster
Smooth Paint (Non-Metallic)	Telescoping Base Column Tube Finish will match Base Trim Color specified for the Foot/Leg			
Metallic Silver (TR-LE)				

Forest Stewardship Council® (FSC®) Statement:

In our continuing support of sustainable forestry and responsible purchasing, Haworth North America is offering FSC certified wood products at no up-charge. By providing FSC certified material, Haworth is supporting our client's green building goals and demonstrating our collective commitment to source materials more sustainably. Haworth will provide to you the necessary FSC certified paperwork with your shipment. For more information, FAQs, and a complete FSC product list (including product exceptions), go to the Library and search FSC. Haworth FSC Trademark License #FSC-C002821

Surface Materials — Planes LT Table

Finish Color Legend

Laminate Finishes

Grade A

Solid Color

H-34	Beige
H-AK	Chalk
H-8J	Charcoal
H-3J	Graphite
H-62	Gray Tone
H-WL	Linen
H-3P	Platinum
H-AA	Putty
H-3E	Smoke

Wood

H-AE	Maple
H-AD	Medium Cherry

Grade B

Premium Wood Grain

H-KA	Brazilwood
H-KG	Columbian Walnut
H-KP	Field Elm
H-KN	Grey Elm
H-KM	Landmark Wood
H-KL	Neo Walnut
H-KC	New Age Oak
H-KR	Phantom Ecru
H-KS	Phantom Pearl
H-KD	River Cherry
H-KF	Williamsburg Cherry

Grade E

Premium

H-C1	Hay
H-C2	Drift
H-C3	Pecan
H-C4	Molasses
H-C5	Mineral
H-C6	Hatch
H-C7	Tanned

*Grade E laminates available on
Rectangle Tops ONLY

Edgeband

Solid Color

HP-34	Beige
HP-AK	Chalk
HP-8J	Charcoal
HP-3J	Graphite
HP-62	Gray Tone
HP-WL	Linen
HP-3P	Platinum
HP-AA	Putty
HP-3E	Smoke

Wood Grain

HP-KA	Brazilwood
HP-AM	Cherry
HP-KG	Columbian Walnut
HP-KP	Field Elm
HP-KN	Grey Elm
HP-KM	Landmark Wood
HP-AE	Maple
HP-AD	Medium Cherry
HP-KL	Neo Walnut
HP-KC	New Age Oak
HP-KR	Phantom Ecru
HP-KS	Phantom Pearl
HP-KD	River Cherry
HP-KF	Williamsburg Cherry

Ply-Edge

HP-PW	Ply-Edge
-------	----------

Premium

HP-C1	Hay
HP-C2	Drift
HP-C3	Pecan
HP-C4	Molasses
HP-C5	Mineral
HP-C6	Hatch
HP-C7	Tanned

Trim

Grade A

Smooth

TR-R	Beige
TR-AK	Chalk
TR-K	Charcoal
TR-C1	Cocoa
TR-J	Graphite
TR-G	Gray Tone
TR-AA	Putty
TR-E	Smoke
TR-PLS	Smooth Plaster
TR-FM	Snow

Textured

TR-TG	Grout
TR-TF	Pitch
TR-TW	Plaster

Grade B

Smooth

TR-1C	Accent Blue
TR-1E	Accent Orange
TR-1G	Blue Jay
TR-1R	Brownstone
TR-1N	Night
TR-1Q	Park
TR-RR	Rusty Red
TR-1M	Sable
TR-1J	Sky Blue
TR-1H	Terra
TR-1K	Wren

Smooth Metallic

TR-MC	Metallic Champagne
TR-LE	Metallic Silver
TR-MG	Metallic Gunmetal

Textured Metallic

TR-HE	Hellenic
TR-AR	Argent
TR-AL	Alloy

Casters

TR-F	Black
TR-7	Fog
TR-LPL	Light Platinum

ALERT: These materials are current, however they are being considered for future obsolescence due to low volume.

Laminate
H-AM Amber Cherry

Trim
TR-CTS Chartreuse
TR-DM Dark Bronze
Metallic

* Select textured and metallic colors will feature coordinating finishes on telescoping table base tube segment. See chart below:

Paint Type	Base Trim Color for Leg/Foot		Telescoping Base Tube Coordinating Finish	
Textured Metallic Paint	Alloy	TR-AL	Smoke	TR-E
	Hellenic	TR-HE	Brownstone	TR-1R
	Argent	TR-AR	Smoke	TR-E
Texture Paint	Grout	TR-TG	Platinum	TR-P
	Pitch	TR-TF	Black	TR-F
	Plaster	TR-TW	Smooth Plaster	TR-PLS
Smooth Paint (Non-Metallic)	Telescoping Base Tube Finish will match Base Trim Color specified for the Foot/Leg			
Smooth Metallic Paint				
Metallic Champagne (TR-MC)				
Metallic Silver (TR-LE)				
Metallic Dark Bronze (TR-DM)				
Metallic Gunmetal (TR-MG)				

Forest Stewardship Council® (FSC®) Statement:

In our continuing support of sustainable forestry and responsible purchasing, Haworth North America is offering FSC certified wood products at no up-charge. By providing FSC certified material, Haworth is supporting our client's green building goals and demonstrating our collective commitment to source materials more sustainably. Haworth will provide to you the necessary FSC certified paperwork with your shipment. For more information, FAQs, and a complete FSC product list (including product exceptions), go to the Library and search FSC. Haworth FSC Trademark License #FSC-C002821

Surface Materials — Planes Table

Finish/Color Legend

Wood Finishes

Grade A

Double Cut

2P-RL	Applegate
WJ-RE	Ebony
2N-RL	Echo
WE-RD	Dune
WE-RT	Melba
CQ-WG	Walnut Grove

Grade B

Cherry

VC-CA1	Amber
VC-W23	American
VC-W33	Caramel
VC-W30	Heritage
VC-W32	Pacific

Maple

VP-LM	Light
VP-N	Natural

Maple Quarter Cut

NM-N	Natural
------	---------

Rift Cut White Oak

NR-W35	Clear
NR-W15	Espresso
NR-W40	Mocha

Walnut

VR-W15	Espresso
VR-W31	Retro

Walnut Quarter Cut

NW-W35	Clear
NW-W15	Espresso
NW-W31	Retro

Laminate Finishes

Grade A

Solid Color

H-34	Beige
H-AK	Chalk
H-8J	Charcoal
H-3J	Graphite
H-62	Gray Tone
H-WL	Linen
H-3P	Platinum
H-AA	Putty
H-3E	Smoke

Wood

H-AE	Maple
H-AD	Medium Cherry

Grade B

Premium Wood Grain

H-KA	Brazilwood
H-KG	Columbian Walnut
H-KP	Field Elm
H-KN	Grey Elm
H-KM	Landmark Wood
H-KL	Neo Walnut
H-KC	New Age Oak
H-KR	Phantom Ecoru
H-KS	Phantom Pearl
H-KD	River Cherry
H-KF	Williamsburg Cherry

Grade E

Premium

H-C1	Hay
H-C2	Drift
H-C3	Pecan
H-C4	Molasses
H-C5	Mineral
H-C6	Hatch
H-C7	Tanned

*Grade E laminates available on
Rectangle Tops ONLY

Edgeband

Solid Color

HP-34	Beige
HP-AK	Chalk
HP-8J	Charcoal
HP-3J	Graphite
HP-62	Gray Tone
HP-WL	Linen
HP-3P	Platinum
HP-AA	Putty
HP-3E	Smoke

Wood Grain

HP-KA	Brazilwood
HP-AM	Cherry
HP-KG	Columbian Walnut
HP-KP	Field Elm
HP-KN	Grey Elm
HP-KM	Landmark Wood
HP-AE	Maple
HP-AD	Medium Cherry
HP-KL	Neo Walnut
HP-KC	New Age Oak
HP-KR	Phantom Ecoru
HP-KS	Phantom Pearl
HP-KD	River Cherry
HP-KF	Williamsburg Cherry

Ply-Edge

HP-PW	Ply-Edge
-------	----------

Premium

HP-C1	Hay
HP-C2	Drift
HP-C3	Pecan
HP-C4	Molasses
HP-C5	Mineral
HP-C6	Hatch
HP-C7	Tanned

Trim

Grade A

Smooth

TR-R	Beige
TR-AK	Chalk
TR-K	Charcoal
TR-C1	Cocoa
TR-J	Graphite
TR-G	Gray Tone
TR-AA	Putty
TR-E	Smoke
TR-PLS	Smooth Plaster
TR-FM	Snow

Textured

TR-TG	Grout
TR-TF	Pitch
TR-TW	Plaster

Grade B

Smooth

TR-IC	Accent Blue
TR-IE	Accent Orange
TR-IG	Blue Jay
TR-IR	Brownstone
TR-IN	Night
TR-IQ	Park
TR-RR	Rusty Red
TR-IM	Sable
TR-IJ	Sky Blue
TR-IH	Terra
TR-IK	Wren

Smooth Metallic

TR-MC	Metallic Champagne
TR-LE	Metallic Silver
TR-MG	Metallic Gunmetal

Textured Metallic

TR-HE	Hellenic
TR-AR	Argent
TR-AL	Alloy

Casters

TR-F	Black
TR-7	Fog
TR-LPL	Light Platinum

ALERT: These materials are current, however they are being considered for future obsolescence due to low volume.

Wood

2R-RL	Butternut
NP-W08	Golden
NP-W07	Light
NX-U	Medium
VR-W12	Naturally Walnut
VP-AD	Sand
WC-RW	Wenge

Laminate

H-AM	Amber Cherry
------	--------------

Trim

TR-CTS	Chartreuse
TR-DM	Dark Bronze Metallic

* Select textured and metallic colors will feature coordinating finishes on telescoping table base tube segment. See chart below:

Matrix for Telescoping Base Tube Finishes

Paint Type	Base Trim Color for Leg/Foot		Telescoping Base Tube Coordinating Finish	
Smooth Metallic Paint	Metallic Champagne	TR-MC	Smoke	TR-E
	Metallic Silver	TR-LE	Smoke	TR-E
	Metallic Dark Bronze	TR-DM	Brownstone	TR-1R
	Metallic Gunmetal	TR-MG	Graphite	TR-J
Textured Metallic Paint	Hellenic	TR-HE	Brownstone	TR-1R
	Argent	TR-AR	Smoke	TR-E
	Alloy	TR-AL	Smoke	TR-E
Textured	Pitch	TR-TF	Black	TR-F
	Grout	TR-TG	Platinum	TR-P
	Plaster	TR-TW	Smooth Plaster	TR-PLS
Smooth Paint (Non-Metallic)	Telescoping Base Tube Finish will match Base Trim Color specified for the Foot/Leg			

Forest Stewardship Council® (FSC®) Statement:

In our continuing support of sustainable forestry and responsible purchasing, Haworth North America is offering FSC certified wood products at no up-charge. By providing FSC certified material, Haworth is supporting our client's green building goals and demonstrating our collective commitment to source materials more sustainably. Haworth will provide to you the necessary FSC certified paperwork with your shipment. For more information, FAQs, and a complete FSC product list (including product exceptions), go to the Library and search FSC. Haworth FSC Trademark License #FSC-C002821

Surface Materials — Planes

Fabrics/Color Legend

Vertical Fabrics

Grade A

(6X)	Chevron
(35)	Etch
(L6)	Highlands
(C1)	Striae
(PY)	Tailored
(3A)	Tellure

Grade B

(33)	Camp
(L5)	Classic
(34)	Fields
(6)	Hue
(ZR)	Kio
(32)	Peca
(PV)	Ritz
(WS)	Shimmer

Grade C

(PH)	Birds Nest
(SW)	Sisal

Grade D

(LV)	Tangram
------	---------

* For most current finish and fabric availability please reference surfaces.haworth.com.

Haworth+

For information on the Haworth+ alliance program, including images and product availability, please refer to: [Haworth.com](https://haworth.com) > Surface Collection > Haworth+ Library

Customer's Own Material (COM)

For general Customer's Own Material (COM) information including processes and forms, please refer to: [Haworth.com](https://haworth.com) > Surface Collection > Resources > COM

For information on approved COM's, please refer to: [Haworth.com](https://haworth.com) > Surface Collection > COM Library

Index

Products are listed alphabetically in this index by alpha-numeric prefix/suffix codes.

Product Code	Product Description
4TEB-15	Electrical Components and Covers – Benching — Single Circuit Base Feed – Receptacle Connection — 3-Circuit and 4-Circuit115
4TEB-20	Electrical Components and Covers – Benching — Single Circuit Base Feed – Receptacle Connection with Power Cord — 3-Circuit and 4-Circuit115
BSFD-S	Electrical Components and Covers – Benching — Base Feed Cover — Vertical108
EAAW-0000-H	Cable Management – Cable Chain104
EAET-C000-SC	Electrical Components and Covers – Benching — Top Feed Pole, End-of-Run107
EAET-C00C-DC	Electrical Components and Covers – Benching — Top Feed Pole, Middle-of-Run107
EKEP-0000-C	Electrical Components and Covers – Benching — Hardwire Kit108
EU EH-0087-2	Electrical Components and Covers – Benching — Infeed Harness113
EU EH-0087-3	Electrical Components and Covers – Benching — Infeed Harness113
EU EH-0087-4	Electrical Components and Covers – Benching — Infeed Harness113
EU EJ-0018-3	Electrical Components and Covers – Benching — Jumper112
EU EJ-0024-2	Electrical Components and Covers – Benching — Jumper112
EU EJ-0024-4	Electrical Components and Covers – Benching — Jumper112
EU EJ-0064-2WF	Electrical Components and Covers – Benching — Internal Power Base™ AI Base Feed114
EU EJ-0064-3WF	Electrical Components and Covers – Benching — Internal Power Base™ AI Base Feed114
EU EJ-0064-4WF	Electrical Components and Covers – Benching — Internal Power Base™ AI Base Feed114
EU EK-2S	Electrical Components and Covers – Benching — Utility Tray Power Retrofit Kit112
EU EK-3S	Electrical Components and Covers – Benching — Utility Tray Power Retrofit Kit112
EU EK-4S	Electrical Components and Covers – Benching — Utility Tray Power Retrofit Kit112
EU ER-15	Electrical Components and Covers – Benching — Triplex Receptacle – 15 Amp110
EU ER-20	Electrical Components and Covers – Benching — Triplex Receptacle – 20 Amp111
FBEW	Electrical Components and Covers – Benching — Wall Feed Field Wired 1 Port114
TA01-CLSN	Accessories – Planes and Planes LT Only — Collision Sensor103
TA01-CSTR	Accessories – Planes and Planes LT Only — Caster Kit103
TA01-HBTT-M	Electrical Components and Covers – Benching — Transition Tray105
TA01-HBTT-MA	Electrical Components and Covers – Benching — Transition Tray – Asymmetrical106
TA01-HBTT-MT	Electrical Components and Covers – Benching — Transition Tray — For use with Middle-of-Run, Top Feed105
TA01-HBTT-MTS	Electrical Components and Covers – Benching — Transition Tray — For use with Fixed Screens and Middle-of-Run, Top Feed106
TACA	Planes 90° Equal Corner — Straight – Electric Adjustment19
TACE-4064-NCDB	Planes 90° Extended Corner — Wrap-Around – Incremental or Crank Adjustment26
TACE-4064-NCEB	Planes 90° Extended Corner — Wrap-Around – Electric Adjustment29
TACE-6470-NCDE	Planes 90° Extended Corner — Wrap-Around – Incremental or Crank Adjustment26
TACE-6470-NCEE	Planes 90° Extended Corner — Wrap-Around – Electric Adjustment29
TACN	Planes 90° Equal Corner — Notched – Electric Adjustment24
TACN-5858-NCEB	Planes 90° Equal Corner — Notched – Electric Adjustment24
TACN-6464-NCEE	Planes 90° Equal Corner — Notched – Electric Adjustment24
TACP-4070-NCEB	Planes 90° Extended Corner — Notched – Electric Adjustment32
TACP-5270-NCEB	Planes 90° Extended Corner — Notched – Electric Adjustment32
TACR	Planes 90° Equal Corner — Wrap Around – Electric Adjustment21
TACR-5858-NCEB	Planes 90° Equal Corner — Wrap Around – Electric Adjustment21
TACR-7070-NCEE	Planes 90° Equal Corner — Wrap Around – Electric Adjustment21
TACZ	Planes Three-Sided Benching — 120° – Electric Adjustment85
TACZ-5858-NCEB	Planes 120° Corner — 120° Wrap-Around – Electric Adjustment35
TARA	Planes — Rectangular – Electric Adjustment15
TARA	Planes — Rectangular – Incremental or Crank Adjustment12
TARA-2458-NH	Planes Single-Sided Benching — Rectangular – Electric Adjustment82
TARA-2458-NH	Planes Two-Sided Benching — Rectangular – Electric Adjustment79
TJ01-CSTR	Accessories – Upside, Planes and Planes LT103
TJBA	Upside Base for Rectangular Table – Electric69

Index

Product Code	Product Description	
TJBA-3CXB-G	Upside Base for 90° or 120° Table – Electric Adjustment	.71
TJRA	Upside — Rectangular – Electric Adjustment	.67
TLCE-4664-LJSNCPE	Planes LT 90° Equal Corner — Wrap-Around Extended – Electric Adjustment	.56
TLCE-4670-NNNNCPB	Planes LT Base for 90° Extended Corner Table – Electric Adjustment	.63
TLCE-5270-NNNNCPB	Planes LT Base for 90° Extended Corner Table – Electric Adjustment	.63
TLCE-6470-LJSNCPE	Planes LT 90° Equal Corner — Wrap-Around Extended – Electric Adjustment	.56
TLCN-5858-LJSNCPB	Planes LT 90° Equal Corner — Notched – Electric Adjustment	.50
TLCN-6464-LJSNCPE	Planes LT 90° Equal Corner — Notched – Electric Adjustment	.50
TLOP-4670-LJSNCPE	Planes LT 90° Equal Corner — Notched Extended – Electric Adjustment	.54
TLOP-5270-LJSNCPE	Planes LT 90° Equal Corner — Notched Extended – Electric Adjustment	.54
TLCR-5858-LJSNCPB	Planes LT 90° Equal Corner — Wrap-Around – Electric Adjustment	.52
TLCR-5858-NNNNCPB	Planes LT Base for 90° Equal Corner Table – Electric Adjustment	.61
TLCR-6464-LJSNCPE	Planes LT 90° Equal Corner — Wrap-Around – Electric Adjustment	.52
TLCR-6464-NNNNCPB	Planes LT Base for 90° Equal Corner Table – Electric Adjustment	.61
TLCZ-4646-LJSNHPB	Planes LT Three-Sided Benching — 120° – Electric Adjustment	.93
TLCZ-4646-NNNNHPB	Planes LT Base for Three-Sided 120° Benching – Electric Adjustment	.101
TLCZ-5858-LJSNCPB	Planes LT 120° Corner — Wrap-Around – Electric Adjustment	.58
TLCZ-5858-NNNNCPB	Planes LT Base for 120° Corner Table – Electric Adjustment	.65
TLRA-2358-LJSNCP	Planes LT — Rectangular – Electric Adjustment	.47
TLRA-2358-LJSNSP	Planes Single-Sided Benching — Rectangular – Electric Adjustment	.90
TLRA-2458-LJSNHE	Planes LT Two-Sided Benching — Rectangular – Electric Adjustment	.88
TLRA-2458-NNNNHE	Planes LT Base for Two-Sided Benching – Electric Adjustment	.97
TLRA-2946-NNNNCP	Planes LT Base for Rectangular Table – Electric Adjustment	.59
TLRA-2946-NNNNTP	Planes LT Base for Rectangular Table – Electric Adjustment	.59
TLRA-2958-NNNNSP	Planes LT Base for Single-Sided Benching – Electric Adjustment	.99
TMCE-4064-NCEB	Planes Base for 90° Extended Corner Table – Electric Adjustment	.43
TMCE-6470-NCEE	Planes Base for 90° Extended Corner Table – Electric Adjustment	.43
TMCR-5858-NCEB	Planes Base for 90° Equal Corner Table – Electric Adjustment	.41
TMCR-6464-NCEE	Planes Base for 90° Equal Corner Table – Electric Adjustment	.41
TMQZ-5858-NCEB	Planes Base for 120° Corner Table – Electric Adjustment	.45
TMRA	Planes Base for Rectangular Table – Electric Adjustment	.39
TMRA	Planes Base for Rectangular Table – Incremental or Crank Adjustment	.37
TMRA-2458-NH	Planes Base for Two-Sided Benching – Electric Adjustment	.95
TRCE-4652	Upside Worksurface 90° Extended Corner – Wrap-Around – Laminate	.73
TRCE-4652	Upside Worksurface 90° Transitional Extended Corner – Wrap-Around – Laminate	.75
TRCE-4652	Upside Worksurface 90° Transitional Extended Corner – Wrap-Around – Laminate	.75
TRCE-6470	Upside Worksurface 90° Extended Corner – Wrap-Around – Laminate	.73
TRCR-5252	Upside Worksurface 90° Equal Corner – Wrap-Around – Laminate	.72
TRCR-7070	Upside Worksurface 90° Equal Corner – Wrap-Around – Laminate	.72
TRCZ-4646	Upside Worksurface 120° Corner – Wrap-Around – Laminate	.77
TVBC	Electrical Components and Covers – Power/Data Cover	.109
VZEB-0000-Y	Electrical Components and Covers – Benching — Base Feed Module — Concealed Hardwire Connection	.113

Product Compatibility and Limited Warranty Policy

Great Expectations

You have them as a Haworth customer and so do we. And because we value our customers, we cover our products with the Haworth North America Product Compatibility and Limited Warranty Policy.

Our Commitment To Product Compatibility – Integrated Product Platforms

As a market leader in the design and manufacture of workspaces that adapt to change, we strive to maintain product compatibility within our various generations of integrated product platforms. This benefits the customer who desires to update or modify their work environment. It also benefits the customer needing to replace a product due to damage or other reasons but which is no longer manufactured or is otherwise unavailable, such as a fabric or finish that is discontinued because of changing market preferences. In both circumstances, we often can provide products with comparable function and performance.

Our Commitment To Product Quality – The Haworth North America Limited Warranty

To ensure customer satisfaction and peace of mind, we stand behind our products with the Haworth North America Limited Warranty. To review the current version of the limited warranty including its terms and conditions, please go to:

www.haworth.com/warranty or contact **OneTouch@Haworth.com** or **1 877 429 6784**.

Warranty Requests or Questions

For questions or service requests pertaining to the Haworth Limited Warranty, please contact your Haworth dealer.

If you are unsure who your dealer is, please contact **OneTouch@Haworth.com** or **1 877 429 6784**.

Effective: September 1, 2021

Terms of Sale

The Terms of Sale apply to all products in the North America Price Lists. To review the current version of the North American Terms of Sale, please go to:

www.haworth.com/terms-of-sale or contact **OneTouch@Haworth.com** or **1 877 429 6784**.

Effective: September 2, 2022

HAWORTH

HAWORTH® is a registered trademark of Haworth, Inc.
© Haworth, Inc. All rights reserved. 2024 2.24 | Item #LIT21017
haworth.com | 800 344 2600