

<b>Price List Dates:</b>	
Pricing	10.02.23
Revisions	04.15.24




	➤ See page
<b>Statement of Line</b>	NA.2
<b>Planning</b>	NA.9
Overview	NA.9
Frames	NA.10
Stacking Frames	NA.11
Off-Module Brackets	NA.12
Sliding Privacy Door	NA.13
Hinged Door	NA.16
Wall-Mount Channel	NA.19
Top Caps and End Trim	NA.20
Frameless Glass	NA.21
Cover Slats	NA.22
Panel Configurations	NA.23
Traxx & Tiles Overview	NA.30
Frame & Tile Heights	NA.31
Traxx	NA.32
Tiles	NA.33
End Panels	NA.39
Power & Data Overview	NA.40
Base Wireway Components	NA.41
Ceiling Power Entries	NA.45
Base Wireway Electrical	page NA.46
Technology Tiles	
Power/Data Components	NA.50

	➤ See page
<b>Pricing</b>	NA.54
Frames	NA.54
Doors	NA.66
Supplemental Brackets	NA.69
Connectors	NA.70
Stacking Connectors	NA.78
Trim and Top Caps	NA.81
Frameless Glass	NA.87
Frameless Resin	NA.89
Divider Screens	NA.91
Cover Slats	NA.93
Narrate Traxx	NA.94
Tiles	NA.95
Single-Sided End Panels	NA.129
Dual-Sided End Panels	NA.141
Dual-Sided End Panel Sets	NA.146
End Panel Returns	NA.152
Power & Data Components	NA.154
Storage	NA.167
Height-Adjust Brackets	NA.171
Work Tools	NA.172
<b>Surface Materials</b>	NA.175
Wood	NA.175
Laminate	NA.176
Paint	NA.179
Textiles	NA.180
COM Yardage Requirements	NA.181

**NARRATE®** PANEL SYSTEM  
Frames and Doors

Statement of Line


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




**Base-Wireway Frames**  
➤ See page NA.54 to specify.




**Open-Base Frames**  
➤ See page NA.56 to specify.



**To-the-Floor Frames**  
➤ See page NA.58 to specify.



**Single-Sided To-the-Floor Frames**  
➤ See page NA.60 to specify.



**Monitor Frames**  
➤ See page NA.62 to specify.




**Multi-Frame Blank Wireway Covers**  
➤ See page NA.63 to specify.




**Mid-Frame Supports**  
➤ See page NA.64 to specify.



**Stacking Frames**  
➤ See page NA.65 to specify.



**Sliding Privacy Doors**  
➤ See page NA.66 for non-locking models.  
➤ See page NA.67 for locking models.



**Hinged Doors**  
➤ See page NA.68 to specify.



# NARRATE® PANEL SYSTEM

Connectors, Brackets, and Trim


Statement of Line

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



## Supplemental Brackets


➤ See page NA.69 to specify.



## 2-Way/L Connectors

➤ See page NA.70 to specify.


➤ See page NA.76 for use with hinged doors.



## 3-Way/T Connectors

➤ See page NA.71 to specify.

➤ See page NA.76 for use with hinged doors.



## 4-Way/X Connectors

➤ See page NA.72 to specify.

➤ See page NA.76 for use with hinged doors.



## Straight Connectors

➤ See page NA.73 to specify.




## 2-Way/V 120° Connectors

➤ See page NA.74 to specify.




## 3-Way/Y 120° Connectors

➤ See page NA.75 to specify.



## Off-Module Brackets and Wall-Mount Brackets

➤ See page NA.77 to specify.



## Frame-Support Posts & Frame Stabilizer Foot

➤ See page NA.77 to specify.




## Stacking Connectors

➤ See page NA.78 to specify.



## Stacking Off-Module Brackets

➤ See page NA.80 to specify.




## End Trim

➤ See page NA.81 to specify.



## Stacking End Trim

➤ See page NA.82 to specify.



## Hi-Lo Vertical Trim

➤ See pages NA.83–NA.84 to specify.



## Top Caps

➤ See page NA.85 to specify.

# NARRATE® PANEL SYSTEM

Screens, Cover Slats, Traxx, and Tiles

Statement of Line


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



## Frameless Glass or Resin

Available in glass and resin.


➤ See pages NA.87–NA.90 to specify.



## Panel-Mount Divider Screens


Available in glass and resin.

➤ See pages NA.91–NA.92.



## Cover Slats

➤ See page NA.93 to specify.




## Narrate Traxx

➤ See page NA.94 to specify.




## Fire-Rated Fabric Tiles

➤ See page NA.95 to specify.



## Wood, Laminate, or Painted Tiles

➤ See page NA.102 to specify.




## Glass Tiles with Frame

➤ See page NA.110 to specify.



## Back-Painted Glass Tiles

➤ See page NA.114 to specify.



## Back-Painted Glass Tiles for Monitor Frames

➤ See page NA.118 to specify.



## Markerboard Tiles


➤ See page NA.119 to specify.



## Metal Tiles

➤ See page NA.121 to specify plain models.

➤ See page NA.122 to specify patterned models.



## Slat Tiles

➤ See page NA.124 to specify.



## Fold-Down Tiles

➤ See page NA.126 to specify.



## Technology Tiles


➤ See page NA.127 to specify without cut-outs.

➤ See page NA.128 to specify with cut-outs.

**NARRATE®** PANEL SYSTEM  
Single-Sided End Panels


Statement of Line

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




**TFL, HPL, or Wood Single-Sided End Panels**

➤ See page NA.129 to specify.



**Resin Insert with Frame Single-Sided End Panels**


➤ See page NA.132 to specify.



**Plywood Single-Sided End Panels**

*Available in four different patterns: crossroads, diagonal, intersect (shown above), and stitch.*


➤ See page NA.134 to specify.



**Painted Single-Sided End Panels**


*Available in four different patterns: crossroads, diagonal, intersect (shown above), and stitch.*

➤ See page NA.136 to specify.



**3D Laminate Single-Sided End Panels**

➤ See page NA.139 to specify.



**TFL or HPL End Panel Returns**


*Can be used with single-sided or dual-sided end panels.*

➤ See page NA.152 to specify.


**NARRATE®** PANEL SYSTEM  
Dual-Sided End Panels and End Panel Sets

Statement of Line


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




**TFL, HPL, or Wood Dual-Sided End Panels**  
➤ See page NA.141 to specify.




**Resin Insert with Frame Dual-Sided End Panels**  
➤ See page NA.142 to specify.




**Plywood Dual-Sided End Panels**  
*Available in four different patterns: crossroads, diagonal, intersect, and stitch (shown above).*  
➤ See page NA.143 to specify.




**Painted Dual-Sided End Panels**  
*Available in four different patterns: crossroads, diagonal, intersect, and stitch (shown above).*  
➤ See page NA.144 to specify.




**3D Laminate Dual-Sided End Panels**  
➤ See page NA.145 to specify.




**TFL, HPL, or Wood Dual-Sided End Panel Sets**  
➤ See page NA.146 to specify.




**Resin Insert with Frame Dual-Sided End Panel Sets**  
➤ See page NA.148 to specify.



**Plywood Dual-Sided End Panel Sets**  
*Available in four different patterns: crossroads (shown above), diagonal, intersect, and stitch.*  
➤ See page NA.149 to specify.



**Painted Dual-Sided End Panel Sets**  
*Available in four different patterns: crossroads (shown above), diagonal, intersect, and stitch.*  
➤ See page NA.150 to specify.




**3D Laminate Dual-Sided End Panel Sets**  
➤ See page NA.151 to specify.


**NARRATE®** PANEL SYSTEM  
Power & Data Components and Cable Managers

Statement of Line


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




**Base-Wireway Harnesses**  
➤ See page NA.154 to specify.



**Mid-Wireway Harnesses**  
➤ See page NA.156 to specify.

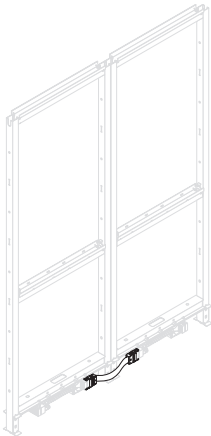


**Electrical Jumpers**  
➤ See page NA.157 to specify.




**Duplex and USB Receptacles**  
➤ See page NA.159 to specify.




**Power Entries**  
➤ See page NA.162 to specify.




**Ceiling Power/Data Poles**  
➤ See page NA.163 to specify.



**Technology Tile Electrical Components**  
➤ See page NA.164 to specify.



**Base-Wireway Hardwire Components and Cover Plates**  
➤ See page NA.165 to specify.



**Cable Managers**  
➤ See page NA.166 to specify.




# NARRATE® PANEL SYSTEM

Storage, Height-Adjust Brackets, and Work Tools


Statement of Line

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




**Flat Profile, Sliding-Door Overhead Storage**

➤See page NA.167 to specify.




**Flat Profile, Open Overhead Storage**

➤See page NA.168 to specify.




**Support Bases for Overhead Storage**

➤See page NA.169 to specify.




**Flat Profile Cubby Storage**

➤See page NA.170 to specify.




**Xside Height-Adjust Bracket**

➤See page NA.171 to specify.



**Metal Work Tools Collection**

➤See pages NA.172–NA.173 to specify.



**Plastic Work Tools Collection**

➤See page NA.174 to specify.

# NARRATE® PANEL SYSTEM

## Overview

## Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

**Narrate panels** are 3¼" thick.

**Ceiling power/data pole** allows power and data to be routed into the station from the ceiling.

**Frameless glass** adds height to the panel for separation but keeps the look open.

**Narrate support Traxx** includes small channel to install components, but is still thin profile for clean aesthetics.

**Narrate trim Traxx** can be utilized where components will not be installed, providing an even better aesthetic.

**Overhead support brackets** used with Narrate support Traxx allows for placement of Footprint overhead storage unit on-module or off-module.

**Connectors and hi-lo trim** accommodate change of direction and change of the height.

**End trims**, available in painted metal or wood, provide a clean aesthetic at the end of panel runs.

**Perks work tools** are available to attach to slat tiles; Narrate work tools are available to hang on Narrate support Traxx.

**Edge support brackets** used with Narrate support Traxx allow for the attachment of Kimball worksurfaces.

**Base wireway covers** provide access to power and data and are included with base wireway frames.

**Technology tile** provides access to power and data at 2nd, 3rd, 4th or 5th segments.

**Undersurface support rails** provide strength to worksurfaces and minimizes the number of additional support required.

**Base power entry**, available in 8-wire or 10-wire, connects station to power source and allows power to be distributed throughout the station.

## Electrical:



**Class A**—Tackable acoustical tiles.  
*Note: COM must comply with U.L. Standard 1286*

**Class B**—Laminate tiles

**Class C**—Wood and painted tiles


# NARRATE® PANEL SYSTEM

## Frames

## Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details



**Frames** are available in 18", 24", 30", 36", 42" and 48" widths and in 2-high (29<sup>1</sup>/<sub>2</sub>" ), 3-high (42<sup>1</sup>/<sub>8</sub>" ), 3.5-high (49<sup>1</sup>/<sub>32</sub>" ), 4-high (54<sup>23</sup>/<sub>32</sub>" ), and 5-high (67<sup>5</sup>/<sub>16</sub>" ) heights. All frames include:


- Mid-frame support (welded in place)
- Glides
- Attachment hardware

**Steel frames** are painted black on base-wireway, single-sided to-the-floor, and to-the-floor frames. Open-base frames are available in a variety of paint colors.

**Base-wireway frames and single-sided to-the-floor** are available in powered and non-powered models and feature painted base-wireway cover(s). Powered models include the power harness. New York City power entry is not applicable in single-sided frames.

**Open-base frames** do not have a base wireway or cover and are open and finished at the bottom. When glides are fully inserted, the clearance under the open base frame is 4<sup>1</sup>/<sub>8</sub>".

**To-the-floor frames** allow tiles to go all the way to the floor. There is no base wireway.

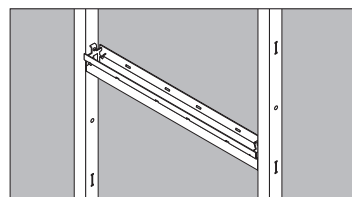


**Welded-in-place mid-frame support** is standard at the 2-high position on 3-, 3.5-, 4-, and 5-high frames to provide support for worksurfaces; it is standard at the 1-high position on 2-high frames. These welded mid-supports cannot be removed or relocated within the frame.

### Surface Materials

- Vertical frame: 16 gauge cold-rolled steel, black
- Horizontal top channel and mid-channel: 16-gauge cold-rolled steel, black
- Horizontal bottom channel: 18-gauge cold-rolled steel, black

### Connections

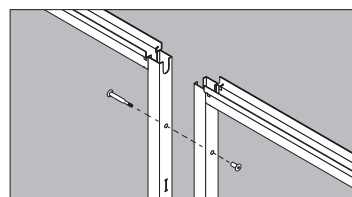

**Frames are attached with bolts** that provide consistent alignment from


frame-to-frame as well as strength and rigidity to the panel run.

**Tiles**, available in support or trim options, are specified based on the upper Traxx that the tile will be installed into.

**Specially sized, to-the-floor tiles** must be specified for the lowest segment on to-the-floor frames to accommodate the extra height. Standard tiles can be used to complete the panel. 5-high to-the-floor frames must be specified with a minimum of two segments. Due to textile width constraints, a 5-high to-the-floor tile is not available.

**Narrate Traxx and tiles** complete the panel frame.  
➤ See page NA.30.

### Power & Data



**Wireway covers** for base-wireway frames and single-sided to-the-floor frames are available punched or non-punched. Longer multi-frame blank covers can be specified to span across multiple frames.  
➤ See page NA.63.


**Top channel in frames** allows for top lay-in cabling capacity.

**Cutouts for routing cables vertically** are provided in the frame's top

channel, bottom channel, and mid-frame supports.

**Data cabling** can also be routed horizontally between tiles and frames and through connectors.

### Planning Factors

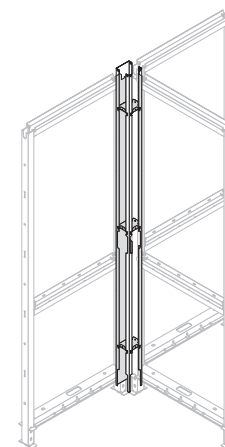

**Mid-frame supports are required wherever Narrate Traxx are used** to support tiles, therefore, if planning segmented panels, additional mid-frame supports, specified separately, may be required.


**Mid-frame supports provided at the 2-high position** (1-high on 2-high frames) are welded in place and cannot be relocated.

**Additional mid-frame supports will be required** to correspond with the bottom of an overhead mounted to the inside top of the frame.

**Additional mid-frame support is not necessary** for center-mounted overheads.

**Supplemental brackets** for same-height frame connections are recommended for maximum stability when wing panel is not tied to a work surface at the front and back.

**5-high x 48"W base wireway monitor frames or single-sided to-the-floor monitor frames** are available to allow one monitor to be mounted inside frame. Accommodates Samsung 50" Class Q60A QLED 4K TV purchased separately. External speakers or soundbar are recommended for use in conjunction with TV to control sound within the station.



**3-high back-painted monitor glass** is required on the side the monitor will be viewed. Back side of frame requires 3-high tile or taller as additional Traxx cannot be placed between 2-high and 5-high locations on the monitor frame.


# NARRATE® PANEL SYSTEM

## Stacking Frames

## Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details



**Stacking frames** may be added to 2-high, 3-high, 4-high, or 5-high base frames to increase the height of the panel.

**IMPORTANT:** 3.5-high base frames cannot accept stacking frames.

**Stacking frames** are available in 1-high and 2-high segments. They include:


- Welded frame
- Attachment hardware

**Stacking frames** available in widths from 18"–96" in 6" increments. Stacking frames wider than 48" are used to span multiple frames; overall width of base frames must equal width of stacking frame.


### Surface Materials

- Vertical frame: 16 gauge cold-rolled steel, black
- Horizontal frame: 16 gauge cold-rolled steel, black


### Connections



**One or two 1-high or 2-high stacking frame** may be added on top of a base frame (except 3.5-high) up to a max. of 93 1/4" including the top cap.




**Stacking frames** can span multiple base frames.




**Hi-lo applications** can be created by using a 1-high stacking frame next to a 2-high stacking frame. Specify appropriate hi-lo vertical trim for end of the run.

### Planning Factors




**Stacking frames 48"W or less are loadbearing when same-height return runs** are used at each end.

*Note: If using two stacking frames, overheads may only be hung on the lower stacking frame.*




**In hi-lo applications, stacking frames can be loadbearing**, but require overheads on both sides.

**Components** must be hung on a top channel of either the base or stacking frame.



**Narrate Traxx** must be used at the top of the stacking frame on both sides. When stacking, Traxx may be used on one, both or neither side of the base frame.



**Center-mounted overheads** can be positioned on top of stacking frames up to 4-high.

**Technology tiles** can be used on stacking frames where data is required; electrical cannot be accommodated on 1-high stacking frame because the power block mounting brackets must attach to a mid channel.

**Specify mid-frame supports separately** if using Narrate Traxx at the 1-high segment on a 2-high stacking frame.

### Related Products

**Vertical end trim and connectors** must be specified to equal the combined height of the base and stacking frames.

**Narrate Traxx and tiles** complete the panel frame.

➤ See page NA.30.


# NARRATE® PANEL SYSTEM

## Off-Module Brackets | Base Frame Height and Stacking

Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details




**Off-module brackets** allow any Narrate frame (base wireway, single-sided to-the-floor, to-the-floor, or open base) to be used to start a new panel run perpendicular to an existing run without using a connector.

**Stacking off module brackets** allow you to stack on top of an off-module run.

**Attachment bracket(s) and attachment hardware** are included.

### Connections



**A minimum of two support Traxx** are required to attach an off-module frame to a Narrate frame run. One attachment point must be at the uppermost point possible of the frame being used to create the off-module connection. The other can vary depending on the location of the support Traxx on the Narrate frame run.

**Stacking off-module bracket** connects the top of the stacking frame to the spine run. Support Traxx are required on the spine run at the same height as the top of the stacking frame.

**Standard wall-mounted Traxx**, when installed at proper heights for use with 37"H tiles, will integrate with Narrate Traxx in 5-high applications. Component heights will match if mounting guidelines are followed.

**To ensure worksurfaces will be at the same height**, use Traxx worksurface brackets for wall-mounted Traxx and Narrate worksurface brackets for Narrate Traxx.

**A 1" gap** (approx.) will occur between the wall and the off-module brackets and frame below the bottom wall-mounted Traxx.

### Power & Data

**Power and data** cannot be routed from the spine run into the off-module run.


### Planning Factors

**Return runs started with an off-module bracket** can provide support for spine runs.

**Full-width tiles** positioned on the spine run behind the off-module run allow the off-module run to be easily reconfigured.

**Hi-lo return wall** can be created using an off-module run.

**In non-loadbearing conditions**, the off-module frame may be equal to or less than the height of the spine run.

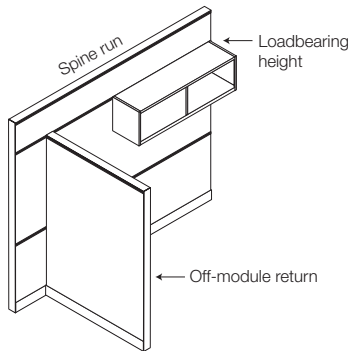

**Loadbearing conditions** require the off-module run to be equal to the loadbearing height of the spine run.




# NARRATE® PANEL SYSTEM

## Sliding Privacy Door

Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details




**Sliding privacy doors** provides for visual privacy. Privacy doors are made of 4mm translucent resin (25 Glacier), providing a lightweight, clean design. They do not need a threshold or header, and are not intended for use as a security door. Models include:

- Door frame and insert
- Attachment hardware
- Matching end trim


**Five heights** are available: 3.5-high, 4-high, 5-high, 6-high, and 7-high to correspond to Narrate frame heights.

**Support Traxx** are required at the top of host frame to allow privacy door to attach. For 6-high and 7-high privacy doors, support Traxx is also required at the 2-high location.

**End trim** should not be ordered for the end of host frame. Privacy door model includes a special end trim designed to work with sliding privacy door.



**Privacy doors are offered in 36"W models only**; actual door width is 12" wider so that when closed, the door overhangs the host frame to which it is attached.



Left-Hand Right-Hand

**Doors are specified to open left or right.** The host frame to which the sliding privacy door's top guide is attached determines handedness.

**Locking models** are pre-drilled for field installation of lock assembly. Lock assembly is standard, but ships separately. Lock engages in the end trim of the host panel. Locking models include:

- Lock housing, core, and key (key random option): black or matte nickel (silver)
- Lock plate

*Note: Key-specific option is available.*  
➤See page NA.15 for more detailed locking information.



**ADA-compliant door handle** is available for field installation; specified separately.

**U.L. listing 1286.**

### Surface Materials

- Frame: painted aluminum
- Insert: 4mm resin (25 Glacier)
- End Trim: painted steel

### Connections

**Privacy doors** can be used with any style of Narrate frame. Narrate frame and privacy door must be the same height and the top Traxx on the Narrate frame must be a support Traxx.

**Bottom of privacy door** is 4¼" shorter than the host frame.

**Stacking frames** can be added to the Narrate base frame that the sliding door is attached to. Use stacking end trims to finish off the end of the stacking frame.

### Planning Factors

**Width of the Narrate frame and support Traxx** must be 48" for privacy door to attach to the frame.

**Privacy doors** can be used with powered frames, but power should only be accessed from side opposite of the sliding door.

# NARRATE® PANEL SYSTEM

## Sliding Privacy Door | Door Placement Guidelines

### Planning


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

**IMPORTANT:** Sliding privacy doors “float” in the top channel and will follow the slope (if any) of the Narrate frame and floor. Any unevenness of the floor will be reflected in how the door matches up against the abutting wall or panel, and may result in a less-than-true vertical line when the door is in the closed position against the abutting panel or wall.


The door sits off the face of the host panel by 3/4".




**IMPORTANT:** When using a sliding privacy door on an unsupported run, host panel run can range between 4'–5', so when the door is extended the panel run is 8' or less. It is also recommended that a square frame-support post is used in host frames to reduce panel movement as sliding door is open and closed.




- Door may be the same height as the host frame or host frame plus a stacking frame.  
*Note: 3.5H sliding privacy door can only be used on a 50"H frame.*




- Door may abut a perpendicular panel run.




- Door cannot travel across a connector due to the space consumed.




- Door can abut a building wall.  
➤ See note at far left.



- Multiple doors may be installed in a panel run. Follow the same application guidelines for Narrate panel runs.  
➤ See page NA.29.



- Any floor variation will be reflected in the privacy doors as they come toward the center.



- Can be positioned inside the workstation; consider the location of work surfaces, overhead storage and accessories.

NARRATE® PANEL SYSTEM  
Sliding Privacy Door | Locking Information

- Locking privacy doors can be specified as:
- Key random with a black lock core and black hinged key (KRB);
  - Key random with a silver (matte nickel) lock core and black hinged key (KRS); or
  - Key specific black (KSB);
  - Key specific silver (KSS)

**Key Random Option:**

When key random option is selected, key numbers will be assigned arbitrarily at the factory with key numbers ranging from KCCB001 to KCCB300 (black) or KSCG001 to KSCG100 (silver).

Randomly numbered lock core(s) will ship standard along with your order for field installation.

With random keying, different furniture units may or may not have the same key number. If you must have all locks keyed differently or all locks keyed the same, choose the key specific option.

**Key Specific Option:**

When a key specific option is selected, the sliding privacy door will be pre-drilled and fitted with hardware to accept either a black or silver lock core; however, no lock cores will be shipped standard with the unit. The price of the unit is reduced by the price of the lock core or cores.

You must specify lock core(s) separately for key specific option; specify any key number from KCCB001 to KCCB300 (black) or KSCG001 to KSCG100 (silver).

To key all the sliding privacy door units in a workstation or department alike, choose a key specific option and order the quantity of locks needed for your installation.

**Black lock cores** and hinged keys are identical to the ones used with Footprint storage.

**Silver lock cores** and round keys are matte nickel. These lock cores and keys are identical to the ones used with Definition series.

**Standard key** that ships with the lock core can be used for the initial installation of the lock core in the field.

**Change key model KSCD1CK** allows removal of keys within these ranges:  
KCCB001–KCCB300  
KSCG001–KSCG100

IMPORTANT: A change key, specified separately, is required to remove lock cores in the field.

**Master key model KS2GMK** will unlock any lock within these key ranges:  
KCCB001–KCCB300  
KSCG001–KSCG100

Planning

Lock Cores & Keys GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Model/Key Range Price



**Black Lock Core with Black Hinged Key**  
KCCB001 to KCCB300 \$29



**Silver Lock Core with Black Hinged Key**  
KSCG001 to KSCG100 \$37

**Change Key**  
KCCB1CK \$25

**Master Key**  
KC2GMK \$25

- How to Specify**
- 1 Specify exact key number for lock cores as the model number or model number for change or master key


# NARRATE® PANEL SYSTEM

## Hinged Door

## Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details



**Hinged doors** are available in 36" and 42" widths, and in left or right hinged models (right hinged shown).




**Actual door widths** (openings) are 32<sup>9</sup>/<sub>16</sub>"W for a 36"W door and 38<sup>9</sup>/<sub>16</sub>"W for a 42"W door. 42"W doors are appropriate for ADA compliance.

**Hinged doors** are 6 high. Door can accept 1-high stacking frames allowing for a 7-high station.

**The door assembly** includes:

- Door
- Attachment hardware
- Door stop and pre-assembled frame
- Door frame consisting of rubber bumpers, threshold, and top header
- Two-piece vertical door jamb

*Note: Top header accepts top cap or tile if using stacking frame. Traxx is not required on top of door.*

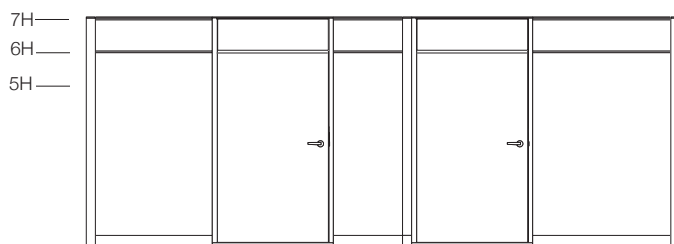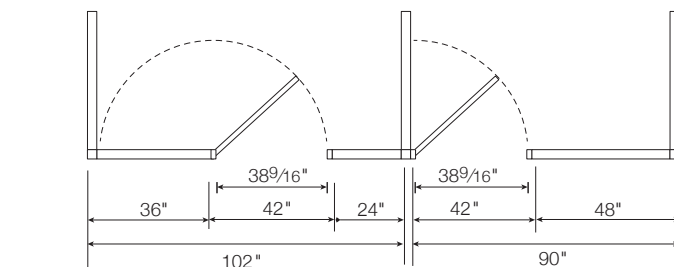

**Locking lever** is available and is suitable for ADA guidelines.

### Surface Materials

- Door: honeycomb core overlaid with veneered 5/16" MDF (paint or wood finish)
- Door frame: aluminum, paint
- Lever/lock: satin chrome
- Threshold: anodized aluminum, black

### Connections


**Door frames** attach directly to the adjacent frame using frame-to-frame alignment bolts. Door frames attach to connectors using connector bolts.

**Narrate hinged doors** can be used in straight run applications between two frames or next to an L, T, or X connector. When attached to a connector, a Narrate connector for use with hinged door must be specified. ➤ See page NA.76.


**When used in a straight run, door frames** should not be more than one 36"W frame from a connector. Maximum panel run when using doors is 3 panels. It is recommended to use a

square frame-support post in frames adjacent to the door frame.

### Planning Factors




**Panel runs with doors** are not considered loadbearing.



**Panel runs perpendicular to runs with doors** are considered loadbearing, provided that panel run application guidelines are followed.

➤ See page NA.27.



Off-module connection

**Off-module panel runs** are not suitable to provide support for the door. Cover slats cannot be attached to doors.

Connectors for use with hinged doors are non-stacking. If no stacking frame is added above the door, specify a 6-high connector. If a 1-high stacking frame is added to the door, then specify a 7-high connector.

If Narrate connector for use with hinged door has lower panels attaching on adjacent sides, then specify the connector specific to the hi-lo application.

**Cover slats** cannot be attached to doors.

### Related Products

**Top cap** must be specified separately to span across the door frame.

➤ See page NA.20.

# NARRATE® PANEL SYSTEM

## Connectors

## Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details



**Connectors** join two or more panels to change direction or add dimensions in panel run. Connectors are available in


- Paint, vertical textile, or wood trim (inside reveal is painted)
- With wood or paint top cap
- With or without wireway covers (wireway cover option is not applicable to X or Y connectors).

**Connectors** can be used in the following configurations:

- L (2-way 90°)
- T (3-way 90°)
- X (4-way 90°)
- Straight (180°)
- V (2-way 120°)
- Y (3-way 120°/120°/120°)

**Top cap, vertical trim, inside reveal trim and connecting bolts** are included with each connector.

**Connectors for use with hinged doors** consist of an extruded aluminum post with top cap and connecting bolts.




**Stacking connectors** can be used to:

- Build up to 7-high stations
- Increase height of an existing station by adding stacking frames and connectors on top with no tear down of existing station


*Note: Connectors for use with hinged doors are non-stacking.*

### Power & Data



**Power and data** can be routed through the base or behind tiles at any height. (Install power and data prior to installing inside connector reveal trim.)

### Planning Factors



**For change of height at connectors**, the base connector will match the height of the lowest frame and then stacking connectors or end trim will be used to finish taller frames.


*Exception: Connectors for use with hinged doors must match the height of the door (6-high) or the height of the door plus one stacking frame (7-high).*

**Stacking connectors can be different than base connector**, for example, you can put a stacking T- or L-connector onto an X-connector.



*Exception: Stacking V-connectors cannot be on top of Y-connectors. Stacking V-connectors can only be used with V-connectors, and stacking Y-connectors must be used with Y-connectors.*

**3.5-high connectors** cannot be stacked on to match other height frames. The actual dimensions of the 3.5-high connector with a stacking connector will not align to other height frames.

**If adding a stacking connector in a different color** than the base connector, and you want the top cap to match the stacking connector, be sure to specify the matching top cap finish as part of the base connector specification.




**For change-of-height applications with three or more panels**, you cannot use hi-lo vertical end trim next to each other on perpendicular panels. However, hi-lo vertical end trim can be used in applications where they do not touch each other as shown above.



**Straight connectors** fill parallel panel runs where one panel run has a connector and the other does not. It is not required to join panels.

### Trim Profiles:



#### Flat

Applies to end trim, hi-lo end trim, and top caps.




# NARRATE® PANEL SYSTEM

## Frame Stabilizer Foot

Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details



**Frame stabilizer foot** allows for 10' long or longer freestanding panel runs.


**Foot** can be used at the end of a center spline run, eliminating the need for a connector or wing panel.

**Foot** can also be added to the end of a wing panel to help reduce movement in the wing panel.

### Surface Materials

- Foot: 16 gauge steel

### Planning Factors

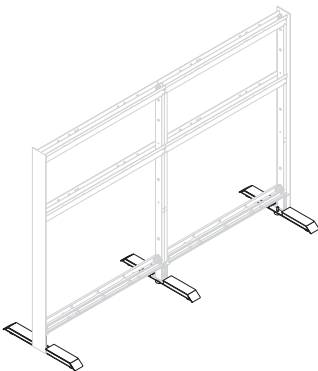

**Frame stabilizer foot** is non-handed. It can be used on the left or right end of a run, as well as in the center of a run. One foot should be used at each vertical location in a freestanding panel run.

### Planning Factors

**Freestanding Narrate run** should be a minimum of 10' long and not exceed 5-high (base frame or base frame with stacking combined).


**Overheads or other components** cannot be used on panel runs supported by a stabilizer foot.

# NARRATE® PANEL SYSTEM

## Wall-Mount Channels

### Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

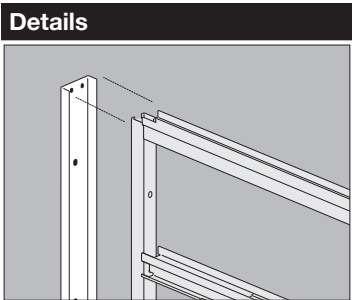


**Wall-mount channel** is used to accommodate out-of-plumb wall conditions when attaching a panel run directly to a building wall.

- Surface Materials
- 20 gauge cold-rolled steel


Connections

**Wall attachment fasteners** are not included. The installer should select and purchase the proper fasteners for the specific wall application.

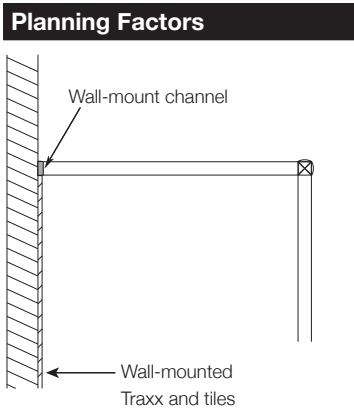

**If using Narrate** in conjunction with wall-mounted Traxx, consider using an Xsite adjustable wall-mount channel which allows adjustment without using field installed shims. The thickness of Xsite adjustable wall-mount channel is the same as wall-mounted Traxx.

**Shims** may be required to level frames if the wall is not square.

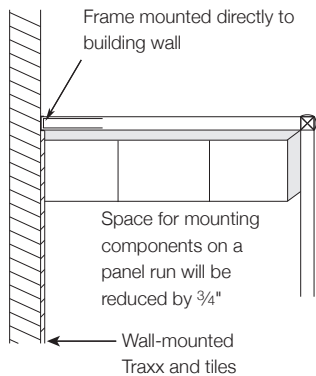

**If you choose not to use an Xsite adjustable wall-mount channel in a wall-mount application,** the available space for mounting components on the panel run perpendicular to the building wall will be reduced by 3/4" where wall-mounted Traxx and tiles extend from the wall and abut the frame.

*Note: To eliminate this condition, use an Xsite adjustable wall-mount channel to shim out from the wall.*

# NARRATE® PANEL SYSTEM


## Top Caps and End Trim

Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details


**Top caps** finish the top of the frame and conceal data cables in the top channel.



**Top caps** are available in widths up to 8'.

**End trim** covers the vertical frame edge at the end of each panel run.

**Hi-lo trim** finishes off the vertical end of frames when transitioning heights.

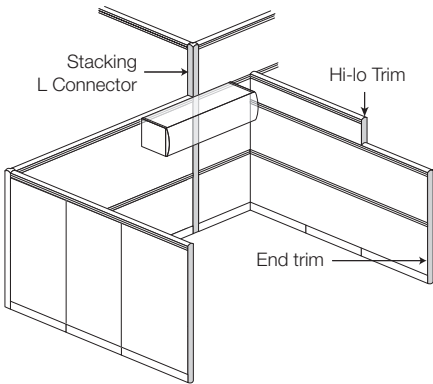


### Surface Materials

- Top caps: wood or paint
- End trim: wood or paint

### Connections

**Top caps** fit securely onto frames using a pressure-fit attachment method.

### Related Products



**Notched top cap**, included with power/data pole, is available in 6" increments from 24" to 48"W.

**Top caps for use with frameless glass** are pre-drilled to accept frameless glass holders.  
➤See page NA.21 for details.

### Overall Panel Heights:

The chart below shows the overall panel height including the top cap, frame, and glides.

2-high	29 <sup>3</sup> / <sub>4</sub> "H
3-high	42 <sup>3</sup> / <sub>8</sub> "H
3.5-high	49 <sup>9</sup> / <sub>32</sub> "H
4-high	54 <sup>29</sup> / <sub>32</sub> "H
5-high	67 <sup>17</sup> / <sub>32</sub> "H
6-high*	80 <sup>3</sup> / <sub>16</sub> "H
7-high*	92 <sup>3</sup> / <sub>4</sub> "H

\* 5-high base frame with stacking frame.

NARRATE® PANEL SYSTEM

Frameless Glass | Panes and Top Caps

Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Details




**Frameless glass** is available in 1/4" tempered glass or resin.

**Top cap with inset channel** must be specified separately. Top cap can span multiple frames up to 8 feet.

Surface Materials

- Resin: glacier
- Glass: clear, charcoal, bronze or etched

Connections




**Top cap for use with frameless glass** features pre-drilled holes, which allows the top cap to be securely bolted to the panel frame.

Planning Factors

**Frameless glass or resin is not loadbearing.** Components or accessories cannot be hung on frameless glass or resin.

**Frameless glass cannot be scribed** in the field.

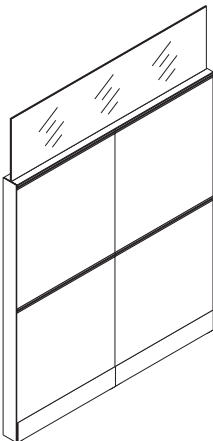

**Width of the frameless glass pane** must be the same width as the top cap. Both should be specified to match the width of the panel frame to which they will attach or the combined width if spanning over two or more frames up to 96"W.

**Specify hi-lo glass pane models for the lower panel** in a hi-lo application. Glass widths have been adjusted to accommodate the vertical hi-lo end trim.

*Note: Hi-lo-hi application is not possible due to the width of the glass.*

**Lay-in cabling** can be accommodated in the top channel. The frameless glass and glass holders will have to be removed to access the interior of the panel and cables.

**3.5-high base frames** can accept frameless glass, but the overall height will not line up with a 4-high panel.

**Customer-supplied glass** can be used with frameless glass top caps with inset channel. Customer's glass should be 6 mm-thick tempered glass or other safety material.

Overall Heights:

Panel Height	Height with Glass
2-high	42 <sup>3</sup> / <sub>8</sub> "
3-high	54 <sup>15</sup> / <sub>16</sub> "
3.5-high	61 <sup>29</sup> / <sub>32</sub> "
4-high	67 <sup>9</sup> / <sub>16</sub> "
5-high	80 <sup>1</sup> / <sub>8</sub> "
5-high + 1 stacking	92 <sup>3</sup> / <sub>4</sub> "
5-high + 2 stacking	105 <sup>3</sup> / <sub>8</sub> "

Codes:

U.L. Listing 1286

# NARRATE® PANEL SYSTEM


## Cover Slats

### Planning


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

#### Details

**Cover slats** are available in horizontal (metal) or vertical (laminated or wood).



**Horizontal metal slats** are 1"H x 2"D and are available in lengths ranging from 60" to 120" in 6" increments.



**Vertical slats** are 3"H and 1"D and are available in lengths ranging from 60" to 96" in 6" increments.

#### Connections

**Support Traxx** are required on both ends of cover slats. Attachment brackets, standard with the cover slat, engage in support Traxx.

**Cover slats** are non-loadbearing, non-UL tested, and cannot have power routed through them.

#### Planning Factors

**Cover slats** are specified as individual pieces. Quantity needed is determined based on how far apart they are placed.

**Vertical cover slats** are not recommended for use with glass tiles with frame. The slats hang below the tile frame, allowing the ends of the slats to be seen through the glass.




# NARRATE® PANEL SYSTEM

## Panel Configurations | Without Components

Planning


Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Unsupported Span:



- 8' maximum
  - 2 panels maximum
  - Minimum wing panels
- See minimum wing panel chart at right.

IMPORTANT: Although testing allows up to 8' or two panels for unsupported runs, Kimball recommends that a frame-support post be used on unsupported runs greater than 4 feet to minimize movement.




If frame-support posts are used in panel runs, the panel run can span indefinitely. Frame-support posts are anchored to the floor with installer-supplied fasteners every other 48". Square frame-support post is for use with 3H and taller frames; round frame-support post is for use with 2H frames or 3H or taller frames when mid-support is installed at the 1H position. Round frame-support posts prevents base-to-beltline jumper.

Overheads cannot be used on runs supported by frame-support post. Wing panels are still required on the end of the panel run when using frame-support post.


IMPORTANT: When using a sliding privacy door on an unsupported run, host panel run can range between 4'–5', so when the door is extended the panel run is 8' or less. It is also recommended that a frame-support post is used in host frames to reduce panel movement as sliding door is open and closed.

### C-Shaped Workstation:




- 12' maximum
- 48"W minimum wing panels on both ends, same height as the spine

### T or Wall on One Side:

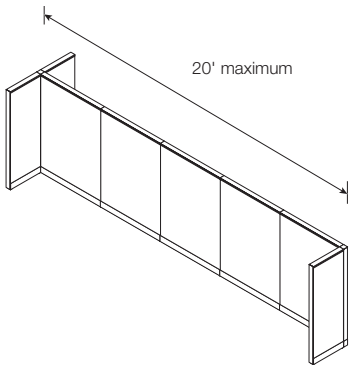

- 20' maximum
  - Minimum wing panel on one end
  - T or wall on at least one side
- See minimum wing panel chart at right.

*Note: Frameless glass does not affect application guidelines on this page.*



IMPORTANT: Supplemental brackets, specified separately, are recommended for maximum stability when wing panel is not tied to worksurface or vertical storage.

### Definitions:

Unsupported panel runs—Runs not attached on BOTH ends to a wall, wing panel, or floor support.

Floor support—Undersurface storage units, support panels, or column legs

### Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage.

Height of Panel Run	Minimum Wing Width
2-high (30")	30"
3-high (42")	30"
3.5-high (50")	36"
4-high (54")	36"
5-high (68")	36"
6-high (80")	48"
7-high (93")	48"

IMPORTANT: Wing panel height is not required to be the same height as the panel run.  
*Exception: Wing panels on 6-high and 7-high runs and any height C-shaped workstations must be the same height as the spine run and 48"W.*


# NARRATE® PANEL SYSTEM

## Panel Configurations | Without Overhead Storage


### Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

#### Supported Runs:




- 16' maximum
  - Mid-support leg
  - Minimum wing panels or 2 support legs
  - No overhangs
  - With or without frameless glass
- See minimum wing panel chart at right.




- 16' maximum
- Mid-supports
- Support legs or wing panels
- No overhangs
- With or without frameless glass

#### C-Shaped Workstation:



- 20' maximum
  - Mid-supports
  - Minimum wing panels
  - 2 floor supports mid-run, minimum
  - Floor supports at end of wing panels
  - No overhangs
  - With or without frameless glass
- See minimum wing panel chart at right.


#### Balanced back-to-back:



- 20' maximum
- Balanced back-to-back
- Mid-supports
- Support legs, storage, or wing panels
- No overhangs
- With or without frameless glass

**IMPORTANT** Unsupported worksurface span of 48"W for 1<sup>3</sup>/<sub>16</sub>" worksurfaces or 60"W for 1<sup>9</sup>/<sub>16</sub>" worksurfaces requires additional support.

- Additional support can be:
- Undersurface support rails
  - Mid-supports
  - Support panels
  - Support legs
  - Storage



**IMPORTANT:** Supplemental brackets, specified separately, are recommended for maximum stability when wing panel is not tied to worksurface or vertical storage.

#### Definitions:

Unsupported panel runs — Runs not attached on BOTH ends to a wall, wing panel, or floor support.

Floor support — Undersurface storage units, support panels, or column legs

#### Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage.

Height of Panel Run	Minimum Wing Width
2-high (30")	30"
3-high (42")	30"
3.5-high (50")	36"
4-high (54")	36"
5-high (68")	36"
6-high (80")	48"
7-high (93")	48"

**IMPORTANT:** Wing panel height is not required to be the same height as the panel run.  
*Exception: Wing panels on 6-high and 7-high runs and any height C-shaped workstations must be the same height as the spine run and 48"W.*


# NARRATE® PANEL SYSTEM

## Panel Configurations | With Overhead Storage

## Planning


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Supported Run:




- 12' maximum
- Mid-support leg
- Minimum wing panels or one wing panel and one end-support leg
- With or without frameless glass
- For hi-lo applications with stacking frames: overheads balanced back to back (for hi-lo with full frames: overheads can be on one side only)
- See minimum wing panel chart on page NA.27.

### Balanced Back-to-Back:




- 16' maximum
- Mid-supports
- Minimum wing panels
- Balanced back-to-back
- With or without frameless glass
- See minimum wing panel chart on page NA.27.
- Note: Runs over 12' are required to be balanced back-to-back.*

### Stacked Overheads, Unbalanced:




- 8' maximum
- 2 overheads stacked, maximum
- 4 overheads total
- Minimum wing panels
- With or without frameless glass

### Stacked Overheads, Balanced Back-to-Back:



- 12' maximum
- 4 overheads per side maximum
- Balanced back to back
- Minimum wing panels
- With or without frameless glass



- 8' maximum stepped run
- Two overheads per side maximum
- Balanced back to back
- Minimum wing panels
- With or without frameless glass

When stacking overheads, place the following at least two Traxx segments apart (e.g., at 3-high and 5-high):

- Square profile standard- or reduced-height hinged door overheads
- Square profile reduced-height flipper door overheads
- Bevel overheads
- Flat profile overheads

When stacking overheads, place the following at least three Traxx segments apart (e.g., at 3-high and 6-high):

- Square profile standard-height flipper door overheads

➤ See clearance chart at left.

**IMPORTANT** Unsupported worksurface span of 48"W for 1 $\frac{3}{16}$ " worksurfaces or 60"W for 1 $\frac{9}{16}$ " worksurfaces requires additional support.

Additional support can be:

- Undersurface support rails
- Mid-supports
- Support panels
- Support legs
- Storage

### Definitions:

Unsupported panel runs—Runs not attached on BOTH ends to a wall, wing panel, or floor support.

Balanced back-to-back—Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

### Stacked Overhead Clearances:

These clearances apply between rows of overheads when placed two Traxx segments apart on 4- to 7-high panels or at 2-high and 3.5-high on a 3.5-high panel:

Overhead Profile	Clearance	
	4- to 7-high	3.5-high
<b>Square (19"H)</b>		
– Hinged Doors	8.7"	3.0"
– Flipper Door*	19.1"	13.4"
<b>Square (16"H)</b>		
– Hinged Doors	8.7"	3.0"
– Flipper Door	8.7"	3.0"
<b>Bevel/Flat</b>		
	8.7"	3.0"
<b>Cubby</b>		
	17.2"	11.5"

\* Placed three segments apart. Not recommended on 3.5-high frames.


# NARRATE® PANEL SYSTEM

## Panel Configurations | With Center-Mounted Overhead Storage


## Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Supported Run:




- 12' maximum
  - Mid-support leg
  - Minimum wing panels or one wing panel and one end-support leg
- See minimum wing panel chart on page NA.27.




- 16' maximum
  - Mid-support leg
  - Minimum wing panels; or
  - Support legs, storage or wing panels
- Note: Not recommended for 5H or stacking frames.*

### Balanced Back-to-Back:




- 16' maximum
- Balanced back-to-back
- Mid-supports
- Support legs, storage or wing panels




- 16' maximum
  - Mid-supports
  - Minimum wing panels
  - Balanced back-to-back
  - With or without frameless glass
- See minimum wing panel chart.
- Note: Runs over 12' are required to be balanced back-to-back.*

### Stacked Overheads:



- 12' maximum
  - Traxx-mount and center-mount overheads
  - Minimum wing panels
  - With or without frameless glass
- Note: Consider potential bracket interference if stacking center-mount above Traxx-mount overheads.*



- 12' maximum stepped run
- Traxx-mount and center-mount overheads
- Two overheads per side maximum
- Balanced back to back
- Minimum wing panels
- With or without frameless glass

**IMPORTANT** Unsupported worksurface span of 48"W for 1 $\frac{3}{16}$ " worksurfaces or 60"W for 1 $\frac{9}{16}$ " worksurfaces requires additional support.

- Additional support can be:
- Undersurface support rails
  - Mid-supports
  - Support panels
  - Support legs
  - Storage

### Definitions:

**Unsupported panel runs**—Runs not attached on BOTH ends to a wall, wing panel, or floor support.

**Balanced back-to-back**—Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

### Center-Mount Overhead Heights:

Panel Config.	Top Cap	
	Height	Flat
<b>Floor to Top of Overhead</b>		
2H	29 $\frac{1}{2}$ "	44 $\frac{3}{16}$ "
3H	42 $\frac{1}{8}$ "	56 $\frac{13}{16}$ "
3.5H	49 $\frac{1}{32}$ "	63 $\frac{11}{16}$ "
4H	54 $\frac{23}{32}$ "	69 $\frac{3}{8}$ "
5H	67 $\frac{5}{16}$ "	82"
5H+1H	79 $\frac{15}{16}$ "	94 $\frac{5}{8}$ "
5H+2H	92 $\frac{9}{16}$ "	107 $\frac{1}{4}$ "
<b>Wskf. to Bottom of Overhead</b>		
3H	42 $\frac{1}{8}$ "	13 $\frac{3}{8}$ "
3.5H	49 $\frac{1}{32}$ "	20 $\frac{1}{4}$ "
4H	54 $\frac{23}{32}$ "	25 $\frac{15}{16}$ "
5H	67 $\frac{5}{16}$ "	38 $\frac{9}{16}$ "
5H+1H	79 $\frac{15}{16}$ "	51 $\frac{3}{16}$ "
5H+2H	92 $\frac{9}{16}$ "	63 $\frac{13}{16}$ "


# NARRATE® PANEL SYSTEM

## Panel Configurations | X Configurations

Planning


Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Unsupported Run:



- 8' maximum
- With or without frameless glass

### Without Overhead Storage:




- 12' maximum
- Mid-supports
- 12"D support panels
- No overheads
- Balanced back-to-back
- Column legs or stick legs for D-shape spanners
- With or without frameless glass

If adding center-mount or balanced, back-to-back overheads, or eliminating D-shape spanners, full-depth support panels are required on the ends of straight worksurfaces.

If adding overheads that will not be back to back, wing panels are required.  
➤See minimum wing panel chart at right.

Mid-supports can also be used in place of 12"D support panels in balanced back-to-back applications.

### With Overhead Storage:



- 16' maximum
- Mid-supports
- Minimum wing panels or end-support legs
- Balanced back-to-back or center-mount overheads
- With or without frameless glass
- See minimum wing panel chart at right. Total wing panel width must follow guidelines.

**IMPORTANT** Unsupported worksurface span of 48"W for 1 $\frac{3}{16}$ " worksurfaces or 60"W for 1 $\frac{9}{16}$ " worksurfaces requires additional support.

- Additional support can be:
- Undersurface support rails
  - Mid-supports
  - Support panels
  - Support legs
  - Storage

### Definitions:

**Unsupported panel runs—**  
Runs not attached on BOTH ends to a wall, wing panel, or floor support.

**Balanced back-to-back—**  
Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

### Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage.

Height of Panel Run	Minimum Wing Width
2-high (30")	30"
3-high (42")	30"
3.5-high (50")	36"
4-high (54")	36"
5-high (68")	36"
6-high (80")	48"
7-high (93")	48"

**IMPORTANT:** Wing panel height is not required to be the same height as the panel run.  
*Exception: Wing panels on 6-high and 7-high runs and any height C-shaped workstations must be the same height as the spine run and 48"W.*


# NARRATE® PANEL SYSTEM

## Panel Configurations | 120°/V and 120°/Y Configurations

Planning


Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### 120°/V:



- 12' maximum
  - Mid-support legs
  - Minimum wing panels or end-support legs
  - Floor supports on end of runs
  - With or without frameless glass
  - With or without face-mount or center-mount overheads
- See minimum wing panel chart at right.


### 120°/Y without Overheads:



- 12' maximum
  - Mid-supports
  - Minimum wing panels or floor supports on ends of runs
  - Column legs or stick legs for D-shaped spanners
  - No overheads
  - With or without frameless glass
- See minimum wing panel chart at right.

**Maximum run can be extended to 16'** when panels are balanced back to back. Wing panels are required. Total wing panel width must follow guidelines.

### 120°/Y with Overheads:



- 16' maximum
  - Mid-supports
  - Minimum wing panels or end-support legs
  - Balanced back-to-back face-mount or center-mount overheads
  - One floor support mid-run, minimum
  - With or without frameless glass
- See minimum wing panel chart at right. Total wing panel width must follow guidelines.

**IMPORTANT** Unsupported worksur-  
face span of 48"W for 1¾" worksur-  
faces or 60"W for 1⅞" worksurfaces  
requires additional support.

- Additional support can be:
- Undersurface support rails
  - Mid-supports
  - Support panels
  - Support legs
  - Storage

### Definitions:

**Floor support—**  
Undersurface storage units,  
support panels, or column legs

**Balanced back-to-back—**  
Runs having similar components  
mounted to opposite sides of the  
run so as to counter-balance the  
load.

### Minimum Wing Panel Widths:

Minimum wing panel widths  
increase according to the  
height of the panel run. These mini-  
mum widths eliminate the possibility  
of tipping or injury  
under standard loading  
and usage.

Height of Panel Run	Minimum Wing Width
2-high (30")	30"
3-high (42")	30"
3.5-high (50")	36"
4-high (54")	36"
5-high (68")	36"
6-high (80")	48"
7-high (93")	48"

**IMPORTANT:** Wing panel height is  
not required to be the same height  
as the panel run.  
*Exception: Wing panels on 6-high  
and 7-high runs and any height  
C-shaped workstations must be the  
same height as the spine run and  
48"W.*


# NARRATE® PANEL SYSTEM

## Panel Configurations | Wall-Mounted Configurations

Planning


Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Unbalanced:




- 12' maximum
  - Mid-support leg
  - Floor support or wall-mounted Traxx to support worksurface end
  - Minimum wing panel
  - With or without frameless glass
  - With or without face-mount or center-mount overheads
- See minimum wing panel chart at right. Total wing panel width must follow guidelines.

### Balanced Back-to-Back:



- 12' maximum
- Mid-supports
- Floor supports or wall-mounted Traxx to support worksurface end
- Two minimum wing panels, support legs, or two full-depth support panels at the end of the run
- Balanced back-to-back
- With or without frameless glass
- With or without face-mount or center-mount overheads



- 16' maximum
  - Mid-supports
  - Floor supports or wall-mounted Traxx to support worksurface end
  - Two minimum wing panels at the end of the run
  - Balanced back-to-back face-mount or center-mount overheads
  - With or without frameless glass
- See minimum wing panel chart at right. Total wing panel width must follow guidelines.



Wall-mount brackets must be secured to the building wall by fastening into the stud or by using drywall fasteners. Selection and purchase of the proper attachment fasteners for your wall is the responsibility of the installer.

**IMPORTANT** Unsupported worksurface span of 48"W for 1<sup>3</sup>/<sub>16</sub>" worksurfaces or 60"W for 1<sup>9</sup>/<sub>16</sub>" worksurfaces requires additional support.

- Additional support can be:
- Undersurface support rails
  - Mid-supports
  - Support panels
  - Support legs
  - Storage

### Definitions:

Floor support—  
Undersurface storage units, support panels, or column legs

Balanced back-to-back—  
Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

### Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage.

Height of Panel Run	Minimum Wing Width
2-high (30")	30"
3-high (42")	30"
3.5-high (50")	36"
4-high (54")	36"
5-high (68")	36"
6-high (80")	48"
7-high (93")	48"

**IMPORTANT:** Wing panel height is not required to be the same height as the panel run.  
*Exception: Wing panels on 6-high and 7-high runs and any height C-shaped workstations must be the same height as the spine run and 48"W.*



# NARRATE® PANEL SYSTEM

## Traxx® and Tiles Overview

### Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

**Narrate tiles** are available in widths ranging from 18" to 96" and in heights of 1- to 5-high segments. Segments are nominally 12 $\frac{5}{8}$ "H. Additional heights—.5-, 1.5-, and 3.5-high tiles—correspond to 3.5-high frames. Tile types include:

- Fire-rated fabric tiles
- Glass tile with frame
- Glass (back painted)
- Wood
- Laminate
- Paint
- Markerboard (metal or laminate)
- Slat
- Metal (plain or patterned)
- Fold-down
- Technology

**Tiles can span two or more frames** on the interior or exterior of a workstation. Tiles cannot span over connectors.

**Tile heights can be mixed on a panel run** to create a segmented, vertical monolithic, or horizontal monolithic look.

*Note: Product information and application guidelines for technology tiles are located in the Power and Data section.*

➤ See pages NA.40 and NA.45.


**3"D interior of frame** can be utilized by specifying fold-down or technology tiles.

**Traxx** available as trim or support. Both provide support to hold tiles in place. Support Traxx are required when supporting worksurfaces, storage, center-mount overheads, cover slats, and accessories.

**Tiles** are installed side-by-side with no panel reveals to create a virtually seamless appearance.

**Tiles can vary in both height and width** from one side of the frame to the other. Each side of the frame is independent of the other, allowing for different aesthetics and accommodating different functions. One side can provide a private office look while the other offers a segmented, highly personalized space.

### How Tiles are Mounted:

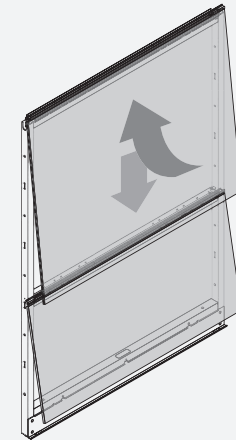

#### Tiles lift in and lower into place.

They are inserted into the Traxx at the top and rest on either a lower Traxx or the frame's bottom channel when in the 1st segment.

**Traxx must extend the entire width** of both the top and bottom of each tile. Mid-frame supports are required at each Traxx location that will support worksurfaces or storage.

*Exception: Tiles that rest on the bottom channel use Traxx at the top of the tile only.*

**Tiles may be omitted on panel runs where visually acceptable**, provided no components are on the affected side of the frame.



# NARRATE® PANEL SYSTEM

## Frame and Tile Height Relationships

Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Illustrations at right show tile heights that match the frame height (monolithic panel plus stacking frames); however, many more tile combinations are possible.


Dimensions are calculated to the top of the frame with glides fully recessed. Flat profile top caps add 1/4". Glides provides 2 1/2" adjustment.

Stacking of 1-high and 2-high frames, along with 1-high and 2-high tiles, can be used to achieve structures up to 6- or 7-high. Stacking is not applicable to 3.5-high frames.


To-the-floor fabric tiles are available in 1-, 2-, 3-, and 4-high models. They are 3 13/16" longer than standard tiles and must be specified for the entire to-the-floor frame height (monolithic) or the lowest segment plus standard tiles to complete the frame above.  
*Note: 5-high fabric tiles for to-the-floor frames are not available due to textile limitations. Wood or laminate to-the-floor tiles are available up to 3-high.*

Combined tile heights must match the overall base frame height.

### Base-Wireway Frames and Open-Base Frames:

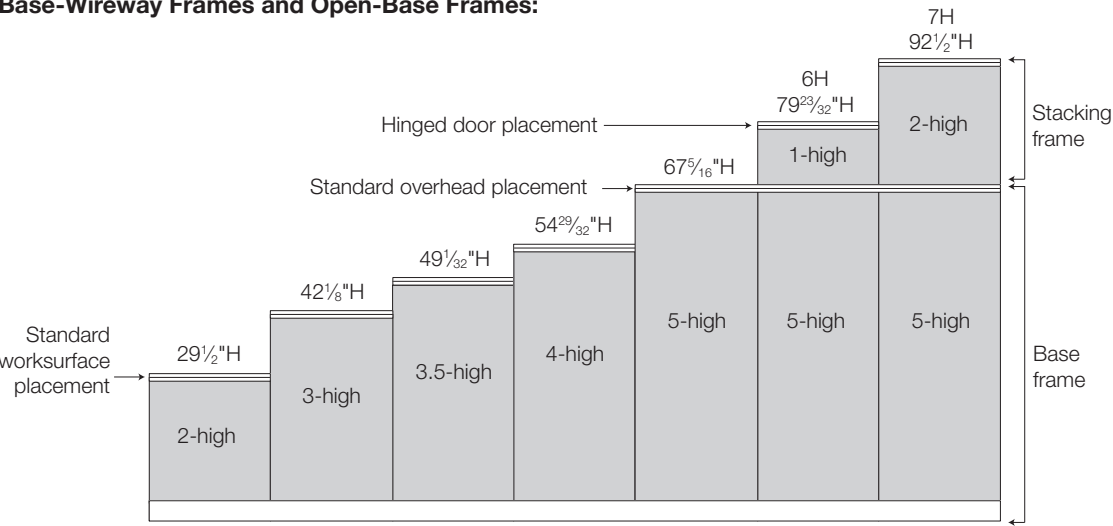


### To-the-Floor Frames:

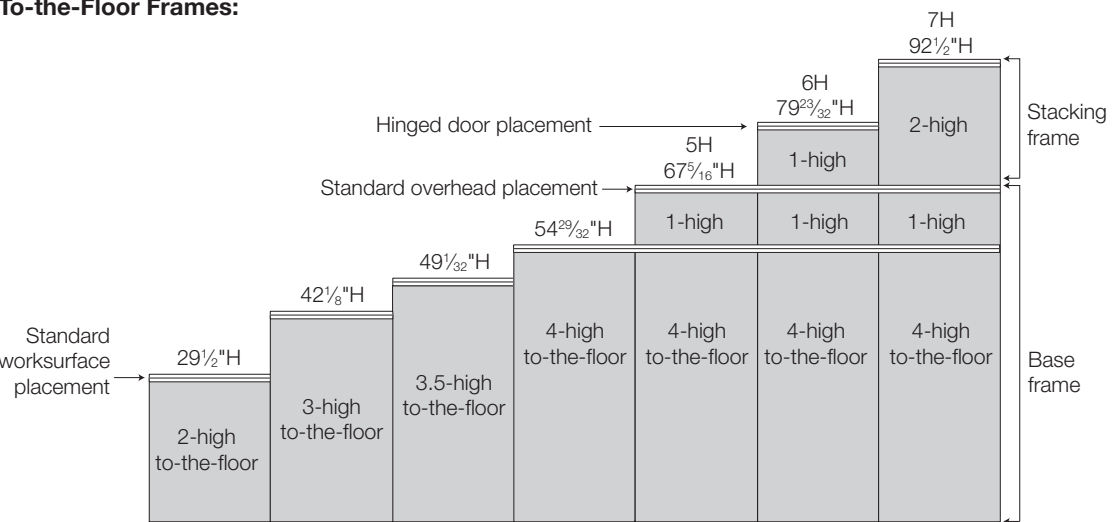


### 3.5-High Tile Combinations:

Only the height combinations shown below are possible for 3.5-high frames.



\* For to-the-floor frames, specify a to-the-floor tile for the full frame or the lowest segment.

### 3.5-High Frame Traxx Relationships:



Traxx locations at the 2-high and 3-high segments correspond to the same locations on other frames. Traxx at the top of the 3.5-high frame does not line up with possible Traxx locations on other frames.


NARRATE® PANEL SYSTEM

Traxx | Trim and Support


Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Details



Support Traxx



Trim Traxx

**Traxx** is available as trim or support. Both styles of Traxx provide support for the Narrate tiles. Support Traxx also provides support for worksurfaces, storage, center-mount overheads, cover slat, and accessories.


**Tiles** are held in place on the frame by Traxx at the top and bottom of the tile.

**Traxx can span** multiple frames up to 144"W for a seamless aesthetic. It is recommended that the longest length Traxx and top cap be used to provide maximum support.

Surface Materials

- Traxx: extruded aluminum, paint

Connections

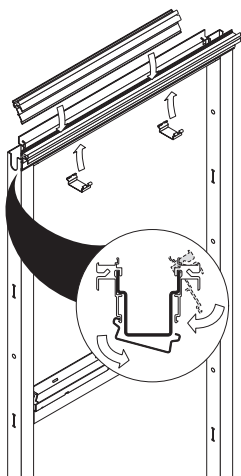

**Traxx attaches** to top channels, mid-frame supports, and stacking frames with Traxx lock brackets (included). Traxx lock bracket slips under the top channel and provides tension to hold both Traxx in place.

**Traxx lock brackets** should be positioned 6" in from the frame verticals when attaching Traxx to the mid-frame supports or the top channel of the frame.

Planning Factors


**Traxx width and tile width** do not have to correspond. Traxx can span across multiple tiles.

**Narrate Traxx, Xsite Traxx and Kimball wall Traxx** are not interchangeable, but are functionally compatible. Narrate Traxx or Xsite Traxx should not be wall mounted.

**Traxx is required at the top** of all frames on BOTH sides.

**Mid-frame supports are required at each Traxx location** below the top channel. Traxx may be located on one or both sides of frame where there is a mid-frame support.

**Traxx can be scribed** in the field.



**In stacking applications,** Narrate Traxx must be located at the top of the stacking frame on both sides. Traxx can be on one, both or neither side of the top of the base frame.


# NARRATE® PANEL SYSTEM

Tiles | Fire-Rated Fabric, Wood, Laminate and Painted Tiles


Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Details



**Tiles** are available in a variety of widths (6" to 96") and heights (.5-high to 5-high). Reference pricing pages for specific sizes available for each tile type.




**Vertical and horizontal monolithic or segmented aesthetics** can be created with the use of tiles.

**Fire-rated fabric tiles** are constructed of fiberglass and covered in vertical textile. They can be field scribed if necessary. Vertical textile is applied railroad style. Fire-rated fabric tiles are class A rated.

**Wood, laminate and painted tiles** are constructed of a 7/16" wood composite core and covered with premium-grade wood veneer or laminate, or painted.

**Wood, laminate and painted tiles** are very durable and are recommended for use under a worksurface, in lower positions in corridors or beside marker tiles. They can also be used to provide visual interest when creating a segmented look.




**Woodgrain direction** runs vertical on wood and woodgrain laminate tiles.


## Surface Materials

- Vertical textiles
- Wood
- TFL
- Paint (excluding metallic paint)


## Connections



**Tiles** are held in place on the frame by Narrate Traxx at the top and bottom of the tile.



Support Traxx



Trim Traxx

**Traxx** extends beyond the face of the tile by 1/16".

## Power & Data

**Power and data** can be routed vertically in the panel's interior behind standard fabric, fire-rated fabric, wood, laminate, painted, back-painted, and combination tiles.

## Planning Factors

**Specify tiles for both sides** of the frame to complete the panel. Tiles may be omitted on panel runs where visually acceptable, provided no components are on the affected side of the frame.

## Acoustical Ratings:

**Fire-Rated Fabric Tiles**  
NRC = 0.75  
STC = 12

## Electrical:



**Class A**—Fire-rated fabric tiles.  
*Note: COM must comply with U.L. Standard 1286*

**Class B**—Laminate (HPL) tiles

**Class C**—Laminate (TFL), wood and painted tiles


# NARRATE® PANEL SYSTEM

Tiles | Framed or Back-Painted Glass

## Planning


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details




**Framed glass tiles** have an extruded aluminum frame (painted or covered with premium grade veneer) with 3mm-thick (clear or frosted) tempered glass. Glass tiles are available in clear or frosted. Glass tiles cannot be field scribed.

**Framed glass tiles** consist of two tile frames (one for each side of the frame) with a single pane of tempered glass between them. Only one glass tile is needed to complete both sides of the frame. They are available in 1-, 1.5-, 2-, and 3-high models.  
*Note: Since framed glass tiles come in sets, Traxx on both sides of the frame must match.*



Frames on glass tiles are 2 1/2"W.




**Back-painted glass** is available in full painted back or painted with opening in center to allow viewing of panel-mounted monitor.

**Back-painted glass tiles are available in six paint options.** Tiles come in widths from 18" to 96" and 1-, 1.5-, 2- and 3-high heights.

### Surface Materials

- Glass tile frames: paint or wood
- Glass panes: clear or frosted tempered glass
- Back-painted glass: paint

### Connections



**Tiles** are held in place on the frame by Traxx at the top and bottom of the tile or by the frame at the bottom when tile is in the bottom segment on the frame.

**Traxx** extends beyond the face of the tile by 1/16".

### Power & Data

**Power and data** cannot be routed through glass tiles.

### Planning Factors

**Tiles must be specified for both sides of frames** when using back-painted tiles as tile opposite of back-painted glass can be different tile type.

**Hanging overheads** over glass tiles is not recommended.

**Consider accessory location.** They may obstruct the view through glass tiles.

**Glass** cannot be field scribed.


# NARRATE® PANEL SYSTEM

## Tiles | Metal Tiles


Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details



**Metal tiles** are available plain or with a perforated or embossed (shown) surface.




**Pattern of perforated or embossed tiles** is consistently spaced on centerlines.  
 Perforation hole size: 3/16" (5 mm)  
 Embossed circle size: 3/8" (10 mm)

### Surface Materials

- 18 gauge steel: paint


### Connections




**Tiles** are held in place on the frame by Traxx at the top and bottom of the tile or by the frame at the bottom when tile is in the lowest segment on the frame.

**Narrate Traxx** extends beyond the face of the tile by 1/16".

### Planning Factors



**Do not use a perforated metal tile** below a technology tile to avoid seeing the jumper passing through the structure.



**Perforated metal tiles**, when used on both sides of a frame, increase ventilation below the worksurface or behind computer equipment. If perforated tiles are used on both sides of a run, it is recommended that they be the same size.

**Metal tiles** are washable, durable, and made of steel so magnets will attach.


# NARRATE® PANEL SYSTEM

Tiles | Markerboard and Slat Tiles

Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175


## Details



**Markerboards are available in metal or laminate models** in a variety of tile widths and heights to provide a larger writing surface for meeting spaces and smaller surfaces for private workspaces.

*Note: Expo dry erase markers are recommended for use on markerboards. All other dry erase markers are not recommended, as they may leave undesirable results when erased.*

**Metal markerboard tiles** are washable, durable, and made of steel so magnets will attach.




**Slat tiles** allow work tools to be placed in appropriate areas to accommodate individual user needs. They accommodate all Kimball Perks metal work tools.

*Note: Narrate work tools hang on support Traxx only. Hanging tools from support Traxx eliminates the need for slat tile unless using Perks work tools.*

**If additional Narrate tools** are needed, the Work|Able slat tile can be used instead of the Narrate slat tile if support Traxx are installed at the top of the work|Able tile.

**2-high slat tiles** require a mid-frame support behind the tile; 3-high slat tiles require two mid-frame supports behind the tile.



**Slat** are 3/4"H; space between slats is 1/2"H. Trim channel is 1/4"W.

.5-high = 4 slats

1-high = 8 slats

1.5-high = 14 slats

2-high = 18 slats

3-high = 28 slats

## Surface Materials

### Metal Markerboard Tiles

- 18 gauge steel: 405 Designer White markerboard paint


### Laminate Markerboard Tiles

- Core: standard 7/16" wood composite
- Erasable markerboard surface: 409M Icy White or 483M Off White
- Vertical edges: black vinyl

### Slat Tiles

- Extruded aluminum: paint

## Connections




**Tiles** are held in place on the frame by Traxx at the top and bottom of the tile or by the frame at the bottom when tile is in the lowest segment on the frame.

**Traxx** extends beyond the face of the tile by 1/16".


**Monitor arms** can be used on 18", 24", and 30"W 1-high and 2-high slat tiles. 2-high and 3-high tiles require an additional mid-frame support, specified separately. Only one monitor arm per slat tile can be accommodated.

**Trim channel on slat tiles** prevents tools from spanning across two slat tiles. Tools can hang within 1/4" of edge of the tile. Trim can be removed to allow tools to span across two slat tiles.

## Planning Factors

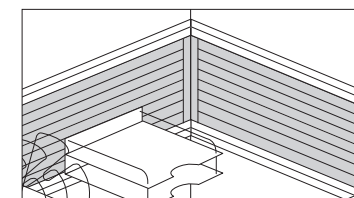

**Slat tiles** can be placed at right angles to each other in a corner.



**Consider what will be above and below** the accessory. It may interfere with other tiles such as glass or markerboard.


# NARRATE® PANEL SYSTEM

## Tiles | Fold-Down Tiles

Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175


### Details

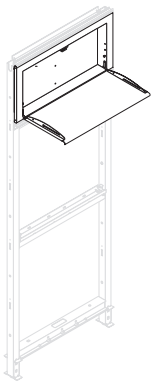

**Fold-down tiles** maximize space by using the interior of the structure. Available in 1-high in four widths: 18", 24", 30", and 36".

**Fold-down tile** features a one-piece door that can be opened to provide a surface for impromptu meetings. Fold-down surface heights:

<i>Mounted at</i>	<i>Surface height</i>
2-high	17¼"
3-high	30"
4-high	42½"
5-high	55"
6-high	67¾"
7-high	80¼"




### Surface Materials

- Tile**
- 18 gauge steel: paint

### Planning Factors

**Specify any tile**, except glass tiles, perforated, or technology tiles, for the opposite side of the panel behind fold-down tiles.



**Fold-down tiles** can be installed at the 2-high segment and above. On a 3.5-high frame, they can be installed at worksurface height with a .5-high tile above.

**Fold-down tiles cannot** cross a frame or connector and cannot be field scribed.

# NARRATE® PANEL SYSTEM


Tiles | Technology Tiles

Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Details

**Technology tile** provides power and data at the 2nd, 3rd, 4th or 5th segments for access below the worksurfaces, at worksurface height, at standing height, or at the overhead position. Technology tiles utilize an 8-wire electrical system.



**Three upper material options** to meet user needs include:

- Tackable fabric
- Markerboard
- Slat

*Note: Markerboard tiles should not be used on unsupported runs due to panel movement when writing on the surface.*

**Tackable fabric technology tile** is constructed with fiberglass covered with vertical textile.


**Three 2 3/4"W x 1 7/16"W cut-outs** are provided in each technology tile to accommodate duplex receptacles and/or data ports. The in-line arrangement of the cut-outs provide a clean aesthetic.

**Technology tiles without cutouts** are available for a seamless look.

## Surface Materials

- Tile: formed steel, paint
- Tile header:
  - Tackable, vertical textile
  - Slat: extruded aluminum, paint
  - Erasable markerboard:
    - 409M Icey White or
    - 483M Off White

## Connections

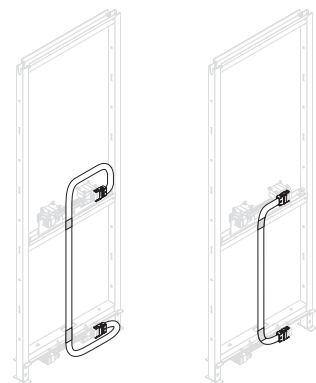


Outside Jumper

Inside Jumper

**Technology tiles may be powered from the base wireway harness** with a vertical jumper. Outside vertical jumper connects to the outside of the harnesses at the base and beltline. Inside vertical jumper connects into a receptacle location at the base and beltline. It is recommended to only use an inside jumper when single-sided electrical is utilized and power needs to continue to adjacent panels, as this jumper reduces the number of receptacle locations available.

**Power can be jumped** from one technology tile to another (frame to frame) or from a frame through a connector to another frame at the 3-high location (above standard worksurface height).



**Ceiling power entry** can be used to bring power to the technology tile from above.

## Planning Factors



**Technology tiles should be placed back to back** for optimum component utilization. The same arrangement of duplex and data receptacles should be used in both tiles.

**Technology tiles cannot be used back to back with fold-down tiles** since both tiles use the interior space.

**Specify technology tiles to match the width** of the frame.

**Technology tiles without cutouts** must be specified where pass-thru jumpers will be used.

**1-high stacking frames can accept technology tiles** where only data is required. Power cannot be installed in this application because the power block mounting brackets must attach to the mid channel.

**2-high stacking frames can accept power block mounting brackets** if a mid-channel is specified to be installed in the stacking frame.



**Hole cover plates**, specified separately, are recommended to cover unused power blocks and where cut-out is not being used for data.

**Consider the tile below a technology tile in base entry applications.**

The jumper needs to pass from the base through the interior of the frame to the tile; therefore, storage tiles or any tiles where the jumper may be visible are not recommended.

**Power harnesses and receptacles** must be specified separately for use with technology tile. These items are not included when a powered panel is specified-power is only in base.

**Vertical jumpers** are used to jump power from base to tech tile.

## Acoustical Ratings:

NRC = 0.75  
STC = 12

## Electrical:



**Class A**— Tiles with tackable acoustical header.

*Note: COM must comply with U.L. Standard 1286*

**Class B**— Tiles with markerboard header.

## Markerboard:

Expo dry erase markers are recommended for use on markerboards. All other dry erase markers are not recommended, as they may leave undesirable results when erased.

## Related Products:

**Perks single-monitor arm** (model 99KSMAM2SMS) is applicable to technology slat tile; technology slat tile can support one or two arms.

➤ See the Perks Technology Management chapter in the *Kimball Accessory Solutions Price List*.

**Perks work tools** are available.

➤ See the Perks Work Tools chapter in the *Kimball Accessory Solutions Price List*.



# NARRATE® PANEL SYSTEM

## End Panels


### Details

**End panels** are available in seven material combinations:


- HPL
- TFL
- Wood
- Resin insert with aluminum frame
- Plywood (four patterns)
- Painted (four patterns)
- 3D laminate

### Three heights:


- 2-high (29<sup>3</sup>/<sub>4</sub>" )
- 3-high (42<sup>1</sup>/<sub>32</sub>" )
- 3.5-high (49<sup>3</sup>/<sub>32</sub>" )



Single sided



Dual sided




Dual-Sided Sets

### Three applications:

- Single sided
- Dual sided
- Dual-sided sets

**End panels** take the place of the connector, frames with Traxx and tiles, and end trim.



**End panel returns** are available in TFL or HPL. They attach to the ends of end panels to create L-configurations and are non-handed. End panels returns are available in 24" and 30" D and in three heights to match end panels.

### Connections

**Brackets with screws** are standard with all end panels, except resin insert models, to allow the front corner of a worksurface to be attached to the end panel.

**When using resin insert with an aluminum frame**, separate support is required to support the front corner of a worksurface next to the end panel (e.g., pedestal or support leg).


### Planning Factors

**End panels range in widths** from 27" to 117" in the same material options.


**Small voids**, an inherent characteristic of plywood, may be visible in edges/ patterns on plywood end panels.

**End panels are intended to be used with same-height Narrate frames.** If using a 3-high or 3.5-high end panel with a 2-high Narrate frame, contact *By Design* to have upper mounting location on the end panel relocated to accommodate attaching the 2-high frame. If using taller Narrate frame with shorter end panel, specify hi-lo vertical trim to cover upper portion of frame.

*Note: 3.5-high end panel will connect with a 3-high Narrate frame without modification.*



**Single-sided end panels that extend more than 48" out from the spine run** should be attached to a worksurface for additional stability.



**For dual-sided end panels over 75"W**, a worksurface should be attached to the end panel on each side to reduce movement in the panel.

## Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Modifications:

Modifications to a standard end panel may include, but are not limited to:

- Unique sizes
  - Color change
  - Different plywood or painted design; a DXF and PDF file of the design must be provided.
  - Custom 6mm material in an aluminum frame
- Download the Narrate Custom End Panel Ordering Information PDF at: [www.kimballinternational.com](http://www.kimballinternational.com)

If you are having an artist produce a custom end panel, we recommend that you order frame attachment brackets which will be needed to attach the end panel to the rest of the Narrate station.

Glides with T-inserts are available if needed for field installation into custom end panels.

For additional details on ordering custom end panels for Narrate: ➤Contact *By Design* at 1.800.482.1717 x6001 or email [Kobydesign@kimball.com](mailto:Kobydesign@kimball.com)

### Grain Direction:

Grain direction on wood and woodgrain laminate end panels runs horizontally. Grain direction on plywood end panels runs vertically.

# NARRATE® PANEL SYSTEM

## Power & Data Overview

## Planning

**Narrate offers 8-wire and 10-wire power systems for the base wireway and 8-wire power for mid-wireway.**

Options include:

- 8-wire shared neutral: 4 hot, 2 neutral, 2 ground
- 10-wire shared neutral: 6 hot, 2 neutral, 2 ground
- 10-wire independent neutral: 4 hot (2 and 2), 4 neutral, 2 ground

*Note: Independent and shared neutral components cannot be mixed.*

**All electrical components** are non-directional.


**The building's power capability** should be determined before power is configured and components are specified.

**Narrate is approved** to accept Chicago electrical.

**Base wireway power harnesses and jumpers** distribute power through the base.

**Base wireway power entry** allows power to enter at the floor, wall, or column. Power can then be distributed to the base and/or jumped up to a technology or power/data tile.

**Technology tiles** provide access to power and data at 2nd, 3rd, 4th, and 5th segments. Technology tiles utilize an 8-wire system.

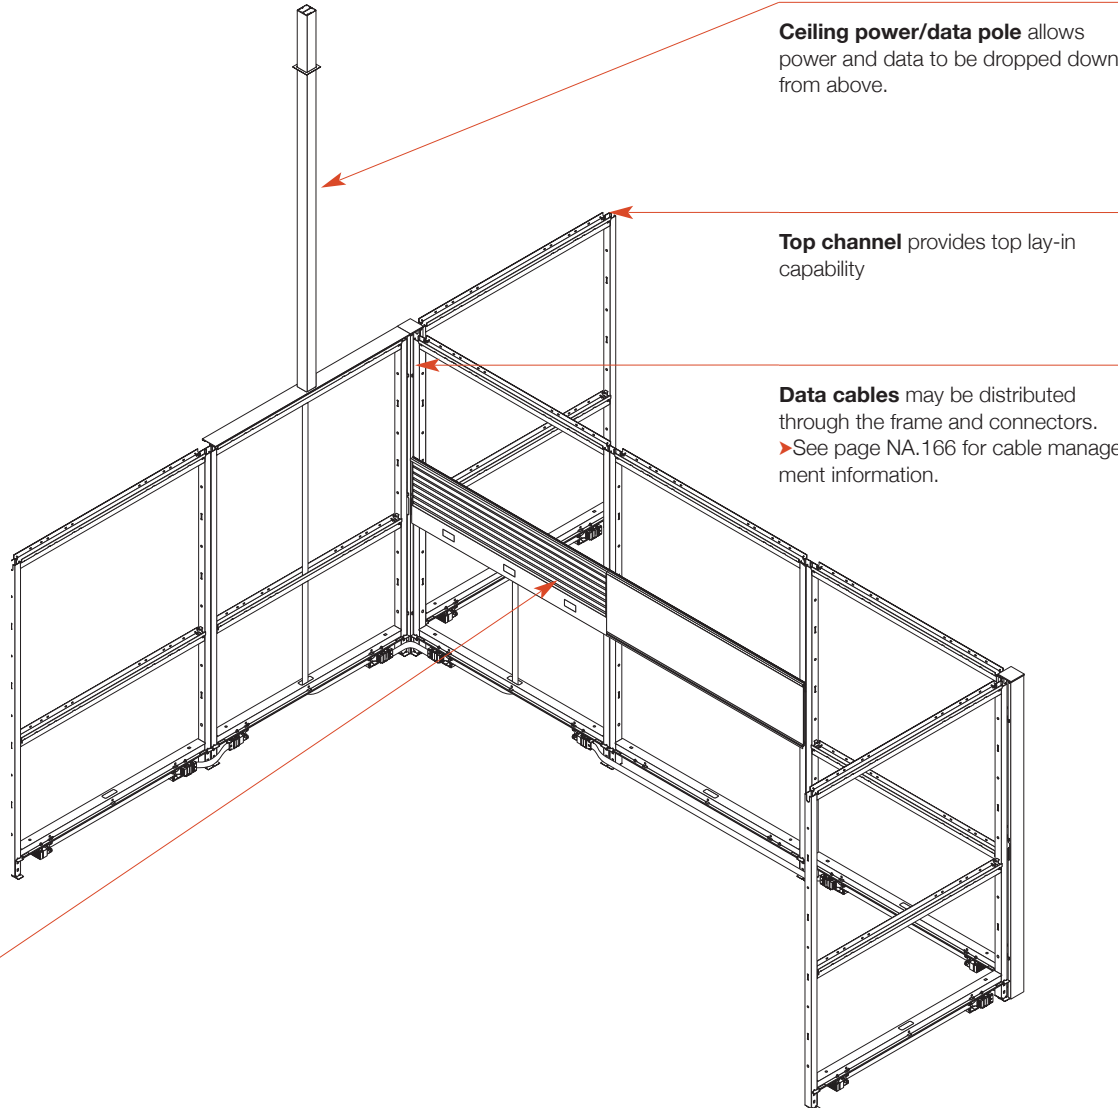

**Ceiling power/data pole** allows power and data to be dropped down from above.

**Top channel** provides top lay-in capability

**Data cables** may be distributed through the frame and connectors.  
 ▶ See page NA.166 for cable management information.

Statement of Line	▶ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175


## Wireway Cover Punch Dimensions:

2.80"W x 1.38"H.


*Applies to both power and data punches.*



No power or data access



Power access only



Power and data access

*Note: All punched (power and power & data) covers include two wireway cover doors.*

▶ See individual frame pricing pages for applicable wireway cover power and/or data punch options.


# NARRATE® PANEL SYSTEM

## Base Wireway Components | Harnesses and Receptacles

Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details

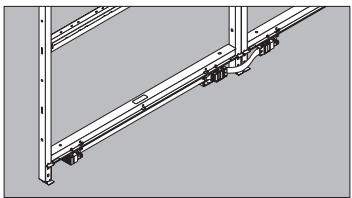

**Base wireway harnesses** distribute power through the base of the frame.

**Dual-sided wireway harness** allows for two duplex receptacles per side, for a total of four. Single-sided harness allows for two duplex receptacles on one side.



**Duplex receptacles** are rated at either 15 or 20 amps and may be installed back-to-back in the base wireway. 20-amp models, required for some large equipment applications, protrude 1/8" more than 15-amp models. Duplex receptacles are available in black, white, or orange for use as a visual aid.



**USB receptacles** are available for use when utilizing the shared neutral power and may be installed back to back. USB receptacles are available in black or white.


**Up to four receptacles** (two per side) can be installed in each base wireway.

### Surface Materials

#### Harness

- Ends: injection-molded plastic
- Conduit: 3/4" oval

### Connections



**Jumper cables** are used to pass power from panel to panel or through non-powered panels.  
➤See page NA.42.

**Building-to-panel power connections** can be accomplished whether the power source is in the wall, floor, or ceiling.

**Power entry** will consume one duplex receptacle location.

**Power & data poles** bring voice/data cables and electrical wiring from the ceiling to the panel run.  
➤See page NA.40.

### Planning Factors

**IMPORTANT:** Planning actual power supplies and branch circuits must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**One receptacle location will be consumed** if the harness will have a power entry (floor/wall or ceiling) or jumper for technology tile attached.

**Specify a base wireway cover without power or data access** if access to power is not needed. Receptacles and a punched wireway cover can be added later as needed.

**Independent and shared neutral components** cannot be mixed if using 10-wire electrical. 8-wire electrical is always shared neutral.

**New York City electrical applications** require a special power entry.  
➤See page NA.43.

**New York City power entry** is not applicable in single-sided frames.

**Hardwire electrical components** for use in the base wireway are available for areas where local codes do not accept modular electrical plug-in components.  
➤See page NA.44.


NARRATE® PANEL SYSTEM

Base Wireway Components | Base Wireway Jumpers and Pass-Thru Jumpers

Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Details



**Jumpers** continue power between two adjacent base wireway harnesses.


**Base wireway jumpers** are available in three different models and are specified according to the application. ➤See chart at right.

**Pass-thru jumpers** are available in 7 different lengths to pass power through a frame base where duplex receptacles are not required. Size required is determined by application. ➤See chart on page NA.158.

Surface Materials

- Ends: injection-molded plastic
- Mesh sleeving
- Metal oval conduit

Planning Factors



**Base wireway jumpers and pass-thru jumpers** connect to a base wireway harness on each end. They cannot connect to another jumper.

**Independent and shared neutral components** cannot be mixed.

Pass-Thru Jumper Selection:

Frame Width to be Passed Thru	Straightline Connections		90° and 120° Connections
	Thru Panel	Thru Connector & Panel	Thru Connector & Panel
18"	33P18EPT*	33P24EPT*	33P24EPT*
24"	33P24EPT*	33P30EPT*	33P30EPT*
30"	33P30EPT*	33P36EPT*	33P36EPT*
36"	33P36EPT*	33P42EPT*	33P42EPT*
42"	33P42EPT*	33P48EPT*	33P48EPT*
48"	33P48EPT*	33P53EPT*	33P53EPT*

\* = 8 for 8-wire option or 10 for 10-wire option

Base Wireway Jumpers Connection Guidelines:

Straight-Line Connections:




**33PEJB1**  
Panel to panel



**33PEJB5**  
Through a connector

90° Connections:



**33PEJB2**  
Through a connector

120° Connections:



**33PEJB5**  
Through a connector

IMPORTANT: Guidelines above for 90° and 120° connections reflect when the jumper is on the inside (shorter length connection). If the jumper is going on the outside (longer length connection), specify the next longest size. For example, in the 90° connection, use 33PEJB5 instead of 33PEJB2 if the connections are going to be on the outside corner.


# NARRATE® PANEL SYSTEM

## Base Wireway Components | Power Entries


Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details



**Base power entries** deliver power from building to frame.



**New York City base power entries** are available to meet codes that require a hardwired infeed connection to modular electrical systems inside the frame. New York City approval number E44747.


#### Capacity:

- 8S 8-wire shared neutral in-feed provides four 20-amp circuits
- 10S 10-wire shared neutral in-feed provides six 20-amp circuits
- 10D 10-wire independent neutral in-feed provides four 20-amp circuits

### Surface Materials

- Black liquid-tight conduit; 4' or 6' length

### Connections

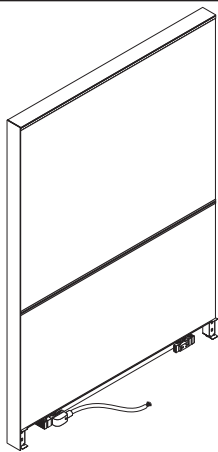

**Base power entry** can be adjusted in the field for left- or right-hand applications.

**New York City model** passes power in one direction and accepts base wireway jumper cable on opposite end.

### Planning Factors

**It is most cost effective** to place your infeeds at the ends of spine runs where the highest usage is expected. You can then feed returns only as needed.

**Multiple power entries** cannot be interconnected.

**Independent and shared neutral components** cannot be mixed.

**System connection to building power** must be made by a licensed electrician.

**Base power entry** extends 1<sup>3</sup>/<sub>4</sub>" from face of frame; allow proper clearance.

**One receptacle location** will be consumed in the base wireway harness by floor/wall power entry.

**If the junction box is on the wall directly behind the system connection**, approximately 12" will be required for the conduit. To avoid this space requirement, offset the junction box from the system connection.

**New York City model** replaces the base wireway harness and eliminates all four receptacles in the panel. Use in 30"W or greater structure due to box size. The electrical contractor must furnish box fittings, conduit, and wiring from the system junction box to the building power source connection for New York City models.

**New York City power entry** is not applicable in single-sided frames.


# NARRATE® PANEL SYSTEM

## Base Wireway Components | Hardwire Boxes & Cover Plates


Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175


### Details




**Hardwire components** allow field hardwiring of power within the base frame where required by local codes.




**Hardwire box** accommodates junctions and receptacles.



**Hardwire cover plate** is solid to cover and protect the contents of the hardwire box.



**Hardwire cover plate for power** provides an access hole, sized to fit Pass & Seymour 26242 series receptacles (or compatible size and type).



**Cover plates** are required for both sides of the hardwire box.

### Planning Factors

**For hardwire applications**, specify non-powered panel frame with appropriate wireway cover punch option and hardwire electrical components separately.  
IMPORTANT: Hardwire boxes are not applicable to single-sided to-the-floor frames.

**Specify power** or power and data base wireway covers.

**Power/data tiles** are compatible with hardwire applications.


NARRATE® PANEL SYSTEM

Ceiling Power Entries and Power/Data Poles

Planning


Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Details

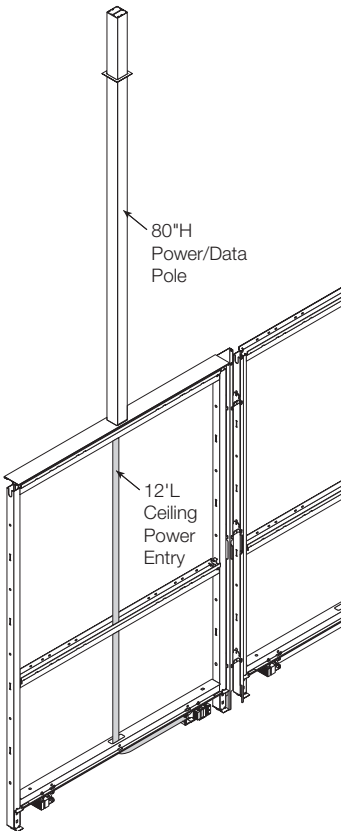


Ceiling power entries deliver building power to the base wire-way in applications where power must be dropped down from above to clusters in open areas away from walls or where power is not accessible in the floor. Ceiling power entry is 12' in length.

- Ceiling power entry capacity:**
- 8S 8-wire shared neutral in-feed provides four 20-amp circuits
  - 10S 10-wire shared neutral in-feed provides six 20-amp circuits
  - 10D 10-wire independent neutral in-feed provides four 20-amp circuits



Power/data pole provides a chase for power or data drops from the ceiling. Pole is specified separately from power entry.



Pole is divided into two sections. A top cap and power pole trim plate are provided to blend into frame top cap. Pole is 2¾"W 2¾"D x 80"H.

- Power/data pole capacity:**
- 32 ¼"-diameter cables at 40% fill (non-powered)
  - 28 ¼"-diameter cables at 40% fill (powered)


Surface Materials

- Ceiling Power Entry**
- ¾" oval metal conduit
- Power/Data Poles**
- Pole: extruded aluminum, paint
  - Top cap: painted steel or wood veneer
  - Trim plate: paint

Planning Factors

- Plan for ceiling power entries** where no glass, storage, or pass-thru tiles are used, since the conduit must have a direct path to the base wire-way harness.
- Multiple power entries** cannot be interconnected.
- Independent and shared neutral components** cannot be mixed.

- System connection to building power** must be made by a licensed electrician. Ceiling power entries do not include junction box and related connectors.
- 6" of ceiling power entry conduit** is required above ceiling for electrical connection.



Power entry must plug into right hand block of base wireway harness.

Use ceiling power entry and poles on frame that is a minimum of 24"W for terminal block to pass through frame opening.

Access to ceiling source is regulated by National Electric Code to 12' maximum conduit for our standard infeed construction. Ceiling power entry in lengths up to 24' are available with custom quote for alternate construction.

New York City approval number is E44747.

Maximum Ceiling Height for Power/Data Pole:

With Ceiling Power Entry	
2-high Frame	
24"-48"W	100 <sup>15</sup> / <sub>16</sub> "
3-high Frame	
24"-48"W	113 <sup>1</sup> / <sub>2</sub> "
3.5-high Frame	
24"-48"W	120 <sup>1</sup> / <sub>2</sub> "
4-high Frame	
24"-48"W	126 <sup>1</sup> / <sub>8</sub> "
5-, 6-, or 7-high Frame	
24"W	140 <sup>3</sup> / <sub>4</sub> "
30"W	137 <sup>3</sup> / <sub>4</sub> "
36"W	134 <sup>3</sup> / <sub>4</sub> "
42"W	131 <sup>3</sup> / <sub>4</sub> "
48"W	128 <sup>3</sup> / <sub>4</sub> "

Without Ceiling Power Entry	
2-high	100 <sup>15</sup> / <sub>16</sub> "
3-high	113 <sup>1</sup> / <sub>2</sub> "
3.5-high	120 <sup>1</sup> / <sub>2</sub> "
4-high	126 <sup>1</sup> / <sub>8</sub> "
5-high	138 <sup>3</sup> / <sub>4</sub> "
6-high	151 <sup>3</sup> / <sub>8</sub> "
7-high	164"




NARRATE® PANEL SYSTEM

Base Wireway Electrical System | Shared Neutral 8-Wire (8S) Circuit Configurations & Wiring Diagrams

Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




The 8-wire configuration supports a 3 & 1 or 2 & 2 configuration.

The shared neutral 8-wire system accommodates up to 13 duplex receptacles per circuit and consists of four 12-gauge hot wires, two 10-gauge neutral wires, and two 12-gauge ground wires.

Narrate's 8-wire electrical system is rated for 20-amp service. To support the usage, 15-amp convenience receptacles can be placed anywhere along the leg of the electrical connection. In the event that an appliance, such as a larger printer/ copier/plotter needs to have a 20-amp receptacle, it is recommended to use a dedicated circuit with a 20-amp receptacle. Using 15-amp convenience receptacles will aid in ensuring that no one leg of the system can pull too much current, which could potentially cause the system to trip out and lose power across the entire system.

3 and 1 (8-wire):

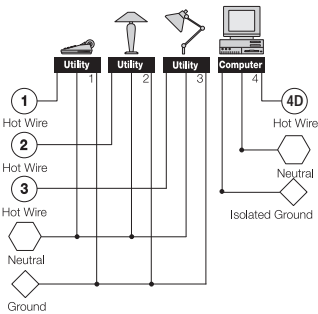


Circuits 1, 2, and 3 share a neutral and common ground, providing circuits for general electrical needs. Customarily, one or more of the circuits is reserved for lighting or other everyday uses, which allows control by central or master switching.

Circuit 4 consists of three separate conductors (hot, neutral, and ground) and meets the BIFMA/ANSI definition for a dedicated circuit.

	15-amp	20-amp
Circuit	Model	Model
1	33PER18S	33PER18S20
2	33PER28S	33PER28S20
3	33PER38S	33PER38S20
4	33PER4D8S	33PER4D8S20

2 and 2 (8-wire):




Circuits 1 and 2 provide a pair of designated circuits for general electrical needs.


Circuits 3 and 4 provide a pair of designated circuits for computer applications.

	15-amp	20-amp
Circuit	Model	Model
1	33PER18S	33PER18S20
2	33PER28S	33PER28S20
3	33PER3D8S	33PER3D8S20
4	33PER4D8S	33PER4D8S20

Narrate 3 and 1 Configuration (8-wire):

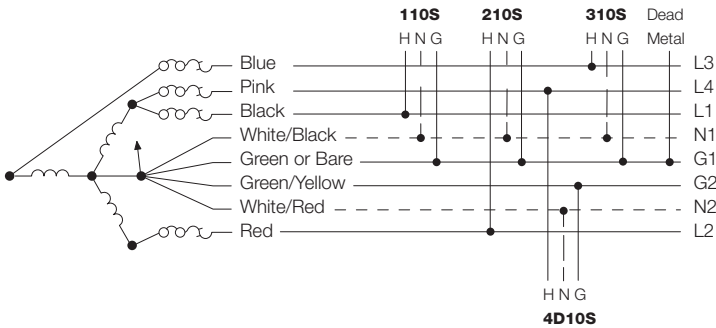

Narrate 2 and 2 Configuration (8-wire):

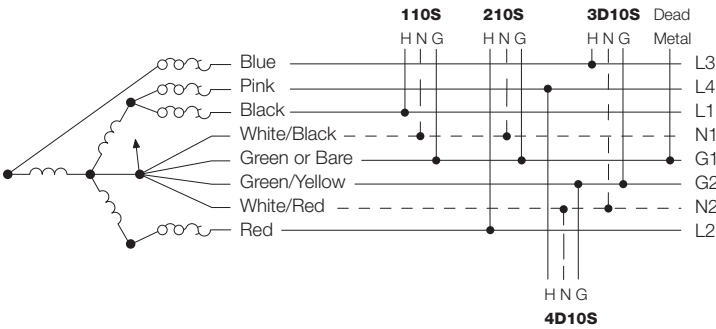




NARRATE® PANEL SYSTEM

Base Wireway Electrical System | Shared Neutral 10-Wire (10S) Circuit Configurations & Wiring Diagrams

Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



The 10-wire configuration supports work environments having heavy intensity, advanced computerized equipment requirements.

The shared neutral 10-wire system accomodates up to 13 duplex receptacles per circuit and consists of six 12-gauge hot wires, two 10-gauge neutral wires, and two 12-gauge ground wires.


Note: Only 8-wire components are available for mid-wireway application, but can connect to 8- or 10-wire shared base power using base-to-tile jumpers.

➤See page NA.46

Xsite's 10-wire electrical system is rated for 20-amp service. To support the usage, 15-amp convenience receptacles can be placed anywhere along the leg of the electrical connection. In the event that an appliance, such as a larger printer/ copier/plotter needs to have a 20-amp receptacle, it is recommended to use a dedicated circuit with a 20-amp receptacle. Using 15-amp convenience receptacles will aid in ensuring that no one leg of the system can pull too much current, which could potentially cause the system to trip out and lose power across the entire system.

IMPORTANT: Planning actual power supplies and branch circuits must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided here is intended to assist specifiers. Access to ceiling power source is regulated by National Code to a maximum of 12 ft. conduit.

3 and 3 (10-wire):




Circuits 1, 2, and 3 share a common 10 gauge neutral and 12 gauge ground wire, providing three designated circuits for lighting and other general/utility equipment.

Circuits 4, 5, and 6 share a common increased size neutral and ground wire, providing three designated circuits for computer applications.

	15-amp	20-amp
Circuit	Model	Model
1	33PER110S	33PER110S20
2	33PER210S	33PER210S20
3	33PER310S	33PER310S20
4	33PER4D10S	33PER4D10S20
5	33PER5D10S	33PER5D10S20
6	33PER6D10S	33PER6D10S20

Narrate 3 and 3 Configuration 10-Wire:

120/208V WYE 3 Phase 8-10 Shared Neutral  
Receptacles: 110S, 210S, 310S, 4D10S, 5D10S, 6D10S

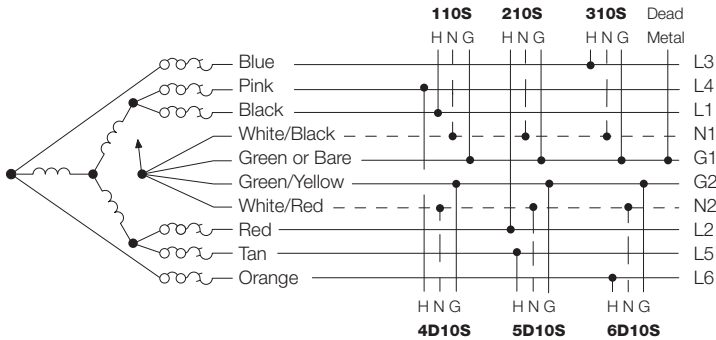


# NARRATE® PANEL SYSTEM

## Base Wireway Electrical System | Independent Neutral 10-Wire (10D) Circuit Configurations

### Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



The 10-wire configuration supports work environments having heavy intensity, advanced computerized equipment requirements.

The independent neutral 10-wire system accommodates up to 13 duplex receptacles per circuit and consists of four 12-gauge hot wires, four 12-gauge neutral wires, and two 12-gauge ground wires.


➤See page NA.49 for wiring diagrams.

Base wireway independent neutral (10D) system cannot be used at belt-line.

Narrate's 10-wire electrical system is rated for 20-amp service. To support the usage, 15-amp convenience receptacles can be placed anywhere along the leg of the electrical connection. In the event that an appliance, such as a larger printer/copier/plotter needs to have a 20-amp receptacle, it is recommended to use a dedicated circuit with a 20-amp receptacle. Using 15-amp convenience receptacles will aid in ensuring that no one leg of the system can pull too much current, which could potentially cause the system to trip out and lose power across the entire system.

IMPORTANT Planning actual power supplies and branch circuits must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided here is intended to assist specifiers. Access to ceiling power source is regulated by National Code to a maximum of 12 ft. conduit.

### 2 and 2 (10-wire):

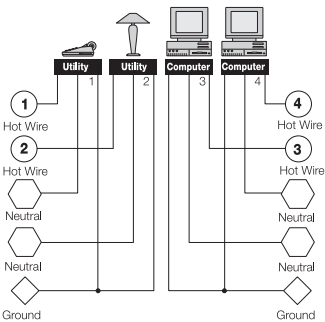

Circuits 1 and 2 each have a neutral wire and share a common ground wire, providing a pair of designated circuits for lighting and other general/utility equipment.

Circuits 3 and 4 each have a neutral wire and share a ground wire, providing a pair of designated circuits for computer applications.

Circuit	15-amp Model	20-amp Model
	Model	Model
1	33PER110D	33PER110D20
2	33PER210D	33PER210D20
3	33PER310D	n/a
4	33PER410D	33PER410D20

NARRATE® PANEL SYSTEM

Base Wireway Electrical System | Independent Neutral 10-Wire (10D) Wiring Diagrams


Planning

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Provide these wiring diagrams to the electrical contractor.


Narrate 2 and 2 Configuration 10-Wire:

120/208V WYE 3 Phase 8-10 Independent Neutral  
Receptacles: 110D, 210D, 310D, 410D

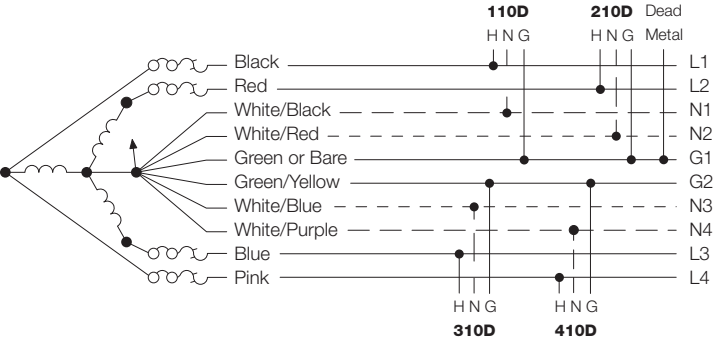


Narrate 2 and 2 Configuration 10-Wire:

120/240V 1 Phase 8-10 Independent Neutral  
Receptacles: 110D, 210D, 310D, 410D

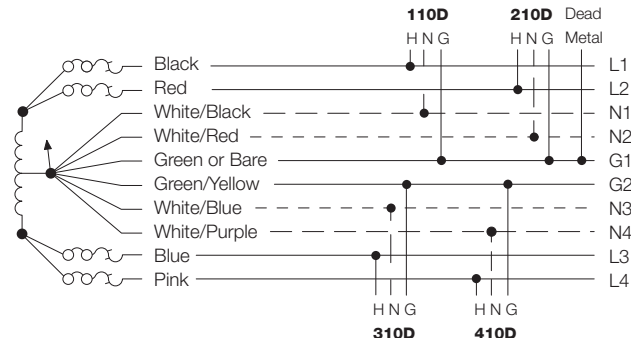


Narrate 2 and 1 Configuration 10-Wire:

120/208V WYE 3 Phase 8-10 Independent Neutral  
Receptacles: 110D, 210D, 410D

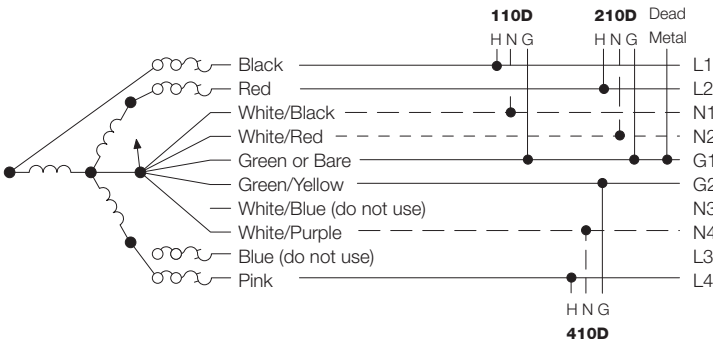

Narrate 1 and 2 Configuration 10-Wire:

120/240V 1 Phase 8-10 Independent Neutral  
Receptacles: 110D, 310D, 410D

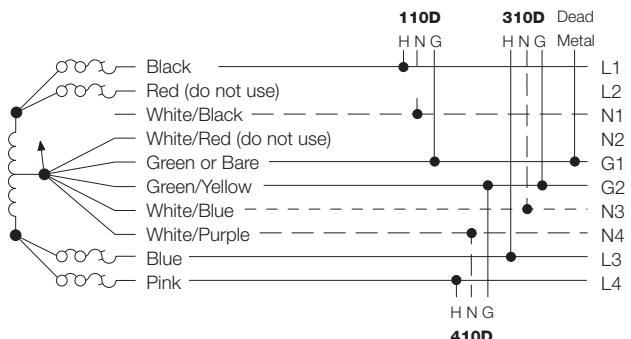

# NARRATE® PANEL SYSTEM

## Technology Tile Power/Data Components


Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Details

**Technology tile** components are required to provide power and data access to the tile.

**Mid-wireway harnesses** are available in 8-wire shared neutral only and in dual sided or single sided models. Dual-sided harness provides two receptacle locations per side; single-sided harness allows two receptacles on one side. 8-wire mid-wireway electrical can be used with either 8-wire or 10-wire shared neutral base electrical. It will not work with the 10-wire independent neutral electrical.

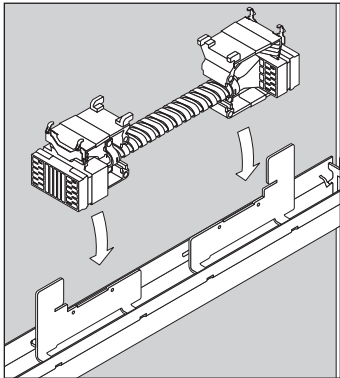

**Mounting brackets** are included with mid wireway harnesses and attach to the frame crossrails.

The same **8-wire jumpers** that are used in the base for 8S power are utilized with technology tiles at beltline to pass power panel to panel or thru connectors. To bring power from the base to the tech tiles a vertical base-to-tile jumper is specified separately.




**Hardwire box** (Tech tile) allows hardwiring of electrical at beltline.



**Duplex receptacles** used in technology tiles are the same as used in the base. The receptacles are available in either 15 or 20 amps.




**Hole cover plates**, specified separately, are recommended to cover unused power blocks or where cut-out is not being used for data.




**Data plates** have two openings and come with a voice/data adapter kit to accommodate couplers/jacks from multiple suppliers. Two of each style of adapter are standard in the kit. ➤See adapter/manufacture chart.

### Receptacle and Data Configuration Options:


24"W




30"W




36"W



42"W



48"W




**Legend:**  
■ = Duplex  
□ = Data

### Connections

**Power must be "started" in a 30"W or wider tile.** Power cannot be "started" from 24"W tiles due to space constraints.

**If open base frames are used,** a ceiling power entry can be used to bring power to the technology tile

### Data Plate Adapter Reference:



Manufacturer	Adapter*
Systimax/CommScope	AA
Uniprise/CommScope	AA
L-Com Keystone Modular	BB
Tyco SL and 100 Connect Series Modular	BB
Siemon Keystone Style	BB
Allen Tel Versa Tap Series	BB
Leviton Quick Port® Series	BB
Nordx Keystone Style	BB
Tyco SL Coupler Series	CC
Krone 6000 Series/ADC	CC
Hubbell Xcelerator™	
Keystone Series	CC
Blank (no coupler/jack)	DD
Ortronics TracJack Series	EE
Panduit Mini-Com Series	FF
Microphone Jack/3-pin XLR, solder type only	GG
Video Monitor Jack/DB-15, panel-mount solder style	HH


\*Adapter identifier is located on the backside of the plate.

# NARRATE® PANEL SYSTEM

## Technology Tile Electrical System | 8-Wire Circuit Configurations

### Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



**8-wire configuration** supports work environments having heavy-intensity advanced computerized equipment requirements. An 8-wire systems includes four 12-gauge hot wires, one 12-gauge dedicated neutral wire, one 10-gauge shared neutral wire, and two 12-gauge ground wires.

➤See electrical service info at left.

➤See wiring configurations at right and wiring diagrams on the next page.


**Base wireway shared neutral (8S or 10S) system or ceiling power in-feed** should be used technology tiles.

**Base wireway independent neutral (10D) system** cannot be used with technology tiles.

**Narrate's technology tile electrical system** is rated for 20-amp service. To support the usage, 15-amp convenience receptacles can be placed anywhere along the leg of the electrical connection. In the event that an appliance, such as a larger printer/copier/plotter needs to have a 20-amp receptacle, it is recommended to use a dedicated circuit with a 20-amp receptacle. Using 15-amp convenience receptacles will aid in ensuring that no one leg of the system can pull too much current, which could potentially cause the system to trip out and lose power across the entire system.

**IMPORTANT** Planning actual power supplies and branch circuits must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided here is intended to assist specifiers.

### 3 and 1 (8-wire):




**Circuits 1, 2, and 3** share a neutral and common ground, providing circuits for general electrical needs. Customarily, one or more of the circuits are reserved for lighting or other everyday uses, which allows control by central or master switching.

**Circuit 4** consists of three separate conductors (hot, neutral, and ground) and meets the BIFMA/ANSI definition for a dedicated circuit.

Cir.	15-amp Model	20-amp Model
1	33PER18S	33PER18S20
2	33PER28S	33PER28S20
3	33PER38S	33PER38S20
4	33PER4D8S	33PER4D8S20

### 2 and 2 (8-wire):



**Circuits 1 and 2** provide a pair of designated circuits for general electrical needs.

**Circuits 3 and 4** provide a pair of designated circuits for computer applications.


	15-amp Model	20-amp Model
1	33PER18S	33PER18S20
2	33PER28S	33PER28S20
3	33PER3D8S	33PER3D8S20
4	33PER4D8S	33PER4D8S20

Planning

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175


2 and 2 Configuration 8-Wire:

120/240V 1 Phase Shared Neutral  
Receptacles: 1, 2, 3Δ, 4Δ

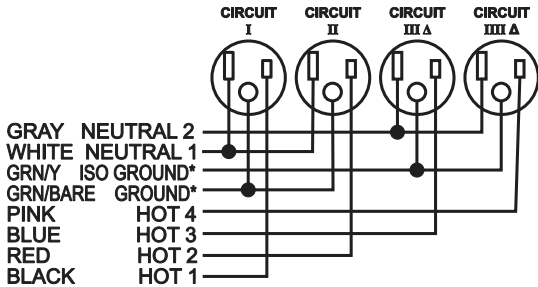

3 and 1 Configuration 8-Wire:

120/240V 1 Phase Shared Neutral  
Receptacles: 1, 2, 3, 4Δ

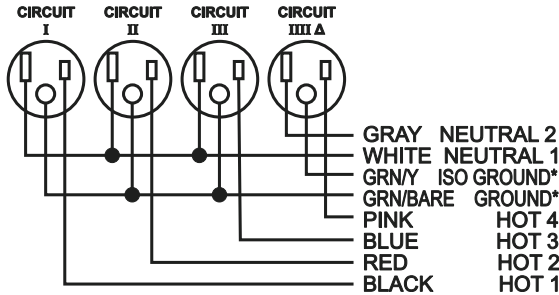


Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Cables may enter the frame through a base wireway cover or through a ceiling power/data pole.


Cables may be routed through the frame in the top channel, at the bottom of the frame above the base wireway, or through the interior of the frame.

Ceiling Entry:



Ceiling entry applications utilize a power/data pole. Pole features a divided septum to separate power and data cables. Cables are distributed in the top channel of the frame and dropped down for access in power/data tiles or in the base wireway.


Base Entry:




In base entry applications, cables enter through the data opening in a base wireway cover (power and data access model). Cables are routed up to the top channel or a power/data tile.

Allow an additional 12' of cable when routing up to the top channel from the base entry.

Horizontal Routing:



Data cable manager guides cables between frame and tiles. Up to 12 1/4"-diameter cables can be accommodated on each side of the frame. Locate as many as required on the frame verticals.



Cables in top channel can be routed through connectors. Top channel is 1 3/4"W and 1 1/4"H.

➤See charts at right for cable capacity and bend radius.

Hi-Lo Applications:

When cabling is distributed in a run with a hi-lo condition, the cabling must go into the frame, pass across the hi-lo condition, and then route back to the top of the frame.

Cable Capacities:

Capacities listed below are for 1/4"-diameter cables at 40% fill. Actual capacities may vary. A substantial number of cables can also be accommodated between the frame and tiles.

	40% Fill
Top channel	36
Top channel and mid-frame support cut-out	30
Power/data pole:	
• With power	46
• Without power	50
• Per segment	25
Power/data pole to top of frame, each direction	14
Connector top cap	
• Paint:	24
• Wood	24

Bend Radius:



	Min.	Max.
Top channel at connector	1"	1 3/8"
Through frame at connector	1"	1 5/8"
Frame to wireway	1"	2 1/8"
Top channel to inside frame	1"	2"
Power/data pole to top channel	1"	2"

# NARRATE® PANEL SYSTEM

Base-Wireway Frames | 2-High, 3-High, and 3.5-High

## Pricing

GSA SIN 33721



Dimensions			Model	Power Option	
D	W	H		Powered	Non-Powered
2-High					
31/4"	18"	291/2"	93P182F	—	\$204
	24"		93P242F	\$384	244
	30"		93P302F	416	267
	36"		93P362F	438	285
	42"		93P422F	467	305
	48"		93P482F	496	325
3-High					
31/4"	18"	421/8"	93P183F	—	\$244
	24"		93P243F	\$429	289
	30"		93P303F	466	315
	36"		93P363F	492	343
	42"		93P423F	527	363
	48"		93P483F	562	393
3.5-High					
31/4"	18"	491/32"	93P18H50F	—	\$261
	24"		93P24H50F	\$440	301
	30"		93P30H50F	478	328
	36"		93P36H50F	507	354
	42"		93P42H50F	539	377
	48"		93P48H50F	575	406

Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads. Additional mid-frame supports must be specified separately.

➤ See page NA.64 to specify.

**IMPORTANT:** 18"W panels do not accept power entry or receptacles.

For hardwire applications, specify non-powered frame and hardwire electrical components separately.

## Standard Includes

- Frame
- Traxx lock brackets
- Attachment hardware
- Mid-frame supports at 2-high position on 3-high and 3.5-high frames
- Two wireway covers
- Base wireway harness on powered frames

*Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*

## How to Specify

- 1 Model
- 2 Power option:  
**P** = Powered  
**N** = Non-powered
- 3 Type of power system (omit for non-powered):  
**8S** = 8-wire shared neutral  
**10S** = 10-wire shared neutral (+\$55)  
**10D** = 10-wire independent neutral (+\$55)
- 4 Wireway cover punch option:  
**P1** = 1 power punched, 1 non-punched (n/a 18"W)  
**P2** = Both power punched (n/a 18"W)  
**PD1** = 1 power & data punched, 1 non-punched (n/a 18" & 24"W)  
**PD2** = Both power & data punched (n/a 18" & 24"W)  
**NP2** = Both non-punched
- 5 Wireway cover paint group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 6 Wireway cover paint designator



# NARRATE® PANEL SYSTEM

Base-Wireway Frames | 4-High and 5-High



Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads. Use of an overhead on a 4- or 5-high frame requires an additional mid-frame support. Additional mid-frame supports must be specified separately.  
 ➤ See page NA.64 to specify.

**IMPORTANT:** 18"W panels do not accept power entry or receptacles.

For hardwire applications, specify non-powered frame and hardwire electrical components separately.

## Pricing

GSA SIN 33721

Dimensions			Model	Power Option	
D	W	H		Powered	Non-Powered
4-High					
3 1/4"	18"	54 <sup>23</sup> / <sub>32</sub> "	93P184F	—	\$267
	24"		93P244F	\$446	307
	30"		93P304F	486	338
	36"		93P364F	515	362
	42"		93P424F	549	385
	48"		93P484F	588	419
5-High					
3 1/4"	18"	67 <sup>5</sup> / <sub>16</sub> "	93P185F	—	\$307
	24"		93P245F	\$498	357
	30"		93P305F	539	389
	36"		93P365F	576	423
	42"		93P425F	613	451
	48"		93P485F	652	481

## Standard Includes

- Frame
- Traxx lock brackets
- Attachment hardware
- Mid-frame supports at 2-high position on 4-high and 5-high frames
- Wireway covers
- Base wireway harness on powered frames

*Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*

## How to Specify

- 1 Model
- 2 Power option:  
**P** = Powered  
**N** = Non-powered
- 3 Type of power system (omit for non-powered):  
**8S** = 8-wire shared neutral  
**10S** = 10-wire shared neutral (+\$55)  
**10D** = 10-wire independent neutral (+\$55)
- 4 Wireway cover punch option:  
**P1** = 1 power punched, 1 non-punched (n/a 18"W)  
**P2** = Both power punched (n/a 18"W)  
**PD1** = 1 power & data punched, 1 non-punched (n/a 18" & 24"W)  
**PD2** = Both power & data punched (n/a 18" & 24"W)  
**NP2** = Both non-punched
- 5 Wireway cover paint group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 6 Wireway cover paint designator




# NARRATE® PANEL SYSTEM

Open-Base Frames | 2-High, 3-High, and 3.5-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
2-High				
3¼"	18"	29½"	93P182FNOB	\$183
	24"		93P242FNOB	194
	30"		93P302FNOB	208
	36"		93P362FNOB	222
	42"		93P422FNOB	233
	48"		93P482FNOB	245
3-High				
3¼"	18"	42⅛"	93P183FNOB	\$225
	24"		93P243FNOB	243
	30"		93P303FNOB	261
	36"		93P363FNOB	278
	42"		93P423FNOB	297
	48"		93P483FNOB	315
3.5-High				
3¼"	18"	49⅓₂"	93P18H50FNOB	\$243
	24"		93P24H50FNOB	254
	30"		93P30H50FNOB	273
	36"		93P36H50FNOB	293
	42"		93P42H50FNOB	307
	48"		93P48H50FNOB	328

## Standard Includes

- Frame
- Traxx lock brackets
- Attachment hardware
- Mid-frame supports at 2-high position on 3-high and 3.5-high frames

*Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*

## How to Specify

- ① Model
- ② Frame paint group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Frame paint designator

Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads. Additional mid-frame supports must be specified separately.

➤ See page NA.64 to specify.

# NARRATE® PANEL SYSTEM

## Open-Base Frames | 4-High and 5-High

Pricing  
GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
4-High				
3 <sup>1</sup> / <sub>4</sub> "	18"	54 <sup>23</sup> / <sub>32</sub> "	93P184FNOB	\$250
	24"		93P244FNOB	263
	30"		93P304FNOB	283
	36"		93P364FNOB	300
	42"		93P424FNOB	321
	48"		93P484FNOB	338
5-High				
3 <sup>1</sup> / <sub>4</sub> "	18"	67 <sup>5</sup> / <sub>16</sub> "	93P185FNOB	\$292
	24"		93P245FNOB	309
	30"		93P305FNOB	332
	36"		93P365FNOB	361
	42"		93P425FNOB	382
	48"		93P485FNOB	407

Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads. Use of an overhead on a 4- or 5-high frame requires an additional mid-frame support. Additional mid-frame supports must be specified separately.  
➤ See page NA.64 to specify.

### Standard Includes

- Frame
- Traxx lock brackets
- Attachment hardware
- Mid-frame supports at 2-high position on 4-high and 5-high frames

*Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*

### How to Specify

- ① Model
- ② Frame paint group:  
**STD** = Standard  
**STDm** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Frame paint designator


# NARRATE® PANEL SYSTEM

To-the-Floor Frames | 2-High, 3-High, and 3.5-High

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
2-High				
31/4"	18"	291/2"	93P182FNF	\$191
	24"		93P242FNF	204
	30"		93P302FNF	221
	36"		93P362FNF	232
	42"		93P422FNF	244
	48"		93P482FNF	255
3-High				
31/4"	18"	421/8"	93P183FNF	\$236
	24"		93P243FNF	254
	30"		93P303FNF	270
	36"		93P363FNF	293
	42"		93P423FNF	308
	48"		93P483FNF	329
3.5-High				
31/4"	18"	491/32"	93P18H50FNF	\$254
	24"		93P24H50FNF	267
	30"		93P30H50FNF	288
	36"		93P36H50FNF	306
	42"		93P42H50FNF	323
	48"		93P48H50FNF	344

### Standard Includes

- Frame
- Traxx lock brackets
- Attachment hardware
- Mid-frame supports at 2-high position on 3-high and 3.5-high frames

*Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*

### How to Specify

- ① Model
- ② Paint designator:  
**BK** = Black

Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads. Additional mid-frame supports must be specified separately.  
➤ See page NA.64 to specify.

# NARRATE® PANEL SYSTEM

## To-the-Floor Frames | 4-High and 5-High

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
4-High				
31/4"	18"	54 <sup>23</sup> / <sub>32</sub> "	93P184FNF	\$262
	24"		93P244FNF	274
	30"		93P304FNF	298
	36"		93P364FNF	312
	42"		93P424FNF	335
	48"		93P484FNF	357
5-High				
31/4"	18"	67 <sup>5</sup> / <sub>16</sub> "	93P185FNF	\$302
	24"		93P245FNF	325
	30"		93P305FNF	348
	36"		93P365FNF	377
	42"		93P425FNF	413
	48"		93P485FNF	424

### Standard Includes

- Frame
  - Traxx lock brackets
  - Attachment hardware
  - Mid-frame supports at 2-high position on 4-high and 5-high frames
- Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*

### How to Specify

- 1 Model
- 2 Paint designator:  

BK = Black

Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads. Use of an overhead on a 4- or 5-high frame requires an additional mid-frame support. Additional mid-frame supports must be specified separately.

➤See page NA.64 to specify.



# NARRATE® PANEL SYSTEM

Single-Sided To-the-Floor Frames | 2-High, 3-High, and 3.5-High

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Power Option	
D	W	H		Powered	Non-Powered
2-High					
31/4"	18"	291/2"	93P182F	—	\$237
	24"		93P242F	\$465	253
	30"		93P302F	504	276
	36"		93P362F	528	292
	42"		93P422F	576	311
	48"		93P482F	599	328
3-High					
31/4"	18"	421/8"	93P183F	—	\$285
	24"		93P243F	\$518	308
	30"		93P303F	559	332
	36"		93P363F	597	360
	42"		93P423F	645	381
	48"		93P483F	677	409
3.5-High					
31/4"	18"	491/32"	93P18H50F	—	\$306
	24"		93P24H50F	\$534	322
	30"		93P30H50F	576	350
	36"		93P36H50F	610	374
	42"		93P42H50F	662	398
	48"		93P48H50F	690	423

Models on this page accommodate a to-the-floor tile on one side and a standard tile on the other; one wireway cover is standard.

Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads. Additional mid-frame supports must be specified separately.

➤ See page NA.64 to specify.

## Standard Includes

- Frame
- Traxx lock brackets
- Attachment hardware
- One wireway cover
- Mid-frame supports at 2-high position on 3-high and 3.5-high frames

*Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*

## How to Specify

- 1 Model
- 2 Power option:  
**PFS** = Powered  
**NFS** = Non-powered
- 3 Type of power system (omit for non-powered):  
**8S** = 8-wire shared neutral  
**10S** = 10-wire shared neutral (+\$55)  
**10D** = 10-wire independent neutral (+\$55)
- 4 Wireway cover punch option:  
**1NP** = 1 non-punched  
**1P** = 1 power punched (n/a 18")  
**1PD** = 1 power & data punched (n/a 18" & 24")
- 5 Wireway cover paint group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 6 Wireway cover paint designator


# NARRATE® PANEL SYSTEM

Single-Sided To-the-Floor Frames | 4-High and 5-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Power Option	
D	W	H		Powered	Non-Powered
4-High Frames					
31/4"	18"	54 <sup>23</sup> / <sub>32</sub> "	93P184F	—	\$312
	24"		93P244F	\$564	328
	30"		93P304F	608	361
	36"		93P364F	650	381
	42"		93P424F	704	411
	48"		93P484F	736	438
5-High Frames					
31/4"	18"	67 <sup>5</sup> / <sub>16</sub> "	93P185F	—	\$360
	24"		93P245F	\$597	390
	30"		93P305F	645	420
	36"		93P365F	690	457
	42"		93P425F	737	484
	48"		93P485F	784	515

Models on this page accommodate a to-the-floor tile on one side and a standard tile on the other; one wire-way cover is standard.

Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads. Use of an overhead on a 4- or 5-high frame requires an additional mid-frame support. Additional mid-frame supports must be specified separately.

➤ See page NA.64 to specify.

## Standard Includes

- Frame
- Traxx lock brackets
- Attachment hardware
- One wireway cover
- Mid-frame supports:
  - At 2-high position on 4-high frames and 5-high frames

*Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*


## How to Specify

- ① Model
- ② Power option:
  - PFS** = Powered
  - NFS** = Non-powered
- ③ Type of power system (omit for non-powered):
  - 8S** = 8-wire shared neutral
  - 10S** = 10-wire shared neutral (+\$55)
  - 10D** = 10-wire independent neutral (+\$55)
- ④ Wireway cover punch option:
  - 1NP** = 1 non-punched
  - 1P** = 1 power punched (n/a 18")
  - 1PD** = 1 power & data punched (n/a 18" & 24")
- ⑤ Wireway cover paint group:
  - STD** = Standard
  - STDm** = Metallic (+10%)
  - GAL1** = Gallery (+10%)
- ⑥ Wireway cover paint designator

# NARRATE® PANEL SYSTEM

## Monitor Frames

Pricing  
GSA SIN 33721



Dimensions			Model	Price
D	W	H		
5-High Single Sided				
31 <sup>1</sup> / <sub>4</sub> "	48"	67 <sup>5</sup> / <sub>16</sub> "	93P485FTVFS	\$1502
5-High Double Sided				
31 <sup>1</sup> / <sub>4</sub> "	48"	67 <sup>5</sup> / <sub>16</sub> "	93P485FTVP	\$1294

Monitor frames require a 3-high back-painted glass tile on the side with the monitor.  
 ➤See page NA.118.

Designed to work with Samsung 50" Class Q60A OLED TV; purchased separately.

Mid-frame supports are required wherever Narrate Traxx are used to support tiles and/or overheads.

Additional mid-frame supports need to be specified separately.  
 ➤See page NA.64 to specify.

### Standard Includes

- Frame
- Traxx lock brackets
- Attachment hardware
- Mid-frame support at 2-high position
- Two wireway covers on double-sided model; one wireway cover on single-sided model
- Base wireway harness
- Mounting bracket for monitor

*Note: To complete the panel, specify Narrate Traxx, tiles, and top cap separately.*

### How to Specify

- ① Model
- ② Type of power system (omit for non-powered):  
**8S** = 8-wire shared neutral  
**10S** = 10-wire shared neutral (+\$55)  
**10D** = 10-wire independent neutral (+\$55)
- ③ Wireway cover punch option:  
**P1** = 1 power punched, 1 non-punched (n/a single-sided model)  
**P2** = Both power punched (n/a single-sided model)  
**PD1** = 1 power & data punched, 1 non-punched (n/a single-sided model)  
**PD2** = Both power & data punched (n/a single-sided model)
- ④ Wireway cover paint group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ⑤ Wireway cover paint designator



NARRATE® PANEL SYSTEM

Multi-Frame Blank Exterior Wireway Covers

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions W	Model	Price
Blank Wireway Covers		
54"	33P54WCX	\$69
60"	33P60WCX	74
66"	33P66WCX	82
72"	33P72WCX	87
78"	33P78WCX	93
84"	33P84WCX	100
90"	33P90WCX	104
96"	33P96WCX	113

How to Specify

- ① Model
- ② Paint group:
  - STD = Standard
  - STDM = Metallic (+10%)
  - GAL1 = Gallery (+10%)
- ③ Paint designator

Blank wireway covers can be used to cover multiple frames for continuous look. If using multi-frame blank wireway covers, select the width to equal the overall width individual frames the cover will span.

# NARRATE® PANEL SYSTEM

## Mid-Frame Supports

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Mid-frame supports are required wherever Traxx are used to support tiles. Specify additional mid-frame supports if needed.

Mid-frame supports 54"–96" are for use with 2 high stacking frames 54"–96" wide.

<i>Dimensions</i> W	<i>Model</i>	<i>Price</i>
<b>Mid-Frame Supports</b>		
18"	<b>93P18MFS</b>	\$44
24"	<b>93P24MFS</b>	48
30"	<b>93P30MFS</b>	54
36"	<b>93P36MFS</b>	60
42"	<b>93P42MFS</b>	64
48"	<b>93P48MFS</b>	70
54"	<b>93P54MFS</b>	75
60"	<b>93P60MFS</b>	79
66"	<b>93P66MFS</b>	85
72"	<b>93P72MFS</b>	94
78"	<b>93P78MFS</b>	98
84"	<b>93P84MFS</b>	101
90"	<b>93P90MFS</b>	104
96"	<b>93P96MFS</b>	107

### Frame Bolts (Package of 24)

<b>93PFBON24</b>	\$75
------------------	------

Frame bolts are used to connect 33P Narrate frames to the newer 93P Narrate frames. They can also be used to connect Xsite 36P frames to the newer 96P Xsite frames.

### Standard Includes

- Mid-frame support or frame bolt package
- Traxx lock brackets

### How to Specify

- 1 Model

# NARRATE® PANEL SYSTEM

## Stacking Frames

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



One 1-high or 2-high stacking frame can be added to 1-, 2-, 3-, 4-, or 5-high base frame.

*Note: Stacking frames cannot be used on 3.5-high base frames.*

Stacking frames 54"-96" are used to span multiple base frames; overall width of base frames must equal width of stacking frame.

Specify end trims and connectors to be equal to the combined height of base and stacking frames.

Specify mid-frame supports separately if using Traxx at the 1-high segment on a 2-high stacking frame.

➤ See page NA.64.

Dimensions			Model	Price
D	W	H		
1-High				
31/4"	18"	125/8"	93P181FS	\$129
	24"		93P241FS	133
	30"		93P301FS	139
	36"		93P361FS	145
	42"		93P421FS	155
	48"		93P481FS	160
	54"		93P541FS	179
	60"		93P601FS	198
	66"		93P661FS	223
	72"		93P721FS	242
	78"		93P781FS	250
	84"		93P841FS	262
	90"		93P901FS	270
	96"		93P961FS	282
2-High				
31/4"	18"	251/4"	93P182FS	\$207
	24"		93P242FS	219
	30"		93P302FS	229
	36"		93P362FS	239
	42"		93P422FS	248
	48"		93P482FS	260
	54"		93P542FS	274
	60"		93P602FS	290
	66"		93P662FS	304
	72"		93P722FS	317
	78"		93P782FS	340
	84"		93P842FS	361
	90"		93P902FS	382
	96"		93P962FS	404

### Standard Includes

- Stacking frame
- Attachment hardware
- Traxx lock brackets

### How to Specify

- ① Model
- ② Paint designator:  
**BK** = Black



# NARRATE® PANEL SYSTEM

Sliding Privacy Doors | Non-Locking

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



**RIGHT HAND  
Model**

**LEFT HAND  
Model**

**Price**

**Dimensions**

*D*

*W*

*H*

**For Use with**

*Opening*

*Host Frame*

## 3.5-High

3/4"	48 1/8"	49 1/8"	36"W	48"W	<b>93P36H50PDR</b>	<b>93P36H50PDL</b>	\$1609
------	---------	---------	------	------	--------------------	--------------------	--------

## 4-High

3/4"	48 1/8"	54 7/8"	36"W	48"W	<b>93P364PDR</b>	<b>93P364PDL</b>	\$1677
------	---------	---------	------	------	------------------	------------------	--------

## 5-High

3/4"	48 1/8"	67 3/8"	36"W	48"W	<b>93P365PDR</b>	<b>93P365PDL</b>	\$1860
------	---------	---------	------	------	------------------	------------------	--------

## 6-High

3/4"	48 1/8"	80"	36"W	48"W	<b>93P366PDR</b>	<b>93P366PDL</b>	\$1961
------	---------	-----	------	------	------------------	------------------	--------


## 7-High

3/4"	48 1/8"	92 5/8"	36"W	48"W	<b>93P367PDR</b>	<b>93P367PDL</b>	\$2069
------	---------	---------	------	------	------------------	------------------	--------

Related Products:

## Door Handle

2"	2"	5 7/8"			<b>33PPDH</b>		\$115
----	----	--------	--	--	---------------	--	-------

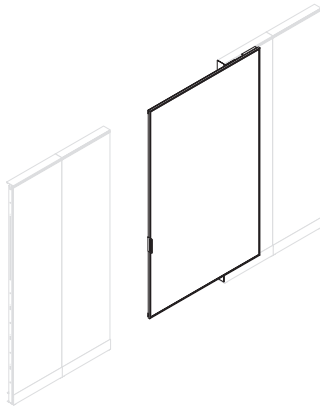

Right-hand door shown.



Door can be shorter than the host frame, but must have a Traxx for the top guide.

*Exception: 3.5H door must be used on a 3.5H frame.*

## Standard Includes

- Door frame: painted aluminum
- Insert: resin (25 Glacier)
- One medium-hard durometer roller wheel and attachment hardware
- End trim for host panel: paint

## How to Specify

### Door

- Model
- Door material:  
**T** = Translucent (25 Glacier)
- Host panel end trim height:  
**3.5** = 3.5H host panel  
**4** = 4H host panel  
**5** = 5H host panel  
**6** = 6H host panel  
**7** = 7H host panel
- End trim profile:  
**F** = Flat
- End trim paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- End trim paint designator
- Door trim paint price group:  
**STD** = Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- Door trim paint designator

### Handle

- Model
- Paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- Paint designator


# NARRATE® PANEL SYSTEM

Sliding Privacy Doors | Locking

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




**RIGHT HAND  
Model**

**LEFT HAND  
Model**

**Price**

<b>Dimensions</b>			<b>For Use with</b>				
<i>D</i>	<i>W</i>	<i>H</i>	<i>Opening</i>	<i>Host Frame</i>			
<b>3.5-High</b>							
3/4"	48 1/8"	49 1/8"	36"W	48"W	<b>93P36H50PDRL</b>	<b>93P36H50PDLL</b>	\$2044
<b>4-High</b>							
3/4"	48 1/8"	54 7/8"	36"W	48"W	<b>93P364PDRL</b>	<b>93P364PDLL</b>	\$2111
<b>5-High</b>							
3/4"	48 1/8"	67 3/8"	36"W	48"W	<b>93P365PDRL</b>	<b>93P365PDLL</b>	\$2294
<b>6-High</b>							
3/4"	48 1/8"	80"	36"W	48"W	<b>93P366PDRL</b>	<b>93P366PDLL</b>	\$2397
<b>7-High</b>							
3/4"	48 1/8"	92 5/8"	36"W	48"W	<b>93P367PDRL</b>	<b>93P367PDLL</b>	\$2504

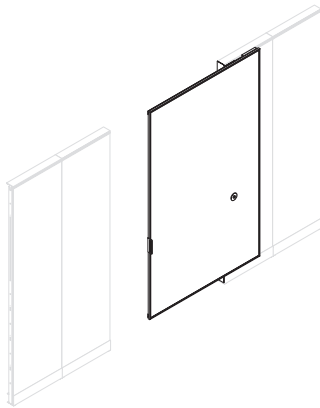

Right-hand door shown.

**IMPORTANT:** Not intended for use as a security door.

Door can be shorter than the host frame, but must have a Traxx for the top guide.

*Exception: 3.5H door must be used on a 3.5H frame.*

Door handle

➤ See page NA.66.

## Standard Includes


- Door frame: painted aluminum
- Insert: resin (25 Glacier)
- One medium-hard durometer roller wheel and attachment hardware
- End trim for host panel: paint
- Locking mechanism assembly:
  - Lock housing, core, and key (key random)
  - Lock plate and attachment hardware

## How to Specify

- 1 Model
- 2 End trim material:  
**P** = Paint
- 3 Lock option:  
**KRB** = Key random, black core  
**KRS** = Key random, silver core  
**KSB** = Key specific black (-\$37; specify lock core separately)  
**KSS** = Key specific silver (-\$37; specify lock core separately)
- 4 Door material:  
**T** = Translucent (25 Glacier)
- 5 Host panel end trim height:  
**3.5** = 3.5H host panel  
**4** = 4H host panel  
**5** = 5H host panel  
**6** = 6H host panel  
**7** = 7H host panel
- 6 End trim profile:  
**F** = Flat
- 7 End trim paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 8 End trim paint designator
- 9 Door trim paint price group:  
**STD** = Standard  
**STD M** = Metallic  
**GAL1** = Gallery
- 10 Door trim paint designator

# NARRATE® PANEL SYSTEM

## Hinged Doors



Right hinge shown

Specify the hinge location (right or left) so that the door will swing in the correct direction. With a right hinge, door will swing away from you to the right; with a left hinge, door will swing away from you to the left.

Top cap must be specified separately to span across door frame.  
➤See page NA.85.

42"W hinged door is recommended for ADA compliance.

Connectors for use in conjunction with hinged door  
➤See page NA.76.

## Pricing

GSA SIN 33721

Dimensions			Model	Price
W	H	Segment		
Wood Doors				
36"	80"	6-high	93P366FAD	\$5182
42"			93P426FAD	5672
Painted Doors				
36"	80"	6-high	93P366FAD	\$4559
42"			93P426FAD	5134

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Standard Includes

- Door: wood or paint (non-metallic)
- Door frame: paint
- Threshold
- Door stop

### How to Specify

- 1 Model
- 2 Hinge location:  
R = Right  
L = Left
- 3 Material:  
W = Wood  
P = Paint
- 4 Door hardware:  
LL2 = Locking lever (+\$707)  
X = No lever
- 5 Frame paint group:  
STD = Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 6 Frame paint designator
- 7 Door paint group:  
STD = Standard  
GAL1 = Gallery (+10%)
- 8 Door paint designator

NARRATE® PANEL SYSTEM  
Supplemental Brackets

Pricing  
GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions		Model	Price
W	L		
X Bracket			
25 <sup>3</sup> / <sub>16</sub> "	25 <sup>3</sup> / <sub>16</sub> "	93PSBX	\$154



<b>T Bracket</b>			
13 <sup>13</sup> / <sub>16</sub> "	25 <sup>3</sup> / <sub>16</sub> "	93PSBT	\$113



<b>L Bracket</b>			
13 <sup>13</sup> / <sub>16</sub> "	13 <sup>13</sup> / <sub>16</sub> "	93PSBL	\$89



<b>120° V Bracket</b>			
19 <sup>15</sup> / <sub>32</sub> "	12 <sup>3</sup> / <sub>32</sub> "	93PSBV	\$92



<b>120° Y Bracket</b>			
22 <sup>13</sup> / <sub>32</sub> "	22 <sup>13</sup> / <sub>32</sub> "	93PSBY	\$148



<b>Storage-to-Traxx Bracket</b>			
2"	2 <sup>13</sup> / <sub>32</sub> "	93PSTB	\$47

Supplemental brackets, specified separately, are recommended for maximum stability when wing panel is not tied to worksurface or vertical storage.

Supplemental brackets are for use with same-height frames. For different height frames, a frame-support post is recommended.  
➤See page NA.77.

Storage-to-Traxx bracket allows vertical storage to attach to wing panels to prevent movement when panels are not tied to surfaces and support.

Standard Includes

- Bracket
- Attachment screws

How to Specify

1 Model

# NARRATE® PANEL SYSTEM

Connectors | 2-Way/L

Pricing

GSA SIN 33721

## Standard Includes

- Top cap
- Attachment hardware
- Wireway cover on applicable models

## How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Connector material:  
**P** = Paint  
**F** = Fabric (vertical textile)  
**W** = Wood
- 4 Top cap profile:  
**F** = Flat
- 5 Top cap wood or paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 6 Top cap wood or paint designator
- 7 Connector wood or paint price group (omit for fabric model):  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 8 Connector wood or paint designator (omit for fabric model)
- 9 Vertical textile grade for fabric connector, if applicable
- 10 Vertical textile number for fabric connector, if applicable
- 11 Connector (inside) paint price group:  
**STD** = Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 12 Connector (inside) paint designator
- 13 Wireway cover paint group (include if applicable):  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 14 Wireway cover paint designator (include if applicable)

## CONNECTOR MATERIAL

Dimensions		Model	Paint	Vertical Textile		Price	Grade	Wood
H	Segment			AA	A			
No Wireway Cover								
29½"	2-high	93P22FCL	\$224	\$217	\$224	\$237		\$535
42⅛"	3-high	93P23FCL	240	233	240	253		568
49"	3.5-high	93P2H50FCL	245	233	245	258		601
54 <sup>23</sup> / <sub>32</sub> "	4-high	93P24FCL	247	240	247	260		629
67 <sup>5</sup> / <sub>16</sub> "	5-high	93P25FCL	252	—	—	—		650
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P26FCL	309	—	—	—		711
92½"	7-high	93P27FCL	354	—	—	—		760
With Wireway Cover								
29½"	2-high	93P22FCLW	\$237	\$230	\$237	\$250		\$546
42⅛"	3-high	93P23FCLW	253	246	253	266		582
49"	3.5-high	93P2H50FCLW	260	253	260	273		615
54 <sup>23</sup> / <sub>32</sub> "	4-high	93P24FCLW	262	255	262	275		643
67 <sup>5</sup> / <sub>16</sub> "	5-high	93P25FCLW	266	259	266	279		664
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P26FCLW	323	—	—	—		725
92½"	7-high	93P27FCLW	366	—	—	—		774



# NARRATE® PANEL SYSTEM

Connectors | 3-Way/T

Pricing

GSA SIN 33721

## Standard Includes



- Top cap
- Attachment hardware
- Wireway cover on applicable models

## How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Connector material:  
**P** = Paint  
**F** = Fabric (vertical textile)  
**W** = Wood
- 4 Top cap profile:  
**F** = Flat
- 5 Top cap wood or paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 6 Top cap wood or paint designator
- 7 Connector wood or paint price group (omit for fabric model):  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 8 Connector wood or paint designator (omit for fabric model)
- 9 Vertical textile grade for fabric connector, if applicable
- 10 Vertical textile number for fabric connector, if applicable
- 11 Connector (inside) paint price group:  
**STD** = Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 12 Connector (inside) paint designator
- 13 Wireway cover paint group (include if applicable):  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 14 Wireway cover paint designator (include if applicable)

## CONNECTOR MATERIAL

<i>Dimensions</i>		<i>Model</i>	<i>Paint</i>	<i>Vertical Textile</i>		<i>Price</i>	<i>Grade</i>	<i>Wood</i>
<i>H</i>	<i>Segment</i>			<i>AA</i>	<i>A</i>		<i>B/COM</i>	
<b>No Wireway Cover</b>								
29½"	2-high	<b>93P32FCT</b>	\$243	\$238	\$243	\$251		\$534
42⅛"	3-high	<b>93P33FCT</b>	250	245	250	258		564
49"	3.5-high	<b>93P3H50FCT</b>	260	255	260	268		592
54 <sup>23</sup> / <sub>32</sub> "	4-high	<b>93P34FCT</b>	263	258	263	271		618
67 <sup>5</sup> / <sub>16</sub> "	5-high	<b>93P35FCT</b>	267	—	—	—		627
79 <sup>29</sup> / <sub>32</sub> "	6-high	<b>93P36FCT</b>	323	—	—	—		682
92½"	7-high	<b>93P37FCT</b>	360	—	—	—		723
<b>With Wireway Cover</b>								
29½"	2-high	<b>93P32FCTW</b>	\$255	\$250	\$255	\$263		\$545
42⅛"	3-high	<b>93P33FCTW</b>	265	260	265	273		577
49"	3.5-high	<b>93P3H50FCTW</b>	273	260	273	281		604
54 <sup>23</sup> / <sub>32</sub> "	4-high	<b>93P34FCTW</b>	276	271	276	284		630
67 <sup>5</sup> / <sub>16</sub> "	5-high	<b>93P35FCTW</b>	281	276	281	289		641
79 <sup>29</sup> / <sub>32</sub> "	6-high	<b>93P36FCTW</b>	337	—	—	—		698
92½"	7-high	<b>93P37FCTW</b>	373	—	—	—		736




# NARRATE® PANEL SYSTEM

Connectors | 4-Way/X

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<b>Dimensions</b>		<b>Model</b>	<b>TOP CAP MATERIAL</b>	
			<b>Paint</b>	<b>Wood</b>
<i>H</i>	<i>Segment</i>			
<b>No Wireway Cover</b>				
29½"	2-high	<b>93P42FCX</b>	\$260	\$398
42⅛"	3-high	<b>93P43FCX</b>	267	427
49"	3.5-high	<b>93P4H50FX</b>	276	449
54 <sup>23</sup> / <sub>32</sub> "	4-high	<b>93P44FCX</b>	288	475
67 <sup>5</sup> / <sub>16</sub> "	5-high	<b>93P45FCX</b>	290	478
79 <sup>29</sup> / <sub>32</sub> "	6-high	<b>93P46FCX</b>	346	526
92½"	7-high	<b>93P47FCX</b>	381	551

## Standard Includes

- Wireway cover
- Top cap
- Attachment hardware

## How to Specify



- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**F** = Flat
- 4 Top cap wood or paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 5 Top cap wood or paint designator
- 6 Connector (inside) paint price group:  
**STD** = Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 7 Connector (inside) paint designator

# NARRATE® PANEL SYSTEM

Connectors | Straight

Pricing

GSA SIN 33721



## CONNECTOR MATERIAL

Dimensions		Model	Paint	Vertical Textile Price Grade			Wood
H	Segment			AA	A	B/COM	
No Wireway Cover							
29½"	2-high	93P12FCS	\$224	\$217	\$224	\$237	\$535
42⅛"	3-high	93P13FCS	240	233	240	253	568
49"	3.5-high	93P1H50FCS	245	238	245	258	601
54 <sup>23</sup> / <sub>32</sub> "	4-high	93P14FCS	247	240	247	260	629
67 <sup>5</sup> / <sub>16</sub> "	5-high	93P15FCS	252	—	—	—	650
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P16FCS	309	—	—	—	711
92½"	7-high	93P17FCS	354	—	—	—	760
With Wireway Cover							
29½"	2-high	93P12FCSW	\$237	\$230	\$237	\$250	\$546
42⅛"	3-high	93P13FCSW	253	246	253	266	582
49"	3.5-high	93P1H50FCSW	260	253	260	273	615
54 <sup>23</sup> / <sub>32</sub> "	4-high	93P14FCSW	262	255	262	275	643
67 <sup>5</sup> / <sub>16</sub> "	5-high	93P15FCSW	266	259	266	279	664
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P16FCSW	323	—	—	—	725
92½"	7-high	93P17FCSW	366	—	—	—	774

## Standard Includes

- Top cap
- Attachment hardware
- Wireway cover on applicable models

## How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Connector material:  
**P** = Paint  
**F** = Fabric (vertical textile)  
**W** = Wood
- ④ Top cap profile:  
**F** = Flat
- ⑤ Top cap wood or paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- ⑥ Top cap wood or paint designator
- ⑦ Connector wood or paint price group (omit for fabric model):  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- ⑧ Connector wood or paint designator (omit for fabric model)
- ⑨ Vertical textile grade for fabric connector, if applicable
- ⑩ Vertical textile number for fabric connector, if applicable
- ⑪ Connector (inside) paint price group:  
**STD** = Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- ⑫ Connector (inside) paint designator
- ⑬ Wireway cover paint group (include if applicable):  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ⑭ Wireway cover paint designator (include if applicable)

# NARRATE® PANEL SYSTEM

Connectors | 2-Way/V

Pricing

GSA SIN 33721



## CONNECTOR MATERIAL

<i>Dimensions</i>		<i>Model</i>	<i>Paint</i>	<i>Vertical Textile</i>		<i>Price Grade</i>	<i>Wood</i>
<i>H</i>	<i>Segment</i>			<i>AA</i>	<i>A</i>		
<b>No Wireway Cover</b>							
29½"	2-high	<b>93P22FCV</b>	\$224	\$219	\$224	\$232	\$535
42½"	3-high	<b>93P23FCV</b>	240	235	240	248	568
49"	3.5-high	<b>93P2H50FCV</b>	245	240	245	253	601
54 <sup>23</sup> / <sub>32</sub> "	4-high	<b>93P24FCV</b>	247	242	247	255	629
67 <sup>5</sup> / <sub>16</sub> "	5-high	<b>93P25FCV</b>	252	—	—	—	650
79 <sup>29</sup> / <sub>32</sub> "	6-high	<b>93P26FCV</b>	309	—	—	—	711
92½"	7-high	<b>93P27FCV</b>	354	—	—	—	760
<b>With Wireway Cover</b>							
29½"	2-high	<b>93P22FCVW</b>	\$237	\$232	\$237	\$245	\$546
42½"	3-high	<b>93P23FCVW</b>	253	248	253	261	582
49"	3.5-high	<b>93P2H50FCVW</b>	260	255	260	268	615
54 <sup>23</sup> / <sub>32</sub> "	4-high	<b>93P24FCVW</b>	262	257	262	270	643
67 <sup>5</sup> / <sub>16</sub> "	5-high	<b>93P25FCVW</b>	266	261	266	274	664
79 <sup>29</sup> / <sub>32</sub> "	6-high	<b>93P26FCVW</b>	323	—	—	—	725
92½"	7-high	<b>93P27FCVW</b>	366	—	—	—	774

## Standard Includes

- Top cap
- Attachment hardware
- Wireway cover on applicable models

## How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Connector material:  
**P** = Paint  
**F** = Fabric (vertical textile)  
**W** = Wood
- 4 Top cap profile:  
**F** = Flat
- 5 Top cap wood or paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 6 Top cap wood or paint designator
- 7 Connector wood or paint price group (omit for fabric model):  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 8 Connector wood or paint designator (omit for fabric model)
- 9 Vertical textile grade for fabric connector, if applicable
- 10 Vertical textile number for fabric connector, if applicable
- 11 Connector (inside) paint price group:  
**STD** = Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 12 Connector (inside) paint designator
- 13 Wireway cover paint group (include if applicable):  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 14 Wireway cover paint designator (include if applicable)

# NARRATE® PANEL SYSTEM

Connectors | 3-Way/Y

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



		TOP CAP MATERIAL		
<b>Dimensions</b>		<b>Model</b>	<b>Paint</b>	<b>Wood</b>
<i>H</i>	<i>Segment</i>			
<b>No Wireway Cover</b>				
29½"	2-high	<b>93P32FCY</b>	\$381	\$381
42⅛"	3-high	<b>93P33FCY</b>	405	405
49"	3.5-high	<b>93P3H50FCY</b>	435	435
54 <sup>23</sup> / <sub>32</sub> "	4-high	<b>93P34FCY</b>	451	451
67 <sup>5</sup> / <sub>16</sub> "	5-high	<b>93P35FCY</b>	459	459
79 <sup>29</sup> / <sub>32</sub> "	6-high	<b>93P36FCY</b>	506	506
92½"	7-high	<b>93P37FCY</b>	535	535

## Standard Includes

- Top cap
- Attachment hardware
- Wireway cover on applicable models




## How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Connector material:  
**P** = Paint
- 4 Top cap profile:  
**F** = Flat
- 5 Top cap wood or paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 6 Top cap wood or paint designator
- 7 Connector wood or paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 8 Connector wood or paint designator

# NARRATE® PANEL SYSTEM

Connectors | For Use with Hinged Door

Pricing  
GSA SIN 33721



CONNECTOR MATERIAL							
Dimensions		Model	Paint	Wood			
H	Segment						
2-Way (L Connector)							
No Wireway Cover							
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P26FCHL	\$345	\$743			
92 <sup>1</sup> / <sub>2</sub> "	7-high	93P27FCHL	386	794			
With Wireway Cover							
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P26FCHLW	\$358	\$758			
92 <sup>1</sup> / <sub>2</sub> "	7-high	93P27FCHLW	401	806			
3-Way (T Connector)							
No Wireway Cover							
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P36FCHT	\$358	\$716			
92 <sup>1</sup> / <sub>2</sub> "	7-high	93P37FCHT	393	757			
With Wireway Cover							
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P36FCHTW	\$370	\$731			
92 <sup>1</sup> / <sub>2</sub> "	7-high	93P37FCHTW	407	768			

			TOP CAP MATERIAL	
<i>Dimensions</i>		<i>Model</i>	<i>Paint</i>	<i>Wood</i>
<i>H</i>	<i>Segment</i>			
4-Way (X Connector)				
No Wireway Cover				
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P46FCHX	\$378	\$559
92 <sup>1</sup> / <sub>2</sub> "	7-high	93P47FCHX	415	587

## Standard Includes

- Top cap
- Attachment hardware
- Wireway cover on applicable models

## How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Connector material (omit for X connector):  
**P** = Paint  
**W** = Wood
- 4 Top cap profile:  
**F** = Flat
- 5 Top cap wood or paint price group:  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 6 Top cap wood or paint designator
- 7 Connector (outside) wood or paint price group (include for L or T connector only):  
**STD** = Group 1/Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 8 Connector wood or paint designator (include for L or T connector only)
- 9 Connector (inside) paint price group (include X-connector or wood L- or T-connector only):  
**STD** = Standard  
**STDM** = Metallic  
**GAL1** = Gallery
- 10 Connector (inside) paint designator (include X-connector or wood L- or T-connector only):
- 11 Wireway cover paint group (include if applicable):  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 12 Wireway cover paint designator (include if applicable)

# NARRATE® PANEL SYSTEM

Connectors | Off-Module Brackets, Wall-Mount Brackets, Frame-Support Post, & Stabilizer Foot

## Pricing

GSA SIN 33721

† GSA Contract Pending

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions		Segment	Model	Price
W	H			
Off-Module Brackets				
11 <sup>1</sup> / <sub>16</sub> "	25 <sup>3</sup> / <sub>8</sub> "	2-high	93P2FCW	\$118
	37 <sup>15</sup> / <sub>16</sub> "	3-high	93P3FCW	123
	44 <sup>7</sup> / <sub>8</sub> "	3.5-high	93PH50FCW	129
	50 <sup>1</sup> / <sub>2</sub> "	4-high	93P4FCW	136
	63 <sup>1</sup> / <sub>8</sub> "	5-high	93P5FCW	139
	75 <sup>3</sup> / <sub>4</sub> "	6-high	93P6FCW	191
	88 <sup>3</sup> / <sub>8</sub> "	7-high	93P7FCW	250
Wall-Mount Brackets				
11 <sup>1</sup> / <sub>16</sub> "	25 <sup>3</sup> / <sub>8</sub> "	2-high	93P2WMB	\$115
	37 <sup>15</sup> / <sub>16</sub> "	3-high	93P3WMB	120
	44 <sup>7</sup> / <sub>8</sub> "	3.5-high	93P50WMB	129
	50 <sup>1</sup> / <sub>2</sub> "	4-high	93P4WMB	131
	63 <sup>1</sup> / <sub>8</sub> "	5-high	93P5WMB	135
	75 <sup>3</sup> / <sub>4</sub> "	6-high	93P6WMB	191
	88 <sup>3</sup> / <sub>8</sub> "	7-high	93P7WMB	205
Frame-Support Post				
Square				
3"	24"		93PFSP1	\$162
Round				
37 <sup>1</sup> / <sub>16</sub> "	28"		33PFSP	\$162
Dimensions			Model	Price
D	W			
Frame Stabilizer Foot				
2 <sup>1</sup> / <sub>16</sub> "	1 <sup>7</sup> / <sub>16</sub> "	17 <sup>11</sup> / <sub>16</sub> "	93PSFP†	\$630

## Standard Includes

### Off-Module Bracket

- Bracket
- Attachment hardware

### Wall-Mount Bracket

- Bracket
- Attachment hardware

### Frame-Support Post

- Metal tube
- Plate

## Tips

IMPORTANT: Round frame-support post is for use with 2H or 3H or taller frames with mid-frame support field-installed at 1H position.

## How to Specify

### Off-Module Bracket

- ① Model
- ② Finish:  
462 = Cinder

### Wall-Mount Bracket or Frame-Support Post

- ① Model

### Frame Stabilizer Foot

- ① Model
- ② Paint group:  
STD = Standard  
STD M = Metallic (+10%)  
GAL1 = Gallery (+10%)
- ③ Paint designator




# NARRATE® PANEL SYSTEM

Stacking Connectors | 2-Way/L, 2-Way/V, 3-Way/T, and 4-Way/X

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



		CONNECTOR MATERIAL						
<b>Dimensions</b>		<b>Model</b>	<b>Paint</b>	<b>Vertical Textile</b>		<b>Price Grade</b>	<b>Wood</b>	
<i>H</i>	<i>Segment</i>			<i>AA</i>	<i>A</i>			<i>B/COM</i>
<b>2-Way/L</b>								
12 <sup>5</sup> / <sub>8</sub> "	1-high	<b>93P1FCLS</b>	\$194	\$187	\$194	\$207	\$293	
25 <sup>1</sup> / <sub>4</sub> "	2-high	<b>93P2FCLS</b>	315	308	315	328	474	

2-Way/V (120°)								
12 <sup>5</sup> / <sub>8</sub> "	1-high	93P1FCVS	\$194	\$189	\$194	\$202	\$293	
25 <sup>1</sup> / <sub>4</sub> "	2-high	93P2FCVS	315	308	315	323	474	

3-Way/T								
12 <sup>5</sup> / <sub>8</sub> "	1-high	93P1FCTS	\$198	\$193	\$198	\$206	\$299	
25 <sup>1</sup> / <sub>4</sub> "	2-high	93P2FCTS	322	317	322	330	483	

Dimensions		Model	Price
H	Segment		
4-Way/X			
12 <sup>5</sup> / <sub>8</sub> "	1-high	93P1FCXS	\$200
25 <sup>1</sup> / <sub>4</sub> "	2-high	93P2FCXS	324

## Standard Includes

- Attachment hardware

Note: Stacking connectors are not applicable on 3.5-high frames.

## How to Specify

- Model
- Connector material (omit for 4-Way/X connector):  
**P** = Paint  
**F** = Fabric (vertical textile)  
**W** = Wood
- Connector wood or paint price group (for wood or paint):  
**STD** = Group 1/Standard  
**STD**M = Metallic  
**GAL**1 = Gallery
- Connector wood or paint designator (wood or paint connector)
- Vertical textile grade for fabric connector, if applicable
- Vertical textile number for fabric connector, if applicable
- Inside paint price group:  
**STD** = Standard  
**STD**M = Metallic (+10%)  
**GAL**1 = Gallery (+10%)
- Inside paint designator




# NARRATE® PANEL SYSTEM

## Stacking Connectors | Straight and 3-Way/Y

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



CONNECTOR MATERIAL								
Dimensions		Model	Paint	Vertical	Textile	Price	Grade	Wood
H	Segment							
Straight Connector								
12 <sup>5</sup> / <sub>8</sub> "	1-high	93P1FCSS	\$194	\$187	\$194	\$207		\$293
25 <sup>1</sup> / <sub>4</sub> "	2-high	93P2FCSS	315	308	315	328		474

- Standard Includes
- Attachment hardware
- How to Specify
- Model
  - Connector material (omit for 3-way/Y):  
**P** = Paint  
**F** = Fabric (vertical textile)  
**W** = Wood
  - Connector wood or paint price group (omit for fabric):  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
  - Connector wood or paint designer (wood or paint connector)
  - Vertical textile grade for fabric connector, if applicable
  - Vertical textile number for fabric connector, if applicable

Stacking connectors are not applicable on 3.5-high frames.

# NARRATE® PANEL SYSTEM

## Stacking Off-Module Brackets

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions		Model	Price
W	H		
1-High			
11 <sup>11</sup> / <sub>16</sub> "	12 <sup>5</sup> / <sub>8</sub> "	93P2FCW1SP	\$61
2-High			
11 <sup>11</sup> / <sub>16</sub> "	25 <sup>1</sup> / <sub>4</sub> "	93P2FCW2SP	\$120

### Standard Includes

- Metal post: painted steel
- Attachment hardware for support Traxx attachment

### How to Specify

- ① Model
- ② Finish:  
462 = Cinder

IMPORTANT: When connector is wall-mounted, installers must supply appropriate fasteners for anchoring connector to the wall.


# NARRATE® PANEL SYSTEM

## End Trim

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions		Model	Price	
H	Segment		Paint	Wood
End Trim				
29½"	2-high	93P2ETC	\$84	\$128
42⅛"	3-high	93P3ETC	94	140
49⅓"	3.5-high	93PH50ETC	120	181
54 <sup>23</sup> / <sub>32</sub> "	4-high	93P4ETC	137	207
67 <sup>5</sup> / <sub>16</sub> "	5-high	93P5ETC	156	233
79 <sup>29</sup> / <sub>32</sub> "	6-high	93P6ETC	198	299
92½"	7-high	93P7ETC	229	344

### Standard Includes

- End trim
- Attachment brackets

### How to Specify

- Model
- Material:  
**P** = Paint  
**W** = Wood
- Trim profile:  
**F** = Flat
- End trim wood or paint price group:  
**STD** = Standard  
**STD<sup>M</sup>** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- End trim wood or paint designator

Painted trim is 3⁄32" thick.  
 Wood trim is 1⁄2" thick.


NARRATE® PANEL SYSTEM

Stacking End Trim

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<b>Dimensions</b>		<b>Model</b>	<b>Price</b>	
<i>H</i>	<i>Segment</i>		<i>Paint</i>	<i>Wood</i>
<b>Stacking End Trim</b>				
12 <sup>9</sup> / <sub>16</sub> "	1-high	<b>93P1ETCS</b>	\$76	\$120
25 <sup>3</sup> / <sub>16</sub> "	2-high	<b>93P2ETCS</b>	87	132

Standard Includes

- End trim
- Attachment brackets

How to Specify

- 1 Model
- 2 Material:  
P = Paint  
W = Wood
- 3 Trim profile:  
F = Flat
- 4 End trim wood or paint price group:  
STD = Standard  
STD<sup>M</sup> = Metallic (+10%)  
GAL<sup>1</sup> = Gallery (+10%)
- 5 End trim wood or paint designator

Painted trim is 3/32" thick.  
Wood trim is 1/2" thick.

# NARRATE® PANEL SYSTEM

Hi-Lo Vertical Trim | Panel-to-Panel

Pricing

GSA SIN 33721


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Standard Includes

- One vertical trim: wood or paint

## How to Specify

- 1 Model
- 2 Material:  
**P** = Paint  
**W** = Wood
- 3 Top cap:  
**F** = Flat
- 4 End trim wood or paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 5 End trim wood or paint designator



<b>Dimensions</b>		<b>Model</b>	<b>Price</b>	
<i>H</i>	<i>Segment</i>		<i>Paint</i>	<i>Wood</i>
<b>For Use with 1-, 2-, 3-, 4-, and 5-High Frames</b>				
12 <sup>9</sup> / <sub>16</sub> "	1-high	<b>93P1HSC</b>	\$77	\$116
25 <sup>3</sup> / <sub>16</sub> "	2-high	<b>93P2HSC</b>	84	128
37 <sup>13</sup> / <sub>16</sub> "	3-high	<b>93P3HSC</b>	94	140
50 <sup>3</sup> / <sub>8</sub> "	4-high	<b>93P4HSC</b>	137	207
63"	5-high	<b>93P5HSC</b>	156	233
<b>For Use with 3.5-High Base Frames</b>				
5 <sup>5</sup> / <sub>8</sub> "	from 3.5-high to 4-high	<b>93PH06HSC</b>	\$75	\$113
6 <sup>7</sup> / <sub>8</sub> "	from 3.5-high to 3-high	<b>93PH07HSC</b>	75	113
18 <sup>1</sup> / <sub>4</sub> "	from 3.5-high to 5-high	<b>93PH18HSC</b>	84	128
19 <sup>1</sup> / <sub>2</sub> "	from 3.5-high to 2-high	<b>93PH19HSC</b>	84	128

Painted trim is <sup>3</sup>/<sub>32</sub>" thick.  
 Wood trim is <sup>1</sup>/<sub>2</sub>" thick.


# NARRATE® PANEL SYSTEM

## Hi-Lo Vertical Trim | Hinged Door Connector-to-Panel

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions		Model	Price	
H	Segment		Paint	Wood
For Use with 1-, 2-, 2.5-, 3-, 3.5, 4-, and 5-High Frames				
12 <sup>17</sup> / <sub>32</sub> "	1-high	93P1HTC	\$168	\$221
25 <sup>5</sup> / <sub>32</sub> "	2-high	93P2HTC	182	253
30 <sup>13</sup> / <sub>16</sub> "	2.5-high	93P37HTC	194	267
37 <sup>3</sup> / <sub>4</sub> "	3-high	93P3HTC	207	274
43 <sup>7</sup> / <sub>16</sub> "	3.5-high	93P50HTC	219	290
50 <sup>11</sup> / <sub>32</sub> "	4-high	93P4HTC	227	297
62 <sup>15</sup> / <sub>16</sub> "	5-high	93P5HTC	240	321

Standard Includes

- One vertical trim: wood or paint

How to Specify

- Model
- Material:  

P = Paint

W = Wood
- Top cap:  

F = Flat
- End trim wood or paint price group:  

STD = Standard

STDM = Metallic (+10%)

GAL1 = Gallery (+10%)
- End trim wood or paint designator

IMPORTANT: These models are only necessary when using a hinged door connector and dropping to a lower-height frame.

Trim is 1/2" thick.

# NARRATE® PANEL SYSTEM

## Top Caps



<b>Dimensions</b> <i>W</i>	<b>Model</b>	<b>Price</b>	
		<i>Paint</i>	<i>Wood</i>
<b>Top Caps</b>			
18"	<b>33P18TC</b>	\$40	\$116
24"	<b>33P24TC</b>	44	124
30"	<b>33P30TC</b>	47	136
36"	<b>33P36TC</b>	52	147
42"	<b>33P42TC</b>	58	159
48"	<b>33P48TC</b>	62	168
54"	<b>33P54TC</b>	67	171
60"	<b>33P60TC</b>	72	186
66"	<b>33P66TC</b>	77	198
72"	<b>33P72TC</b>	82	208
78"	<b>33P78TC</b>	101	216
84"	<b>33P84TC</b>	115	237
90"	<b>33P90TC</b>	130	250
96"	<b>33P96TC</b>	144	254
102"	<b>33P102TC</b>	153	—
108"	<b>33P108TC</b>	163	—
114"	<b>33P114TC</b>	171	—
120"	<b>33P120TC</b>	181	—
126"	<b>33P126TC</b>	190	—
132"	<b>33P132TC</b>	198	—
138"	<b>33P138TC</b>	206	—
144"	<b>33P144TC</b>	219	—

Top caps for use with frameless glass  
 ➤ See page NA.86.

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Standard Includes

- Top cap: paint or wood

### How to Specify

- 1 Model
- 2 Material:  
**P** = Paint  
**W** = Wood
- 3 Top cap profile:  
**F** = Flat
- 4 Wood or paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL 1** = Gallery (+10%)
- 5 Wood or paint designator

# NARRATE® PANEL SYSTEM

Top Caps | For Use with Frameless Glass or Resin

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<i>Dimensions</i> W	<i>Model</i>	<i>Price</i>
<b>Top Caps with Insert Channel</b>		
18"	<b>33P18TCFGIP</b>	\$198
24"	<b>33P24TCFGIP</b>	209
30"	<b>33P30TCFGIP</b>	245
36"	<b>33P36TCFGIP</b>	281
42"	<b>33P42TCFGIP</b>	316
48"	<b>33P48TCFGIP</b>	352
54"	<b>33P54TCFGIP</b>	378
60"	<b>33P60TCFGIP</b>	405
66"	<b>33P66TCFGIP</b>	431
72"	<b>33P72TCFGIP</b>	458
78"	<b>33P78TCFGIP</b>	492
84"	<b>33P84TCFGIP</b>	528
90"	<b>33P90TCFGIP</b>	562
96"	<b>33P96TCFGIP</b>	598

## Standard Includes

- Top cap: paint

## How to Specify

- ① Model
- ② Top cap profile:  
**F** = Flat
- ③ Paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ④ Paint designator
- ⑤ Retainer clip color:  
**446** = Black

IMPORTANT: Frameless glass or resin pane must be specified separately. Specify pane and top cap to match the widest of the panel frame or the combined widest of multiple frames to which they will attach.



# NARRATE® PANEL SYSTEM

## Frameless Glass



IMPORTANT: Top cap with insert channel for frameless glass or resin must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

Frameless Glass for Use on Lower Panel in a Hi-Lo Application  
 ➤ See page NA.88

Pricing  
 GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Dimensions			Model	Glass Type			
D	W	H		Clear	Bronze	Charcoal	Etched
Glass Panes							
1/4"	177/8"	133/8"	33P182FG	\$374	\$374	\$374	\$509
	237/8"		33P242FG	397	397	397	534
	297/8"		33P302FG	421	421	421	619
	357/8"		33P362FG	455	455	455	707
	417/8"		33P422FG	516	516	516	860
	477/8"		33P482FG	542	542	542	946
	537/8"		33P542FG	654	654	654	994
	597/8"		33P602FG	676	676	676	1164
	657/8"		33P662FG	751	751	751	1309
	717/8"		33P722FG	828	828	828	1396
	777/8"		33P782FG	886	886	886	1490
	837/8"		33P842FG	983	983	983	1578
	897/8"		33P902FG	1056	1056	1056	1676
	957/8"		33P962FG	1119	1119	1119	1764

### Standard Includes

- Frameless glass pane: tempered glass

### How to Specify

- 1 Model
- 2 Glass type:
  - 22** = Charcoal
  - 32** = Clear
  - 42** = Bronze
  - 72** = Etched

# NARRATE® PANEL SYSTEM

Frameless Glass | For Use on Lower Panel in a Hi-Lo Application

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Glass Type			
D	W	H		Clear	Bronze	Charcoal	Etched
For Use with Painted Hi-Lo Trim							
1/4"	17 3/4"	13 3/8"	33P182FGH	\$374	\$374	\$374	\$509
	23 3/4"		33P242FGH	397	397	397	534
	29 3/4"		33P302FGH	421	421	421	619
	35 3/4"		33P362FGH	455	455	455	707
	41 3/4"		33P422FGH	516	516	516	860
	47 3/4"		33P482FGH	542	542	542	946
	53 3/4"		33P542FGH	654	654	654	994
	59 3/4"		33P602FGH	676	676	676	1164
	65 3/4"		33P662FGH	751	751	751	1309
	71 3/4"		33P722FGH	828	828	828	1396
	77 3/4"		33P782FGH	886	886	886	1490
	83 3/4"		33P842FGH	983	983	983	1578
	89 3/4"		33P902FGH	1056	1056	1056	1676
	95 3/4"		33P962FGH	1119	1119	1119	1764
For Use with Wood Hi-Lo Trim							
1/4"	17 3/8"	13 3/8"	33P182FGHW	\$374	\$374	\$374	\$509
	23 3/8"		33P242FGHW	397	397	397	534
	29 3/8"		33P302FGHW	421	421	421	619
	35 3/8"		33P362FGHW	455	455	455	707
	41 3/8"		33P422FGHW	516	516	516	860
	47 3/8"		33P482FGHW	542	542	542	946
	53 3/8"		33P542FGHW	654	654	654	994
	59 3/8"		33P602FGHW	676	676	676	1164
	65 3/8"		33P662FGHW	751	751	751	1309
	71 3/8"		33P722FGHW	828	828	828	1396
	77 3/8"		33P782FGHW	886	886	886	1490
	83 3/8"		33P842FGHW	983	983	983	1578
	89 3/8"		33P902FGHW	1056	1056	1056	1676
	95 3/8"		33P962FGHW	1119	1119	1119	1764

IMPORTANT: Top cap with insert channel for frameless glass or resin must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

## Standard Includes

- Frameless glass pane: tempered glass

## How to Specify

- 1 Model
- 2 Glass type:
  - 2 = Charcoal
  - 3 = Clear
  - 4 = Bronze
  - 7 = Etched

# NARRATE® PANEL SYSTEM

Frameless Resin

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
Resin Panes				
1/4"	177/8"	133/8"	33P181FR	\$262
	237/8"		33P241FR	288
	297/8"		33P301FR	307
	357/8"		33P361FR	332
	417/8"		33P421FR	376
	477/8"		33P481FR	406
	537/8"		33P541FR	457
	597/8"		33P601FR	514
	657/8"		33P661FR	576
	717/8"		33P721FR	620
	777/8"		33P781FR	696
	837/8"		33P841FR	728
	897/8"		33P901FR	814
	957/8"		33P961FR	835

## Standard Includes

- Frameless resin pane

## How to Specify

- ① Model
- ② Resin color:  
25 = Glacier

IMPORTANT: Top cap with insert channel for frameless glass or resin must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

Frameless Resin for Use on Lower Panel in a Hi-Lo Application  
➤ See page NA.90

# NARRATE® PANEL SYSTEM

Frameless Resin | For Use on Lower Panel in a Hi-Lo Application

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
For Use with Painted Hi-Lo Trim				
1/4"	173/4"	133/8"	33P181FRH	\$262
	233/4"		33P241FRH	288
	293/4"		33P301FRH	307
	353/4"		33P361FRH	332
	413/4"		33P421FRH	376
	473/4"		33P481FRH	406
	533/4"		33P541FRH	457
	593/4"		33P601FRH	514
	653/4"		33P661FRH	576
	713/4"		33P721FRH	620
	773/4"		33P781FRH	696
	833/4"		33P841FRH	728
	893/4"		33P901FRH	814
	953/4"		33P961FRH	835
For Use with Wood Hi-Lo Trim				
1/4"	173/8"	133/8"	33P181FRHW	\$262
	233/8"		33P241FRHW	288
	293/8"		33P301FRHW	307
	353/8"		33P361FRHW	332
	413/8"		33P421FRHW	376
	473/8"		33P481FRHW	406
	533/8"		33P541FRHW	457
	593/8"		33P601FRHW	514
	653/8"		33P661FRHW	576
	713/8"		33P721FRHW	620
	773/8"		33P781FRHW	696
	833/8"		33P841FRHW	728
	893/8"		33P901FRHW	814
	953/8"		33P961FRHW	835

IMPORTANT: Top cap with insert channel for frameless glass or resin must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

## Standard Includes

- Frameless resin pane

## How to Specify

- ① Model
- ② Resin color:  
25 = Glacier


# NARRATE® PANEL SYSTEM

Panel-Mount Divider Screens | Glass

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Model	Dimensions (Inches)			Screen Thickness	No. of Brackets	Price	GSA SIN
	Overall D	W	H				
93P24H18PVGP	5	24	18	1/4	2	\$550	33721
93P30H18PVGP	5	30	18	1/4	2	\$589	33721
93P36H18PVGP	5	36	18	1/4	4	\$636	33721
93P42H18PVGP	5	42	18	1/4	4	\$721	33721
93P48H18PVGP	5	48	18	1/4	4	\$758	33721

## Standard Includes

- Screen: clear, tempered glass with radiused corners
- Metal brackets: paint

## Installation

- Screen and brackets ship in separate boxes
- Adhere tape to inside of trim Traxx bracket before bracket installation
- Attach brackets to Traxx
- Place screen between the brackets and secure by tightening brackets with a screwdriver
- Two people recommended

## Tips


- The number of brackets is determined by screen width

## How to Specify

- 1 Model
- 2 Traxx type:
  - ST** = Support Traxx
  - TT** = Trim Traxx
  - ST\_TT** = Support Traxx one side; Trim Traxx one side
- 3 Glass designator:
  - 3** = Clear
- 4 Bracket paint price group:
  - STD** = Standard
  - STD M** = Metallic (+10%)
  - GAL1** = Gallery (+10%)
- 5 Bracket paint designator

# NARRATE® PANEL SYSTEM

## Panel-Mount Divider Screens | Resin



<b>Model</b>	<b>Dimensions (Inches)</b>			<b>Screen Thickness</b>	<b>No. of Brackets</b>	<b>Price</b>	<b>GSA</b>
	<i>Overall D</i>	<i>W</i>	<i>H</i>				<i>SIN</i>
<b>93P24H18PVRP</b>	5	24	18	1/4	2	\$879	33721
<b>93P30H18PVRP</b>	5	30	18	1/4	2	\$912	33721
<b>93P36H18PVRP</b>	5	36	18	1/4	4	\$984	33721
<b>93P42H18PVRP</b>	5	42	18	1/4	4	\$1118	33721
<b>93P48H18PVRP</b>	5	48	18	1/4	4	\$1174	33721

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Standard Includes

- Screen: resin with radiused corners
- Metal brackets: paint

## Installation

- Screen and brackets ship in separate boxes
- Adhere tape to inside of trim Traxx bracket before bracket installation
- Remove protective film from screen
- Attach brackets to Traxx
- Place screen between the brackets and secure by tightening brackets with a screwdriver
- Two people recommended

## Tips

- The number of brackets is determined by screen width

## How to Specify


- ① Model
- ② Traxx type:
  - ST** = Support Traxx
  - TT** = Trim Traxx
  - ST\_TT** = Support Traxx one side; Trim Traxx one side
- ③ Resin designator:
  - 1377** = Clear
  - 25** = Glacier
- ④ Bracket paint price group:
  - STD** = Standard
  - STD M** = Metallic (+10%)
  - GAL1** = Gallery (+10%)
- ⑤ Bracket paint designator

# NARRATE® PANEL SYSTEM

## Cover Slats

Pricing  
GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Material
H	W	H		
Horizontal				
2"	60"	1"	33P60HCSP	\$276
	66"		33P66HCSP	299
	72"		33P72HCSP	320
	78"		33P78HCSP	343
	84"		33P84HCSP	362
	90"		33P90HCSP	383
	96"		33P96HCSP	407
	102"		33P102HCSP	427
	108"		33P108HCSP	443
	114"		33P114HCSP	465
	120"		33P120HCSP	482



Dimensions			Model	Material	
H	W	H		TFL	Wood
Vertical					
1"	60"	3"	33P60VCS	\$309	\$439
	66"		33P66VCS	334	444
	72"		33P72VCS	359	450
	78"		33P78VCS	382	473
	84"		33P84VCS	407	495
	90"		33P90VCS	431	515
	96"		33P96VCS	458	538

Vertical slats are not applicable for use with hinged doors or glass tiles with frames.

Sold as individual slats, determine quantity needed based on how far apart you wish to space slats.

### Standard Includes

- Slat
- Attachment hardware

### How to Specify

#### Metal Horizontal Slat

- ① Model
- ② Paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Paint designator

#### TFL or Wood Vertical Slat

- ① Model
- ② Slat type  
**LL** = TFL  
**W** = Wood
- ③ Wood or laminate price group:  
**STD** = Group 1
- ④ Wood or laminate designator



# NARRATE® PANEL SYSTEM

Narrate Traxx

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions W	Model	Type of Traxx	
		Support	Trim
Frame-Mounted Traxx			
18"	93P18P	\$33	\$22
24"	93P24P	39	28
30"	93P30P	46	33
36"	93P36P	53	39
42"	93P42P	60	46
48"	93P48P	71	58
54"	93P54P	77	64
60"	93P60P	81	69
66"	93P66P	86	74
72"	93P72P	98	82
78"	93P78P	105	89
84"	93P84P	114	102
90"	93P90P	120	107
96"	93P96P	131	118
102"	93P102P	135	123
108"	93P108P	139	127
114"	93P114P	147	135
120"	93P120P	159	143
126"	93P126P	163	147
132"	93P132P	168	156
138"	93P138P	173	161
144"	93P144P	178	164

## Tips

Traxx is required at top location on both sides of frame to allow for top cap attachment.

Traxx are required at top and bottom of each tile except when bottom tile rests on bottom channel of frame.

Support traxx are required anywhere that components (worksurfaces, storage, center-mount overheads, work tools, etc.) will be placed.

Trim traxx are used for cleaner aesthetics when no components will be attached to the Traxx.

Appropriate height tiles must be specified. This is determined by the type of upper Traxx used to hold the tile in place.

## How to Specify

- 1 Model
- 2 Traxx type:  
**ST** = Support Traxx  
**TT** = Trim Traxx
- 3 Paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 4 Paint designer



# NARRATE® PANEL SYSTEM

Fire-Rated Fabric Tiles | .5-High

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Vertical Textile Price Grade		
W	Trim H	Support H		AA	A	B/COM
<b>.5-High</b>						
18"	6 <sup>23</sup> / <sub>32</sub> "	6 <sup>11</sup> / <sub>32</sub> "	<b>33P18H06IT</b>	\$21	\$35	\$60
24"			<b>33P24H06IT</b>	19	37	71
30"			<b>33P30H06IT</b>	17	40	82
36"			<b>33P36H06IT</b>	18	46	96
42"			<b>33P42H06IT</b>	23	53	108
48"			<b>33P48H06IT</b>	27	62	125
54"			<b>33P54H06IT</b>	32	71	143
60"			<b>33P60H06IT</b>	36	77	153
66"			<b>33P66H06IT</b>	38	84	168
72"			<b>33P72H06IT</b>	42	93	185
78"			<b>33P78H06IT</b>	47	100	197
84"			<b>33P84H06IT</b>	50	108	213
90"			<b>33P90H06IT</b>	53	115	229
96"			<b>33P96H06IT</b>	63	127	245

- Standard Includes
- Tackable tile (class A fire rating)

- How to Specify
- Model
  - Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
  - Tile material:  
**A** = Tackable acoustical
  - Vertical textile grade
  - Vertical textile number

IMPORTANT .5-high tile is only for use with 3.5-high frame.

Vertical textile is applied railroaded.

Specify tiles for both sides of frame.

# NARRATE® PANEL SYSTEM

Fire-Rated Fabric Tiles | 1-High

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Vertical Textile Price Grade		
W	Trim H	Support H		AA	A	B/COM
1-High						
18"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P181IT	\$25	\$39	\$64
24"			33P241IT	25	43	77
30"			33P301IT	23	46	88
36"			33P361IT	25	53	103
42"			33P421IT	37	67	122
48"			33P481IT	40	75	138
54"			33P541IT	42	81	153
60"			33P601IT	48	89	165
66"			33P661IT	54	100	184
72"			33P721IT	62	113	205
78"			33P781IT	67	120	217
84"			33P841IT	69	127	232
90"			33P901IT	70	132	246
96"			33P961IT	77	141	259
To-the-Floor 1-High						
18"	16 <sup>7</sup> / <sub>32</sub> "	15 <sup>27</sup> / <sub>32</sub> "	33P181IT	\$38	\$52	\$77
24"			33P241IT	42	60	94
30"			33P301IT	51	74	116
36"			33P361IT	54	82	132
42"			33P421IT	70	100	155
48"			33P481IT	79	114	177
54"			33P541IT	91	130	202
60"			33P601IT	96	137	213
66"			33P661IT	104	150	234
72"			33P721IT	108	159	251
78"			33P781IT	128	181	278
84"			33P841IT	139	197	302
90"			33P901IT	146	208	322
96"			33P961IT	238	238	356

Fabric is applied railroaded.

Specify tiles for both sides of frame.

## Standard Includes

- Tackable tile (class A fire rating)

## How to Specify

### 1-High Tiles

- 1 Model

- 2 Tile type:

**ST** = Support

**TT** = Trim

*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*

- 3 Tile material:

**A** = Tackable acoustical

- 4 Vertical textile grade

- 5 Vertical textile number

### To-the-Floor 1-High Tiles

- 1 Model

- 2 Tile type:

**ST** = Support

**TT** = Trim

*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*

- 3 Tile material:

**AF** = Tackable acoustical

- 4 Vertical textile grade

- 5 Vertical textile number


# NARRATE® PANEL SYSTEM

## Fire-Rated Fabric Tiles | 1.5-High

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Vertical Textile Price Grade		
W	Trim H	Support H		AA	A	B/COM
1.5-High						
18"	19 <sup>5</sup> / <sub>16</sub> "	18 <sup>15</sup> / <sub>16</sub> "	33P18H18IT	\$38	\$52	\$77
24"			33P24H18IT	42	60	94
30"			33P30H18IT	51	74	116
36"			33P36H18IT	54	82	132
42"			33P42H18IT	70	100	155
48"			33P48H18IT	79	114	177
54"			33P54H18IT	91	130	202
60"			33P60H18IT	96	137	213
66"			33P66H18IT	104	150	234
72"			33P72H18IT	108	159	251
78"			33P78H18IT	128	181	278
84"			33P84H18IT	139	197	302
90"			33P90H18IT	146	208	322
96"			33P96H18IT	174	238	356

### Standard Includes

- Tackable tile (class A fire rating)

### How to Specify

- Model
- Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- Tile material:  
**A** = Tackable acoustical
- Vertical textile grade
- Vertical textile number

IMPORTANT 1.5-high tile is only for use with 3.5-high frame.

Fabric is applied railroaded.

Specify tiles for both sides of frame.


# NARRATE® PANEL SYSTEM

## Fire-Rated Fabric Tiles | 2-High

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Vertical Textile Price Grade		
W	Trim H	Support H		AA	A	B/COM
2-High						
18"	25"	24 <sup>5</sup> / <sub>8</sub> "	33P182IT	\$55	\$69	\$94
24"			33P242IT	58	76	110
30"			33P302IT	68	91	133
36"			33P362IT	85	113	163
42"			33P422IT	97	127	182
48"			33P482IT	106	141	204
54"			33P542IT	124	163	235
60"			33P602IT	133	174	250
66"			33P662IT	141	187	271
72"			33P722IT	147	198	290
78"			33P782IT	161	214	311
84"			33P842IT	174	232	337
90"			33P902IT	184	246	360
96"			33P962IT	199	263	381
To-the-Floor 2-High						
18"	28 <sup>13</sup> / <sub>16</sub> "	28 <sup>7</sup> / <sub>16</sub> "	33P182IT	\$75	\$89	\$114
24"			33P242IT	92	110	144
30"			33P302IT	106	129	171
36"			33P362IT	128	156	206
42"			33P422IT	145	175	230
48"			33P482IT	163	198	261
54"			33P542IT	188	227	299
60"			33P602IT	205	246	322
66"			33P662IT	236	282	366
72"			33P722IT	261	312	404
78"			33P782IT	275	328	425
84"			33P842IT	285	343	448
90"			33P902IT	301	363	477
96"			33P962IT	326	390	508

Fabric is applied railroaded.

Specify tiles for both sides of frame.

### Standard Includes

- Tackable tile (class A fire rating)

### How to Specify

#### 2-High Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Tile material:  
**A** = Tackable acoustical
- 4 Vertical textile grade
- 5 Vertical textile number

#### To-the-Floor 2-High Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Tile material:  
**AF** = Tackable acoustical
- 4 Vertical textile grade
- 5 Vertical textile number


# NARRATE® PANEL SYSTEM

Fire-Rated Fabric Tiles | 3-High

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Vertical Textile Price Grade		
W	Trim H	Support H		AA	A	B/COM
3-High						
18"	37 <sup>19</sup> / <sub>32</sub> "	37 <sup>7</sup> / <sub>32</sub> "	33P183IT	\$75	\$89	\$114
24"			33P243IT	92	110	144
30"			33P303IT	106	129	171
36"			33P363IT	128	156	206
42"			33P423IT	145	175	230
48"			33P483IT	163	198	261
54"			33P543IT	188	227	299
60"			33P603IT	205	246	322
66"			33P663IT	236	282	366
72"			33P723IT	261	312	404
78"			33P783IT	275	328	425
84"			33P843IT	285	343	448
90"			33P903IT	301	363	477
96"			33P963IT	326	390	508
To-the-Floor 3-High						
18"	41 <sup>15</sup> / <sub>32</sub> "	41 <sup>1</sup> / <sub>32</sub> "	33P183IT	\$83	\$97	\$122
24"			33P243IT	102	120	154
30"			33P303IT	122	145	187
36"			33P363IT	159	187	237
42"			33P423IT	171	201	256
48"			33P483IT	208	243	306
54"			33P543IT	228	267	339
60"			33P603IT	248	289	365
66"			33P663IT	262	308	392
72"			33P723IT	295	346	438
78"			33P783IT	318	371	468
84"			33P843IT	343	401	506
90"			33P903IT	366	428	542
96"			33P963IT	393	457	575

Fabric is applied railroaded.

Specify tiles for both sides of frame.

## Standard Includes

- Tackable tile (class A fire rating)

## How to Specify

### 3-High Tiles

- 1 Model

- 2 Tile type:

**ST** = Support

**TT** = Trim

*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*

- 3 Tile material:

**A** = Tackable acoustical

- 4 Vertical textile grade

- 5 Vertical textile number

### To-the-Floor 3-High Tiles

- 1 Model

- 2 Tile type:

**ST** = Support

**TT** = Trim

*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*

- 3 Tile material:

**AF** = Tackable acoustical

- 4 Vertical textile grade

- 5 Vertical textile number

# NARRATE® PANEL SYSTEM

## Fire-Rated Fabric Tiles | 3.5-High

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Vertical Textile Price Grade		
W	Trim H	Support H		AA	A	B/COM
3.5-High						
18"	44 <sup>17</sup> / <sub>32</sub> "	44 <sup>5</sup> / <sub>32</sub> "	33P18H44IT	\$83	\$97	\$122
24"			33P24H44IT	102	120	154
30"			33P30H44IT	122	145	187
36"			33P36H44IT	159	187	237
42"			33P42H44IT	171	201	256
48"			33P48H44IT	208	243	306
To-the-Floor 3.5-High						
18"	48 <sup>11</sup> / <sub>32</sub> "	47 <sup>31</sup> / <sub>32</sub> "	33P18H44IT	\$94	\$108	\$133
24"			33P24H44IT	115	133	167
30"			33P30H44IT	146	169	211
36"			33P36H44IT	176	204	254
42"			33P42H44IT	203	233	288
48"			33P48H44IT	232	267	330

Standard Includes

- Tackable tile (class A fire rating)

How to Specify

3.5-High Tiles

- Model
- Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- Tile material:  
**A** = Tackable acoustical
- Vertical textile grade
- Vertical textile number

To-the-Floor 3.5-High Tiles

- Model
- Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- Tile material:  
**AF** = Tackable acoustical
- Vertical textile grade
- Vertical textile number

IMPORTANT 3.5-high tile is only for use with 3.5-high frame.

Fabric is applied railroaded.

Specify tiles for both sides of frame.

# NARRATE® PANEL SYSTEM

Fire-Rated Fabric Tiles | 4-High and 5-High

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Vertical Textile Price Grade		
W	Trim H	Support H		AA	A	B/COM
4-High						
18"	50 <sup>3</sup> / <sub>16</sub> "	49 <sup>13</sup> / <sub>16</sub> "	33P184IT	\$94	\$108	\$133
24"			33P244IT	115	133	167
30"			33P304IT	146	169	211
36"			33P364IT	176	204	254
42"			33P424IT	203	233	288
48"			33P484IT	232	267	330
To-the-Floor 4-High						
18"	54"	53 <sup>5</sup> / <sub>8</sub> "	33P184IT	\$117	\$131	\$156
24"			33P244IT	142	160	194
30"			33P304IT	173	196	238
36"			33P364IT	209	237	287
42"			33P424IT	248	278	333
48"			33P484IT	285	320	383
5-High						
18"	62 <sup>25</sup> / <sub>32</sub> "	62 <sup>3</sup> / <sub>8</sub> "	33P185IT	\$117	\$131	\$156
24"			33P245IT	142	160	194
30"			33P305IT	173	196	238
36"			33P365IT	209	237	287
42"			33P425IT	248	278	333
48"			33P485IT	285	320	383

Fabric is applied railroaded.

Specify tiles for both sides of frame.

5-high tiles are not available in to-the-floor models due to fabric limitations.

Standard Includes

- Tackable tile (class A fire rating)

How to Specify

- 4- and 5-High Tiles
- Model
  - Tile type:  
ST = Support  
TT = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
  - Tile material:  
A = Tackable acoustical
  - Vertical textile grade
  - Vertical textile number

- To-the-Floor 4-High Tiles
- Model
  - Tile type:  
ST = Support  
TT = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
  - Tile material:  
AF = Tackable acoustical
  - Vertical textile grade
  - Vertical textile number

# NARRATE® PANEL SYSTEM

Laminate, Paint, and Wood Tiles | .5-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Material		
W	Trim H	Support H		Laminate	Paint	Wood
.5-High						
18"	6 <sup>23</sup> / <sub>32</sub> "	6 <sup>11</sup> / <sub>32</sub> "	33P18H06IT	\$236	\$322	332
24"			33P24H06IT	238	335	347
30"			33P30H06IT	239	350	360
36"			33P36H06IT	240	362	373
42"			33P42H06IT	243	373	383
48"			33P48H06IT	245	382	393
54"			33P54H06IT	247	393	413
60"			33P60H06IT	250	419	438
66"			33P66H06IT	253	467	485
72"			33P72H06IT	255	478	500
78"			33P78H06IT	260	501	526
84"			33P84H06IT	262	514	538
90"			33P90H06IT	265	536	558
96"			33P96H06IT	266	558	580

IMPORTANT .5-high tile is only for use with 3.5-high frame.

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint not available.

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Woodgrain laminate is available on laminate tiles 60"W and smaller; grain runs vertical.

If woodgrain CSL is requested on tiles over 60"W, the grain will run horizontal. For tiles 60"W and smaller, the grain will run vertical.

## Standard Includes

- Tile

## How to Specify

### Laminate Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**LL** = Laminate
- 4 Laminate designator

### Paint Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**P** = Paint
- 5 Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- 6 Paint designator

### Wood Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**W** = Wood
- 4 Wood price group:  
**STD** = Group 1
- 5 Wood designator




# NARRATE® PANEL SYSTEM

Laminate, Paint, and Wood Tiles | 1-High

Pricing  
GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<b>Dimensions</b>			<b>Model</b>	<b>Material</b>		
<i>W</i>	<i>Trim H</i>	<i>Support H</i>		<i>Laminate</i>	<i>Paint</i>	<i>Wood</i>
<b>1-High</b>						
18"	12 <sup>3</sup> / <sub>8</sub> "	12"	<b>33P181IT</b>	\$254	\$357	\$373
24"			<b>33P241IT</b>	265	368	386
30"			<b>33P301IT</b>	273	389	421
36"			<b>33P361IT</b>	282	423	455
42"			<b>33P421IT</b>	291	459	496
48"			<b>33P481IT</b>	299	477	518
54"			<b>33P541IT</b>	306	504	552
60"			<b>33P601IT</b>	314	528	588
66"			<b>33P661IT</b>	323	572	684
72"			<b>33P721IT</b>	332	595	785
78"			<b>33P781IT</b>	338	610	808
84"			<b>33P841IT</b>	345	624	834
90"			<b>33P901IT</b>	350	645	841
96"			<b>33P961IT</b>	368	654	851

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint not available.

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Woodgrain laminate is available on laminate tiles 60"W and smaller; grain runs vertical.

If woodgrain CSL is requested on tiles over 60"W, the grain will run horizontal. For tiles 60"W and smaller, the grain will run vertical.

## Standard Includes

- Tile

## How to Specify

### Laminate Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**LL** = Laminate
- 4 Laminate designator

### Paint Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**P** = Paint
- 5 Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- 6 Paint designator

### Wood Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**W** = Wood
- 4 Wood price group:  
**STD** = Group 1
- 5 Wood designator

# NARRATE® PANEL SYSTEM

Laminate, Paint, and Wood Tiles | To-the-Floor 1-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<b>Dimensions</b>			<b>Model</b>	<b>Material</b>		
<i>W</i>	<i>Trim H</i>	<i>Support H</i>		<i>Laminate</i>	<i>Paint</i>	<i>Wood</i>
<b>To-the-Floor 1-High</b>						
18"	16 <sup>7</sup> / <sub>32</sub> "	15 <sup>27</sup> / <sub>32</sub> "	<b>33P181IT</b>	\$273	\$419	\$457
24"			<b>33P241IT</b>	288	435	482
30"			<b>33P301IT</b>	300	458	529
36"			<b>33P361IT</b>	311	472	568
42"			<b>33P421IT</b>	324	491	618
48"			<b>33P481IT</b>	338	514	665
54"			<b>33P541IT</b>	352	535	710
60"			<b>33P601IT</b>	365	552	752
66"			<b>33P661IT</b>	378	570	879
72"			<b>33P721IT</b>	391	592	1007
78"			<b>33P781IT</b>	406	608	1037
84"			<b>33P841IT</b>	419	628	1068
90"			<b>33P901IT</b>	432	647	1079
96"			<b>33P961IT</b>	444	660	1093

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint is not available.

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Woodgrain laminate is available on laminate tiles 60"W and smaller; grain runs vertical.

If woodgrain CSL is requested on tiles over 60"W, the grain will run horizontal. For tiles 60"W and smaller, the grain will run vertical.

## Standard Includes

- Tile

## How to Specify

### Laminate Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**FLL** = Laminate
- 4 Laminate designator

### Paint Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**P** = Paint
- 5 Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- 6 Paint designator

### Wood Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**W** = Wood
- 4 Wood price group:  
**STD** = Group 1
- 5 Wood designator


# NARRATE® PANEL SYSTEM

Laminate, Paint, and Wood Tiles | 1.5-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<b>Dimensions</b>			<b>Model</b>	<b>Material</b>		
<i>W</i>	<i>Trim H</i>	<i>Support H</i>		<i>Laminate</i>	<i>Paint</i>	<i>Wood</i>
<b>1.5-High</b>						
18"	19 <sup>5</sup> / <sub>16</sub> "	18 <sup>15</sup> / <sub>16</sub> "	<b>33P18H18IT</b>	\$273	\$426	\$467
24"			<b>33P24H18IT</b>	288	442	491
30"			<b>33P30H18IT</b>	300	463	541
36"			<b>33P36H18IT</b>	311	477	580
42"			<b>33P42H18IT</b>	324	497	630
48"			<b>33P48H18IT</b>	338	519	675
54"			<b>33P54H18IT</b>	352	539	719
60"			<b>33P60H18IT</b>	365	559	764
66"			<b>33P66H18IT</b>	378	577	895
72"			<b>33P72H18IT</b>	391	597	1022
78"			<b>33P78H18IT</b>	406	615	1052
84"			<b>33P84H18IT</b>	419	633	1083
90"			<b>33P90H18IT</b>	432	653	1095
96"			<b>33P96H18IT</b>	444	665	1107

IMPORTANT 1.5-high tile is only for use with 3.5-high frame.

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint is not available.

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Woodgrain laminate is available on laminate tiles 60"W and smaller; grain runs vertical.

If woodgrain CSL is requested on tiles over 60"W, the grain will run horizontal. For tiles 60"W and smaller, the grain will run vertical.

## Standard Includes

- Tile

## How to Specify

### Laminate Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**LL** = Laminate
- 4 Laminate designator

### Paint Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**P** = Paint
- 5 Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- 6 Paint designator

### Wood Tiles


- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**W** = Wood
- 4 Wood price group:  
**STD** = Group 1
- 5 Wood designator

# NARRATE® PANEL SYSTEM

Laminate, Paint, and Wood Tiles | 2-High

Pricing  
GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Material		
W	Trim H	Support H		Laminate	Paint	Wood
2-High						
18"	25"	24 <sup>5</sup> / <sub>8</sub> "	33P182IT	\$282	\$434	\$475
24"			33P242IT	298	450	501
30"			33P302IT	311	469	549
36"			33P362IT	325	489	575
42"			33P422IT	340	508	603
48"			33P482IT	366	529	644
54"			33P542IT	390	549	683
60"			33P602IT	408	568	731
66"			33P662IT	428	583	906
72"			33P722IT	438	604	1036
78"			33P782IT	458	624	1068
84"			33P842IT	474	644	1099
90"			33P902IT	491	662	1110
96"			33P962IT	508	677	1122

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint is not available.

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Woodgrain laminate is available on laminate tiles 60"W and smaller; grain runs vertical.

If woodgrain CSL is requested on tiles over 60"W, the grain will run horizontal. For tiles 60"W and smaller, the grain will run vertical.

## Standard Includes

- Tile

## How to Specify

### Laminate Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**LL** = Laminate
- 4 Laminate designator

### Paint Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**P** = Paint
- 5 Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- 6 Paint designator

### Wood Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**W** = Wood
- 4 Wood price group:  
**STD** = Group 1
- 5 Wood designator


# NARRATE® PANEL SYSTEM

Laminate, Paint, and Wood Tiles | To-the-Floor 2-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<b>Dimensions</b>			<b>Model</b>	<b>Material</b>		
<i>W</i>	<i>Trim H</i>	<i>Support H</i>		<i>Laminate</i>	<i>Paint</i>	<i>Wood</i>
<b>To-the-Floor 2-High</b>						
18"	28 <sup>13</sup> / <sub>16</sub> "	28 <sup>7</sup> / <sub>16</sub> "	<b>33P182IT</b>	\$294	\$470	\$541
24"			<b>33P242IT</b>	306	480	558
30"			<b>33P302IT</b>	338	490	618
36"			<b>33P362IT</b>	357	509	672
42"			<b>33P422IT</b>	373	528	733
48"			<b>33P482IT</b>	397	545	787
54"			<b>33P542IT</b>	416	562	840
60"			<b>33P602IT</b>	434	578	892
66"			<b>33P662IT</b>	455	596	1041
72"			<b>33P722IT</b>	474	610	1193
78"			<b>33P782IT</b>	492	628	1228
84"			<b>33P842IT</b>	511	644	1266
90"			<b>33P902IT</b>	535	662	1275
96"			<b>33P962IT</b>	552	677	1291

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint is not available.

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Woodgrain laminate is available on laminate tiles 60"W and smaller; grain runs vertical.

If woodgrain CSL is requested on tiles over 60"W, the grain will run horizontal. For tiles 60"W and smaller, the grain will run vertical.

## Standard Includes

- Tile

## How to Specify

### Laminate Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**FLL** = Laminate
- 4 Laminate designator

### Paint Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**P** = Paint
- 5 Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- 6 Paint designator

### Wood Tiles


- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**W** = Wood
- 4 Wood price group:  
**STD** = Group 1
- 5 Wood designator

# NARRATE® PANEL SYSTEM

Laminate, Paint, and Wood Tiles | 3-High

Pricing  
GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Material		
W	Trim H	Support H		Laminate	Paint	Wood
3-High						
18"	37 <sup>19</sup> / <sub>32</sub> "	37 <sup>7</sup> / <sub>32</sub> "	33P183IT	\$306	\$475	\$577
24"			33P243IT	317	484	607
30"			33P303IT	350	496	677
36"			33P363IT	384	515	749
42"			33P423IT	461	535	820
48"			33P483IT	475	550	889
54"			33P543IT	490	567	948
60"			33P603IT	508	583	1007
66"			33P663IT	531	600	1176
72"			33P723IT	543	616	1347
78"			33P783IT	559	633	1388
84"			33P843IT	576	650	1429
90"			33P903IT	591	668	1442
96"			33P963IT	608	682	1459

Specify tiles for both sides of frame.

Wood grain direction is vertical.

Metallic paint is not available.

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Woodgrain laminate is available on laminate tiles 60"W and smaller; grain runs vertical.

If woodgrain CSL is requested on tiles over 60"W, the grain will run horizontal. For tiles 60"W and smaller, the grain will run vertical.

## Standard Includes

- Tile

## How to Specify

### Laminate Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**LL** = Laminate
- 4 Laminate designator

### Paint Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**P** = Paint
- 5 Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- 6 Paint designator

### Wood Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**W** = Wood
- 4 Wood price group:  
**STD** = Group 1
- 5 Wood designator


# NARRATE® PANEL SYSTEM

Laminate, Paint, and Wood Tiles | To-the-Floor 3-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<b>Dimensions</b>			<b>Model</b>	<b>Material</b>		
<i>W</i>	<i>Trim H</i>	<i>Support H</i>		<i>Laminate</i>	<i>Paint</i>	<i>Wood</i>
<b>To-the-Floor 3-High</b>						
18"	41 15/32"	41 1/32"	<b>33P183IT</b>	\$325	\$498	\$598
24"			<b>33P243IT</b>	351	506	628
30"			<b>33P303IT</b>	377	516	699
36"			<b>33P363IT</b>	413	538	749
42"			<b>33P423IT</b>	440	551	841
48"			<b>33P483IT</b>	470	566	906
54"			<b>33P543IT</b>	497	580	971
60"			<b>33P603IT</b>	526	595	1028
66"			<b>33P663IT</b>	550	610	1197
72"			<b>33P723IT</b>	567	623	1364
78"			<b>33P783IT</b>	590	636	1410
84"			<b>33P843IT</b>	607	650	1450
90"			<b>33P903IT</b>	628	672	1465
96"			<b>33P963IT</b>	649	690	1485

Specify tiles for both sides of frame.

Wood grain direction is vertical.

Metallic paint is not available.

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Woodgrain laminate is available on laminate tiles 60"W and smaller; grain runs vertical.

If woodgrain CSL is requested on tiles over 60"W, the grain will run horizontal. For tiles 60"W and smaller, the grain will run vertical.

## Standard Includes

- Tile

## How to Specify

### Laminate Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**FLL** = Laminate
- 4 Laminate designator

### Paint Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**P** = Paint
- 5 Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- 6 Paint designator

### Wood Tiles

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim
- 3 Tile material:  
**W** = Wood
- 4 Wood price group:  
**STD** = Group 1
- 5 Wood designator

# NARRATE® PANEL SYSTEM

Glass Tiles with Frame | 1-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
1-High				
18"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P181IT	\$305
24"			33P241IT	344
30"			33P301IT	365
36"			33P361IT	406
42"			33P421IT	470
48"			33P481IT	512
54"			33P541IT	546
60"			33P601IT	570
66"			33P661IT	624
72"			33P721IT	661
78"			33P781IT	685
84"			33P841IT	716
90"			33P901IT	737
96"			33P961IT	766

## Standard Includes

- Two frames with glass: clear or frosted

## How to Specify

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Tile material:  
**GAP** = Glass with painted frame
- 4 Glass type:  
**3** = Clear  
**9** = Frosted both sides (+25%)
- 5 Paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 6 Paint designator

Specify one glass tile model to complete both sides of Narrate frame. Each model includes two frames with glass, one for each side of the frame.

Power and data cables cannot be routed through glass tiles.

54"–96"W glass tiles for use with 1-high stacking frames only.




# NARRATE® PANEL SYSTEM

Glass Tiles with Frame | 1.5-High

Pricing  
GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
1.5-High				
18"	19 <sup>5</sup> / <sub>16</sub> "	18 <sup>15</sup> / <sub>16</sub> "	33P18H18IT	\$332
24"			33P24H18IT	354
30"			33P30H18IT	381
36"			33P36H18IT	426
42"			33P42H18IT	497
48"			33P48H18IT	544

## Standard Includes

- Two frames with glass: clear or frosted

## How to Specify

- Model
- Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- Tile material:  
**GAP** = Glass with painted frame
- Glass type:  
**3** = Clear  
**9** = Frosted both sides (+25%)
- Paint price group:  
**STD** = Standard  
**STD<sup>M</sup>** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- Paint designator

Specify one glass tile model to complete both sides of Narrate frame. Each model includes two frames with glass, one for each side of the frame.

Power and data cables cannot be routed through glass tiles.


# NARRATE® PANEL SYSTEM

Glass Tiles with Frame | 2-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
2-High				
18"	25"	24 <sup>5</sup> / <sub>8</sub> "	33P182IT	\$446
24"			33P242IT	473
30"			33P302IT	498
36"			33P362IT	529
42"			33P422IT	588
48"			33P482IT	631
54"			33P542IT	688
60"			33P602IT	744
66"			33P662IT	799
72"			33P722IT	854
78"			33P782IT	889
84"			33P842IT	921
90"			33P902IT	934
96"			33P962IT	946

## Standard Includes

- Two frames with glass: clear or frosted

## How to Specify

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Tile material:  
**GAP** = Glass with painted frame
- 4 Glass type:  
**3** = Clear  
**9** = Frosted both sides (+25%)
- 5 Paint price group:  
**STD** = Standard  
**STD<sup>M</sup>** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 6 Paint designator

Specify one glass tile model to complete both sides of Narrate frame. Each model includes two frames with glass, one for each side of the frame.

Power and data cables cannot be routed through glass tiles.

54"–96"W glass tiles for use with 2-high stacking frames only.

# NARRATE® PANEL SYSTEM

Glass Tiles with Frame | 3-High

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
3-High				
18"	37 <sup>19</sup> / <sub>32</sub> "	37 <sup>7</sup> / <sub>32</sub> "	33P183IT	\$483
24"			33P243IT	527
30"			33P303IT	554
36"			33P363IT	614
42"			33P423IT	670
48"			33P483IT	715

## Standard Includes

- Two frames with glass: clear or frosted

## How to Specify

- Model
- Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- Tile material:  
**GAP** = Glass with painted frame
- Glass type:  
**3** = Clear  
**9** = Frosted both sides (+25%)
- Paint price group:  
**STD** = Standard  
**STD<sup>M</sup>** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- Paint designator

Specify one glass tile model to complete both sides of Narrate frame. Each model includes two frames with glass, one for each side of the frame.

Power and data cables cannot be routed through glass tiles.

# NARRATE® PANEL SYSTEM

Back-Painted Glass Tiles | 1-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
1-High				
18"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P181IT	\$415
24"			33P241I	524
30"			33P301IT	631
36"			33P361IT	741
42"			33P421IT	850
48"			33P481IT	958
54"			33P541IT	1065
60"			33P601IT	1172
66"			33P661IT	1280
72"			33P721IT	1388
78"			33P781IT	1501
84"			33P841IT	1613
90"			33P901IT	1727
96"			33P961IT	1838

## Standard Includes

- Glass pane: back painted

## How to Specify

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Tile material:  
**BPG** = Back-painted glass
- 4 Paint designator  
**405** = Designer White  
**425** = Shadow  
**440** = Cloud  
**450** = Fog  
**462** = Cinder  
**501** = Platinum Metallic

Specify tiles for both sides of frame.  
*Note: Does not need to be glass tiles on both sides.*


# NARRATE® PANEL SYSTEM

Back-Painted Glass Tiles | 1.5-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
1.5-High				
18"	19 <sup>5</sup> / <sub>16</sub> "	18 <sup>15</sup> / <sub>16</sub> "	33P18H18IT	\$544
24"			33P24H18IT	696
30"			33P30H18IT	844
36"			33P36H18IT	998
42"			33P42H18IT	1148
48"			33P48H18IT	1306
54"			33P54H18IT	1456
60"			33P60H18IT	1607
66"			33P66H18IT	1754
72"			33P72H18IT	1906
78"			33P78H18IT	2059
84"			33P84H18IT	2214
90"			33P90H18IT	2367
96"			33P96H18IT	2522

## Standard Includes

- Glass pane: back painted

## How to Specify

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Tile material:  
**BPG** = Back-painted glass
- 4 Paint designator  
**405** = Designer White  
**425** = Shadow  
**440** = Cloud  
**450** = Fog  
**462** = Cinder  
**501** = Platinum Metallic

Specify tiles for both sides of frame.  
*Note: Does not need to be glass tiles on both sides*


# NARRATE® PANEL SYSTEM

Back-Painted Glass Tiles | 2-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
2-High				
18"	25"	24 <sup>5</sup> / <sub>8</sub> "	33P182IT	\$805
24"			33P242IT	871
30"			33P302IT	1052
36"			33P362IT	1232
42"			33P422IT	1423
48"			33P482IT	1613
54"			33P542IT	1811
60"			33P602IT	2008
66"			33P662IT	2193
72"			33P722IT	2376
78"			33P782IT	2571
84"			33P842IT	2762
90"			33P902IT	2956
96"			33P962IT	3149

## Standard Includes

- Glass pane: back painted

## How to Specify

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Tile material:  
**BPG** = Back-painted glass
- 4 Paint designator  
**405** = Designer White  
**425** = Shadow  
**440** = Cloud  
**450** = Fog  
**462** = Cinder  
**501** = Platinum Metallic

Specify tiles for both sides of frame.  
*Note: Does not need to be glass tiles on both sides.*


# NARRATE® PANEL SYSTEM

Back-Painted Glass Tiles | 3-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
3-High				
18"	37 <sup>19</sup> / <sub>32</sub> "	37 <sup>7</sup> / <sub>32</sub> "	33P183IT	\$963
24"			33P243IT	1219
30"			33P303IT	1485
36"			33P363IT	1747
42"			33P423IT	2013
48"			33P483IT	2285
54"			33P543IT	2578
60"			33P603IT	2873
66"			33P663IT	3161
72"			33P723IT	3452
78"			33P783IT	3734
84"			33P843IT	4015
90"			33P903IT	4295
96"			33P963IT	4575

## Standard Includes

- Back-painted glass pane

## How to Specify

- 1 Model
- 2 Tile type:  
**ST** = Support  
**TT** = Trim  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Tile material:  
**BPG** = Back-painted glass
- 4 Paint designator  
**405** = Designer White  
**425** = Shadow  
**440** = Cloud  
**450** = Fog  
**462** = Cinder  
**501** = Platinum Metallic

Specify tiles for both sides of frame.  
 (Note: does not need to be glass tiles on both sides).

➤ See page NA.118 for back-painted glass tile for use with monitor frame.


# NARRATE® PANEL SYSTEM

## Back-Painted Glass Tiles | 3-High for Monitor Frame

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
3-High				
48"	37 <sup>19</sup> / <sub>32</sub> "	37 <sup>7</sup> / <sub>32</sub> "	33P483IT	\$2667
84"			33P843IT	4415
96"			33P963IT	4973

Standard Includes

- Back-painted glass pane

- How to Specify
- Model
  - Tile type:
    - STV = Support
    - TTV = Trim
    - Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)
  - Tile material:
    - BPG = Back-painted glass
  - Paint designator
    - 405 = Designer White
    - 425 = Shadow
    - 440 = Cloud
    - 450 = Fog
    - 462 = Cinder
    - 501 = Platinum Metallic

Tiles for use with 50" monitor centered:  
 48" glass tile used with 48"W frame;  
 84" glass tile used with 48"W and two 18"W frames; 96" glass tile used with 48"W and two 24"W frames.

Designed to work with Samsung 50" Class Q60A QLED 4K TV purchased separately.

Specify tiles for both sides of frame.



# NARRATE® PANEL SYSTEM

Markerboard Tiles | .5-High, 1-High, and 1.5-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Material	
W	Trim H	Support H		Metal	Laminate
.5-High Tiles					
30"	6 <sup>23</sup> / <sub>32</sub> "	6 <sup>11</sup> / <sub>32</sub> "	33P30H06IT	—	\$279
36"			33P36H06IT	—	328
42"			33P42H06IT	—	334
48"			33P48H06IT	—	355
1-High Tiles					
30"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P301IT	\$158	\$376
36"			33P361IT	189	389
42"			33P421IT	223	403
48"			33P481IT	250	423
1.5-High Tiles					
30"	19 <sup>5</sup> / <sub>16</sub> "	18 <sup>15</sup> / <sub>16</sub> "	33P30H18IT	\$268	\$445
36"			33P36H18IT	322	492
42"			33P42H18IT	373	535
48"			33P48H18IT	432	601
54"			33P54H18IT	482	681
60"			33P60H18IT	538	784

IMPORTANT .5-high and 1.5-high tiles are only for use with 3.5-high frame.

Specify tiles for both sides of frame. Markerboard tiles should not be used on unsupported runs due to panel movement when writing on the surface.

## Standard Includes

- Tile: painted metal or laminate

*Note: Expo dry erase markers are recommended for use on markerboards. All other dry erase markers are not recommended, as they may leave undesirable results when erased.*

## How to Specify

### Metal Markerboard Tile

- 1 Model
- 2 Traxx type:  
**STDMP** = Support Traxx  
**TTDMP** = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Paint designator:  
**405M** = Designer White

### Laminate Markerboard Tile

- 1 Model
- 2 Traxx type:  
**STK** = Support Traxx  
**TTK** = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 2 Laminate designator:  
**409M** = Icy White  
**483M** = Off White


# NARRATE® PANEL SYSTEM

## Markerboard Tiles | 2-High and 3-High

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Material	
W	Trim H	Support H		Metal	Laminate
2-High Tiles					
30"	25"	24 <sup>5</sup> / <sub>8</sub> "	33P302IT	\$316	\$466
36"			33P362IT	376	543
42"			33P422IT	436	615
48"			33P482IT	485	698
54"			33P542IT	567	776
60"			33P602IT	629	851
3-High Tiles					
30"	37 <sup>19</sup> / <sub>32</sub> "	37 <sup>7</sup> / <sub>32</sub> "	33P303IT	\$472	\$593
36"			33P363IT	559	636
42"			33P423IT	—	702
48"			33P483IT	—	731
54"			33P543IT	—	887
60"			33P603IT	—	1029

Specify tiles for both sides of frame.

Markerboard tiles should not be used on unsupported runs due to panel movement when writing on the surface.

Standard Includes

- Tile: painted metal or laminate

*Note: Expo dry erase markers are recommended for use on markerboards. All other dry erase markers are not recommended, as they may leave undesirable results when erased.*

How to Specify

Metal Markerboard Tile

- 1 Model
- 2 Traxx type:  
STDMP = Support Traxx  
TTDMP = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Paint designator:  
405M = Designer White

Laminate Markerboard Tile

- 1 Model
- 2 Traxx type:  
STK = Support Traxx  
TTK = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 2 Laminata designator:  
409M = Icey White  
483M = Off White

# NARRATE® PANEL SYSTEM

## Plain Metal Tiles


## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



IMPORTANT 1.5-high tile is only for use with 3.5-high frame. Specify tiles for both sides of frame.



Dimensions			Model	Price
W	Trim H	Support H		
1-High Tiles				
18"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P181IT	\$125
24"			33P241IT	136
30"			33P301IT	147
36"			33P361IT	162
42"			33P421IT	171
48"			33P481IT	184
1.5-High Tiles				
18"	19 <sup>5</sup> / <sub>16</sub> "	18 <sup>15</sup> / <sub>16</sub> "	33P18H18IT	\$137
24"			33P24H18IT	156
30"			33P30H18IT	170
36"			33P36H18IT	189
42"			33P42H18IT	207
48"			33P48H18IT	225
54"			33P54H18IT	247
60"			33P60H18IT	273
2-High Tiles				
18"	25"	24 <sup>5</sup> / <sub>8</sub> "	33P182IT	\$147
24"			33P242IT	170
30"			33P302IT	192
36"			33P362IT	213
42"			33P422IT	230
48"			33P482IT	244
54"			33P542IT	262
60"			33P602IT	282
3-High Tiles				
18"	37 <sup>19</sup> / <sub>32</sub> "	37 <sup>7</sup> / <sub>32</sub> "	33P183IT	\$174
24"			33P243IT	205
30"			33P303IT	237
36"			33P363IT	268

### Standard Includes

- Tile: metal

### How to Specify

- 1 Model
- 2 Traxx type:  
**STPM** = Support Traxx  
**TTPM** = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 4 Paint designator

# NARRATE® PANEL SYSTEM

Patterned Metal Tiles | .5-High and 1-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
<b>.5-High Tiles</b>				
18"	6 <sup>23</sup> / <sub>32</sub> "	6 <sup>11</sup> / <sub>32</sub> "	<b>33P18H06IT</b>	\$72
24"			<b>33P24H06IT</b>	93
30"			<b>33P30H06IT</b>	114
36"			<b>33P36H06IT</b>	131
42"			<b>33P42H06IT</b>	146
48"			<b>33P48H06IT</b>	171
54"			<b>33P54H06IT</b>	189
60"			<b>33P60H06IT</b>	206
72"			<b>33P72H06IT</b>	246
<b>1-High Tiles</b>				
18"	12 <sup>3</sup> / <sub>8</sub> "	12"	<b>33P181IT</b>	\$91
24"			<b>33P241IT</b>	105
30"			<b>33P301IT</b>	129
36"			<b>33P361IT</b>	146
42"			<b>33P421IT</b>	167
48"			<b>33P481IT</b>	191
54"			<b>33P541IT</b>	213
60"			<b>33P601IT</b>	233
72"			<b>33P721IT</b>	288

## Standard Includes

- Tile: metal

## How to Specify

- 1 Model
- 2 Traxx type:  
**STM** = Support Traxx  
**TTM** = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Metal pattern:  
**A** = Perforated  
**B** = Embossed
- 4 Paint price group:  
**STD** = Standard  
**STD<sup>M</sup>** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 5 Paint designator

IMPORTANT .5-high tile is only for use with 3.5-high frame.

Specify tiles for both sides of frame.

# NARRATE® PANEL SYSTEM

Patterned Metal Tiles | 1.5-High and 2-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
1.5-High Tiles				
18"	19 <sup>5</sup> / <sub>16</sub> "	18 <sup>15</sup> / <sub>16</sub> "	33P18H18IT	\$118
24"			33P24H18IT	144
30"			33P30H18IT	187
36"			33P36H18IT	216
42"			33P42H18IT	266
48"			33P48H18IT	291
54"			33P54H18IT	309
60"			33P60H18IT	330
72"			33P72H18IT	370
2-High Tiles				
18"	25"	24 <sup>5</sup> / <sub>8</sub> "	33P182IT	\$144
24"			33P242IT	171
30"			33P302IT	213
36"			33P362IT	255
42"			33P422IT	301
48"			33P482IT	316
54"			33P542IT	337
60"			33P602IT	359
72"			33P722IT	398

## Standard Includes

- Tile: metal

## How to Specify

- 1 Model
- 2 Traxx type:  
**STM** = Support Traxx  
**TTM** = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 3 Metal pattern:  
**A** = Perforated  
**B** = Embossed
- 4 Paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 5 Paint designator

IMPORTANT 1.5-high tile is only for use with 3.5-high frame.

Specify tiles for both sides of frame.

# NARRATE® PANEL SYSTEM

Slat Tiles | .5-High, 1-High, and 1.5-High

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



IMPORTANT .5 and 1.5-high tiles are for only use with 3.5-high frame.

Specify tiles for both sides of frame.

Monitor arms can be used on 18", 24", and 30"W 1-high and 2-high slat tiles. 2-high tiles require an additional mid-frame support for stability, specified separately. One single monitor arm per slat tile can be accommodated.

➤ See the Perks Technology Management chapter in the *Kimball Accessory Solutions Price List*.

Dimensions			Model	Price
W	Trim H	Support H		
.5-High Tiles				
18"	6 <sup>23</sup> / <sub>32</sub> "	6 <sup>11</sup> / <sub>32</sub> "	33P18H06IT	\$237
24"			33P24H06IT	300
30"			33P30H06IT	373
36"			33P36H06IT	446
42"			33P42H06IT	526
48"			33P48H06IT	599
1-High Tiles				
18"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P181IT	\$266
24"			33P241IT	337
30"			33P301IT	423
36"			33P361IT	506
42"			33P421IT	591
48"			33P481IT	674
1.5-High Tiles				
18"	19 <sup>5</sup> / <sub>16</sub> "	18 <sup>15</sup> / <sub>16</sub> "	33P18H18IT	\$434
24"			33P24H18IT	570
30"			33P30H18IT	715
36"			33P36H18IT	861
42"			33P42H18IT	1002
48"			33P48H18IT	1144

## Standard Includes

- Slat tile
- Two trim channels

## How to Specify

- 1 Model
- 2 Traxx type:  
**STS** = Support Traxx  
**TTS** = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 4 Paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 5 Paint designator

NARRATE® PANEL SYSTEM

Slat Tiles | 2-High and 3-High

Pricing  
GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
2-High Tiles				
18"	25"	24 <sup>5</sup> / <sub>8</sub> "	33P182IT	\$509
24"			33P242IT	674
30"			33P302IT	841
36"			33P362IT	1012
42"			33P422IT	1176
48"			33P482IT	1234
3-High Tiles				
18"	37 <sup>19</sup> / <sub>32</sub> "	37 <sup>7</sup> / <sub>32</sub> "	33P183IT	\$759
24"			33P243IT	1012
30"			33P303IT	1262
36"			33P363IT	1515
42"			33P423IT	1768
48"			33P483IT	2017

Standard Includes

- Slat tile
- Two trim channels

How to Specify

- 1 Model
- 2 Traxx type:  
STS = Support Traxx  
TTS = Trim Traxx  
*Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)*
- 4 Paint price group:  
STD = Standard  
STD<sup>M</sup> = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 5 Paint designator

Specify tiles for both sides of frame.

Monitor arms can be used on 18", 24", and 30"W 1-high and 2-high slat tiles. 2-high tiles require an additional mid-frame support for stability, specified separately. One single monitor arm per slat tile can be accommodated.  
➤See the Perks Technology Management chapter in the *Kimball Accessory Solutions Price List*.

NARRATE® PANEL SYSTEM

Fold-Down Tiles

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
W	Trim H	Support H		
1-High Fold-Down Tiles				
18"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P181IT	\$877
24"			33P241IT	982
30"			33P301IT	1160
36"			33P361IT	1259

Standard Includes

- Fold-down tile

- How to Specify
- 1 Model
  - 2 Traxx type:
    - STF = Support Traxx
    - TTF = Trim Traxx
    - Note: Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)
  - 3 Paint price group:
    - STD = Standard
    - STDM = Metallic (+10%)
    - GAL1 = Gallery (+10%)
  - 4 Paint designator

Specify tiles for both sides of frame.

Tiles cannot be placed back to back, or back to back with a technology tile.

Can only be installed at the 2-high location or above.






NARRATE® PANEL SYSTEM

Technology Tiles | Without Cutouts

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Vertical Textile Price Grade		
W	Trim H	Support H		AA	A	B/COM
1-High Fabric Tile						
24"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P241IT	\$224	\$242	\$276
30"			33P301IT	240	263	305
36"			33P361IT	250	278	328
42"			33P421IT	268	298	353
48"			33P481IT	287	322	385
Dimensions			Model	Price		
W	Trim H	Support H				
1-High Markerboard Tile						
24"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P241IT	\$309		
30"			33P301IT	343		
36"			33P361IT	370		
42"			33P421IT	411		
48"			33P481IT	463		
1-High Slat Tile						
24"	12 <sup>3</sup> / <sub>8</sub> "	12"	33P241IT	\$421		
30"			33P301IT	491		
36"			33P361IT	576		
42"			33P421IT	672		
48"			33P481IT	759		

Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Specify tiles to match the full width of the frame.

Standard Includes

- Technology tile

How to Specify

- Fabric Tile**
- 1 Model
  - 2 Traxx type:
    - STBANC = Support Traxx
    - TTBANC = Trim Traxx
  - 3 Paint price group:
    - STD = Standard
    - STDM = Metallic (+10%)
    - GAL1 = Gallery (+10%)
  - 4 Paint designator
  - 5 Vertical textile grade
  - 6 Vertical textile number

- Markerboard Tile**
- 1 Model
  - 2 Traxx type:
    - STBKNC = Support Traxx
    - TTBKNC = Trim Traxx
  - 3 Paint price group:
    - STD = Standard
    - STDM = Metallic (+10%)
    - GAL1 = Gallery (+10%)
  - 4 Paint designator
  - 5 Markerboard designator:
    - 409M = Icy White
    - 483M = Off White



- Slat Tile**
- 1 Model
  - 2 Traxx type:
    - STBSNC = Support Traxx
    - TTBSNC = Trim Traxx
  - 3 Paint price group:
    - STD = Standard
    - STDM = Metallic (+10%)
    - GAL1 = Gallery (+10%)
  - 4 Paint designator

NARRATE® PANEL SYSTEM  
Technology Tiles | With Cutouts

Pricing

GSA SIN 33721 | COM GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Specify tiles to match the full width of the frame. Tile type must match the upper Traxx in which it will be installed (i.e., support tile is used with support Traxx, trim tile is used with trim Traxx.)

Electrical components for technology tiles must be specified separately. Specify hole cover plates for cut-outs that will not be used.

Work tools and monitor arms  
➤ See the Perks Technology Management and Work Tools chapters in the *Kimball Accessory Solutions Price List*.

Dimensions				Model	Vertical Textile Price Grade		
W	Trim H	Support H	Cutouts		AA	A	B/COM
1-High Fabric Tile							
24"	12 <sup>3</sup> / <sub>8</sub> "	12"	2	33P241IT	\$224	\$242	\$276
30"			3	33P301IT	240	263	305
36"			3	33P361IT	250	278	328
42"			3	33P421IT	268	298	353
48"			3	33P481IT	287	322	385

Dimensions				Model	Price
W	Trim H	Support H	Cutouts		
1-High Markerboard Tile					
24"	12 <sup>3</sup> / <sub>8</sub> "	12"	2	33P241IT	\$309
30"			3	33P301IT	343
36"			3	33P361IT	370
42"			3	33P421IT	411
48"			3	33P481IT	463

1-High Slat Tile					
24"	12 <sup>3</sup> / <sub>8</sub> "	12"	2	33P241IT	\$421
30"			3	33P301IT	491
36"			3	33P361IT	576
42"			3	33P421IT	672
48"			3	33P481IT	759



Standard Includes

- Technology Tile

How to Specify

Fabric Tile

- 1 Model
- 2 Traxx type:  
STBA = Support Traxx  
TTBA = Trim Traxx
- 3 Paint price group:  
STD = Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 4 Paint designator
- 5 Vertical textile grade
- 6 Vertical textile number

Markerboard Tile

- 1 Model
- 2 Traxx type:  
STBK = Support Traxx  
TTBK = Trim Traxx
- 3 Paint price group:  
STD = Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 4 Paint designator
- 5 Markerboard designator:  
409M = Icey White  
483M = Off White

Slat Tile

- 1 Model
- 2 Traxx type:  
STBS = Support Traxx  
TTBS = Trim Traxx
- 3 Paint price group:  
STD = Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 4 Paint designator


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | TFL, HPL, or Wood

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application shown.

<b>Dimensions</b>			<b>Model</b>	<b>Material</b>		
<i>D</i>	<i>W</i>	<i>H</i>		<i>TFL (LL)</i>	<i>HPL (L)</i>	<i>Wood (W)</i>
<b>2-High</b>						
13 <sup>1</sup> / <sub>16</sub> "*	27 <sup>27</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	<b>33P2730EP</b>	\$759	\$989	\$1700
	33 <sup>27</sup> / <sub>64</sub> "		<b>33P3330EP</b>	788	1068	1791
	39 <sup>27</sup> / <sub>64</sub> "		<b>33P3930EP</b>	813	1130	1880
	45 <sup>27</sup> / <sub>64</sub> "		<b>33P4530EP</b>	842	1190	1972
	51 <sup>27</sup> / <sub>64</sub> "		<b>33P5130EP</b>	869	1250	2061
	57 <sup>27</sup> / <sub>64</sub> "		<b>33P5730EP</b>	898	1309	2153
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6330EP</b>	937	1394	2243
	69 <sup>27</sup> / <sub>64</sub> "		<b>33P6930EP</b>	978	1477	2335
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7530EP</b>	1019	1564	2422
	81 <sup>27</sup> / <sub>64</sub> "		<b>33P8130EP</b>	1059	1648	2516
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8730EP</b>	1098	1733	2605
	93 <sup>27</sup> / <sub>64</sub> "		<b>33P9330EP</b>	1137	1815	2696
	99 <sup>27</sup> / <sub>64</sub> "		<b>33P9930EP</b>	—	—	2876
	105 <sup>27</sup> / <sub>64</sub> "		<b>33P10530EP</b>	—	—	3054
	111 <sup>27</sup> / <sub>64</sub> "		<b>33P11130EP</b>	—	—	3236
	117 <sup>27</sup> / <sub>64</sub> "		<b>33P11730EP</b>	—	—	3414

\*Depth dimension for TFL end panels is 1<sup>1</sup>/<sub>8</sub>".

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- ① Model
- ② Application orientation:  
**L** = Left hand  
**R** = Right hand
- ③ Material:  
**LL** = TFL  
**L** = HPL  
**W** = Wood
- ④ Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ⑤ Wood or laminate price group:  
**STD** = Group 1
- ⑥ Wood or laminate designator
- ⑦ Laminate edge designator

End Panel Returns  
 ➤ See page NA.152.


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | TFL, HPL, or Wood, continued

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application shown.

Dimensions			Model	Material		
D	W	H		TFL (LL)	HPL (L)	Wood (W)
3-High						
13 <sup>1</sup> / <sub>16</sub> "*	27 <sup>27</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	33P2742EP	\$846	\$1209	\$1724
	33 <sup>27</sup> / <sub>64</sub> "		33P3342EP	900	1335	1812
	39 <sup>27</sup> / <sub>64</sub> "		33P3942EP	944	1451	1911
	45 <sup>27</sup> / <sub>64</sub> "		33P4542EP	988	1569	2039
	51 <sup>27</sup> / <sub>64</sub> "		33P5142EP	1033	1684	2151
	57 <sup>27</sup> / <sub>64</sub> "		33P5742EP	1076	1801	2251
	63 <sup>27</sup> / <sub>64</sub> "		33P6342EP	1121	1918	2348
	69 <sup>27</sup> / <sub>64</sub> "		33P6942EP	1166	2034	2450
	75 <sup>27</sup> / <sub>64</sub> "		33P7542EP	1211	2149	2548
	81 <sup>27</sup> / <sub>64</sub> "		33P8142EP	1255	2267	2647
	87 <sup>27</sup> / <sub>64</sub> "		33P8742EP	1300	2382	2747
	93 <sup>27</sup> / <sub>64</sub> "		33P9342EP	1344	2498	2846
	99 <sup>27</sup> / <sub>64</sub> "		33P9942EP	—	—	3046
	105 <sup>27</sup> / <sub>64</sub> "		33P10542EP	—	—	3250
	111 <sup>27</sup> / <sub>64</sub> "		33P11142EP	—	—	3460
	117 <sup>27</sup> / <sub>64</sub> "		33P11742EP	—	—	3689

\*Depth dimension for TFL end panels is 11/8".

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
LL = TFL  
L = HPL  
W = Wood
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Wood or laminate price group:  
STD = Group 1
- 6 Wood or laminate designator
- 7 Laminate edge designator

End Panel Returns  
➤ See page NA.152.


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | TFL, HPL, or Wood, continued

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application shown.

<b>Dimensions</b>			<b>Model</b>	<b>Material</b>		
<i>D</i>	<i>W</i>	<i>H</i>		<i>TFL (LL)</i>	<i>HPL (L)</i>	<i>Wood (W)</i>
<b>3.5-High</b>						
1 <sup>3</sup> / <sub>16</sub> "*	27 <sup>27</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	<b>33P2750EP</b>	\$905	\$1348	\$1739
	33 <sup>27</sup> / <sub>64</sub> "		<b>33P3350EP</b>	956	1481	1847
	39 <sup>27</sup> / <sub>64</sub> "		<b>33P3950EP</b>	1004	1627	1952
	45 <sup>27</sup> / <sub>64</sub> "		<b>33P4550EP</b>	1056	1773	2061
	51 <sup>27</sup> / <sub>64</sub> "		<b>33P5150EP</b>	1105	1921	2170
	57 <sup>27</sup> / <sub>64</sub> "		<b>33P5750EP</b>	1156	2067	2279
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6350EP</b>	1206	2213	2386
	69 <sup>27</sup> / <sub>64</sub> "		<b>33P6950EP</b>	1256	2360	2496
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7550EP</b>	1305	2505	2604
	81 <sup>27</sup> / <sub>64</sub> "		<b>33P8150EP</b>	1356	2652	2712
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8750EP</b>	1408	2798	2820
	93 <sup>27</sup> / <sub>64</sub> "		<b>33P9350EP</b>	1458	2905	2927
	99 <sup>27</sup> / <sub>64</sub> "		<b>33P9950EP</b>	—	—	3143
	105 <sup>27</sup> / <sub>64</sub> "		<b>33P10550EP</b>	—	—	3371
	111 <sup>27</sup> / <sub>64</sub> "		<b>33P11150EP</b>	—	—	3602
	117 <sup>27</sup> / <sub>64</sub> "		<b>33P11750EP</b>	—	—	3831

\*Depth dimension for TFL end panels is 1<sup>1</sup>/<sub>8</sub>".

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
LL = TFL  
L = HPL  
W = Wood
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Wood or laminate price group:  
STD = Group 1
- 6 Wood or laminate designator
- 7 Laminate edge designator

End Panel Returns  
➤ See page NA.152.


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | Resin Insert with Frame

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application shown.

Dimensions			Model	Price
D	W	H		
2-High				
1 <sup>1</sup> / <sub>2</sub> "	27 <sup>27</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	33P2730EP	\$1582
	33 <sup>27</sup> / <sub>64</sub> "		33P3330EP	1686
	39 <sup>27</sup> / <sub>64</sub> "		33P3930EP	1789
	45 <sup>27</sup> / <sub>64</sub> "		33P4530EP	1893
	51 <sup>27</sup> / <sub>64</sub> "		33P5130EP	1995
	57 <sup>27</sup> / <sub>64</sub> "		33P5730EP	2100
	63 <sup>27</sup> / <sub>64</sub> "		33P6330EP	2203
	69 <sup>27</sup> / <sub>64</sub> "		33P6930EP	2306
	75 <sup>27</sup> / <sub>64</sub> "		33P7530EP	2412
	81 <sup>27</sup> / <sub>64</sub> "		33P8130EP	2469
	87 <sup>27</sup> / <sub>64</sub> "		33P8730EP	2524
	93 <sup>27</sup> / <sub>64</sub> "		33P9330EP	2579
3-High				
1 <sup>1</sup> / <sub>2</sub> "	27 <sup>27</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	33P2742EP	\$1749
	33 <sup>27</sup> / <sub>64</sub> "		33P3342EP	1866
	39 <sup>27</sup> / <sub>64</sub> "		33P3942EP	1981
	45 <sup>27</sup> / <sub>64</sub> "		33P4542EP	2096
	51 <sup>27</sup> / <sub>64</sub> "		33P5142EP	2213
	57 <sup>27</sup> / <sub>64</sub> "		33P5742EP	2329
	63 <sup>27</sup> / <sub>64</sub> "		33P6342EP	2444
	69 <sup>27</sup> / <sub>64</sub> "		33P6942EP	2559
	75 <sup>27</sup> / <sub>64</sub> "		33P7542EP	2781
	81 <sup>27</sup> / <sub>64</sub> "		33P8142EP	2897
	87 <sup>27</sup> / <sub>64</sub> "		33P8742EP	3013
	93 <sup>27</sup> / <sub>64</sub> "		33P9342EP	3016

## Standard Includes

- End panel with metal frame and resin insert
- Attachment hardware

## How to Specify

- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
PR = Painted frame with resin insert
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Frame paint price group:  
STD = Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 6 Frame paint designator
- 7 Resin finish:  
25 = Glacier


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | Resin Insert with Frame, continued

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application shown.

<b>Dimensions</b>			<b>Model</b>	<b>Price</b>
<i>D</i>	<i>W</i>	<i>H</i>		
<b>3.5-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	27 <sup>27</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	<b>33P2750EP</b>	\$1860
	33 <sup>27</sup> / <sub>64</sub> "		<b>33P3350EP</b>	1991
	39 <sup>27</sup> / <sub>64</sub> "		<b>33P3950EP</b>	2123
	45 <sup>27</sup> / <sub>64</sub> "		<b>33P4550EP</b>	2255
	51 <sup>27</sup> / <sub>64</sub> "		<b>33P5150EP</b>	2387
	57 <sup>27</sup> / <sub>64</sub> "		<b>33P5750EP</b>	2520
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6350EP</b>	2651
	69 <sup>27</sup> / <sub>64</sub> "		<b>33P6950EP</b>	2781
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7550EP</b>	3002
	81 <sup>27</sup> / <sub>64</sub> "		<b>33P8150EP</b>	3133
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8750EP</b>	3265
	93 <sup>27</sup> / <sub>64</sub> "		<b>33P9350EP</b>	3301

## Standard Includes

- End panel with metal frame and resin insert
- Attachment hardware

## How to Specify

- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
PR = Painted frame with resin insert
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Frame paint price group:  
STD = Standard  
STDM = Metallic (+10%)  
GAL1 = Gallery (+10%)
- 6 Frame paint designator
- 7 Resin finish:  
25 = Glacier


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | Plywood

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application and intersect pattern shown.


Dimensions			Model	Price
D	W	H		
2-High				
11 <sup>1</sup> / <sub>2</sub> "	27 <sup>27</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	93P2730EP2	\$2904
	33 <sup>27</sup> / <sub>64</sub> "		93P3330EP2	3334
	39 <sup>27</sup> / <sub>64</sub> "		93P3930EP2	3764
	45 <sup>27</sup> / <sub>64</sub> "		93P4530EP2	4194
	51 <sup>27</sup> / <sub>64</sub> "		93P5130EP2	4626
	57 <sup>27</sup> / <sub>64</sub> "		93P5730EP2	5058
	63 <sup>27</sup> / <sub>64</sub> "		93P6330EP2	5489
	69 <sup>27</sup> / <sub>64</sub> "		93P6930EP2	5920
	75 <sup>27</sup> / <sub>64</sub> "		93P7530EP2	6353
	81 <sup>27</sup> / <sub>64</sub> "		93P8130EP2	6783
	87 <sup>27</sup> / <sub>64</sub> "		93P8730EP2	7213
	93 <sup>27</sup> / <sub>64</sub> "		93P9330EP2	7644

## Standard Includes

- End panel
- Attachment hardware

## How to Specify


- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
D = Plywood
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Pattern:  
C = Crossroads  
D = Diagonal  
I = Intersect  
S = Stitch
- 6 Finish:  
CR = Clear




**C** = Crossroads



**D** = Diagonal



**I** = Intersect



**S** = Stitch




# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | Plywood, continued

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application and intersect pattern shown.


<b>Dimensions</b>			<b>Model</b>	<b>Price</b>
<i>D</i>	<i>W</i>	<i>H</i>		
<b>3-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	27 <sup>27</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	<b>93P2742EP2</b>	\$3750
	33 <sup>27</sup> / <sub>64</sub> "		<b>93P3342EP2</b>	4365
	39 <sup>27</sup> / <sub>64</sub> "		<b>93P3942EP2</b>	4980
	45 <sup>27</sup> / <sub>64</sub> "		<b>93P4542EP2</b>	5596
	51 <sup>27</sup> / <sub>64</sub> "		<b>93P5142EP2</b>	6209
	57 <sup>27</sup> / <sub>64</sub> "		<b>93P5742EP2</b>	6825
	63 <sup>27</sup> / <sub>64</sub> "		<b>93P6342EP2</b>	7439
	69 <sup>27</sup> / <sub>64</sub> "		<b>93P6942EP2</b>	8053
	75 <sup>27</sup> / <sub>64</sub> "		<b>93P7542EP2</b>	8661
	81 <sup>27</sup> / <sub>64</sub> "		<b>93P8142EP2</b>	9277
	87 <sup>27</sup> / <sub>64</sub> "		<b>93P8742EP2</b>	9892
	93 <sup>27</sup> / <sub>64</sub> "		<b>93P9342EP2</b>	10519

## Standard Includes

- End panel
- Attachment hardware

## How to Specify


- ① Model
- ② Application orientation:  
**L** = Left hand  
**R** = Right hand
- ③ Material:  
**D** = Plywood
- ④ Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ⑤ Pattern:  
**C** = Crossroads  
**D** = Diagonal  
**I** = Intersect  
**S** = Stitch
- ⑥ Finish:  
**CR** = Clear




**C** = Crossroads



**D** = Diagonal



**I** = Intersect



**S** = Stitch


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | Painted

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application and intersect pattern shown.


<b>Dimensions</b>			<b>Model</b>	<b>Price</b>
<i>D</i>	<i>W</i>	<i>H</i>		
<b>2-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	27 <sup>27</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	<b>93P2730EP</b>	\$2468
	33 <sup>27</sup> / <sub>64</sub> "		<b>93P3330EP</b>	2834
	39 <sup>27</sup> / <sub>64</sub> "		<b>93P3930EP</b>	3199
	45 <sup>27</sup> / <sub>64</sub> "		<b>93P4530EP</b>	3565
	51 <sup>27</sup> / <sub>64</sub> "		<b>93P5130EP</b>	3933
	57 <sup>27</sup> / <sub>64</sub> "		<b>93P5730EP</b>	4299
	63 <sup>27</sup> / <sub>64</sub> "		<b>93P6330EP</b>	4666
	69 <sup>27</sup> / <sub>64</sub> "		<b>93P6930EP</b>	5032
	75 <sup>27</sup> / <sub>64</sub> "		<b>93P7530EP</b>	5399
	81 <sup>27</sup> / <sub>64</sub> "		<b>93P8130EP</b>	5765
	87 <sup>27</sup> / <sub>64</sub> "		<b>93P8730EP</b>	6131
	93 <sup>27</sup> / <sub>64</sub> "		<b>93P9330EP</b>	6498

## Standard Includes

- End panel
- Attachment hardware

## How to Specify


- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
P = Paint
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Pattern:  
C = Crossroads  
D = Diagonal  
I = Intersect  
S = Stitch
- 6 Paint price group:  
STD = Standard  
GAL1 = Gallery (+10%)
- 7 Paint designator




**C** = Crossroads



**D** = Diagonal



**I** = Intersect



**S** = Stitch


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | Painted, continued

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application and intersect pattern shown.


<b>Dimensions</b>			<b>Model</b>	<b>Price</b>
<i>D</i>	<i>W</i>	<i>H</i>		
<b>3-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	27 <sup>27</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	<b>93P2742EP</b>	\$3188
	33 <sup>27</sup> / <sub>64</sub> "		<b>93P3342EP</b>	3711
	39 <sup>27</sup> / <sub>64</sub> "		<b>93P3942EP</b>	4233
	45 <sup>27</sup> / <sub>64</sub> "		<b>93P4542EP</b>	4756
	51 <sup>27</sup> / <sub>64</sub> "		<b>93P5142EP</b>	5277
	57 <sup>27</sup> / <sub>64</sub> "		<b>93P5742EP</b>	5802
	63 <sup>27</sup> / <sub>64</sub> "		<b>93P6342EP</b>	6311
	69 <sup>27</sup> / <sub>64</sub> "		<b>93P6942EP</b>	6846
	75 <sup>27</sup> / <sub>64</sub> "		<b>93P7542EP</b>	7361
	81 <sup>27</sup> / <sub>64</sub> "		<b>93P8142EP</b>	7886
	87 <sup>27</sup> / <sub>64</sub> "		<b>93P8742EP</b>	8409
	93 <sup>27</sup> / <sub>64</sub> "		<b>93P9342EP</b>	8941

## Standard Includes

- End panel
- Attachment hardware

## How to Specify


- ① Model
- ② Application orientation:  
**L** = Left hand  
**R** = Right hand
- ③ Material:  
**P** = Paint
- ④ Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ⑤ Pattern:  
**C** = Crossroads  
**D** = Diagonal  
**I** = Intersect  
**S** = Stitch
- ⑥ Paint price group:  
**STD** = Standard  
**GAL1** = Gallery (+10%)
- ⑦ Paint designator




**C** = Crossroads



**D** = Diagonal



**I** = Intersect



**S** = Stitch


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | Painted, continued

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application and intersect pattern shown.


Dimensions			Model	Price
D	W	H		
3.5-High				
1 <sup>1</sup> / <sub>2</sub> "	27 <sup>27</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	93P2750EP	\$3566
	33 <sup>27</sup> / <sub>64</sub> "		93P3350EP	4175
	39 <sup>27</sup> / <sub>64</sub> "		93P3950EP	4779
	45 <sup>27</sup> / <sub>64</sub> "		93P4550EP	5385
	51 <sup>27</sup> / <sub>64</sub> "		93P5150EP	5992
	57 <sup>27</sup> / <sub>64</sub> "		93P5750EP	6599
	63 <sup>27</sup> / <sub>64</sub> "		93P6350EP	7205
	69 <sup>27</sup> / <sub>64</sub> "		93P6950EP	7810
	75 <sup>27</sup> / <sub>64</sub> "		93P7550EP	8416
	81 <sup>27</sup> / <sub>64</sub> "		93P8150EP	9023
	87 <sup>27</sup> / <sub>64</sub> "		93P8750EP	9629
	93 <sup>27</sup> / <sub>64</sub> "		93P9350EP	10237

## Standard Includes

- End panel
- Attachment hardware

## How to Specify


- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
P = Paint
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Pattern:  
C = Crossroads  
D = Diagonal  
I = Intersect  
S = Stitch
- 6 Paint price group:  
STD = Standard  
GAL1 = Gallery (+10%)
- 7 Paint designator




**C** = Crossroads



**D** = Diagonal



**I** = Intersect



**S** = Stitch


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | 3D Laminate

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application shown.

Dimensions			Model	Price
D	W	H		
2-High				
11/2"	27 <sup>27</sup> /64"	29 <sup>3</sup> /4"	33P2730EP	\$6538
	33 <sup>27</sup> /64"		33P3330EP	6959
	39 <sup>27</sup> /64"		33P3930EP	7414
	45 <sup>27</sup> /64"		33P4530EP	7869
	51 <sup>27</sup> /64"		33P5130EP	8324
	57 <sup>27</sup> /64"		33P5730EP	8778
	63 <sup>27</sup> /64"		33P6330EP	9235
	69 <sup>27</sup> /64"		33P6930EP	9689
	75 <sup>27</sup> /64"		33P7530EP	10045
	81 <sup>27</sup> /64"		33P8130EP	10500
	87 <sup>27</sup> /64"		33P8730EP	10955
	93 <sup>27</sup> /64"		33P9330EP	11410
3-High				
11/2"	27 <sup>27</sup> /64"	42 <sup>11</sup> /21"	33P2742EP	\$7290
	33 <sup>27</sup> /64"		33P3342EP	7898
	39 <sup>27</sup> /64"		33P3942EP	8482
	45 <sup>27</sup> /64"		33P4542EP	9068
	51 <sup>27</sup> /64"		33P5142EP	9654
	57 <sup>27</sup> /64"		33P5742EP	10237
	63 <sup>27</sup> /64"		33P6342EP	10824
	69 <sup>27</sup> /64"		33P6942EP	11409
	75 <sup>27</sup> /64"		33P7542EP	11997
	81 <sup>27</sup> /64"		33P8142EP	12581
	87 <sup>27</sup> /64"		33P8742EP	13169
	93 <sup>27</sup> /64"		33P9342EP	13752

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
T = 3D Laminate
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Exterior (face) 3D laminate designator
- 6 Accent 3D laminate designator


# NARRATE® PANEL SYSTEM

End Panels for Single-Sided Applications | 3D Laminate, continued

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Left-hand application shown.

<b>Dimensions</b>			<b>Model</b>	<b>Price</b>
<i>D</i>	<i>W</i>	<i>H</i>		
<b>3.5-High</b>				
1½"	27 <sup>27</sup> /64"	49 <sup>9</sup> /32"	<b>33P2750EP</b>	\$7418
	33 <sup>27</sup> /64"		<b>33P3350EP</b>	8893
	39 <sup>27</sup> /64"		<b>33P3950EP</b>	9489
	45 <sup>27</sup> /64"		<b>33P4550EP</b>	10084
	51 <sup>27</sup> /64"		<b>33P5150EP</b>	10678
	57 <sup>27</sup> /64"		<b>33P5750EP</b>	11275
	63 <sup>27</sup> /64"		<b>33P6350EP</b>	11869
	69 <sup>27</sup> /64"		<b>33P6950EP</b>	12464
	75 <sup>27</sup> /64"		<b>33P7550EP</b>	13051
	81 <sup>27</sup> /64"		<b>33P8150EP</b>	13646
	87 <sup>27</sup> /64"		<b>33P8750EP</b>	14242
	93 <sup>27</sup> /64"		<b>33P9350EP</b>	14836

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- 1 Model
- 2 Application orientation:  
L = Left hand  
R = Right hand
- 3 Material:  
T = 3D Laminate
- 4 Application:  
33P = For use with 33P frames  
93P = For use with 93P frames
- 5 Exterior (face) 3D laminate designator
- 6 Accent 3D laminate designator


# NARRATE® PANEL SYSTEM

End Panels for Dual-Sided Applications | TFL, HPL, or Wood

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Material		
D	W	H		TFL (LL)	HPL (L)	Wood (W)
2-High						
1 <sup>3</sup> / <sub>16</sub> "*	51 <sup>35</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	33P5130DEP	\$906	\$1354	\$1495
	63 <sup>35</sup> / <sub>64</sub> "		33P6330DEP	973	1505	1572
	75 <sup>35</sup> / <sub>64</sub> "		33P7530DEP	1037	1655	1727
	87 <sup>35</sup> / <sub>64</sub> "		33P8730DEP	1104	1802	1866
	99 <sup>35</sup> / <sub>64</sub> "		33P9930DEP	—	—	2008
	111 <sup>35</sup> / <sub>64</sub> "		33P11130DEP	—	—	2148
3-High						
1 <sup>3</sup> / <sub>16</sub> "*	51 <sup>35</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	33P5142DEP	\$992	\$1773	\$1911
	63 <sup>35</sup> / <sub>64</sub> "		33P6342DEP	1076	2010	2108
	75 <sup>35</sup> / <sub>64</sub> "		33P7542DEP	1166	2142	2303
	87 <sup>35</sup> / <sub>64</sub> "		33P8742DEP	1254	2364	2500
	99 <sup>35</sup> / <sub>64</sub> "		33P9942DEP	—	—	2697
	111 <sup>35</sup> / <sub>64</sub> "		33P11142DEP	—	—	2891
3.5-High						
1 <sup>3</sup> / <sub>16</sub> "*	51 <sup>35</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	33P5150DEP	\$1074	\$2053	\$2268
	63 <sup>35</sup> / <sub>64</sub> "		33P6350DEP	1181	2337	2427
	75 <sup>35</sup> / <sub>64</sub> "		33P7550DEP	1293	2634	2745
	87 <sup>35</sup> / <sub>64</sub> "		33P8750DEP	1403	2927	3062
	99 <sup>35</sup> / <sub>64</sub> "		33P9950DEP	—	—	3379
	111 <sup>35</sup> / <sub>64</sub> "		33P11150DEP	—	—	3695

\*Depth dimension for TFL end panels is 1<sup>1</sup>/<sub>8</sub>".

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- ① Model
- ② Material:  
**LL** = TFL  
**L** = HPL  
**W** = Wood
- ③ Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ④ Wood or laminate price group:  
**STD** = Group 1
- ⑤ Wood or laminate designator
- ⑥ Laminate edge designator

End Panel Returns  
 ➤ See page NA.152.

# NARRATE® PANEL SYSTEM

End Panels for Dual-Sided Applications | Resin Insert with Frame

Pricing

GSA SIN 33721


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Standard Includes

- End panel with metal frame and resin insert
- Attachment hardware

## How to Specify

- ① Model
- ② Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ③ Frame paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ④ Frame paint designator
- ⑤ Resin finish:  
**25** = Glacier



<b>Dimensions</b>			<b>Model</b>	<b>Price</b>
<i>D</i>	<i>W</i>	<i>H</i>		
<b>2-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	<b>33P5130DEPPR</b>	\$1957
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6330DEPPR</b>	2148
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7530DEPPR</b>	2339
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8730DEPPR</b>	2530
<b>3-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	<b>33P5142DEPPR</b>	\$2284
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6342DEPPR</b>	2512
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7542DEPPR</b>	2737
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8742DEPPR</b>	2964
<b>3.5-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	<b>33P5150DEPPR</b>	\$2469
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6350DEPPR</b>	2726
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7550DEPPR</b>	2985
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8750DEPPR</b>	3245



# NARRATE® PANEL SYSTEM

End Panels for Dual-Sided Applications | Plywood

Pricing

GSA SIN 33721


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Standard Includes

- End panel
- Attachment hardware


## How to Specify

- ① Model
- ② Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ③ Pattern:  
**C** = Crossroads  
**D** = Diagonal  
**I** = Intersect  
**S** = Stitch
- ④ Finish:  
**CR** = Clear



Stitch plywood pattern shown.


Dimensions			Model	Price
D	W	H		
2-High				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	93P5130DEP2D	\$4631
	63 <sup>27</sup> / <sub>64</sub> "		93P6330DEP2D	5494
	75 <sup>27</sup> / <sub>64</sub> "		93P7530DEP2D	6356
	87 <sup>27</sup> / <sub>64</sub> "		93P8730DEP2D	7220
3-High				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	93P5142DEP2D	\$6213
	63 <sup>27</sup> / <sub>64</sub> "		93P6342DEP2D	7445
	75 <sup>27</sup> / <sub>64</sub> "		93P7542DEP2D	8677
	87 <sup>27</sup> / <sub>64</sub> "		93P8742DEP2D	9905




**C** = Crossroads



**D** = Diagonal



**I** = Intersect



**S** = Stitch

# NARRATE® PANEL SYSTEM

End Panels for Dual-Sided Applications | Painted

Pricing

GSA SIN 33721


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- ① Model
- ② Application:
  - 33P** = For use with 33P frames
  - 93P** = For use with 93P frames
- ③ Pattern:
  - C** = Crossroads
  - D** = Diagonal
  - I** = Intersect
  - S** = Stitch
- ③ Paint price group:
  - STD** = Standard
  - GAL1** = Gallery (+10%)
- ④ Paint designator



Stitch plywood pattern shown.

Dimensions			Model	Price
D	W	H		
2-High				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	93P5130DEPP	\$3936
	63 <sup>27</sup> / <sub>64</sub> "		93P6330DEPP	4669
	75 <sup>27</sup> / <sub>64</sub> "		93P7530DEPP	5403
	87 <sup>27</sup> / <sub>64</sub> "		93P8730DEPP	6136
3-High				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	93P5142DEPP	\$5282
	63 <sup>27</sup> / <sub>64</sub> "		93P6342DEPP	6328
	75 <sup>27</sup> / <sub>64</sub> "		93P7542DEPP	7375
	87 <sup>27</sup> / <sub>64</sub> "		93P8742DEPP	8419
3.5-High				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	93P5150DEPP	\$6002
	63 <sup>27</sup> / <sub>64</sub> "		93P6350DEPP	7215
	75 <sup>27</sup> / <sub>64</sub> "		93P7550DEPP	8430
	87 <sup>27</sup> / <sub>64</sub> "		93P8750DEPP	9642


# NARRATE® PANEL SYSTEM

End Panels for Dual-Sided Applications | 3D Laminate

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<i>Dimensions</i>			<i>Model</i>	<i>Price</i>
<i>D</i>	<i>W</i>	<i>H</i>		
<b>2-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	<b>33P5130DEPT</b>	\$7694
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6330DEPT</b>	8884
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7530DEPT</b>	10073
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8730DEPT</b>	11262
<b>3-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	<b>33P5142DEPT</b>	\$10098
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6342DEPT</b>	11287
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7542DEPT</b>	12476
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8742DEPT</b>	13665
<b>3.5-High</b>				
1 <sup>1</sup> / <sub>2</sub> "	51 <sup>27</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	<b>33P5150DEPT</b>	\$10970
	63 <sup>27</sup> / <sub>64</sub> "		<b>33P6350DEPT</b>	12157
	75 <sup>27</sup> / <sub>64</sub> "		<b>33P7550DEPT</b>	13348
	87 <sup>27</sup> / <sub>64</sub> "		<b>33P8750DEPT</b>	14537

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- ① Model
- ② Application:
  - 33P** = For use with 33P frames
  - 93P** = For use with 93P frames
- ③ Exterior (face) 3D laminate designator
- ④ Accent 3D laminate designator

# NARRATE® PANEL SYSTEM

End Panel Sets for Dual-Sided Applications | TFL, HPL, or Wood

## Pricing

GSA SIN 33721


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Standard Includes

- End panel
- Attachment hardware

### How to Specify

- ① Model
- ② Material:  
**LL** = TFL  
**L** = HPL  
**W** = Wood
- ③ Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ④ Wood or laminate price group:  
**STD** = Group 1
- ⑤ Wood or laminate designator
- ⑥ Laminate edge designator



Dimensions			Model	Material		
D	W	H		TFL (LL)	HPL (L)	Wood (W)
2-High						
13 <sup>1</sup> / <sub>16</sub> "*	49 <sup>4</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	33P5030DSEP	\$1612	\$2882	—
	55 <sup>4</sup> / <sub>64</sub> "		33P5630DSEP	1670	3276	—
	61 <sup>4</sup> / <sub>64</sub> "		33P6230DSEP	1731	3672	3566
	67 <sup>4</sup> / <sub>64</sub> "		33P6830DSEP	1789	4065	3996
	73 <sup>4</sup> / <sub>64</sub> "		33P7430DSEP	1849	4457	4695
	79 <sup>4</sup> / <sub>64</sub> "		33P8030DSEP	1906	4853	5126
	85 <sup>4</sup> / <sub>64</sub> "		33P8630DSEP	1965	5246	5555
	91 <sup>4</sup> / <sub>64</sub> "		33P9230DSEP	2022	5642	5985
	97 <sup>4</sup> / <sub>64</sub> "		33P9830DSEP	—	—	6414
	103 <sup>4</sup> / <sub>64</sub> "		33P10430DSEP	—	—	6843
	109 <sup>4</sup> / <sub>64</sub> "		33P11030DSEP	—	—	7273
	115 <sup>4</sup> / <sub>64</sub> "		33P11630DSEP	—	—	7703
3-High						
13 <sup>1</sup> / <sub>16</sub> "*	49 <sup>4</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	33P5042DSEP	\$1922	\$3025	—
	55 <sup>4</sup> / <sub>64</sub> "		33P5642DSEP	2015	3508	—
	61 <sup>4</sup> / <sub>64</sub> "		33P6242DSEP	2108	3991	4601
	67 <sup>4</sup> / <sub>64</sub> "		33P6842DSEP	2202	4476	5111
	73 <sup>4</sup> / <sub>64</sub> "		33P7442DSEP	2297	4959	5620
	79 <sup>4</sup> / <sub>64</sub> "		33P8042DSEP	2392	5443	6132
	85 <sup>4</sup> / <sub>64</sub> "		33P8642DSEP	2482	5927	6640
	91 <sup>4</sup> / <sub>64</sub> "		33P9242DSEP	2575	6411	7151
	97 <sup>4</sup> / <sub>64</sub> "		33P9842DSEP	—	—	7661
	103 <sup>4</sup> / <sub>64</sub> "		33P10442DSEP	—	—	8172
	109 <sup>4</sup> / <sub>64</sub> "		33P11042DSEP	—	—	8681
	115 <sup>4</sup> / <sub>64</sub> "		33P11642DSEP	—	—	9191

\*Depth dimension for TFL end panels is 1<sup>1</sup>/<sub>8</sub>".

Dimensions are for each end panel in set.

End Panel Returns  
 ➤ See page NA.152.

# NARRATE® PANEL SYSTEM

End Panel Sets for Dual-Sided Applications | TFL, HPL, or Wood, continued

## Pricing

GSA SIN 33721


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Standard Includes

- End panel
- Attachment hardware

### How to Specify

- ① Model
- ② Material:  
**LL** = TFL  
**L** = HPL  
**W** = Wood
- ③ Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ④ Wood or laminate price group:  
**STD** = Group 1
- ⑤ Wood or laminate designator
- ⑥ Laminate edge designator



Dimensions			Model	Material		
D	W	H		TFL (LL)	HPL (L)	Wood (W)
3.5-High						
13 <sup>1</sup> / <sub>16</sub> "*	49 <sup>49</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	33P5050DSEP	\$2046	\$3321	—
	55 <sup>49</sup> / <sub>64</sub> "		33P5650DSEP	2155	3846	—
	61 <sup>49</sup> / <sub>64</sub> "		33P6250DSEP	2261	4370	5898
	67 <sup>49</sup> / <sub>64</sub> "		33P6850DSEP	2368	4892	6463
	73 <sup>49</sup> / <sub>64</sub> "		33P7450DSEP	2476	5417	7027
	79 <sup>49</sup> / <sub>64</sub> "		33P8050DSEP	2583	5939	7590
	85 <sup>49</sup> / <sub>64</sub> "		33P8650DSEP	2692	6464	8152
	91 <sup>49</sup> / <sub>64</sub> "		33P9250DSEP	2795	6987	8717
	97 <sup>49</sup> / <sub>64</sub> "		33P9850DSEP	—	—	9283
	103 <sup>49</sup> / <sub>64</sub> "		33P10450DSEP	—	—	9845
	109 <sup>49</sup> / <sub>64</sub> "		33P11050DSEP	—	—	10410
	115 <sup>49</sup> / <sub>64</sub> "		33P11650DSEP	—	—	10973

\*Depth dimension for TFL end panels is 1<sup>1</sup>/<sub>8</sub>".

Dimensions are for each end panel in set.

End Panel Returns  
 ➤ See page NA.152.

# NARRATE® PANEL SYSTEM

End Panel Sets for Dual-Sided Applications | Resin Insert with Frame

Pricing

GSA SIN 33721


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Standard Includes

- End panel with metal frame and resin insert
- Attachment hardware

## How to Specify

- ① Model
- ② Application:  
**33P** = For use with 33P frames  
**93P** = For use with 93P frames
- ③ Frame paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ④ Frame paint designator
- ⑤ Resin finish:  
**25** = Glacier



Dimensions			Model	Price
D	W	H		
2-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	33P5030DSEPPR	\$3351
	55 <sup>49</sup> / <sub>64</sub> "		33P5630DSEPPR	3521
	61 <sup>49</sup> / <sub>64</sub> "		33P6230DSEPPR	3690
	67 <sup>49</sup> / <sub>64</sub> "		33P6830DSEPPR	3861
	73 <sup>49</sup> / <sub>64</sub> "		33P7430DSEPPR	4028
	79 <sup>49</sup> / <sub>64</sub> "		33P8030DSEPPR	4196
	85 <sup>49</sup> / <sub>64</sub> "		33P8630DSEPPR	4368
	91 <sup>49</sup> / <sub>64</sub> "		33P9230DSEPPR	4537
3-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	33P5042DSEPPR	\$3947
	55 <sup>49</sup> / <sub>64</sub> "		33P5642DSEPPR	4153
	61 <sup>49</sup> / <sub>64</sub> "		33P6242DSEPPR	4357
	67 <sup>49</sup> / <sub>64</sub> "		33P6842DSEPPR	4564
	73 <sup>49</sup> / <sub>64</sub> "		33P7442DSEPPR	4768
	79 <sup>49</sup> / <sub>64</sub> "		33P8042DSEPPR	4974
	85 <sup>49</sup> / <sub>64</sub> "		33P8642DSEPPR	5178
	91 <sup>49</sup> / <sub>64</sub> "		33P9242DSEPPR	5382
3.5-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	33P5050DSEPPR	\$4294
	55 <sup>49</sup> / <sub>64</sub> "		33P5650DSEPPR	4531
	61 <sup>49</sup> / <sub>64</sub> "		33P6250DSEPPR	4766
	67 <sup>49</sup> / <sub>64</sub> "		33P6850DSEPPR	5003
	73 <sup>49</sup> / <sub>64</sub> "		33P7450DSEPPR	5239
	79 <sup>49</sup> / <sub>64</sub> "		33P8050DSEPPR	5475
	85 <sup>49</sup> / <sub>64</sub> "		33P8650DSEPPR	5711
	91 <sup>49</sup> / <sub>64</sub> "		33P9250DSEPPR	5947

Dimensions are for each end panel in set.


# NARRATE® PANEL SYSTEM

End Panel Sets for Dual-Sided Applications | Plywood

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Crossroads plywood pattern shown.


Dimensions			Model	Price
D	W	H		
2-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	93P5030DSEP2D	\$8121
	55 <sup>49</sup> / <sub>64</sub> "		93P5630DSEP2D	8971
	61 <sup>49</sup> / <sub>64</sub> "		93P6230DSEP2D	9820
	67 <sup>49</sup> / <sub>64</sub> "		93P6830DSEP2D	10670
	73 <sup>49</sup> / <sub>64</sub> "		93P7430DSEP2D	11520
	79 <sup>49</sup> / <sub>64</sub> "		93P8030DSEP2D	12368
	85 <sup>49</sup> / <sub>64</sub> "		93P8630DSEP2D	13218
	91 <sup>49</sup> / <sub>64</sub> "		93P9230DSEP2D	14067
3-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	93P5042DSEP2D	\$11255
	55 <sup>49</sup> / <sub>64</sub> "		93P5642DSEP2D	12484
	61 <sup>49</sup> / <sub>64</sub> "		93P6242DSEP2D	13713
	67 <sup>49</sup> / <sub>64</sub> "		93P6842DSEP2D	14940
	73 <sup>49</sup> / <sub>64</sub> "		93P7442DSEP2D	16169
	79 <sup>49</sup> / <sub>64</sub> "		93P8042DSEP2D	17397
	85 <sup>49</sup> / <sub>64</sub> "		93P8642DSEP2D	18625
	91 <sup>49</sup> / <sub>64</sub> "		93P9242DSEP2D	19842

## Standard Includes

- End panel
- Attachment hardware

## How to Specify


- ① Model
- ② Application:
  - 33P** = For use with 33P frames
  - 93P** = For use with 93P frames
- ③ Pattern:
  - C** = Crossroads
  - D** = Diagonal
  - I** = Intersect
  - S** = Stitch
- ④ Finish:
  - CR** = Clear




**C** = Crossroads



**D** = Diagonal



**I** = Intersect



**S** = Stitch

Dimensions are for each end panel in set.


# NARRATE® PANEL SYSTEM

End Panel Sets for Dual-Sided Applications | Painted

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Crossroads pattern shown.

Dimensions			Model	Price
D	W	H		
2-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	93P5030DSEPP	\$6903
	55 <sup>49</sup> / <sub>64</sub> "		93P5630DSEPP	7626
	61 <sup>49</sup> / <sub>64</sub> "		93P6230DSEPP	8347
	67 <sup>49</sup> / <sub>64</sub> "		93P6830DSEPP	9069
	73 <sup>49</sup> / <sub>64</sub> "		93P7430DSEPP	9791
	79 <sup>49</sup> / <sub>64</sub> "		93P8030DSEPP	10513
	85 <sup>49</sup> / <sub>64</sub> "		93P8630DSEPP	11236
	91 <sup>49</sup> / <sub>64</sub> "		93P9230DSEPP	11957
3-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	93P5042DSEPP	\$9567
	55 <sup>49</sup> / <sub>64</sub> "		93P5642DSEPP	10612
	61 <sup>49</sup> / <sub>64</sub> "		93P6242DSEPP	11655
	67 <sup>49</sup> / <sub>64</sub> "		93P6842DSEPP	12698
	73 <sup>49</sup> / <sub>64</sub> "		93P7442DSEPP	13744
	79 <sup>49</sup> / <sub>64</sub> "		93P8042DSEPP	14788
	85 <sup>49</sup> / <sub>64</sub> "		93P8642DSEPP	15832
	91 <sup>49</sup> / <sub>64</sub> "		93P9242DSEPP	16866
3.5-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	93P5050DSEPP	\$10997
	55 <sup>49</sup> / <sub>64</sub> "		93P5650DSEPP	12214
	61 <sup>49</sup> / <sub>64</sub> "		93P6250DSEPP	13427
	67 <sup>49</sup> / <sub>64</sub> "		93P6850DSEPP	14644
	73 <sup>49</sup> / <sub>64</sub> "		93P7450DSEPP	15860
	79 <sup>49</sup> / <sub>64</sub> "		93P8050DSEPP	17075
	85 <sup>49</sup> / <sub>64</sub> "		93P8650DSEPP	18290
	91 <sup>49</sup> / <sub>64</sub> "		93P9250DSEPP	19502

Dimensions are for each end panel in set.

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- ① Model
- ② Application:
  - 33P** = For use with 33P frames
  - 93P** = For use with 93P frames
- ③ Pattern:
  - C** = Crossroads
  - D** = Diagonal
  - I** = Intersect
  - S** = Stitch
- ③ Paint price group:
  - STD** = Standard
  - GAL1** = Gallery (+10%)
- ④ Paint designator




# NARRATE® PANEL SYSTEM

End Panel Sets for Dual-Sided Applications | 3D Laminate

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
2-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	29 <sup>3</sup> / <sub>4</sub> "	33P5030DSEPT	\$16463
	55 <sup>49</sup> / <sub>64</sub> "		33P5630DSEPT	17451
	61 <sup>49</sup> / <sub>64</sub> "		33P6230DSEPT	18441
	67 <sup>49</sup> / <sub>64</sub> "		33P6830DSEPT	19430
	73 <sup>49</sup> / <sub>64</sub> "		33P7430DSEPT	20419
	79 <sup>49</sup> / <sub>64</sub> "		33P8030DSEPT	21408
	85 <sup>49</sup> / <sub>64</sub> "		33P8630DSEPT	22400
	91 <sup>49</sup> / <sub>64</sub> "		33P9230DSEPT	23389
3-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	42 <sup>11</sup> / <sub>32</sub> "	33P5042DSEPT	\$19996
	55 <sup>49</sup> / <sub>64</sub> "		33P5642DSEPT	20970
	61 <sup>49</sup> / <sub>64</sub> "		33P6242DSEPT	21945
	67 <sup>49</sup> / <sub>64</sub> "		33P6842DSEPT	22918
	73 <sup>49</sup> / <sub>64</sub> "		33P7442DSEPT	23896
	79 <sup>49</sup> / <sub>64</sub> "		33P8042DSEPT	24872
	85 <sup>49</sup> / <sub>64</sub> "		33P8642DSEPT	25846
	91 <sup>49</sup> / <sub>64</sub> "		33P9242DSEPT	26820
3.5-High				
11½"	49 <sup>49</sup> / <sub>64</sub> "	49 <sup>9</sup> / <sub>32</sub> "	33P5050DSEPT	\$22951
	55 <sup>49</sup> / <sub>64</sub> "		33P5650DSEPT	23676
	61 <sup>49</sup> / <sub>64</sub> "		33P6250DSEPT	24402
	67 <sup>49</sup> / <sub>64</sub> "		33P6850DSEPT	25123
	73 <sup>49</sup> / <sub>64</sub> "		33P7450DSEPT	25850
	79 <sup>49</sup> / <sub>64</sub> "		33P8050DSEPT	26573
	85 <sup>49</sup> / <sub>64</sub> "		33P8650DSEPT	27298
	91 <sup>49</sup> / <sub>64</sub> "		33P9250DSEPT	28023

## Standard Includes

- End panel
- Attachment hardware

## How to Specify

- ① Model
- ② Application:
  - 33P** = For use with 33P frames
  - 93P** = For use with 93P frames
- ③ Exterior (face) 3D laminate designator
- ④ Accent 3D laminate designator

Dimensions are for each end panel in set.

# NARRATE® PANEL SYSTEM

End Panel Returns | TFL or HPL

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



<b>Dimensions</b>			<b>Model</b>	<b>Material</b>	
<i>D</i>	<i>W</i>	<i>H</i>		<i>TFL (LL)</i>	<i>HPL (L)</i>
<b>2-High</b>					
1⅜"	25⅜"	29¾"	<b>33P2530EPR</b>	\$759	\$989
1⅜"	30⅜"	29¾"	<b>33P3130EPR</b>	788	1068
<b>3-High</b>					
1⅜"	25⅜"	42Ⅰ⁄₃₂"	<b>33P2542EPR</b>	\$846	\$1209
1⅜"	30⅜"	42Ⅰ⁄₃₂"	<b>33P3142EPR</b>	900	1335
<b>3.5-High</b>					
1⅜"	25⅜"	49⁹⁄₃₂"	<b>33P2550EPR</b>	\$905	\$1348
1⅜"	30⅜"	49⁹⁄₃₂"	<b>33P3150EPR</b>	956	1481

\*Depth dimension for TFL end panels is 1 $\frac{1}{8}$ ".

## Standard Includes

- End panel return
- Two L brackets with 2H and 3H returns; three L brackets with 3.5H returns
- Bracket covers: paint

## How to Specify

- 1 Model
- 2 Material:  
**LL** = TFL  
**L** = HPL
- 3 Bracket cover paint group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 4 Bracket cover paint designator
- 4 Laminate price group:  
**STD** = Group 1
- 5 Laminate designator
- 6 Laminate edge designator


NARRATE® PANEL SYSTEM

Custom End Panel Brackets and Glides

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




Model	Price
<b>For Single-Sided or Dual-Sided End Panels</b>	
<i>For Use with 33P Narrate Frame Models</i>	
<b>33PEPBKDS1</b>	\$268
<i>For Use with 93P Narrate Frame Models</i>	
<b>93PEPBKDS1</b>	\$263

**Standard Includes**

- Brackets and wood screws

**How to Specify**

1 Model



<b>For Dual-Sided End Panel Sets</b>	
<i>For Use with 33P Narrate Frame Models</i>	
<b>33PEPBKDSS1</b>	\$538
<i>For Use with 93P Narrate Frame Models</i>	
<b>93PEPBKDSS1</b>	\$527


<b>Glides with T-Inserts (Set of 2)</b>	
<b>33PEPGS</b>	\$15

➤See page NA.39 for additional details on utilizing custom end panels with Narrate.

**NARRATE®** PANEL SYSTEM
 Electrical Components | Single-Sided Wireway Harnesses

Pricing
 GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



For Use With	Model	Price
<b>8-Wire</b>		
24"W frames	<b>33P24EDBS8</b>	\$199
30"W frames	<b>33P30EDBS8</b>	219
36"W frames	<b>33P36EDBS8</b>	229
42"W frames	<b>33P42EDBS8</b>	255
48"W frames	<b>33P48EDBS8</b>	262
<b>10-Wire</b>		
24"W frames	<b>33P24EDBS10</b>	\$253
30"W frames	<b>33P30EDBS10</b>	270
36"W frames	<b>33P36EDBS10</b>	282
42"W frames	<b>33P42EDBS10</b>	309
48"W frames	<b>33P48EDBS10</b>	315

**How to Specify**

❶ Model
 ❷ Power type (for 10-wire only):
 

10S = Shared neutral
 10D = Independent neutral

IMPORTANT: All electrical components must be the same power type (8, 10S or 10D).


Single sided base wireway harnesses accommodate up to two receptacles.

**NARRATE®** PANEL SYSTEM
 Electrical Components | Dual-Sided Base Wireway Harnesses

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



For Use With	Model	Price
<b>8-Wire</b>		
24"W frames	<b>33P24EDB8</b>	\$132
30"W frames	<b>33P30EDB8</b>	139
36"W frames	<b>33P36EDB8</b>	144
42"W frames	<b>33P42EDB8</b>	155
48"W frames	<b>33P48EDB8</b>	162
<b>10-Wire</b>		
24"W frames	<b>33P24EDB10</b>	\$187
30"W frames	<b>33P30EDB10</b>	193
36"W frames	<b>33P36EDB10</b>	198
42"W frames	<b>33P42EDB10</b>	206
48"W frames	<b>33P48EDB10</b>	214

How to Specify

❶ Model

❷ Power type (for 10-wire only):

10S = Shared neutral

10D = Independent neutral

IMPORTANT: All electrical components must be the same power type (8, 10S or 10D).

Base wireway harnesses accommodate up to four receptacles.

**NARRATE®** PANEL SYSTEM

Electrical Components | Single- and Dual-Sided Mid-Wireway Harnesses

Pricing



GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

How to Specify

1

Model



Model	Price
<b>Single Sided</b>	
33P24EDMS8	\$242
33P30EDMS8	261
33P36EDMS8	265
33P42EDMS8	291
33P48EDMS8	298
<b>Dual Sided</b>	
33P24EDM8	\$159
33P30EDM8	173
33P36EDM8	184
33P42EDM8	191
33P48EDM8	204

Mid-wireway harness only available in 8-wire; however, the 8-wire mid-wireway harness can connect to 8-wire or 10-wire base harnesses.

Dual-sided harnesses accommodate up to four receptacles; single-sided harnesses accommodate up to two receptacles.


# NARRATE® PANEL SYSTEM

## Electrical Components | Jumpers

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

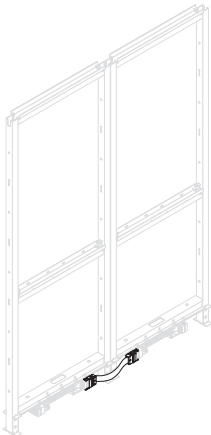

Model	Description	Function	Price
<b>8-Wire</b>			
<i>For Use in Straight-Line Applications</i>			
<b>33PEJB18</b>	From panel to panel	Routes power panel to panel	\$98
<b>33PEJB58</b>	Thru connector	Routes power panel to panel through connector	100
<i>For Use in 90° Applications</i>			
<b>33PEJB28</b>	Thru connector	Routes power panel to panel through 90° corner	\$100
<i>For Use in 120° Applications</i>			
<b>33PEJB58</b>	Thru connector	Routes power panel to panel through 120° corner	\$100
<b>10-Wire</b>			
<i>For Use in Straight-Line Applications</i>			
<b>33PEJB110</b>	From panel to panel	Routes power panel to panel	\$124
<b>33PEJB510</b>	Thru connector	Routes power panel to panel through connector	125
<i>For Use in 90° Applications</i>			
<b>33PEJB210</b>	Thru connector	Routes power panel to panel through 90° corner	\$125
<i>For Use in 120° Applications</i>			
<b>33PEJB510</b>	Thru connector	Routes power panel to panel through 120° corner	\$125

Jumpers are specified according to application. 8-wire jumpers are used in base or mid-wireway, 10-wire jumpers are only available in base.


IMPORTANT: All electrical components must be the same power type (8, 10S or 10D).

Pass-thru jumpers  
➤See page NA.158.

How to Specify

❶ Model  
 ❷ Power type (for 10-wire only):  
   **10S** = Shared neutral  
   **10D** = Independent neutral

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

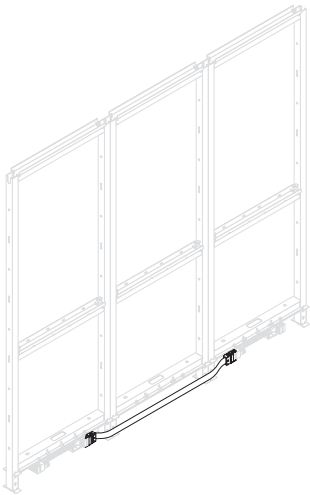

Model	Price
<b>8-Wire</b>	
33P18EPT8	\$236
33P24EPT8	238
33P30EPT8	240
33P36EPT8	243
33P42EPT8	245
33P48EPT8	247
33P53EPT8	250
<b>10-Wire</b>	
33P18EPT10	\$262
33P24EPT10	265
33P30EPT10	267
33P36EPT10	269
33P42EPT10	273
33P48EPT10	275
33P53EPT10	278

Standard Includes

- Jumper

How to Specify

- ① Model
- ② Power type (for 10-wire only):
  - 10S = Shared neutral
  - 10D = Independent neutral

Pass-Thru Jumper Selection:

Frame Width to be Passed Thru	Straightline Connections		90° and 120° Connections
	Thru Panel	Thru Connector & Panel	Thru Connector & Panel
18"	33P18EPT	33P24EPT	33P24EPT
24"	33P24EPT	33P30EPT	33P30EPT
30"	33P30EPT	33P36EPT	33P36EPT
36"	33P36EPT	33P42EPT	33P42EPT
42"	33P42EPT	33P48EPT	33P48EPT
48"	33P48EPT	33P53EPT	33P53EPT

Pass-through jumpers are specified according to application.

➤ See chart at right.

IMPORTANT: All electrical components must be the same power type (8, 10S or 10D).



# NARRATE® PANEL SYSTEM

Electrical Components | 15-Amp Duplex Receptacles

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



For Use With	Available Colors			STANDARD		WITH CONTROLLED CIRCUIT STAMP	
	Cinder	Designer White	Dark Orange	Model	Price	Model	Price
<b>Shared Neutral (8) configured as 8-Wire, 3 and 1</b>							
Circuit 1	•	•		33PER18S	\$38	33PER18SC	\$43
Circuit 2	•	•		33PER28S	38	33PER28SC	43
Circuit 3	•	•	•	33PER38S	38	33PER38SC	43
Circuit 4	•	•	•	33PER4D8S	38	33PER4D8SC	43
<b>Shared Neutral (8) configured as 8-Wire, 2 and 2</b>							
Circuit 1	•	•		33PER18S	\$38	33PER18SC	\$43
Circuit 2	•	•		33PER28S	38	33PER28SC	43
Circuit 3	•	•	•	33PER3D8S	38	33PER3D8SC	43
Circuit 4	•	•	•	33PER4D8S	38	33PER4D8SC	43
<b>Shared Neutral (10S) configured as 10-Wire, 3 and 3</b>							
Circuit 1	•	•		33PER110S	\$39	33PER110SC	\$44
Circuit 2	•	•		33PER210S	39	33PER210SC	44
Circuit 3	•	•		33PER310S	39	33PER310SC	44
Circuit 4	•	•	•	33PER4D10S	39	33PER4D10SC	44
Circuit 5	•	•	•	33PER5D10S	39	33PER5D10SC	44
Circuit 6	•	•	•	33PER6D10S	39	33PER6D10SC	44
<b>Independent Neutral (10D)</b>							
Circuit 1	•	•	•	33PER110D	\$39	33PER110DC	\$44
Circuit 2	•	•	•	33PER210D	39	33PER210DC	44
Circuit 3	•	•	•	33PER310D	39	33PER310DC	44
Circuit 4	•	•	•	33PER410D	39	33PER410DC	44

IMPORTANT: California Title 24 requires all controlled circuits to be identifiable with a permanent marking.

Select receptacle models based on the wiring configuration

IMPORTANT: All electrical components must be the same power type: 8, 10S, or 10D.

## Standard Includes

- Duplex receptacle

## How to Specify

- ① Model
- ② Color designator  
**439** = Nebulous White  
**462** = Cinder  
**498** = Orange (available on noted receptacles only)

# NARRATE® PANEL SYSTEM

Electrical Components | 20-Amp Duplex Receptacles

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



For Use With	Available Colors			STANDARD		WITH CONTROLLED CIRCUIT STAMP	
	Cinder	Designer White	Dark Orange	Model	Price	Model	Price
<b>Shared Neutral (8) configured as 8-Wire, 3 and 1</b>							
Circuit 1	•	•		33PER18S20	\$45	33PER18S20C	\$48
Circuit 2	•	•		33PER28S20	45	33PER28S20C	48
Circuit 3	•	•	•	33PER38S20	45	33PER38S20C	48
Circuit 4	•	•	•	33PER4D8S20	45	33PER4D8S20C	48
<b>Shared Neutral (8) configured as 8-Wire, 2 and 2</b>							
Circuit 1	•	•		33PER18S20	\$45	33PER18S20C	\$48
Circuit 2	•	•		33PER28S20	45	33PER28S20C	48
Circuit 3	•	•	•	33PER3D8S20	45	33PER3D8S20C	48
Circuit 4	•	•	•	33PER4D8S20	45	33PER4D8S20C	48
<b>Shared Neutral (10S) configured as 10-Wire, 3 and 3</b>							
Circuit 1	•	•		33PER110S20	\$39	33PER110S20C	49
Circuit 2	•	•		33PER210S20	46	33PER210S20C	49
Circuit 3	•	•		33PER310S20	46	33PER3D10S20C	—
Circuit 4	•	•	•	33PER4D10S20	46	33PER4D10S20C	49
Circuit 5	•	•	•	33PER5D10S20	46	33PER5D10S20C	49
Circuit 6	•	•	•	33PER6D10S20	46	33PER6D10S20C	49
<b>Independent Neutral (10D)</b>							
Circuit 1	•	•	•	33PER110D20	\$46	33PER110D20C	\$49
Circuit 2	•	•	•	33PER210D20	39	33PER210D20C	49
Circuit 3	Not available in 20-amp; use 15-amp receptacle model 33PER310D.						
Circuit 4	•	•	•	33PER410D20	46	33PER410D20C	49

IMPORTANT: California Title 24 requires all controlled circuits to be identifiable with a permanent marking.

Select receptacle models based on the wiring configuration.

IMPORTANT: All electrical components must be the same power type: 8, 10S, or 10D.

## Standard Includes

- Duplex receptacle

## How to Specify

- 1 Model
- 2 Color designator  
**439** = Nebulous White  
**462** = Cinder  
**498** = Orange (available on noted receptacles only)

NARRATE® PANEL SYSTEM

Electrical Components | USB Receptacles

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



For Use With	Available Colors		Model	Price
	Cinder	Nebulous White		
Circuit <b>Neutral (8) configured as 8-Wire, 3 and 1</b>				
Circuit 1	•	•	<b>33PERUP1S</b>	\$207
Circuit 2	•	•	<b>33PERUP2S</b>	207
Circuit 3	•	•	<b>33PERUP3S</b>	207
Circuit 4	•	•	<b>33PERUP4S</b>	207
<b>Shared Neutral (8) configured as 8-Wire, 2 and 2</b>				
Circuit 1	•	•	<b>33PERUP1S</b>	\$207
Circuit 2	•	•	<b>33PERUP2S</b>	207
Circuit 3	•	•	<b>33PERUP3S</b>	207
Circuit 4	•	•	<b>33PERUP4S</b>	207
<b>Shared Neutral (10S) configured as 10-Wire, 3 and 3</b>				
Circuit 1	•	•	<b>33PERUP1S</b>	\$207
Circuit 2	•	•	<b>33PERUP2S</b>	207
Circuit 3	•	•	<b>33PERUP3S</b>	207
Circuit 4	•	•	<b>33PERUP4S</b>	207
Circuit 5	•	•	<b>33PERUP5S</b>	207
Circuit 6	•	•	<b>33PERUP6S</b>	207

Standard Includes

- USB receptacle

How to Specify

- 1 Model
- 2 Color designator
- 439 = Nebulous White
- 462 = Cinder

IMPORTANT: All electrical components must be the same power type: 8, 10S, or 10D.

Models on this page are not applicable to independent neutral configurations.


NARRATE® PANEL SYSTEM

Electrical Components | Power Entries

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

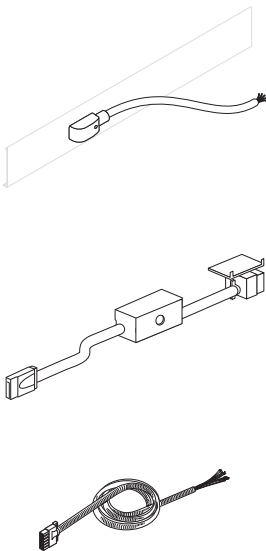

Description	Model	Price
<b>Base Power Entry</b>		
<b>8-Wire</b>		
4' Length	33PEPE4B8	\$275
6' Length	33PEPE6B8	298
<b>10-Wire</b>		
4' Length	33PEPE4B10	\$328
6' Length	33PEPE6B10	351
<b>New York City Floor/Wall Power Entry</b>		<i>Note: Approval number E44747.</i>
8-Wire	33PEPEBNYC8	\$352
10-Wire	33PEPEBNYC10	506
<b>Ceiling Power Entry</b>		
<b>8-Wire</b>		
12' Length	33PEPEC8	\$355
<b>10-Wire</b>		
12' Length	33PEPEC10	\$381

IMPORTANT: All electrical components must be the same power type: 8, 10S, or 10D. Power entries use one receptacle location.

Access to ceiling source is regulated by National Electric Code to 12' maximum conduit for standard includes construction. Lengths up to 24' are available with custom quote for alternate construction.

Ceiling power entry must plug into right-hand block of base wireway harness. It does not include junction box or related connectors.

Power/data pole must be specified separately for ceiling power entry.  
➤See page NA.163.

Standard Includes

- Power entry assembly

How to Specify

- ① Model
- ② Power type (omit for 8-wire models):
  - S = Shared neutral
  - D = Independent neutral


# NARRATE® PANEL SYSTEM

Electrical Components | Power/Data Poles

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions		Model	Top Cap Material	
Top Cap W	Pole Length		Wood (W)	Paint (P)
Ceiling Power/Data Poles				
24"	80"	33P24CPDPK	\$596	\$397
30"		33P30CPDPK	596	397
36"		33P36CPDPK	596	397
42"		33P42CPDPK	596	397
48"		33P48CPDPK	596	397

- Standard Includes
- Pole: paint
  - Notched structure top caps: wood or paint
  - Power pole trim plate: paint

- How to Specify
- 1 Model
  - 2 Top cap material:  
W = Wood  
P = Paint
  - 3 Top cap profile:  
F = Flat
  - 4 Top cap wood or paint price group:  
STD = Group 1/Standard  
STD<sup>M</sup> = Metallic (+10%)  
GAL<sup>1</sup> = Gallery (+10%)
  - 5 Top cap wood or paint designator
  - 6 Power pole and trim plate paint price group:  
STD = Standard  
STD<sup>M</sup> = Metallic (+10%)  
GAL<sup>1</sup> = Gallery (+10%)
  - 7 Power pole and trim plate paint designator

Ceiling power entry for use with power pole.  
➤See page NA.162.


# NARRATE® PANEL SYSTEM

Electrical Components | For Technology Tiles

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

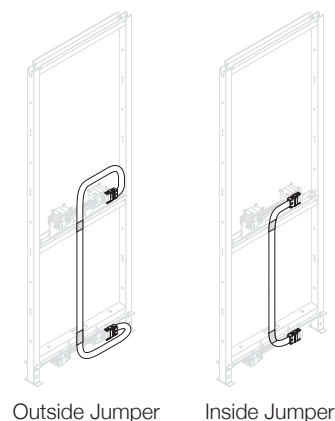

Model	Price
<b>Vertical Base-to-Tile Jumpers</b>	
<i>Outside Jumpers</i>	
<b>33PEBT84J48</b>	\$162
<b>33PEBT84J72</b>	204
<b>33PEBT84J94</b>	246
<i>Inside Jumpers</i>	
<b>33PEBT84JI48</b>	\$275
<b>33PEBT84JI72</b>	328
<b>33PEBT84JI94</b>	365

Jumper Selection Matrix:

Frame Width	Tile Location			
	2-high	3-high	4-high	5-high
30"	33PEBT84J48	33PEBT84J72	33PEBT84J72	33PEBT84J72
36"	33PEBT84J72	33PEBT84J72	33PEBT84J94	33PEBT84J94
42"	33PEBT84J72	33PEBT84J72	33PEBT84J94	33PEBT84J94
48"	33PEBT84J72	33PEBT84J72	33PEBT84J94	33PEBT84J94

## Hardwire Box for Tech Tile


<b>33PEHBB2</b>	\$167
-----------------	-------

## Data Plate

<b>33PETTDP02</b>	\$35
-------------------	------

## Hole Cover Plates (set of 10)

<b>33PETTRCP1</b>	\$108
-------------------	-------



Specify a technology tile without cuts for a panel with a pass-thru jumpers. They cannot be placed behind other tiles.

## Standard Includes

### Data Plate

- One plate with two openings
- Voice/data adapter kit with two of each style: black with Cinder plate or white with Designer White plate (PVC-free plastic)

### Cover Plates

- Set of 10 plates: paint

## How to Specify

### Jumper

- 1 Model

### Hardwire Box

- 1 Model

### Data Plates

- 1 Model
- 2 Paint price group:
  - STD** = Standard
  - STD M** = Metallic (+10%)
  - GAL1** = Gallery (+10%)
- 3 Paint designator
- 4 Adapter plate color designator:
  - 462** = Cinder
  - 405** = Designer White

### Hole Cover Plates


- 1 Model
- 2 Paint price group:
  - STD** = Standard
  - STD M** = Metallic (+10%)
  - GAL1** = Gallery (+10%)
- 3 Paint designator

# NARRATE® PANEL SYSTEM


Electrical Components | Hardwire

Pricing  
GSA SIN 33721


Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
Hardwire Box				
27⅞"	611⁄16"	31⁄16"	33PEHBB	\$161



Hardwire Cover Plate				
			33PEHBC	\$71



Hardwire Cover Plate for Power				
			33PEHBCP	\$77

Use standard non-powered frames and appropriately punched wireway covers.

Consult local electrical codes prior to specification.

Receptacles, conduit, wiring, and other required components to be supplied by electrician.

**Standard Includes**

- Box or cover plate: galvanized

**How to Specify**

- Model

# NARRATE® PANEL SYSTEM

## Cable Management

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Standard Includes

- Cable manager

### Tips

Data cable manager holds 24 1/4"-diameter cables.



### How to Specify

#### Vertical Cable Manager

- ① Model
- ② Vertical textile grade
- ③ Vertical textile number

#### Data Cable Manager

- ① Model



Dimensions			Model	Price
D	W	H		
Vertical Cable Manager				
For Use with Standard-Height (18 <sup>11</sup> / <sub>16</sub> "H) Square-Profile Overheads				
15 <sup>1</sup> / <sub>16</sub> "	7 <sup>7</sup> / <sub>8</sub> "	19 <sup>1</sup> / <sub>4</sub> "	33P1VCMN2	\$34
For Use with Reduced-Height (16 <sup>1</sup> / <sub>2</sub> "H) Square-, Bevel-, and Flat-Profile Overheads				
15 <sup>1</sup> / <sub>16</sub> "	7 <sup>7</sup> / <sub>8</sub> "	21 <sup>5</sup> / <sub>8</sub> "	33P3VCMN2	\$38
For Use with Flat-Profile Sliding-Door Overheads				
15 <sup>1</sup> / <sub>16</sub> "	7 <sup>7</sup> / <sub>8</sub> "	23 <sup>5</sup> / <sub>8</sub> "	33P5VCMN2	\$42
For Use with Center-Mount Overheads on 3H Narrate Panels				
15 <sup>1</sup> / <sub>16</sub> "	7 <sup>7</sup> / <sub>8</sub> "	14 <sup>1</sup> / <sub>8</sub> "	33P3HVCMN	\$43
For Use with Center-Mount Overheads on 3.5H Narrate Panels				
15 <sup>1</sup> / <sub>16</sub> "	7 <sup>7</sup> / <sub>8</sub> "	21"	33P50HVCMN	\$44
For Use with Center-Mount Overheads on 4H Narrate Panels				
15 <sup>1</sup> / <sub>16</sub> "	7 <sup>7</sup> / <sub>8</sub> "	26 <sup>5</sup> / <sub>8</sub> "	33P4HVCMN	\$47
Data Cable Manager				
			33PDCM	\$13

Fabric is railroaded on vertical cable manager. Grade A pricing is shown; use a specification tool for other fabric grades.




# NARRATE® PANEL SYSTEM

Flat Profile Overhead Storage | Sliding-Door Cabinets, Center-Mount

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
Two-Sided Access				
Compartment on Right (shown)				
14 <sup>5</sup> / <sub>8</sub> "	36"	14 <sup>3</sup> / <sub>8</sub> "	33S3614SOS2RP	\$1965
	42"		33S4214SOS2RP	2038
	48"		33S4814SOS2RP	2082
	54"		33S5414SOS2RP	2313
	60"		33S6014SOS2RP	2386
	66"		33S6614SOS2RP	2431
	72"		33S7214SOS2RP	2508
Compartment on Left				
14 <sup>5</sup> / <sub>8</sub> "	36"	14 <sup>3</sup> / <sub>8</sub> "	33S3614SOS2LP	\$1965
	42"		33S4214SOS2LP	2038
	48"		33S4814SOS2LP	2082
	54"		33S5414SOS2LP	2313
	60"		33S6014SOS2LP	2386
	66"		33S6614SOS2LP	2431
	72"		33S7214SOS2LP	2508

Related Products:

<b>Center-Mount Bracket Kit</b> (set of 2)		
<b>33PC2F</b>		\$274

Support bases or center-mount brackets must be specified separately.

Support bases  
➤ See page NA.169.

Lighting  
➤ See the Perks Lighting chapter in the *Kimball Accessory Solutions Price List*.

Cable Manager  
➤ See page NA.166.

## Standard Includes

- Chassis with center divider: metal
- Sliding door(s): metal

## How to Specify

- ① Model
- ② Bracket option:  
**X** = No brackets
- ③ Lock option:  
**KRB** = Key random, black core (+\$228)  
**KRS** = Key random, silver core (+228)  
**KSB** = Key specific, black (+\$154) specify lock core separately.  
**KSS** = Key specific, silver (+\$154) specify lock core separately.  
**X** = Non-locking
- ④ Door paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ⑤ Door paint designator
- ⑥ Chassis paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ⑦ Chassis paint designator
- ⑧ Accent paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ⑩ Accent paint designator


# NARRATE® PANEL SYSTEM

Flat Profile Overhead Storage | Open Cabinets, Center-Mount

Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
Two-Sided Access				
Compartment on Right (shown)				
14 <sup>5</sup> / <sub>8</sub> "	36"	14 <sup>3</sup> / <sub>8</sub> "	33S3614SO2RP	\$1352
	42"		33S4214SO2RP	1425
	48"		33S4814SO2RP	1467
	54"		33S5414SO2RP	1691
	60"		33S6014SO2RP	1762
	66"		33S6614SO2RP	1808
	72"		33S7214SO2RP	1880
Compartment on Left				
14 <sup>5</sup> / <sub>8</sub> "	36"	14 <sup>3</sup> / <sub>8</sub> "	33S3614SO2LP	\$1352
	42"		33S4214SO2LP	1425
	48"		33S4814SO2LP	1467
	54"		33S5414SO2LP	1691
	60"		33S6014SO2LP	1762
	66"		33S6614SO2LP	1808
	72"		33S7214SO2LP	1880

Related Products:

<b>Center-Mount Bracket Kit (set of 2)</b>		
<b>33PC2F</b>		\$274

Support bases or center-mount brackets must be specified separately.

Support bases  
➤ See page NA.169.

Lighting  
➤ See the Perks Lighting chapter in the *Kimball Accessory Solutions Price List*.

Cable Manager  
➤ See page NA.166.

## Standard Includes

- Chassis with center divider: metal

## How to Specify

- 1 Model
- 2 Bracket option):  
**X** = No brackets
- 3 Chassis paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 4 Chassis paint designator
- 5 Accent paint price group:  
**STD** = Standard  
**STDM** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- 6 Accent paint designator

NARRATE® PANEL SYSTEM

Flat Profile Overhead Storage | Support Bases for Perpendicular-Mount Applications

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions		Model	Price
D	H		
Disc Bases			
12"	30"	33P1230DP	\$1055
Support Post			
2¾"	30"	33P0230SP	\$633

Standard Includes

- Metal base with attachment bracket
- Overhead attachment brackets with disc base

How to Specify

- ① Model
- ② Paint price group:
  - STD** = Standard
  - STD M** = Metallic (+10%)
  - GAL 1** = Gallery (+10%)
- ③ Paint designator


# NARRATE® PANEL SYSTEM

## Flat Profile Overhead Storage | Cubby Storage

Pricing

GSA SIN 33721

Statement of Line	➤See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions				Model	Price
D	W	H	Interior Storage H		
Metal Cubby Storage					
12"	47¾"	615⁄16"	415⁄16"	33S4807SMCXP	\$821
	59¾"			33S6007SMCXP	1147
	71¾"			33S7207SMCXP	1304
Cubby Storage Ganging Brackets					
				12SGB	\$33

### Standard Includes

- Chassis: metal
- Narrate panel mounting brackets
- Support blocks
- Center divider

### How to Specify

#### Cubby

- Model
- Paint price group:
  - STD** = Standard
  - STDm** = Metallic
  - GAL1** = Gallery
- Paint designator

#### Brackets

- Model
- Paint price group:
  - STD** = Standard
  - STDm** = Metallic (+10%)
  - GAL1** = Gallery (+10%)
- Paint designator

IMPORTANT: For use on Narrate Traxx only.

Ganging bracket is required when mounting cubbies side by side.


Cubbies cannot be mounted below center-mount overheads.

NARRATE® PANEL SYSTEM

Xsede Height-Adjust Bracket

Pricing

GSA SIN 33721



Dimensions			Model	Price	Shipping	
D	W	H			lbs.	Cubic Feet
Right-Hand						
24"			33W24HABPBRXP	\$175	2.95	0.13
30"			33W30HABPBRXP	185	3.23	0.13
Left-Hand						
24"			33W24HABPBLXP	\$175	2.95	0.13
30"			33W30HABPBLXP	185	3.23	0.13

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Standard Includes

- Bracket

Tips

IMPORTANT: Height-adjust bracket is for use with Xsede T-leg base only. Narrate Support Traxx installed at the 2-high location are required.

How to Specify

- ① Model
- ② Paint price group:
  - STD** = Group 1/Standard
  - STD M** = Metallic (+10%)
  - GAL 1** = Gallery (+10%)
- ③ Paint designator

# NARRATE® PANEL SYSTEM

Metal Work Tools | For Use with Narrate Support Traxx Only

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175




### Standard Includes

- Metal work tool: paint

### How to Specify

- ① Model
- ② Paint price group:  
**STD** = Standard  
**STD M** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Paint designator

Dimensions			Model	Price
D	H	W		
Name Plate				
9"	1"		33P0109NPP	\$259
Pendaflex Folder Holders (set of 2)				
1"	2¼"		33P0102PFHP	\$155
Coat Hook or Phone/Ear Bud Holder				
1"	1"	1½"	33PEPHP	\$98
Slant Sorter				
9"	1⅜"	13"	33P0912SSP	\$246
Vertical Sorter				
1⅜"	9"	13"	33P0913VSP	\$279



Metal work tools on this page are also for use with Work|Able Traxx and slat tiles.






# NARRATE® PANEL SYSTEM

Metal Work Tools | For Use with Narrate Support Traxx Only, continued

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
Paper Tray				
9½"	13"	1¾"	33P0913PTP	\$245
Personal Shelf				
5¼"	13"	1¾"	33P0513PSP	\$245
Phone Shelf				
4"	7½"	1¾"	33P0407PSP	\$235
Dry-Erase Markerboard with Tray				
12 <sup>9</sup> / <sub>32</sub> "	11 <sup>27</sup> / <sub>64</sub> "	8 <sup>21</sup> / <sub>64</sub> "	33P0811DMP	\$243
Stainless Steel Utility Cup				
4¼"	3"	3⅝"	33P0404CH	\$181
Picture Frame				
5⅞"	7¼"	5½"	33P0507PFP	\$201
5⅞"	10¼"	8½"	33P0810PFP	219

Metal work tools on this page are also for use with Work|Able Traxx and slat tiles.

## Standard Includes

- Metal work tool: paint

## How to Specify

- ① Model
- ② Paint price group:  
**STD** = Standard  
**STD<sup>M</sup>** = Metallic (+10%)  
**GAL1** = Gallery (+10%)
- ③ Paint designator





# NARRATE® PANEL SYSTEM

Plastic Work Tools | For Use with Narrate Support Traxx Only

## Pricing

GSA SIN 33721

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175



Dimensions			Model	Price
D	W	H		
Letter-Size Paper Tray				
14"	9 <sup>3</sup> / <sub>8</sub> "	2"	33P149LTPT	\$100
Legal-Size Paper Tray				
10 <sup>1</sup> / <sub>2</sub> "	15"	2"	33P1115LPT	\$124
Slant Sorter				
12 <sup>1</sup> / <sub>2</sub> "	7"	7 <sup>1</sup> / <sub>2</sub> "	33PSS	\$101
Accessory Tray				
9 <sup>3</sup> / <sub>8</sub> "	10 <sup>1</sup> / <sub>8</sub> "	2"	33PAC	\$71
Pencil Cup				
3 <sup>1</sup> / <sub>2</sub> "	4"	4"	33PCP	\$51
Universal Clips (Set of 3)				
			33PUC	\$13

### Standard Includes

- Plastic work tool: black or clear
- Clips: steel

### Tips

Plastic work tools on this page are also for use with Work|Able Traxx and slat tiles.

IMPORTANT: Plastic work tools on this page are not for use on Xsite Traxx, Xsite slat tile, or Narrate slat tile, Traxx (TTWMT), or HIT/FIT slat tiles.

Clips come standard with Narrate plastic work tools to hang on Narrate Traxx. The universal clips shown above can be specified to convert the corresponding Perks® plastic work tools to hang on Narrate Traxx.

### How to Specify

- 1 Model
- 2 Plastic color:  
B = Black  
C = Clear

### Universal Clips

- 1 Model



# NARRATE® PANEL SYSTEM

## Wood

## Surface Materials

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Wood

*Applies to:*

- Wood tiles
- End panels
- Doors

#### Group 1 (STD)

<i>Designator</i>	<i>Color</i>	<i>Species<sup>1</sup></i>
AD	Almond	Straight Grain
MC	Amber	Cherry
AC	Autumn	Cherry
IM	Brighton	Maple
CO	Canyon	Straight Grain
CL	Caramel	Maple
CR	Clear Plywood <sup>2</sup>	
CC	Cordoba	Cherry
CW	Cordovan	Walnut
DF	Driftwood	Straight Grain
HN	Honey	Maple
TM	Huntington	Maple
DW	Judicial	Walnut
MW	Midtown	Walnut
MH	Mocha	Cherry
YO	Monterey	Straight Grain
NM	Natural	Maple
PB	Portobello	Straight Grain
792	Sable	Straight Grain
SC	Sedona	Cherry
TW	Tribeca	Walnut
TF	Truffle	Cherry
NW	Tuscan	Straight Grain
UW	Urban	Walnut

➤ For a complete overview of the surface materials program, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

➤ For special wood finishes, customer-specified paint, and customer-specified laminate processes and upcharges, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

#### FOOTNOTES:

<sup>1</sup> The wood species listed indicates the solid wood or veneer to which the finish color will be applied.

<sup>2</sup> Available on plywood end panels only.

# NARRATE® PANEL SYSTEM

Laminate | High-Pressure Laminate (HPL)

Surface Materials

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

*Applies to:*

- End panels

## Woodgrain Group 1 (STD)

793	Acorn
AD	Almond
MC	Amber
AC2	Autumn 2
BZ	Brazilwood
IM	Brighton
CO	Canyon
CI	Chai
CC	Cordoba
CW	Cordovan
DF	Driftwood
TM	Huntington
DW	Judicial
KN	Kona
MW	Midtown
MH	Mocha
YO	Monterey
PC	Porcini
PT	Portico
PB	Portobello
792	Sable
SC	Sedona
SK	Skyline
TW	Tribeca
TF	Truffle
NW	Tuscan
UW	Urban
WL	Willow

## Solid Color Group 1 (STD)

480	Antique White
403	Chamois
462	Cinder
492	Cinder Linear
440	Cloud
457	Dapple
405	Designer White
491	Designer White Linear
450	Fog
488	Frosty White
461	Graphite
478	Platinum Grey
420	Sandstone
425	Shadow
460	Storm
419	Wallaby

## Pattern Group 1 (STD)

818	Crisp Linen
821	Elemental Concrete
819	Flax Gauze
822	Smoke Quarstone
814	White Tigris

## Gallery Group 1 (GAL1)

*5% upcharge*

G1001	Citadel
G1011	Pepperdust

## Gallery Group 2 (GAL2)

*6% upcharge*

G1002	Planked Raw Oak
G1003	Evening Notte
G1004	Kirsche
G1005	Midnight Run
G1006	Sepia Walnut
G1007	Serotina
G1008	Timeless
G1009	White Nebbia
G1012	Phantom Ecru

➤ For a complete overview of the surface materials program, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

➤ For special wood finishes, customer-specified paint, and customer-specified laminate processes and upcharges, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

# NARRATE® PANEL SYSTEM

Laminate | Thermally Fused Laminate (TFL)

Surface Materials

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

## Applies to:

- End panels
- Laminate tiles
- Cover slats

### Woodgrain Group 1 (STD)

AD	Almond
MC	Amber
IM	Brighton
CO	Canyon
CC	Cordoba
DF	Driftwood
TM	Huntington
MW	Midtown
MH	Mocha
YO	Monterey
PB	Portobello
792	Sable
SC	Sedona
TW	Tribeca
NW	Tuscan
UW	Urban

### Solid Color Group 1 (STD)

480	Antique White
462	Cinder
440	Cloud
405	Designer White
450	Fog
488	Frosty White
461	Graphite
420	Sandstone
460	Storm
419	Wallaby

➤ For a complete overview of the surface materials program, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

➤ For special wood finishes, customer-specified paint, and customer-specified laminate processes and upcharges, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

**NARRATE®** PANEL SYSTEM  
Laminate | 3D Laminate

Surface Materials

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

---

<i>Applies to:</i>	<b>Solid Color</b>
• End panels	462 Cinder
	405 Designer White
	450 Fog

➤ For a complete overview of the surface materials program, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

# NARRATE® PANEL SYSTEM

## Paint

## Surface Materials

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

### Applies to:

- All painted surfaces, except back-painted tiles

### Standard (STD)

437	Cement
462	Cinder
440	Cloud
423	Concrete
457	Dapple
405	Designer White
450	Fog
109	Fossil
488	Frosty White
461	Graphite
463	Iron
400	Linen
454	Morrel
443	Pavestone
455	Quarry
420	Sandstone
425	Shadow
460	Storm
419	Wallaby

### Metallic (STDM)<sup>1</sup>

10% upcharge	
514	Carbon Metallic
547	Dark Bronze Metallic
501	Platinum Metallic
503	Satin Nickel Metallic
544	Silver Pearl
504	Taupe Metallic

### Gallery (GAL1)

10% upcharge	
G2004	Blush
G2006	Brick Red
G2003	Chive
G2002	Dark Blue
G2008	Eucalyptus
G2012	Ginkgo
G2007	Lavender Ash
G2001	Moon Beam
G2010	Naval
G2013	Olive Branch
G2011	Rustic Sun
G2005	Sangria
G2009	Tidewater

➤ For a complete overview of the surface materials program, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

➤ For special wood finishes, customer-specified paint, and customer-specified laminate processes and upcharges, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

### FOOTNOTES:

<sup>1</sup> Metallic paint not available on paint tiles or end panels.

<sup>2</sup> No upcharge

### Applies to:

- Back-painted glass tiles

462	Cinder
440	Cloud
405	Designer White
450	Fog
425	Shadow

501	Platinum Metallic <sup>2</sup>
-----	--------------------------------

NARRATE® PANEL SYSTEM

Textiles

Surface Materials

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

- Applies to:*

  - Connectors
  - Fire-rated fabric tiles
  - Vertical cable managers
- Kimball International Vertical Textiles**

Price Grades AA–B

➤ For a complete overview of the surface materials program, see the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com)

# NARRATE® PANEL SYSTEM

## COM Yardage Requirements

## Surface Materials

GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

**Kimball has analyzed each model** to most accurately reflect the yardage requirements. Fabric is railroaded.

The yardage requirement for each model is listed for 66"W directional, 66"W non-directional, and 54"W directional, where applicable.

\*\*\* = indicates the model has been truncated. Base model numbers may include additional letters or numbers; the yardage will be the same.

Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.
33P12FCS***	0.3	0.3	0.3	33P301IT***	1.0	1.0	1.0	33P482IT***	1.5	1.5	1.5
33P13FCS***	0.3	0.3	0.3	33P302IT***	1.0	1.0	1.0	33P483IT***	1.5	1.5	1.5
33P14FCS***	0.3	0.3	0.3	33P303IT***	1.0	1.0	1.0	33P4844IT***	1.5	1.5	1.5
33P15FCS***	0.3	n/a	0.3	33P3044IT***	1.0	1.0	1.0	33P484IT***	1.5	1.5	1.5
33P181IT***	0.6	0.6	0.6	33P304IT***	1.0	1.0	1.0	33P485IT***	1.5	n/a	1.5
33P182IT***	0.6	0.6	0.6	33P305IT***	1.0	n/a	1.0	33P48H06IT***	1.5	1.5	1.5
33P183IT***	0.6	0.6	0.6	33P30H06IT***	1.0	1.0	1.0	33P48H18IT***	1.5	1.5	1.5
33P1844IT***	0.6	0.6	0.6	33P30H18IT***	1.0	1.0	1.0	33P48H44IT***	1.5	1.5	1.5
33P184IT***	0.6	0.6	0.6	33P30H44IT***	1.0	1.0	1.0	33P4HVC MN	0.2	0.2	0.2
33P185IT***	0.6	n/a	0.6	33P32FCT***	0.2	0.2	0.2	33P50HVC MN	0.2	0.2	0.2
33P18H06IT***	0.6	0.6	0.6	33P33FCT***	0.2	0.2	0.2	33P541IT***	1.7	1.7	1.7
33P18H18IT***	0.6	0.6	0.6	33P34FCT***	0.2	0.2	0.2	33P542IT***	1.7	1.7	1.7
33P18H44IT***	0.6	0.6	0.6	33P35FCT***	0.2	n/a	0.2	33P543IT***	1.7	1.7	1.7
33P1FCLSF	0.3	0.3	0.3	33P361IT***	1.2	1.2	1.2	33P54H06IT***	1.7	1.7	1.7
33P1FCSSF	0.3	0.3	0.3	33P362IT***	1.2	1.2	1.2	33P54H18IT***	1.7	1.7	1.7
33P1FCTSF	0.2	0.2	0.2	33P363IT***	1.2	1.2	1.2	33P5VC MN2	0.2	0.2	0.2
33P1FCVSF	0.2	0.2	0.2	33P364IT***	1.2	1.2	1.2	33P601IT***	1.8	1.8	1.8
33P1H50FCS***	0.3	0.3	0.3	33P364IT***	1.2	1.2	1.2	33P602IT***	1.8	1.8	1.8
33P1VC MN2	0.2	0.2	0.2	33P365IT***	1.2	n/a	1.2	33P603IT***	1.8	1.8	1.8
33P22FCL***	0.3	0.3	0.3	33P36H06IT***	1.2	1.2	1.2	33P6044IT***	1.8	1.8	1.8
33P22FCV***	0.2	0.2	0.2	33P36H18IT***	1.2	1.2	1.2	33P604IT***	1.8	1.8	1.8
33P23FCL***	0.3	0.3	0.3	33P36H44IT***	1.2	1.2	1.2	33P605IT***	1.8	n/a	1.8
33P23FCV***	0.2	0.2	0.2	33P3H50FCT***	0.2	0.2	0.2	33P60H06IT***	1.8	1.8	1.8
33P241IT***	0.8	0.8	0.8	33P3HVC MN	0.2	0.2	0.2	33P60H18IT***	1.8	1.8	1.8
33P242IT***	0.8	0.8	0.8	33P3VC MN2	0.2	0.2	0.2	33P661IT***	2.0	2.0	2.0
33P243IT***	0.8	0.8	0.8	33P421IT***	1.3	1.3	1.3	33P662IT***	2.0	2.0	2.0
33P2444IT***	0.8	0.8	0.8	33P422IT***	1.3	1.3	1.3	33P663IT***	2.0	2.0	2.0
33P244IT***	0.8	0.8	0.8	33P423IT***	1.3	1.3	1.3	33P66H06IT***	2.0	2.0	2.0
33P245IT***	0.8	n/a	0.8	33P4244IT***	1.3	1.3	1.3	33P66H18IT***	2.0	2.0	2.0
33P24FCL***	0.3	0.3	0.3	33P424IT***	1.3	1.3	1.3	33P721IT***	2.2	2.2	2.2
33P24FCV***	0.2	0.2	0.2	33P425IT***	1.3	n/a	1.3	33P722IT***	2.2	2.2	2.2
33P25FCL***	0.3	0.3	0.3	33P42H06IT***	1.3	1.3	1.3	33P723IT***	2.2	2.2	2.2
33P25FCV***	0.2	0.2	0.2	33P42H18IT***	1.3	1.3	1.3	33P724IT***	2.2	2.2	2.2
33P2FCL***	0.3	0.3	0.3	33P42H44IT***	1.3	1.3	1.3	33P725IT***	2.2	n/a	2.2
33P2FCV***	0.2	0.2	0.2	33P481IT***	1.5	1.5	1.5	33P72H06IT***	2.2	2.2	2.2

### How to Use this Table

- ① Locate the model number
- ② Select yardage from the appropriate column.

➤ See the **Surface Materials Reference Guide** at [www.kimballinternational.com](http://www.kimballinternational.com) for COM policy and additional information.

# NARRATE® PANEL SYSTEM

## COM Yardage Requirements, continued

### Surface Materials

GSA Non-Contract

Statement of Line	➤ See page NA.2
Planning	NA.9
Pricing	NA.54
Surface Materials	NA.175

Model	66"W Directional	54"W Directional	66"W Non-Dir.
33P72H18IT***	2.2	2.2	2.2
33P781IT***	2.3	2.3	2.3
33P782IT***	2.3	2.3	2.3
33P781IT***	2.3	2.3	2.3
33P782IT***	2.3	2.3	2.3
33P783IT***	2.3	2.3	2.3
33P78H06IT***	2.3	2.3	2.3
33P78H18IT***	2.3	2.3	2.3
33P841IT***	2.5	2.5	2.5
33P842IT***	2.5	2.5	2.5
33P843IT***	2.5	2.5	2.5
33P841IT***	2.5	2.5	2.5
33P842IT***	2.5	2.5	2.5
33P843IT***	2.5	2.5	2.5
33P84H06IT***	2.5	2.5	2.5
33P84H18IT***	2.5	2.5	2.5
33P901IT***	2.7	2.7	2.7
33P902IT***	2.7	2.7	2.7
33P903IT***	2.7	2.7	2.7
33P901IT***	2.7	2.7	2.7
33P902IT***	2.7	2.7	2.7
33P903IT***	2.7	2.7	2.7
33P90H06IT***	2.7	2.7	2.7
33P90H18IT***	2.7	2.7	2.7
33P961IT***	2.8	2.8	2.8
33P962IT***	2.8	2.8	2.8
33P963IT***	2.8	2.8	2.8
33P961IT***	2.8	2.8	2.8
33P962IT***	2.8	2.8	2.8
33P963IT***	2.8	2.8	2.8
33P96H06IT***	2.8	2.8	2.8
33P96H18IT***	2.8	2.8	2.8

### How to Use this Table

- ① Locate the model number
- ② Select yardage from the appropriate column.

➤ See the *Surface Materials Reference Guide* at [www.kimballinternational.com](http://www.kimballinternational.com) for COM policy and additional information.