

ACCESSORIES

Product Specifications	550
Product Options	553
Product Pages	554

ACCESSORIES

POWER/DATA ELECTRICAL SPECIFICATIONS

ROUND GROMMET (G10)

- NACG10EL features 2 120 volt receptacles and 2 Cat5E data ports and 6' AC cord rated at 15 amps; data ports are not pre-wired
- Field installable
- For conference tables only
- Black nylon
- 8 adapter plates are provided

PIVOTING POWER GROMMET (MHO-B) (G12B, G12C)

- Field installable
- Silver, black, or white powder coat
- (G12B) 2 power outlets and 2 USB-A + C combo
- (G12C) 4 power outlets with 72" circuit breaker cord
- Must be ordered separately and installed in the field – top should be ordered with CUT-G12C option
- Hardwire available
- Specify model number only
- 6 ft. cord
- UL Listed

INTERLINK IQ PIVOTING POWER GROMMET (MHO-B)(G12B, G12C)

- Non-sequential "Daisy chain" solution
- Interlink IQ system can be used with training tables
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- Jumper or transitional jumper used between the smart box and G12 IQ grommets when the span between grommet locations are greater than 60"
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized

DOUBLE PIVOTING M2X-B POWER GROMMET (G15B)

- Accommodates table thicknesses of ¾"-1¼"
- 1 touch door remains open during use
- 2 6 ft. power cords with 3-prong molded plug for each side
- Spill-proof
- Available in silver, black or white powder coat
- Hardwire/Chicago Code available
- Corded units (standard and hardwire) have 2 72" long power cords (1 for each side) rated at 15 amps 120 volts
- Grommet comes with undersurface wire managers attached underneath conference top
- Field installable into a CUT-G15 (must be ordered)
- UL Listed
- G15B SIDE 1: 2 power outlets, 1 blank data port, 1 HDMI, and 1 USB A + C combo SIDE 2: 2 power outlets, 1 blank data port, 1 VGA and 1 USB-A + C combo

INTERLINK IQ DOUBLE PIVOTING M2X-B POWER GROMMET (G15B)

- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- 1 touch door remains open during use
- Maximum of 4 units because G15 is double sided (F8)
- Two G15 units connected together will span 77½" from center of grommet 1 to center of grommet 2.
- Two G15 units connected together with 1 60" jumper will span 135½" from center of grommet 1 to center of grommet 2.
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized
- G15B Interlink has SIDE 1: 2 power outlets, 1 blank data port, 1 HDMI, and 1 USB-A + C combo SIDE 2: 2 power outlets, 1 blank data port, 1 VGA and 1 USB-A + C combo

TRANSITIONAL JUMPER

- Jumper used to connect an older IQ version and new IQ system (as of November 2019)

POWER/DATA OASIS (G162)

- To be ordered with G16 cutout options
- Must be inserted and installed into cutouts in field
- Fits into CUT-G16C, CUT-G16E, CUT-G16LR, CUT-G16A, and CUT-G16CE options
- Silver or black powder coat
- The Power/Data Oasis may be utilized with any wire access base; however, for the cleanest aesthetic, specify the panel base kit
- Power/Data Oasis (G162) unit will feature 6 power receptacles with 2 108" power cords and molded plugs rated at 12 amps 120 volts, 2 charging USB (2.1); 1 HDMI; 1 VGA with mini stereo, and 1 RJ45 data jack
- Power/Data Oasis hardwire unit (G162) will feature 6 power receptacles with 1 72" long hardwire conduit covered pigtail cable on 1 end which carries 2 20 amp 120 volt circuits to power 2 sides of the Power/Data Oasis, 2 charging USB (2.1); 1 HDMI; 1 VGA with mini stereo, and 1 RJ45 data jack. Not Chicago Code
- Hardwire/Chicago Code available
- Standard units have cords that are 9 ft. long rated at 15 amps 120 volts and molded plug. Hardwire units have cords that are 6 ft. long rated at 20 amps 120 volts and molded plug
- Cannot be field scribed for cutout
- UL Listed
- For more specification information: www.electri-cable.com

GLENBEIGH PIVOTING POWER GROMMET (G17A, G17B, G17C)

- Accommodates table thickness of ¾"-1¼"
- 10 ft. power cord with 3-prong molded plug
- Spill-proof
- Available in silver, black or white powder coat
- Hardwire/Chicago Code available
- 15 amp, 120v (hardwire models)
- 10 ft. metal conduit (hardwire models)
- UL Listed
- G17A available with 2 power outlets
- G17B available with 1 power outlet and 1 USB-A + C combo port
- G17C available with 1 power outlet

INTERLINK IQ SYSTEM (G17A, G17B, G17C)

- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- Jumper or transitional jumper used between the smart box and G17 IQ grommets when the span between grommet locations are greater than 60"
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized
- G17A Interlink has 2 power outlets
- G17B Interlink has 1 power and 1 dual USB-A + C combo
- G17C Interlink has 1 power outlet

POWER GROMMET (G23)

- Field installable when CUT-G23 option is specified
- Die-cast zinc in black or silver powder coat
- Includes 2 power outlets and 2 power USB ports
- Silver, black, or white
- Hardwire available
- 9 foot, 15 amp cord
- UL Listed

DAISY LINK (G23)

- Field installable when CUT-G23 option is specified
- Silver, black, or white
- Includes 2 15 amp power receptacles (no data) and 2 USB (3.0 power) power ports
- Thumbscrew version with 2 backerplates and 2¼"-20 thumbscrews
- 72" single circuit power cord for plugged starter unit; 48¾" conduit and 24" power cord with 20 amp molded plug
- 72¾" multi-circuit conduit power cord for hardwire starter unit
- Add-on unit does include a 60" jumper; jumper cable is 60¾" metal conduit with female to female ends for connecting 2 daisy link power grommets
- UL Listed

DAISY LINK JUMPER

- 80", 180", or 240" jumper cable is metal conduit with female to female ends to connect 2 daisy link power grommets when the power is jumped between tables

NODE POWER GROMMET (G33)

- For use with select Maneuver tables
- Available in black, silver, or white powder coat
- Contains 1 electrical outlet and 2 USB-A ports
- 72" 15 amp power cord included
- Maximum worksurface thickness is 1½"
- UL approved
- Tamper resistant
- Spill-proof

POWER TOWER

- Available in gloss black or silver with black faceplates, or gloss white with white faceplates
- Unit comes with (12) 15 amp 120 volt, tamper resistant receptacles and (6) USB 3.0 power charging ports that provide 2.1 amps. Data ports are not provided
- 108" 15 amp power cord included
- Circuit breaker located in the bottom of the tower for overload protection
- 6 rubber feet prevent sliding and provide ¾" floor clearance
- Tri-core design allows for 360° power access
- 3 slots in the base provide an anchor for tethering the unit to the floor or pole if stationary application is desired

UNDERSURFACE POWER/DATA

- Contains 1 electrical outlet and 2 USB ports
- Mounts under surface
- 72" power cord included

MOIRÉ POWER CENTER (G10A, G10B)

- Installs into round G10 (3" dia.) worksurface grommet
- Adjusts to worksurfaces thickness of 1⅞"-1⅝"
- Available in light grey, black, or white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- (G10A) 2 power outlets and 2 USB-A dual ports
- (G10B) 4 power outlets

DEAN POWER CENTER

- Mounts to the edge of a worksurface with no table cut outs or installation required
- Adjusts to worksurface thickness up to 2¼"
- Molded plastic faceplate with an anodized aluminum housing
- Available in light grey, black, and white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- Available with 2 power
- Available with 1 power, 1 dual USB-A dual port
- Available with 3 power
- Available with 2 power, 1 USB-A + C combo, 2 power, and 1 USB-A dual port

BURELÉ POWER CENTER

- Mounts to the edge of a worksurface with no table cut outs or installation required
- Adjusts to worksurfaces from ¼"-2¾"
- Available in light grey, black or white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- Available with 2 power, 1 dual USB-A port, 1 USB-C port
- Available with 4 power

HITCH

- Freestanding, portable charging center
- Available in black or white
- 20w power supply
- Battery: 3.6v, 11.6ah (amp hours), 41.76 wh (watt hours)
- Dead to full charge time is 4½ hours
- 6' charging cord is 5 volts at 4 amps
- Cannot charge devices while unit is being charged
- Display light indicates full charge
- UL Listed
- Hitch models have a Lithium battery and MUST ship separately via Fed Ex Ground

4-TRAC

- Used as a power distribution in conjunction with our electrical grommet options
- 4 wires, 2 circuits, 20 amps each (circuit 1 and 2 only)
- 13 duplex receptacles per circuit (26) 15 amp duplex
- UL Listed as a manufactured wiring system
- Ease of install and reconfigure options
- Field installable

GARCIA

- Mounts to the undersurface of a worksurface
- Available in Black, White, and Fog
- Includes a 72" cord
- Available with 1 USB-A, 1 USB-C
- UL Listed

ACCESSORIES

TULLY

- Features a long tail that bends and wraps around cushions for stability; tucks in between the cushions and arms of chairs
- Available in Black, White, and Fog
- Includes a 120" cord
- Available with 1 Power, 1 USB-A, 1 USB-C
- Tamper Resistant
- UL Listed

TRIPPEL

- Set on surface
- Available in Black, White, and Fog
- Includes a 108" cord
- Available with 2 power, 2 USB-A
- Features Qi Wireless Charging which will work with the following:
 - Apple iPhone 8, 8 Plus, X
 - Samsung Galaxy S9, S9+, Note 5, Note 8, S8, S8+, S7, S7 Active, S7 Edge, S6, S6 Edge
 - Lg V30, G6 (US version only), G4 (optional), G3 (optional)
 - Microsoft Lumia 1520, 1020, 930, 929, 928, 920
 - Google Nexus 4, 5, 6, 7 (2013)
 - BlackBerry Pov Z30
- UL Listed

WILLOW

- Set on surface
- Available in Beech with a Teal cord, Walnut with a Black cord, or Black with a Black cord
- Includes a 108" cord
- Available with 1 power, 1 USB-A
- Tamper resistant
- UL listed

POWER STRIP

- Available in Black
- Includes a 120" cord
- Available with 6 power
- UL Listed

HEARTH

- Birdhouse shaped power supply with 1 Power and 1 Dual USB-A
- Handmolded concrete body with a wood base detail
- 108" solid brass braided cord
- UL Listed

APPARATUS

- Set on surface
- Available in Flat black with a black braided cord, and matte white with a white braided cord
- 108" cord
- 1 Power and 1 Dual USB-A
- Manufactured with sturdy cast aluminum
- ETL Listed

SIDEKICK

- Felt sofa arm overlay
- Heather Gray unit features power and a braided cord in Poppy. Camel unit features a power and braided cord in Dusk
- 108" cord
- Features a felt pocket to store items while charging
- ETL and UL Listed

ASHLEY DUO


- Includes 2 power, 2 USB
- 72" cord
- Must have at least 5.5" of clearance under surface at point of application to be able to mount
- Ashley Surface Clamp Mount models are only compatible with standard flat rim profile worksurfaces thicknesses between ½" (12.7mm) – 2⅜" (71mm).
- UL Listed

TACK BOARD VERTICAL TEXTILE OPTIONS

Grade AA	Grade A	Grade B
Lea	Compose	Frenzied
	Crossroads	Fuse
	Dune	Linen
	Fusion	Lyko
	Infuse	Pact
	Merge	Prose
	Mykel	Savile
	Plinth	
	Repetition	
	Tapestry	COM (Grade B)

RAILROADED TACK BOARD

- Shaded rectangle portrays a railroaded privacy/modesty screen.



DIMENSION KEY

D	Depth
W	Width
H	Height
A	Overhang: Approach Side
KW	Kneespace Width

• For a complete overview of the surface materials program, see the Surface Materials Reference Guide at www.kimballinternational.com
• For special wood finishes, customer-specified paint, customer-specified laminate processes and upcharges, see the Surface Materials Reference Guide at www.kimballinternational.com



ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

15NTVMAS

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
FLAT PANEL WALL MOUNT KIT 	15NTVMAS Black	\$ 499	15¾-47¼		15¾-31¼		—	25 lbs.	2.0
	- Adjustable Universal Wall Mount adjusts to allow installation of most 32" to 80" flat panel - Must mount onto an architectural wall - Black powder coat - VESA mounting compliant								
PERSONAL MARKER BOARD 	NAC1214MBL Laminate	\$ 202	¾	12	14	—	—	lbs.	
	- High gloss, white laminate marker board - Marker board and hooks sold separately - Hooks to attach to bottom of worksurface to hang marker boards								
SINGLE HOOK 	NAC02HKS Stainless Steel	\$ 80	¾	½	1¾	—	—	lbs.	
	Hooks to attach to bottom of worksurface to hang marker boards								
DOUBLE HOOK 	NAC03HKD Aluminum	\$ 44	1¾	3¼	2½	—	—	lbs.	
	- Hooks to attach to bottom of worksurface to hang marker boards - Cannot be used on knife rim tops								







Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC18TLDBPUS

	MODEL NO./DESCRIPTION	LIST PRICE	D	W	H	A	KW	CARTONED WEIGHT	CUBIC FEET
ELEMENT LED DESKTOP LIGHT 	NAC18TLDBPUS Task Light w/Desktop Base, Plug/USB, Silver	\$ 1401	14	—	14	—	—	3 lbs.	0.7
	• Available in silver • MCX LED freestanding light • Working height 18" and maximum reach 28" • 360° swivel from base, 135° front-to-back head tilt, 90° side-to-side head rotation • 1 120VAC 3 prong receptacle electrical outlet • 7 levels of light adjustment • 2 USB charging ports providing 1 amp 5VDC of power								
PIPER LINEAR LED DESKTOP LIGHT 	NAC18TLDBUH Task Light w/Desktop Base, USB, White	\$ 784	11½	7½	18¼	—	—	10 lbs.	1.2
	• Available in white • LED freestanding light • 3 color temps, dimming • 1 USB charging port that provides 5 volts and 1 amp of charging power • 4'11" white cord plus a 3' cord extender • UL Listed								
REVO DESKTOP LIGHT 	NAC1406TLDB1S Silver	\$ 735			14¾	—	—	8.31 lbs.	1.82
	NAC1406TLDB1B Black	735			14¾	—	—	8.31 lbs.	1.82
	NAC1406TLDB1W White	735			14¾	—	—	8.31 lbs.	1.82
	• 108" power cord • ETL Listed								
VOYAGE DESKTOP LIGHT 	NAC1408TLDB1S Silver	\$ 735			14¾	—	—	8.31 lbs.	1.82
	NAC1408TLDB1B Black	735			14¾	—	—	8.31 lbs.	1.82
	NAC1408TLDB1W White	735			14¾	—	—	8.31 lbs.	1.82
	• 108" power cord • ETL Listed								
CONVENIENCE OUTLET 	NAC0902EL5C Black	\$ 305	13	22	1¾	—	—	2 lbs.	0.3
	• 5 grounded electrical receptacles • 1 telephone jack with 14 ft. cord • 10 ft. power cord • Includes remote on/off power switch • Black housing and cords • UL Listed								
POWER TOWER 	NAC25ELPTB Black	\$ 3170	16¾	16¾	25½	—	—	68 lbs.	6.5
	NAC25ELPTH White	3170	16¾	16¾	25½	—	—	68 lbs.	6.5
	NAC25ELPTS Silver	3170	16¾	16¾	25½	—	—	68 lbs.	6.5
	• Available in gloss black or silver with black faceplates, or gloss white with white faceplates • Unit comes with (12) 15 amp 120 volt, tamper resistant receptacles and (6) USB 3.0 power charging ports that provide 2.1 amps. Data ports are not provided • 108" 15 amp power cord included • Circuit breaker located in the bottom of the tower for overload protection • 6 rubber feet prevent sliding and provide ¾" floor clearance • Tri-core design allows for 360° power access • 3 slots in the base provide an anchor for tethering the unit to the floor or pole if stationary application is desired								

ACCESSORIES



Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:


NACG10EL

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		

ROUND GROMMET (G10)




NACG10EL	Electrical Grommet	\$ 642	4 1/4"	4 1/4"	5"	—	—	2 lbs.	0.12
NACG10	Grommet	104	4 1/4"	4 1/4"	1 1/4"	—	—	1 lbs.	0.12

MOIRÉ,
G10 POWER/USB GROMMET

98KG40AELPGBK	Black	\$ 600				—	—	1.7 lbs.	0.24
98KG40AELPGWH	White	600				—	—	1.7 lbs.	0.24
98KG40AELPGLG	Light Grey	600				—	—	1.7 lbs.	0.24

- 2 power, 2 dual USB A/C, 2.0 amps
- Black cord on black and light grey, white cord on white, 6 ft, 15 amp plugged cord
- Fits in G10 grommet hole diameter 3"
- Adjust to thickness from 1 3/16" - 1 1/8"
- UL Listed

MOIRÉ,
G10 POWER GROMMET

NACG10BELPGB	Black	\$ 384				—	—	1.7 lbs.	0.24
NACG10BELPGW	White	384				—	—	1.7 lbs.	0.24
NACG10BELPGG	Light Grey	384				—	—	1.7 lbs.	0.24

- 4 power
- Black, 6 ft, 15 amp plugged cord with built in circuit breaker
- Black cord on black and light grey, white cord on white
- Fits in G10 grommet hole diameter 3"
- Adjust to thickness from 1 3/16" - 1 1/8"
- UL Listed

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG12BELPGB

**PIVOTING POWER GROMMET
(MHO-B) (G12B)**

NACG12BELPGB

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG12BELPGB Black	\$ 893	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPGS Silver	893	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPGW White	893	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1B Braided Cord, Black	\$ 965	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1S Braided Cord, Silver	965	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1W Braided Cord, White	965	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELHCB Hardwire, Black	\$ 893	4%	8%	1½	—	—	3 lbs.	0.2
NACG12BELHCS Hardwire, Silver	893	4%	8%	1½	—	—	3 lbs.	0.2
NACG12BELHCW Hardwire, White	893	4%	8%	1½	—	—	3 lbs.	0.2

- 2 power outlets and 2 USB-A + C ports
- Units are powder coated

**PIVOTING POWER GROMMET
(MHO-B) (G12C)**

NACG12CELPGB

NACG12CELPGB Black	\$ 618	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPGS Silver	618	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPGW White	618	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1B Braided Cord, Black	\$ 691	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1S Braided Cord, Silver	691	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1W Braided Cord, White	691	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELHCB Hardwire, Black	\$ 618	4%	8%	1½	—	—	3 lbs.	0.2
NACG12CELHCS Hardwire, Silver	618	4%	8%	1½	—	—	3 lbs.	0.2
NACG12CELHCW Hardwire, White	618	4%	8%	1½	—	—	3 lbs.	0.2

- 4 power outlets with 72" circuit breaker cord
- Units are powder coated

ACCESSORIES

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:


NACG12BELPD2IQKB

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
INTERLINK IQ SYSTEM (G12B)	FULL SET OF 8 UNITS							
NACG12BELPD2IQKB Set of 8, Black	\$ 8019	4%	8%	1½	—	—	25 lbs.	4.0
NACG12BELPD2IQKS Set of 8, Silver	8019	4%	8%	1½	—	—	25 lbs.	4.0
NACG12BELPD2IQKW Set of 8, White	8019	4%	8%	1½	—	—	25 lbs.	4.0

- Full sets include 8 grommets and smart box with starter plug



NACG12BELPD2IQKS



NACG12BELPD2IQB

INTERLINK GROMMETS


NACG12BELPD2IQB Interlink Grommet, Black	\$ 874	4%	8%	1½	—	—	3 lbs.	3.0
NACG12BELPD2IQS Interlink Grommet, Silver	874	4%	8%	1½	—	—	3 lbs.	3.0
NACG12BELPD2IQW Interlink Grommet, White	874	4%	8%	1½	—	—	3 lbs.	3.0

- Each power grommet includes 2 power outlets and 2 charging USB-A + C ports
- Non-sequential "Daisy chain" solution for flip/nest training tables
- When Interlink solution is ordered, flip/nest training table must specify CUT-G12C grommet
- When Interlink solution is ordered, use table ganging brackets
- Specify model number only
- Interlink cord with plug is 120" in length
- Length of cord from coupler to unit on all units is 14"
- Length from coupler to coupler is 60"
- Units are powder coated
- Must order smart box with plug separately


INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 733	—	120	—	—	—	3 lbs.	0.15
NACEL2IQ60J Interlink IQ Jumper-60"	163	—	60	—	—	—	3 lbs.	0.15
NACEL2IQ60TJ Transitional Jumper	171	—	60	—	—	—	3 lbs.	0.15


- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 566-567



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

TO ORDER, SPECIFY:
1. Model Number

SAMPLE MODEL NUMBER:
NACG15BELPGB

1 TOUCH DOUBLE PIVOTING
POWER GROMMET (M2X-B)
(G15B)



NACG15BELPGB

MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
NACG15BELPGB	Black	\$ 2152	8	9¾	1½	—	—	5 lbs.	0.4
NACG15BELPGS	Silver	2152	8	9¾	1½	—	—	5 lbs.	0.4
NACG15BELPGW	White	2152	8	9¾	1½	—	—	5 lbs.	0.4
NACG15BELHCB	Black/Hardwire	\$ 2152	8	9¾	1½	—	—	5 lbs.	0.4
NACG15BELHCS	Silver/Hardwire	2152	8	9¾	1½	—	—	5 lbs.	0.4
NACG15BELHCW	White/Hardwire	2152	8	9¾	1½	—	—	5 lbs.	0.4

- See pages 550-552 for detailed specifications
- Units are powder coated
- Side 1: 2 power, 1 dual USB-A + C, 1 HDMI, and 1 blank
- Side 2: 2 power, 1 dual USB-A + C, 1 VGA, and 1 blank
- Units include 2 72" long cords (1 for each side)

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG15BELPD2IQKB

	MODEL NO./DESCRIPTION		PRICE	D	W	H	A	KW	WEIGHT	FEET
	FULL SET OF 4 UNITS									
	NACG15BELPD2IQKB	Set of 4, Black	\$ 8066	8	9¾	1½	—	—	20 lbs.	3.2
	NACG15BELPD2IQKS	Set of 4, Silver	8066	8	9¾	1½	—	—	20 lbs.	3.2
	NACG15BELPD2IQKW	Set of 4, White	8066	8	9¾	1½	—	—	20 lbs.	3.2

- Full sets include 4 grommets and smart box with starter plug

INTERLINK GROMMETS


NACG15BELPD2IQB Interlink Grommet, Black	\$ 1930	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELPD2IQS Interlink Grommet, Silver	1930	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELPD2IQW Interlink Grommet, White	1930	8	9¼	1½	—	—	5 lbs.	0.4

- Units are powder coated
- Side 1: 2 power, 1 dual USB-A + C, 1 HDMI, and 1 blank
- Side 2: 2 power, 1 dual USB-A + C, 1 VGA, and 1 blank
- 1 touch door remains open during use
- Interlink IQ full set is a set of 4 (8 total sides)
- Maximum is 4 units
- Must order smart box with plug separately


INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 733	—	120	—	—	—	3 lbs.	0.15
NACEL2IQ60J Interlink IQ Jumper-60"	163	—	60	—	—	—	3 lbs.	0.15
NACEL2IQ60TJ Transitional Jumper	171	—	60	—	—	—	3 lbs.	0.15


- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- 1 touch door remains open during use
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 4)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 566-567



NACG15BELPD2IQKS




SIDE 1




SIDE 2


NACG15BELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ


TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:


NACG162ELB

POWER/DATA OASIS (G162)



MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG162ELB Black	\$ 3532	9	15	4	—	—	8 lbs.	1.2
NACG162ELS Silver	3532	9	15	4	—	—	8 lbs.	1.2
NACG162ELHB Black/Hardwire/Modular Connect	\$ 4121	9	15	4	—	—	8 lbs.	1.2
NACG162ELHS Silver/Hardwire/Modular Connect	4121	9	15	4	—	—	8 lbs.	1.2
NACG162ELHCB Black/Hardwire	\$ 4121	9	15	4	—	—	8 lbs.	1.2
NACG162ELHCS Silver/Hardwire	4121	9	15	4	—	—	8 lbs.	1.2

- See pages 550-552 for detailed specifications
- The Power/Data Oasis may be utilized with any wire access base; however, for the cleanest aesthetic, specify the panel base kit
- Units are powder coated
- Modular connect does not meet city code

HARDWIRE POWER/DATA OASIS
DAISY CHAIN KITS (G16)

SILVER POWDER COAT	BLACK POWDER COAT							
NACG162ELHS120LR	NACG162ELHB120LR	\$ 8408	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS144LR	NACG162ELHB144LR	8408	9	15	4	—	—	42 lbs. 5.4
NACG162ELHS168LR	NACG162ELHB168LR	8408	9	15	4	—	—	42 lbs. 5.4
NACG162ELHS168A	NACG162ELHB168A	13074	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS168CE	NACG162ELHB168CE	8408	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS192LR	NACG162ELHB192LR	8408	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS192A	NACG162ELHB192A	13074	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS192CE	NACG162ELHB192CE	8408	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS216LR	NACG162ELHB216LR	8408	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS216A	NACG162ELHB216A	13074	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS216CE	NACG162ELHB216CE	8408	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS240LR	NACG162ELHB240LR	8408	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS240A	NACG162ELHB240A	13074	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS240CE	NACG162ELHB240CE	8408	9	15	4	—	—	41 lbs. 5.4

- Example Model: NACG162ELHS**120LR** (**120** - designates size of table top; **LR** - designates grommet locations); see pages 14-15 for details
- G16 Grommet CUTOUTS must be specified in the conference top in which the Power/Data Oasis units will be installed
- Kits include jumper cables and hardwire starter cable required to daisy chain the Power/Data Oasis units
- "LR" models include 2 Oasis units, "A" models include 3 Oasis units and "CE" models include 2 Oasis units
- Units are powder coated

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG17AELPGB

1 TOUCH PIVOTING
POWER GROMMET (G17A)


MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG17AELPGB Black	\$ 472	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPGS Silver	472	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPGW White	472	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1B Braided Cord, Black	\$ 546	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1S Braided Cord, Silver	546	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1W Braided Cord, White	546	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCB Hardwire, Black	\$ 497	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCS Hardwire, Silver	497	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCW Hardwire, White	497	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 2 power outlets
- Units are powder coated
- See pages 550-552 for details

1 TOUCH PIVOTING
POWER GROMMET (G17B)

NACG17BELPGB Black	\$ 485	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPGS Silver	485	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPGW White	485	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1B Braided Cord, Black	\$ 557	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1S Braided Cord, Silver	557	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1W Braided Cord, White	557	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCB Hardwire, Black	\$ 585	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCS Hardwire, Silver	585	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCW Hardwire, White	585	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 1 power outlet and 1 dual USB-A + C combo
- Units are powder coated
- See pages 550-552 for details

1 TOUCH PIVOTING
POWER GROMMET (G17C)

NACG17CELPGB Black	\$ 466	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPGS Silver	466	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPGW White	466	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1B Braided Cord, Black	\$ 540	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1S Braided Cord, Silver	540	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1W Braided Cord, White	540	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCB Hardwire, Black	\$ 491	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCS Hardwire, Silver	491	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCW Hardwire, White	491	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 1 power outlet
- Units are powder coated
- See pages 550-552 for details


TO ORDER, SPECIFY:

1. Model Number


SAMPLE MODEL NUMBER:

NACG17AELPD2IQKB


INTERLINK IQ SYSTEM (G17A)




NACG17AELPD2IQKS




NACG17AELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

MODEL NO./DESCRIPTION

LIST
PRICEDIMENSIONS
D W H A KWCARTONED CUBIC
WEIGHT FEET

FULL SET OF 8 UNITS

NACG17AELPD2IQKB	Set of 8, Black	\$ 3976
NACG17AELPD2IQKS	Set of 8, Silver	3976
NACG17AELPD2IQKW	Set of 8, White	3976

4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55

- Full sets include 8 grommets and smart box with starter plug

INTERLINK GROMMETS

NACG17AELPD2IQB	Interlink Grommet, Black	\$ 484
NACG17AELPD2IQS	Interlink Grommet, Silver	484
NACG17AELPD2IQW	Interlink Grommet, White	484

4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15

- Must order smart box with plug separately

INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 733
NACEL2IQ60J	Interlink IQ Jumper-60"	163
NACEL2IQ60TJ	Transitional Jumper	171

—	120	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15

- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 566-567






ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG17BELPD2IQKB

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
 NACG17BELPD2IQKS	FULL SET OF 8 UNITS								
	NACG17BELPD2IQKB Set of 8, Black	\$ 5284	4¼	5¼	2½	—	—	19 lbs.	1.55
	NACG17BELPD2IQKS Set of 8, Silver	5284	4¼	5¼	2½	—	—	19 lbs.	1.55
	NACG17BELPD2IQKW Set of 8, White	5284	4¼	5¼	2½	—	—	19 lbs.	1.55
	• Full sets include 8 grommets and smart box with starter plug								
 NACG17BELPD2IQB	INTERLINK GROMMETS								
	NACG17BELPD2IQB Interlink Grommet, Black	\$ 676	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG17BELPD2IQS Interlink Grommet, Silver	676	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG17BELPD2IQW Interlink Grommet, White	676	4¼	5¼	2½	—	—	3 lbs.	0.15
	• Must order smart box with plug separately								
 NACEL2IQBB	INTERLINK IQ SMART BOX AND JUMPER								
	NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 733	—	120	—	—	—	3 lbs.	0.15
	NACEL2IQ60J Interlink IQ Jumper-60"	163	—	60	—	—	—	3 lbs.	0.15
	NACEL2IQ60TJ Transitional Jumper	171	—	60	—	—	—	3 lbs.	0.15
	• Must order smart box with plug separately • UL Recognized • Non-sequential "Daisy chain" solution • Interlink IQ system must begin with a smart box with plug (or full set) • Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60" • Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019) • Jumpers count as one connection (maximum of 8) • The Interlink IQ system is ONLY plugged. This system cannot be hardwired • Units are powder coated • Built-in status indicator: green means go, red light indicates too many units • See charts on pages 566-567								
 NACEL2IQ60J									
 NACEL2IQ60TJ									


TO ORDER, SPECIFY:

1. Model Number


SAMPLE MODEL NUMBER:

NACG17CELPD2IQKB


INTERLINK IQ SYSTEM (G17C)




NACG17CELPD2IQKS




NACG17CELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

MODEL NO./DESCRIPTION

LIST
PRICEDIMENSIONS
D W H

A

KW

CARTONED CUBIC
WEIGHT FEET

FULL SET OF 8 UNITS

NACG17CELPD2IQKB	Set of 8, Black	\$ 3763
NACG17CELPD2IQKS	Set of 8, Silver	3763
NACG17CELPD2IQKW	Set of 8, White	3763

4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55

- Full sets include 8 grommets and smart box with starter plug

INTERLINK GROMMETS

NACG17CELPD2IQB	Interlink Grommet, Black	\$ 456
NACG17CELPD2IQS	Interlink Grommet, Silver	456
NACG17CELPD2IQW	Interlink Grommet, White	456

4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15

- Must order smart box with plug separately


INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 733
NACEL2IQ60J	Interlink IQ Jumper-60"	163
NACEL2IQ60TJ	Transitional Jumper	171


—	120	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15

- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 566-567

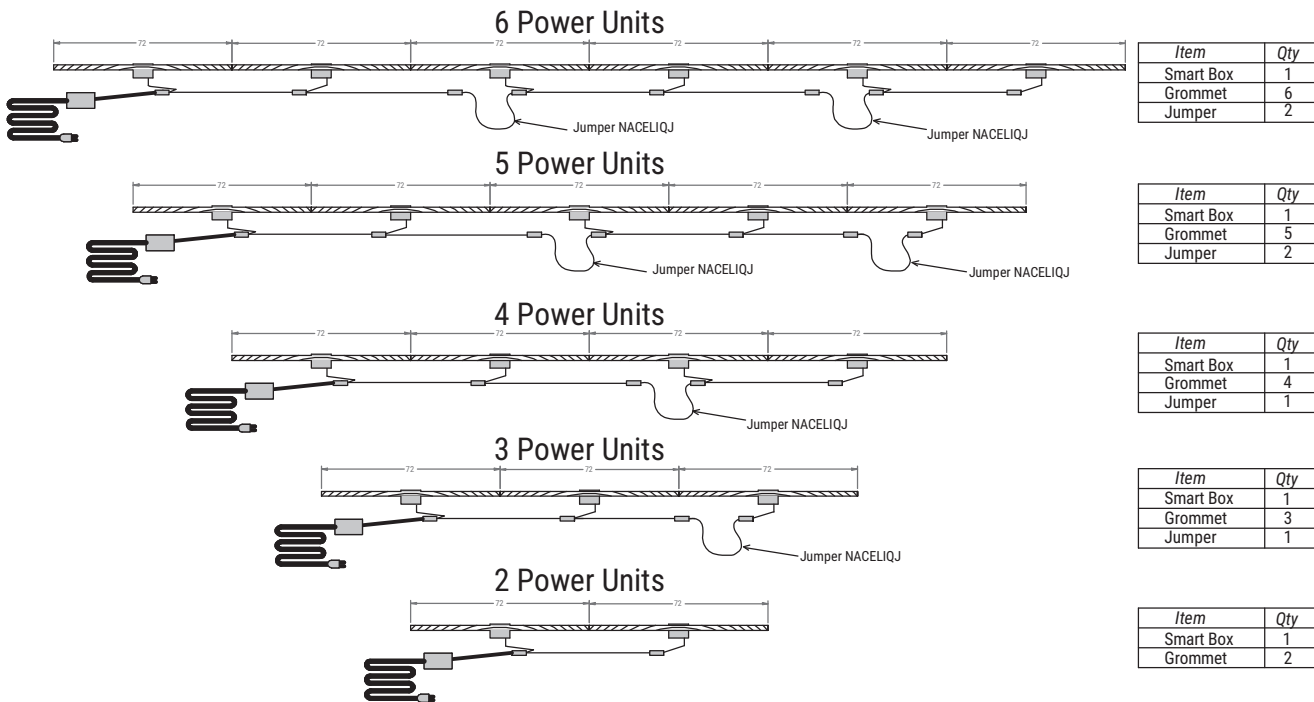
Configuration of IQ System for 72" WaveWorks Training Tables - Max of 6 IQ Units per run



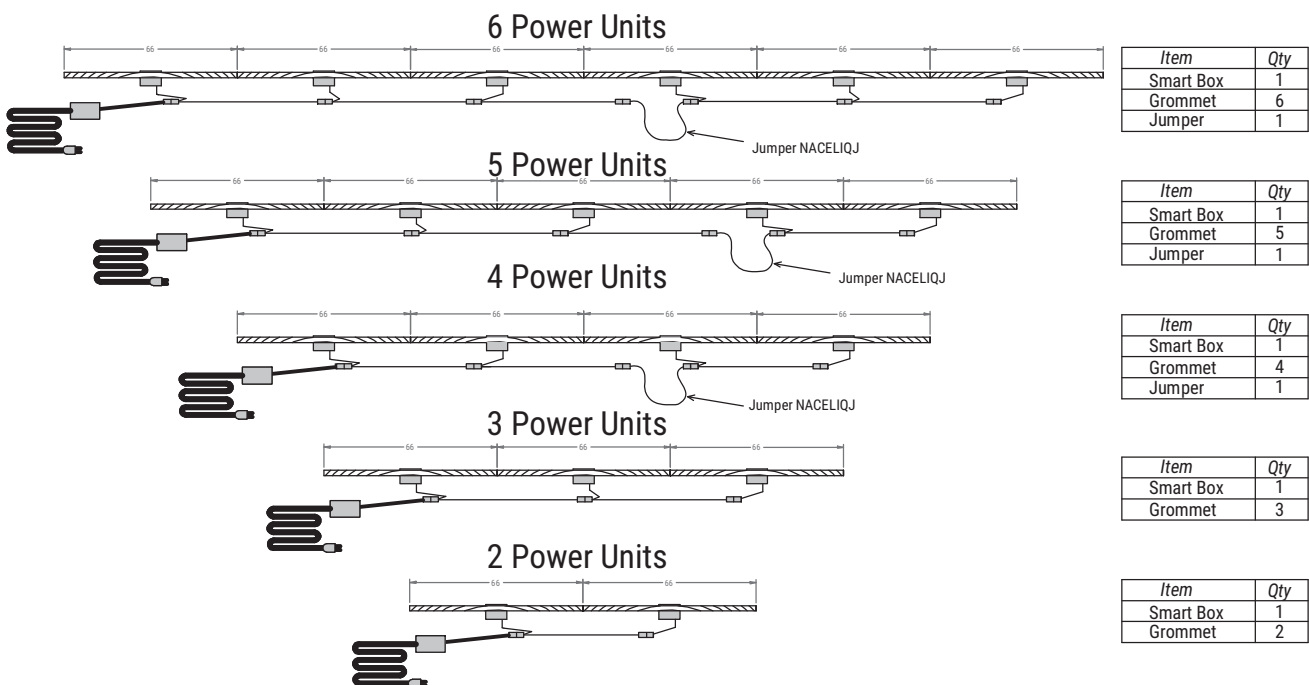
Configuration of IQ System for 66" WaveWorks Training Tables - Max of 6 IQ Units per run



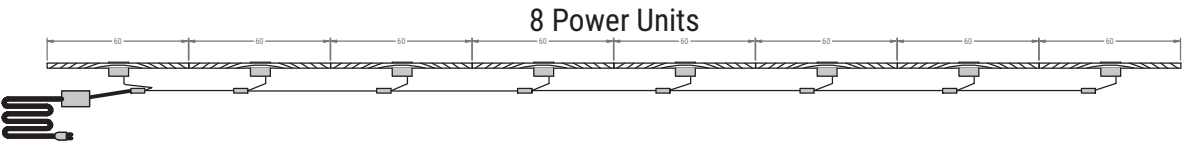
Configuration of IQ System for 60" WaveWorks Training Tables - Max of 8 IQ Units per run




Item	Qty
Smart Box	1
Grommet	8

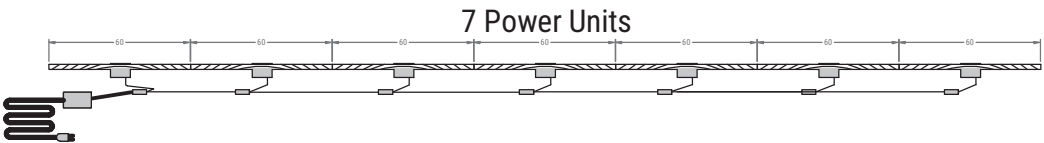


Item	Qty
Smart Box	1
Grommet	7




Item	Qty
Smart Box	1
Grommet	6




Item	Qty
Smart Box	1
Grommet	5



Item	Qty
Smart Box	1
Grommet	4



Item	Qty
Smart Box	1
Grommet	3



Item	Qty
Smart Box	1
Grommet	2


ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number


SAMPLE MODEL NUMBER:

NACG23ELB


	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
	POWER GROMMET (G23)								
	NACG23ELB Black	\$ 683	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELS Silver	683	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELHCB Black/Hardwire	\$ 761	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELHCS Silver/Hardwire	761	2½	4½	3¼	—	—	2.3 lbs.	0.2

- Not intended for use on conference tables
- Includes 2 power outlets and 2 power USB ports
- Units are powder coated

DAISY LINK (G23)



Plugged Starter Unit



Hardwire Starter Unit

DAISY LINK STARTER UNITS

NACG23ELDLB1	Black - G23, Plugged	\$ 777	2½	4½	3¼	—	—	4.1 lbs.	0.4
NACG23ELDLS1	Silver - G23, Plugged	777	2½	4½	3¼	—	—	4.1 lbs.	0.4
NACG23ELDLHB1	Black - G23, Hardwire/Modular Connect	\$ 777	2½	4½	3¼	—	—	3.7 lbs.	0.4
NACG23ELDLHS1	Silver - G23, Hardwire/Modular Connect	777	2½	4½	3¼	—	—	3.7 lbs.	0.4

- Modular connect does not meet city code

DAISY LINK ADD-ON UNITS/JUMPER KIT

NACG23ELDLB2	Black - G23	\$ 816	2½	4½	3¼	—	—	2.3 lbs.	0.4
NACG23ELDLS2	Silver - G23	816	2½	4½	3¼	—	—	2.3 lbs.	0.4


- 60" jumper included with each daisy link add-on unit
- Units are powder coated

DAISY LINK JUMPER (80", 180", AND 240")

NAC80ELDLJ	80" Daisy Chain Jumper	\$ 284	¾	80	2	—	—	2.4 lbs.	0.4
NAC180ELDLJ	180" Daisy Chain Jumper	432				—	—	lbs.	
NAC240ELDLJ	240" Daisy Chain Jumper	509				—	—	lbs.	

- 80" jumper is needed when connecting power between tables
- Units are powder coated

NODE POWER GROMMET (G33)



98KG33AELPGBK	Black	\$ 435	4	4	3½	—	—	1 lbs.	0.2
98KG33AELPGSV	Silver	435	4	4	3½	—	—	1 lbs.	0.2
98KG33AELPGWH	White	435	4	4	3½	—	—	1 lbs.	0.2


- For use with Maneuver gear, shield, and 120° tables when CUT-G33 option is specified
- 1 power and 1 dual USB A/C


TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC07ELPG4BUAB

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
				D	W	H				
BURELÉ, POWER, CLAMP MOUNT 	NAC07ELPG4BUAB	Black	\$ 454				—	—	1.25 lbs.	0.24
	NAC07ELPG4BUAW	White	454				—	—	1.25 lbs.	0.24
	NAC07ELPG4BUAG	Light Grey	454				—	—	1.25 lbs.	0.24
	• Clamp mount unit • 4 power outlets • Black, 6 ft, 15 amp plugged cord with built in circuit breaker • UL Listed									

BURELÉ, POWER/USB, CLAMP MOUNT 	98K07ELPG4BUBBK	Black	\$ 762				—	—	1.25 lbs.	0.24
	98K07ELPG4BUBWH	White	762				—	—	1.25 lbs.	0.24
	98K07ELPG4BUBLG	Light Grey	762				—	—	1.25 lbs.	0.24
	• Clamp mount unit • 2 power, 1 dual USB A/C, 2.0 amp, 1 single USB-C -18 Watt • Black, 6 ft 15 amp plugged power cord • UL Listed									


ACCESSORIES


TO ORDER, SPECIFY:


1. Model Number


SAMPLE MODEL NUMBER:


NAC04ELPG2DEAB


	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
DEAN, 2 PORT, POWER, CLAMP MOUNT 	NAC04ELPG2DEAB Black	\$ 408				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEAW White	408				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEAG Light Grey	408				—	—	1.95 lbs.	0.24
	• Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 2 power • Black, 6 ft, 15 amp plugged power cord • UL Listed								

DEAN, 2 PORT, POWER/USB, CLAMP MOUNT 	98K04ELPG2DEBBK Black	\$ 422				—	—	1.95 lbs.	0.24
	98K04ELPG2DEBWH White	422				—	—	1.95 lbs.	0.24
	98K04ELPG2DEBLG Light Grey	422				—	—	1.95 lbs.	0.24
	• Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 1 power, 1 dual USB A/C 2.0 amp • Black, 6 ft, 15 amp plugged power cord • UL Listed								

DEAN, 3 PORT, POWER, CLAMP MOUNT 	NAC06ELPG3DEAB Black	\$ 416				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEAW White	416				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEAG Light Grey	416				—	—	1.95 lbs.	0.24
	• Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 3 power • Black, 6 ft, 15 amp plugged power cord • UL Listed								

DEAN, 3 PORT, POWER/USB, CLAMP MOUNT 	NAC06ELPG3DEBB Black	\$ 554				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEBW White	554				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEBG Light Grey	554				—	—	1.95 lbs.	0.24
	• Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 2 power, 1 USB-A + C combo 18 watt, 2.0 amp; end receptacle rotated 90° • Black, 6 ft, 15 amp plugged power cord • UL Listed								

HITCH, BATTERY-POWERED 	98K04ELPG4HTABK Black	\$ 732				—	—	1.7 lbs.	0.24
	98K04ELPG4HTAWH White	732				—	—	1.7 lbs.	0.24
	• Freestanding and portable • 2 USB-A and 1 USB-C • 1 LED battery indicator light • Black, 6 ft, 15 amp plugged power cord assembly for recharging. 5v, 4 amps • The unit is not UL Listed • The power pack is UL Listed • 11.6 amp hours, 20 watt power supply • Hitch models have a Lithium battery and MUST ship separately via Fed Ex Ground								


UNDERSURFACE POWER/DATA 	98K03ELPG2MTBBK	\$ 392	3	3	1½	—	—	2 lbs.	0.3
	• Can be mounted to the underside of any surface • Contains 1 power outlet and 1 dual USB A/C port • Mounts under surface • 72" power cord included								


TO ORDER, SPECIFY:


1. Model Number


SAMPLE MODEL NUMBER:


NAC03ELPG2GABW

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
				D	W	H	A	KW		
GARCIA 	NAC03ELPG2GABW	White	\$ 434	4	2¾	1½	—	—	1.27 lbs.	0.9
	NAC03ELPG2GABB	Black	434	4	2¾	1½	—	—	1.27 lbs.	0.9
	NAC03ELPG2GABG	Fog	434	4	2¾	1½	—	—	1.27 lbs.	0.9
	• 72" cord • Includes 2 USB-A+C									

TULLY 	NAC06ELPG3TUAW	White	\$ 637	2¼	5%	12¾	—	—	3.05 lbs.	0.40
	NAC06ELPG3TUAB	Black	637	2¼	5%	12¾	—	—	3.05 lbs.	0.40
	NAC06ELPG3TUAG	Fog	637	2¼	5%	12¾	—	—	3.05 lbs.	0.40
	• 120" braided cord • Includes 2 USB-A, 1 USB-C and Power									

WILLOW 	98K04ELPG2WLAWA	Walnut with black braided cord	\$ 453	4	3¾	2¼	—	—	2.18 lbs.	0.17
	98K04ELPG2WLABK	Black with black braided cord	453	4	3¾	2¼	—	—	2.18 lbs.	0.17
	98K04ELPG2WLABE	Beech with Teal braided cord	453	4	3¾	2¼	—	—	2.18 lbs.	0.17
	• 108" cord • Includes 1 Power, 1 dual USB A/C port • Tamper resistant									

TRIPPEL 	98K08ELPG3TRAWH	White	\$ 449	3¾	7%	3¾	—	—	2 lbs.	0.13
	98K08ELPG3TRABK	Black	449	3¾	7%	3¾	—	—	2 lbs.	0.13
	98K08ELPG3TRALG	Fog	449	3¾	7%	3¾	—	—	2 lbs.	0.13
	• Set on surface unit • Included 2 power and 1 dual USB A/C • Tamper resistant • Features Qi wireless charging									

POWER STRIP 	NAC0902EL6PS	Black	\$ 106	1¾	9½	1¾	—	—	lbs.	
	• 120" Cord • Includes 6 power									





ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:


NAC05ELPG2HRAC

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
HEARTH 	NAC05ELPG2HRAC	\$ 677	5 $\frac{3}{8}$	3 $\frac{1}{4}$	5 $\frac{3}{8}$	—	—	3 lbs.	0.31
	- Includes 1 power, 1 Dual USB-A 108" power cord - Handmolded concrete body with a wood base detail - Features a solid brass braided cord - UL Listed								
SIDEKICK 	NAC29ELPG2SKAG Heather Gray Felt	\$ 529	2 $\frac{3}{8}$	15	29 $\frac{1}{2}$	—	—	2 lbs.	0.59
	NAC29ELPG2SKAC Camel Felt	529	2 $\frac{3}{8}$	15	29 $\frac{1}{2}$	—	—	2 lbs.	0.59
	- Felt sofa arm overlay - Includes 1 power, 1 Dual USB-A, and felt pocket - Heather Gray unit features power and a braided cord in Poppy. Camel unit features a power and braided cord in Dusk 108" power cord - UL Listed								
APPARATUS 	NAC05ELPG2APAB Black	\$ 400	3 $\frac{3}{8}$	4 $\frac{13}{16}$	2	—	—	lbs.	
	NAC05ELPG2APAW White	400	3 $\frac{3}{8}$	4 $\frac{13}{16}$	2	—	—	lbs.	
	- Includes 1 power, 1 Dual USB-A 108" power cord - Black unit features a black braided cord and silver hardware. White unit features a white braided cord and silver hardware - ETL and UL Listed								
ASHLEY DUO 	98K06ELPG3ADABK Black	\$ 469	3 $\frac{3}{8}$	5 $\frac{1}{2}$	1 $\frac{13}{16}$	—	—	lbs.	
	98K06ELPG3ADAWH White	469	3 $\frac{3}{8}$	5 $\frac{1}{2}$	1 $\frac{13}{16}$	—	—	lbs.	
	- Includes 2 power, 1 dual USB A/C port 72" power cord - Must have at least 5$\frac{1}{2}$" of clearance under surface at point of application to be able to mount - Clamp mount; Unit will fit on worksurface thicknesses $\frac{1}{2}$"-2$\frac{13}{16}$" - UL Listed								

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:
NAC120ELE4P

	MODEL NO./DESCRIPTION		LIST PRICE	
4- TRAC POWER ENTRY 	NAC120ELE4P	Plugged	\$ 408	
	NAC120ELE4H	Hardwire	274	
	NAC72ELE4NH	NYC Hardwire	501	



4- TRAC KIT	NACEL4KTC1	48"-60" Tables	\$ 276	
	NACEL4KTC2	72"-84" Tables	301	
	NACEL4KTC3	96"-108" Tables	408	
	NACEL4KTC4	120" Tables	501	
	NACEL4KTC5	144" Tables	639	
	NACEL4KTC6	168" Tables	654	
	NACEL4KTC7	192" Tables	686	
	NACEL4KTC8	216" Tables	715	
	NACEL4KTC9	240" Tables	870	

• See page 574 for details



4-TRAC ELECTRICAL

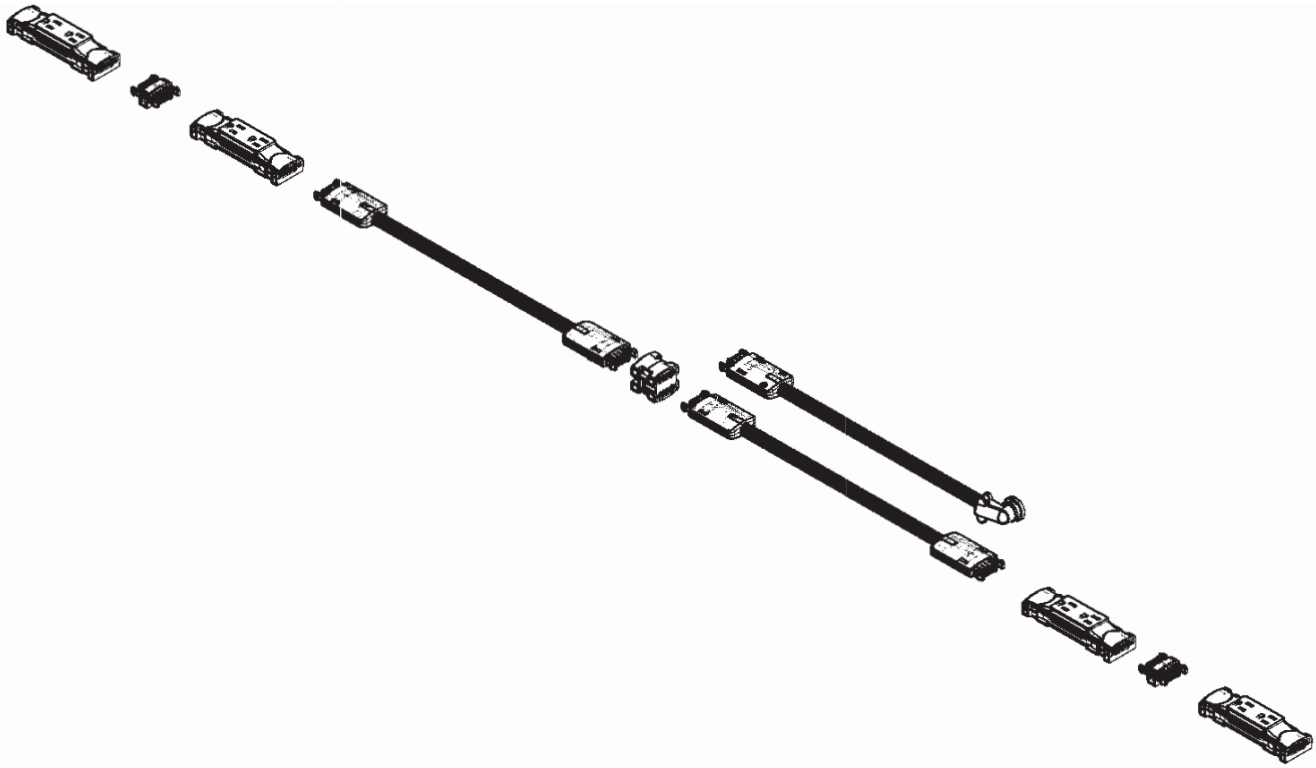


TABLE LENGTH	A DUPLEX	B DUPLEX	C DUPLEX	D DUPLEX
48"	n/a	16 $\frac{3}{16}$	31 $\frac{1}{16}$	n/a
60"	n/a	22 $\frac{3}{16}$	37 $\frac{1}{16}$	n/a
72"	n/a	24 $\frac{3}{16}$	47 $\frac{1}{16}$	n/a
84"	n/a	30 $\frac{3}{8}$	53 $\frac{1}{16}$	n/a
96"	30 $\frac{1}{16}$	36 $\frac{3}{8}$	59 $\frac{3}{4}$	n/a
108"	36 $\frac{1}{16}$	42 $\frac{3}{8}$	65 $\frac{3}{4}$	n/a
120"	38 $\frac{3}{16}$	44 $\frac{3}{8}$	75 $\frac{7}{16}$	n/a
144"	38 $\frac{3}{16}$	44 $\frac{3}{8}$	99 $\frac{7}{16}$	105 $\frac{1}{2}$
168"	44 $\frac{1}{4}$	50 $\frac{3}{16}$	117 $\frac{3}{8}$	123 $\frac{3}{16}$
192"	50 $\frac{1}{4}$	56 $\frac{3}{16}$	135 $\frac{3}{8}$	141 $\frac{1}{16}$
216"	50 $\frac{3}{16}$	56 $\frac{1}{4}$	159 $\frac{9}{16}$	165 $\frac{3}{8}$
240"	14 $\frac{5}{8}$	68 $\frac{1}{4}$	171 $\frac{1}{16}$	224 $\frac{1}{16}$

*Dimensions are in inches
See page 573 for pricing

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC0318WMV

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
				D	W	H	A	KW		
VERTICAL WIRE MANAGER 	NAC0318WMV	Cinder	\$ 279	—	3	18	—	—	2 lbs.	0.1
	NAC0318WMVS	Platinum Metallic	279	—	3	18	—	—	2 lbs.	0.1
	NAC0318WMVN	Satin Nickel Metallic	279	—	3	18	—	—	2 lbs.	0.1
	• Applicable to all 2½" diameter C, T and X bases • Clamps to leg; no hardware required									

MESH WIRE MANAGER 	NAC0318WMM	Black	\$ 137	—	3	17½	—	—	2 lbs.	0.1
	• Applicable to all 2½" diameter C, T and X bases • Wraps around leg and is secured with Velcro®									

VERTICAL WIRE MANAGER 	NAC30WMV		\$ 312	1½	3¼	31	—	—	2 lbs.	0.2
	• Graphite color • Attaches to underside of worksurface; flexible; used to conceal power in-feed and data cables									

HORIZONTAL WIRE MANAGER 	NAC17WMH	Black Plastic	\$ 76	2½	17	4¼	—	—	3 lbs.	0.5
	NAC24WMH	Black Plastic	88	2½	24	4¼	—	—	3 lbs.	0.5
	• Attaches below worksurface; can be installed horizontally or vertically • Used to conceal power in-feed and data cables									

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number
2. Leather Color

SAMPLE MODEL NUMBER:

NAC06WMSTF 82008

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
WIRE MANAGEMENT LEATHER STRAP		DI		H				
NAC06WMSTF	\$ 88	1¼		6			5 lbs.	0.5
• Available in grade L8 Florence only 82002 Florence Almond Biscotti, 82006 Florence Terra, 82008 Florence Mezza Luna, and 82009 Florence Struzzo • Sold in a quantity of 1								



WIRE MANAGEMENT LEATHER SLEEVE








NAC28WMSLF	For Worksurface Height	\$ 208		28
NAC34WMSLF	For Counter Height	222		34
NAC40WMSLF	For Bar Height	237		40
• Available in grade L8 Florence only 82002 Florence Almond Biscotti, 82006 Florence Terra, 82008 Florence Mezza Luna, and 82009 Florence Struzzo • Sold in quantity of 1				

TO ORDER, SPECIFY:

1. Model Number
2. Shelf Color
3. Laminate Color

SAMPLE MODEL NUMBER:

10N1867FDSHL PB PB
NAC1205WGV1

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
	D	W	H	A	KW					
FREESTANDING KIOSK 	10N1867FDSHL	Laminate	\$ 1423	13 ¹ / ₁₆	17 ¹ / ₁₆	66 ³ / ₈	—	—	73 lbs.	19.7
	• Can be used to hang additional PPE equipment (ie. Glove holders and sanitizer dispensers) Limit of 10 lbs hung on the back									
SINGLE WIRE GLOVE BOX 	NAC1205WGV1	Steel	\$ 121	3 ¹ / ₁₆	11 ¹ / ₁₆	4 ³ / ₈	—	—	1 lbs.	1.38
	• Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 1 std size box of gloves									
DOUBLE WIRE GLOVE BOX 	NAC1210WGV2	Steel	\$ 165	3 ¹ / ₁₆	11 ¹ / ₁₆	9 ¹ / ₂	—	—	1 lbs.	2.7
	• Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 2 std size boxes of gloves									
QUAD WIRE GLOVE BOX 	NAC1219WGV4	Steel	\$ 236	3 ¹ / ₁₆	11 ¹ / ₁₆	19	—	—	1 lbs.	5.2
	• Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 4 std size boxes of gloves									
AUTOMATIC HAND SANITIZER DISPENSER 	NAC0407USD1		\$ 818	4 ³ / ₈	6	11	—	—	2.2 lbs.	8.1
	• Dispenser accepts most bulk liquid soaps and sanitizers up to 12mL capacity, inside a solid case of durable ABS plastic • 4 C Batteries sold separately. External On-Off switch • Tamper resistant lock system with key for convenient access for assigned personnel • Motion Dispenser: Dispenses within a sense detection of 3'-5" • 2.2 lbs Empty (without fluid)									

ACCESSORIES

PRODUCTION SPECIFICATIONS

- Screen extends 4" below worksurface



Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

- Quick Delivery lead times applicable to orders of 20 screens or less

TO ORDER, SPECIFY:

- Model Number

SAMPLE MODEL NUMBER:

NAC7240PVCBP

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
POLYCARBONATE EDGE MOUNT SURFACE SCREEN 	¼" POLYCARBONATE THICKNESS								
	40" HIGH					ABOVE WORKSURFACE H			
	NAC7240PVCBP	\$ 520	72	40	34				
	NAC6640PVCBP	510	66	40	34				
	NAC6040PVCBP	497	60	40	34				
	NAC5440PVCBP	488	54	40	34				
	NAC4840PVCBP	476	48	40	34				
	NAC4240PVCBP	466	42	40	34				
	NAC3640PVCBP	433	36	40	34				
	NAC3040PVCBP	323	30	40	34				
	30" HIGH								
	NAC7230PVCBP	\$ 442	72	30	24				
	NAC6630PVCBP	435	66	30	24				
	NAC6030PVCBP	426	60	30	24				
	NAC5430PVCBP	417	54	30	24				
	NAC4830PVCBP	408	48	30	24				
	NAC4230PVCBP	400	42	30	24				
	NAC3630PVCBP	367	36	30	24				
	NAC3030PVCBP	284	30	30	24				
	NAC2730PVCBP	280	27	30	24				
	24" HIGH								
	NAC7224PVCBP	\$ 398	72	24	18				
	NAC6624PVCBP	391	66	24	18				
	NAC6024PVCBP	382	60	24	18				
	NAC5424PVCBP	376	54	24	18				
	NAC4824PVCBP	366	48	24	18				
	NAC4224PVCBP	359	42	24	18				
	NAC3624PVCBP	271	36	24	18				
	NAC3024PVCBP	262	30	24	18				
	NAC2724PVCBP	259	27	24	18				

- Quick Delivery Screens will feature Platinum Metallic mounting brackets. Specify bracket application
- Screen extends 4" below worksurface
- Clear U-Channel edge molding attached on all sides of screen
- Fits on 1½" – 1⅞" worksurface thicknesses
- Polycarbonate Thickness ¼"
- Semi-Opaque Reeded Polycarbonate Screen
- Metal Mounting Bracket
- When ordering both back and side edge mount screens, size down for side screens to avoid interference
- Brackets ship in box with screen
- Remove protective film from screen
- Edge Mount Privacy Panel faceplate can be installed horizontally or vertically
- Will require attachment to surface with fasteners – 2 people recommended for installation

PRODUCTION SPECIFICATIONS

- Screen extends 12" below worksurface



Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.


- Quick Delivery lead times applicable to orders of 20 screens or less

TO ORDER, SPECIFY:

- Model Number

SAMPLE MODEL NUMBER:

NAC7244PVMCBP

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
POLYCARBONATE EDGE MOUNT SURFACE SCREEN/MODESTY 	¼" POLYCARBONATE THICKNESS								
	44" HIGH								
	NAC7244PVMCBP	\$ 1214		72	44	30			
	NAC6644PVMCBP	1212		66	44	30			
	NAC6044PVMCBP	843		60	44	30			
	NAC5444PVMCBP	842		54	44	30			
	NAC4844PVMCBP	731		48	44	30			
	NAC4244PVMCBP	726		42	44	30			
	NAC3644PVMCBP	703		36	44	30			
	NAC3044PVMCBP	524		30	44	30			
	38" HIGH								
	NAC7238PVMCBP	\$ 1207		72	38	24			
	NAC6638PVMCBP	1204		66	38	24			
	NAC6038PVMCBP	833		60	38	24			
	NAC5438PVMCBP	831		54	38	24			
	NAC4838PVMCBP	722		48	38	24			
	NAC4238PVMCBP	718		42	38	24			
	NAC3638PVMCBP	695		36	38	24			
	NAC3038PVMCBP	519		30	38	24			
	NAC2738PVMCBP	514		27	38	24			
	32" HIGH								
	NAC7232PVMCBP	\$ 496		72	32	18			
	NAC6632PVMCBP	494		66	32	18			
	NAC6032PVMCBP	469		60	32	18			
	NAC5432PVMCBP	468		54	32	18			
	NAC4832PVMCBP	464		48	32	18			
	NAC4232PVMCBP	460		42	32	18			
	NAC3632PVMCBP	339		36	32	18			
	NAC3032PVMCBP	332		30	32	18			
	NAC2732PVMCBP	330		27	32	18			
	24" HIGH								
	NAC2432PVMCBP	296		24	32	18			
	NAC2132PVMCBP	295		21	32	18			

- Quick Delivery Screens will feature Platinum Metallic mounting brackets. Specify bracket application
- Screen extends 12" below worksurface
- Clear U-Channel edge molding attached on all sides of screen
- Fits on 1½" – 1⅝" worksurface thicknesses
- Polycarbonate Thickness ¼"
- Semi-Opaque Reeded Polycarbonate Screen
- Metal Mounting Bracket
- When ordering both back and side edge mount screens, size down for side screens to avoid interference
- Brackets ship in box with screen
- Remove protective film from screen
- Edge Mount Privacy Panel faceplate can be installed horizontally or vertically
- Will require attachment to surface with fasteners – 2 people recommended for installation

ACCESSORIES

PRODUCTION SPECIFICATIONS

- Screen extends 4" below worksurface

TO ORDER, SPECIFY:

1. Model Number
2. Textile Grade/Color
3. Metal Color (holder)

SAMPLE MODEL NUMBER:

NAC7224PVCP A 8600 423

- See page 435 for textiles

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS							
			D	W	H	A	KW	CARTONED WEIGHT	CUBIC FEET	
EDGE MOUNTED PRIVACY SCREEN RECTANGULAR, RESIN 	¼" RESIN THICKNESS 40" HIGH	GRADE 1	ABOVE WORKSURFACE H							
	NAC7240PVCP	\$ 1303	72	40	34					
	NAC6640PVCP	1289	66	40	34					
	NAC6040PVCP	1123	60	40	34					
	NAC5440PVCP	1109	54	40	34					
	NAC4840PVCP	1068	48	40	34					
	NAC4240PVCP	1057	42	40	34					
	NAC3640PVCP	739	36	40	34					
	NAC3040PVCP	649	30	40	34					
	NAC2740PVCP	642	27	40	34					
	NAC2440PVCP	557	24	40	34					
	NAC2140PVCP	550	21	40	34					
	30" HIGH		72	30	24					
	NAC7230PVCP	\$ 1012	66	30	24					
	NAC6630PVCP	1007	60	30	24					
	NAC6030PVCP	884	54	30	24					
	NAC5430PVCP	874	48	30	24					
	NAC4830PVCP	782	42	30	24					
	NAC4230PVCP	773	36	30	24					
	NAC3630PVCP	591	30	30	24					
	NAC3030PVCP	553	27	30	24					
	NAC2730PVCP	547	24	30	24					
	NAC2430PVCP	457	21	30	24					
	NAC2130PVCP	452								
	24" HIGH		¾	71⅜	24	—	—	24 lbs.	4.7	
	NAC7224PVCP	\$ 684	¾	65⅜	24	—	—	22 lbs.	4.3	
	NAC6624PVCP	681	¾	59⅜	24	—	—	19 lbs.	4.0	
	NAC6024PVCP	499	¾	53⅜	24	—	—	17 lbs.	3.6	
	NAC5424PVCP	488	¾	47⅞	24	—	—	16 lbs.	3.3	
	NAC4824PVCP	428	¾	41⅞	24	—	—	14 lbs.	2.9	
	NAC4224PVCP	454	¾	35⅞	24	—	—	12 lbs.	2.5	
	NAC3624PVCP	349	¾	29⅜	24	—	—	10 lbs.	2.2	
	NAC3024PVCP	329	¾	27	24	—	—	9 lbs.	2.0	
	NAC2724PVCP	324	¾	23⅜	24	—	—	8 lbs.	1.8	
	NAC2424PVCP	296	¾	21	24	—	—	7 lbs.	1.6	
	NAC2124PVCP	293								

- Screen extends 4" below the surface
- Specify resin grade and color: Grade 1 Clear (1377) and Frosted (1677)
- Dual-sided resin screen has radiused corners and is ¼" thick
- Overall thickness with brackets is 1³/₈"
- Fits on 1¹/₈"-1¹³/₁₆" worksurface thicknesses
- Specify metal color for holders: Cinder (462), Concrete (423), Iron (463), Platinum Metallic (501), and Satin Nickel Metallic (503)
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1³/₈" and 1¹³/₁₆" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- When ordering both back and side edge mount screens, size down for side screens to avoid interface
- Brackets ship in box with screen
- Remove protective film from screen

PRODUCTION SPECIFICATIONS

- Screen extends 4" below worksurface

TO ORDER, SPECIFY:

1. Model Number
2. Resin Grade/Color
3. Metal Color (holder)

SAMPLE MODEL NUMBERS:

- NAC7224PVCTP 1 1677 462
- See page 435 for textiles

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
EDGE MOUNTED PRIVACY SCREEN TAPERED, RESIN 		GRADE 1							
	NAC7224PVCTP	\$ 1187	3/16	71 13/16	24	—	—	24 lbs.	4.7
	NAC6624PVCTP	1130	3/16	65 13/16	24	—	—	22 lbs.	4.3
	NAC6024PVCTP	1071	3/16	59 13/16	24	—	—	19 lbs.	4.0
	NAC5424PVCTP	1012	3/16	53 13/16	24	—	—	17 lbs.	3.6
	NAC4824PVCTP	958	3/16	47 7/8	24	—	—	16 lbs.	3.3
	NAC4224PVCTP	897	3/16	41 7/8	24	—	—	14 lbs.	2.9
	NAC3624PVCTP	837	3/16	35 7/8	24	—	—	12 lbs.	2.5
	NAC3024PVCTP	777	3/16	29 15/16	24	—	—	10 lbs.	2.2
	NAC2724PVCTP	748	3/16	27	24	—	—	9 lbs.	2.0
	NAC2424PVCTP	717	3/16	23 13/16	24	—	—	8 lbs.	1.8
	NAC2124PVCTP	689	3/16	21	24	—	—	7 lbs.	1.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are 3/16" thick dual sided resin; the overall assembly thickness, including the holders, is 1 1/2"
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1 3/16" and 1 1/16" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 4" below the surface

ACCESSORIES

PRODUCTION SPECIFICATIONS

- Screen extends 12" below worksurface


TO ORDER, SPECIFY:

1. Model Number
2. Resin Grade/Color
3. Metal Color (holder)

SAMPLE MODEL NUMBER:

NAC7232PVMCP 1 1677 462

- See page 435 for textiles

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS						CARTONED WEIGHT	CUBIC FEET
	¼" RESIN THICKNESS 44" HIGH	GRADE 1	ABOVE WORKSURFACE H							
	NAC7244PVMCP	\$ 1717	72	44	30					
	NAC6644PVMCP	1711	66	44	30					
	NAC6044PVMCP	1450	60	44	30					
	NAC5444PVMCP	1448	54	44	30					
	NAC4844PVMCP	1031	48	44	30					
	NAC4244PVMCP	1024	42	44	30					
	NAC3644PVMCP	950	36	44	30					
	NAC3044PVMCP	747	30	44	30					
	NAC2744PVMCP	744	27	44	30					
	NAC2444PVMCP	616	24	44	30					
	NAC2144PVMCP	613	21	44	30					
38" HIGH										
NAC7238PVMCP	\$ 1232	72	38	24						
NAC6638PVMCP	1226	66	38	24						
NAC6038PVMCP	1045	60	38	24						
NAC5438PVMCP	1043	54	38	24						
NAC4838PVMCP	1012	48	38	24						
NAC4238PVMCP	1007	42	38	24						
NAC3638PVMCP	703	36	38	24						
NAC3038PVMCP	622	30	38	24						
NAC2738PVMCP	618	27	38	24						
NAC2438PVMCP	539	24	38	24						
NAC2138PVMCP	537	21	38	24						
32" HIGH										
NAC7232PVMCP	\$ 1201	¾	72	32	—	—		46 lbs.	6.0	
NAC6632PVMCP	1198	¾	66	32	—	—		34 lbs.	5.5	
NAC6032PVMCP	818	¾	60	32	—	—		32 lbs.	5.1	
NAC5432PVMCP	814	¾	54	32	—	—		30 lbs.	4.6	
NAC4832PVMCP	783	¾	48	32	—	—		28 lbs.	4.1	
NAC4232PVMCP	714	¾	42	32	—	—		26 lbs.	3.7	
NAC3632PVMCP	683	¾	36	32	—	—		24 lbs.	3.2	
NAC3032PVMCP	518	¾	30	32	—	—		22 lbs.	2.8	
NAC2732PVMCP	501	¾	27	32	—	—		22 lbs.	2.5	
NAC2432PVMCP	466	¾	24	32	—	—		20 lbs.	2.3	
NAC2132PVMCP	452	¾	21	32	—	—		18 lbs.	2.1	

- Screen extends 12" below the surface
- Specify resin grade and color: Grade 1 Clear (1377) and Frosted (1677)
- Dual-sided resin screen has radiused corners and is ¼ thick
- Overall thickness with brackets is 1½"
- Fits on 1½"-1¾" worksurface thicknesses
- Specify metal color for holders: Cinder (462), Concrete (423), Iron (463), Platinum Metallic (501), and Satin Nickel Metallic (503)
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1½" and 1¾" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- When ordering both back and side edge mount screens, size down for side screens to avoid interface
- Brackets ship in box with screen
- Remove protective film from screen
- Edge Mount Privacy Panel faceplate can be installed horizontally or vertically
- Will require attachment to surface with fasteners – 2 people recommended for installation

PRODUCTION SPECIFICATIONS

- Screen extends 4" below worksurface

TO ORDER, SPECIFY:

1. Model Number
2. Resin Grade/Color
3. Metal Color (holder)

SAMPLE MODEL NUMBERS:

NAC7224PVC2PFA A 8600 423

- See page 435 for textiles

	MODEL NO./DESCRIPTION			LIST PRICE	DIMENSIONS			CARTONED CUBIC	
	1" TEXTILE SCREEN THICKNESS	GRADE AA	GRADE A	GRADE B/COM	D	W	H	A	KW
EDGE MOUNTED PRIVACY SCREEN RECTANGULAR, TEXTILE	40" HIGH							ABOVE WORKSURFACE H	
	NAC7240PVC2PFA	\$ 1637	\$ 1735	\$ 1922	72	40	34		
	NAC6640PVC2PFA	1550	1640	1811	66	40	34		
	NAC6040PVC2PFA	1444	1527	1685	60	40	34		
	NAC5440PVC2PFA	1346	1421	1564	54	40	34		
	NAC4840PVC2PFA	1242	1309	1436	48	40	34		
	NAC4240PVC2PFA	1170	1230	1344	42	40	34		
	NAC3640PVC2PFA	1076	1128	1227	36	40	34		
	NAC3040PVC2PFA	977	1021	1104	30	40	34		
	NAC2740PVC2PFA	929	969	1046	27	40	34		
	NAC2440PVC2PFA	846	883	953	24	40	34		
	NAC2140PVC2PFA	812	844	906	21	40	34		
	30" HIGH								
	NAC7230PVC2PFA	\$ 1385	\$ 1483	\$ 1670	72	30	24		
	NAC6630PVC2PFA	1303	1393	1564	66	30	24		
	NAC6030PVC2PFA	1221	1304	1462	60	30	24		
	NAC5430PVC2PFA	1136	1211	1354	54	30	24		
	NAC4830PVC2PFA	1054	1121	1248	48	30	24		
	NAC4230PVC2PFA	971	1031	1145	42	30	24		
	NAC3630PVC2PFA	887	939	1038	36	30	24		
	NAC3030PVC2PFA	806	850	933	30	30	24		
	NAC2730PVC2PFA	761	801	878	27	30	24		
	NAC2430PVC2PFA	654	691	761	24	30	24		
	NAC2130PVC2PFA	626	658	720	21	30	24		
	24" HIGH								
	NAC7224PVC2PFA	\$ 1129	\$ 1181	\$ 1280	1 $\frac{1}{8}$ "	71 $\frac{3}{8}$ "	24	—	—
	NAC6624PVC2PFA	1074	1120	1208	1 $\frac{1}{8}$ "	65 $\frac{1}{8}$ "	24	—	—
	NAC6024PVC2PFA	1014	1060	1148	1 $\frac{1}{8}$ "	59 $\frac{1}{8}$ "	24	—	—
	NAC5424PVC2PFA	951	991	1068	1 $\frac{1}{8}$ "	53 $\frac{1}{8}$ "	24	—	—
	NAC4824PVC2PFA	891	926	992	1 $\frac{1}{8}$ "	47 $\frac{7}{8}$ "	24	—	—
	NAC4224PVC2PFA	832	867	933	1 $\frac{1}{8}$ "	41 $\frac{7}{8}$ "	24	—	—
	NAC3624PVC2PFA	749	778	833	1 $\frac{1}{8}$ "	35 $\frac{5}{8}$ "	24	—	—
	NAC3024PVC2PFA	694	717	761	1 $\frac{1}{8}$ "	29 $\frac{1}{8}$ "	24	—	—
	NAC2724PVC2PFA	659	682	726	1 $\frac{1}{8}$ "	27	24	—	—
	NAC2424PVC2PFA	621	644	688	1 $\frac{1}{8}$ "	23 $\frac{1}{8}$ "	24	—	—
	NAC2124PVC2PFA	590	607	640	1 $\frac{1}{8}$ "	21	24	—	—

- Screen extends 4" below the surface
- Privacy screens are 1 $\frac{1}{8}$ " thick dual sided textile
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- Specify tack textile grade and color
- Textile will be railroded
- Specify metal color for holders: Cinder (462), Concrete (423), Iron (463), Platinum Metallic (501), and Satin Nickel Metallic (503)
- For use on 1 $\frac{1}{8}$ " and 1 $\frac{1}{2}$ " surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Will require attachment to surface with fasteners – 2 people recommended for installation

ACCESSORIES

PRODUCTION SPECIFICATIONS

- Screen extends 4" below worksurface

TO ORDER, SPECIFY:

1. Model Number
2. Bracket Application
3. Bracket Paint Color

SAMPLE MODEL NUMBER:

- NAC7240PVCPP
- See page 435 for textiles

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
PET EDGE MOUNT SCREEN 	½" PET THICKNESS 40" HIGH								
	NAC7240PVCPP	\$ 1657		72	40	34			
	NAC6640PVCPP	1589		66	40	34			
	NAC6040PVCPP	1558		60	40	34			
	NAC5440PVCPP	1310		54	40	34			
	NAC4840PVCPP	1185		48	40	34			
	NAC4240PVCPP	1083		42	40	34			
	NAC3640PVCPP	1072		36	40	34			
	NAC3040PVCPP	808		30	40	34			
	NAC2740PVCPP	653		27	40	34			
	NAC2440PVCPP	584		24	40	34			
	NAC2140PVCPP	505		21	40	34			
	30" HIGH								
	NAC7230PVCPP	\$ 1640		72	30	24			
	NAC6630PVCPP	1574		66	30	24			
	NAC6030PVCPP	1544		60	30	24			
	NAC5430PVCPP	1291		54	30	24			
	NAC4830PVCPP	994		48	30	24			
	NAC4230PVCPP	849		42	30	24			
	NAC3630PVCPP	808		36	30	24			
	NAC3030PVCPP	781		30	30	24			
	NAC2730PVCPP	555		27	30	24			
	NAC2430PVCPP	427		24	30	24			
	NAC2130PVCPP	425		21	30	24			
	24" HIGH								
	NAC7224PVCPP	\$ 901		72	24	18			
	NAC6624PVCPP	868		66	24	18			
	NAC6024PVCPP	845		60	24	18			
	NAC5424PVCPP	746		54	24	18			
	NAC4824PVCPP	676		48	24	18			
	NAC4224PVCPP	608		42	24	18			
	NAC3624PVCPP	509		36	24	18			
	NAC3024PVCPP	469		30	24	18			
	NAC2724PVCPP	405		27	24	18			
	NAC2424PVCPP	384		24	24	18			
	NAC2124PVCPP	353		21	24	18			

- Screen extends 4" below worksurface
- PET Screen with radiused corners
- Fits on 1½" – 1¾" worksurface thicknesses
- PET Thickness ½"
- Nordic Knit PET Screen
- Metal Mounting Bracket
- When ordering both back and side edge mount screens, size down for side screens to avoid interface
- Brackets ship in box with screen
- Remove protective film from screen
- Edge Mount Privacy Panel faceplate can be installed horizontally or vertically
- Will require attachment to surface with fasteners – 2 people recommended for installation

PRODUCTION SPECIFICATIONS

- Screen extends 12" below worksurface

TO ORDER, SPECIFY:

1. Model Number
2. Bracket Application
3. Bracket Paint Color

SAMPLE MODEL NUMBER:

NAC7244PVMCPP

- See page 435 for textiles

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
PET EDGE MOUNT SURFACE SCREEN/MODESTY SCREEN	½" PET THICKNESS								
	44" HIGH								
	NAC7244PVMCPP	\$ 1657		72	44	30			
	NAC6644PVMCPP	1595		66	44	30			
	NAC6044PVMCPP	1571		60	44	30			
	NAC5444PVMCPP	1324		54	44	30			
	NAC4844PVMCPP	1191		48	44	30			
	NAC4244PVMCPP	1097		42	44	30			
	NAC3644PVMCPP	1087		36	44	30			
	NAC3044PVMCPP	812		30	44	30			
	NAC2744PVMCPP	666		27	44	30			
	NAC2444PVMCPP	589		24	44	30			
	NAC2144PVMCPP	514		21	44	30			
	38" HIGH								
	NAC7238PVMCPP	\$ 1652		72	38	24			
	NAC6638PVMCPP	1587		66	38	24			
	NAC6038PVMCPP	1555		60	38	24			
	NAC5438PVMCPP	1305		54	38	24			
	NAC4838PVMCPP	1180		48	38	24			
	NAC4238PVMCPP	1072		42	38	24			
	NAC3638PVMCPP	1056		36	38	24			
	NAC3038PVMCPP	797		30	38	24			
	NAC2738PVMCPP	629		27	38	24			
	NAC2438PVMCPP	576		24	38	24			
	NAC2138PVMCPP	496		21	38	24			
	32" HIGH								
	NAC7232PVMCPP	\$ 1645		72	32	18			
	NAC6632PVMCPP	1578		66	32	18			
	NAC6032PVMCPP	1552		60	32	18			
	NAC5432PVMCPP	1296		54	32	18			
	NAC4832PVMCPP	1017		48	32	18			
	NAC4232PVMCPP	870		42	32	18			
	NAC3632PVMCPP	823		36	32	18			
	NAC3032PVMCPP	792		30	32	18			
	NAC2732PVMCPP	565		27	32	18			
	NAC2432PVMCPP	434		24	32	18			
	NAC2132PVMCPP	433		21	32	18			

- Screen extends 12" below worksurface
- PET Screen with radiused corners
- Fits on 1½" - 1⅞" worksurface thicknesses
- PET Thickness ½"
- Nordic Knit PET Screen
- Metal Mounting Bracket
- When ordering both back and side edge mount screens, size down for side screens to avoid interface
- Brackets ship in box with screen
- Remove protective film from screen
- Edge Mount Privacy Panel faceplate can be installed horizontally or vertically
- Will require attachment to surface with fasteners - 2 people recommended for installation

ACCESSORIES

PRODUCTION SPECIFICATIONS

- Screen extends 12" below worksurface

TO ORDER, SPECIFY:

1. Model Number
2. Textile Grade/Color
3. Metal Color (holder)

SAMPLE MODEL NUMBER:

NAC7232PVMC2PFA A 8600 423

- See page 435 for textiles

	MODEL NO./DESCRIPTION				LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
	1" TEXTILE SCREEN THICKNESS	GRADE AA	GRADE A	GRADE B/COM		D	W	H				
EDGE MOUNTED PRIVACY/MODESTY SCREEN RECTANGULAR, TEXTILE	44" HIGH								ABOVE WORKSURFACE H			
	NAC7244PVMC2PFA	\$ 1546	\$ 1644	\$ 1831		72	44	30				
	NAC6644PVMC2PFA	1458	1548	1719		66	44	30				
	NAC6044PVMC2PFA	1351	1434	1592		60	44	30				
	NAC5444PVMC2PFA	1261	1336	1479		54	44	30				
	NAC4844PVMC2PFA	1169	1236	1363		48	44	30				
	NAC4244PVMC2PFA	1085	1145	1259		42	44	30				
	NAC3644PVMC2PFA	991	1043	1142		36	44	30				
	NAC3044PVMC2PFA	903	947	1030		30	44	30				
	NAC2744PVMC2PFA	852	892	969		27	44	30				
	38" HIGH											
	NAC7238PVMC2PFA	\$ 1485	\$ 1583	\$ 1770		72	38	24				
	NAC6638PVMC2PFA	1394	1484	1655		66	38	24				
	NAC6038PVMC2PFA	1289	1372	1530		60	38	24				
	NAC5438PVMC2PFA	1206	1281	1424		54	38	24				
	NAC4838PVMC2PFA	1115	1182	1309		48	38	24				
	NAC4238PVMC2PFA	1033	1093	1207		42	38	24				
	NAC3638PVMC2PFA	948	1000	1099		36	38	24				
	NAC3038PVMC2PFA	858	902	985		30	38	24				
	NAC2738PVMC2PFA	813	853	930		27	38	24				
	32" HIGH											
	NAC7232PVMC2PFA	\$ 1556	\$ 1654	\$ 1841	1 $\frac{1}{16}$	72	32	—	—		46 lbs.	6.0
	NAC6632PVMC2PFA	1462	1554	1730	1 $\frac{1}{16}$	66	32	—	—		34 lbs.	5.5
	NAC6032PVMC2PFA	1358	1441	1599	1 $\frac{1}{16}$	60	32	—	—		32 lbs.	5.1
	NAC5432PVMC2PFA	1270	1345	1488	1 $\frac{1}{16}$	54	32	—	—		30 lbs.	4.6
	NAC4832PVMC2PFA	1172	1241	1373	1 $\frac{1}{16}$	48	32	—	—		28 lbs.	4.1
	NAC4232PVMC2PFA	1086	1146	1260	1 $\frac{1}{16}$	42	32	—	—		26 lbs.	3.7
	NAC3632PVMC2PFA	973	1025	1124	1 $\frac{1}{16}$	36	32	—	—		24 lbs.	3.2
	NAC3032PVMC2PFA	884	930	1018	1 $\frac{1}{16}$	30	32	—	—		22 lbs.	2.8
	NAC2732PVMC2PFA	838	878	955	1 $\frac{1}{16}$	27	32	—	—		22 lbs.	2.5
	NAC2432PVMC2PFA	735	775	852	1 $\frac{1}{16}$	24	32	—	—		20 lbs.	2.3
	NAC2132PVMC2PFA	705	740	806	1 $\frac{1}{16}$	21	32	—	—		18 lbs.	2.1

- Screen extends 12" below the surface
- Privacy screens are 1 $\frac{1}{16}$ " thick dual sided textile
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- Specify tack textile grade and color
- Textile will be railroded
- Specify metal color for holders: Cinder (462), Concrete (423), Iron (463), Platinum Metallic (501), and Satin Nickel Metallic (503)
- For use on 1 $\frac{1}{16}$ " and 1 $\frac{1}{8}$ " surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Will require attachment to surface with fasteners – 2 people recommended for installation



Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

TO ORDER, SPECIFY:

1. Model Number
2. Resin Grade/Color
3. Paint Color

SAMPLE MODEL NUMBERS:

NAC6012MPA 1 1677 462
NACGBT2

- See page 435 for textiles


MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
		D	W	H				
RECTANGULAR MODESTY PANEL ⅓ HEIGHT RESIN	GRADE 1							
NAC6012MPA	\$ 929	⅜	59⅛	12⅝	—	—	5 lbs.	3.9
NAC5412MPA	835	⅜	53⅛	12⅝	—	—	5 lbs.	3.8
NAC4812MPA	741	⅜	47⅛	12⅝	—	—	4 lbs.	3.7
NAC4212MPA	650	⅜	41¾	12⅝	—	—	4 lbs.	3.7
NAC3612MPA	556	⅜	35¾	12⅝	—	—	4 lbs.	3.7
NAC3012MPA	466	⅜	29¾	12⅝	—	—	3 lbs.	3.6
NAC2412MPA	372	⅜	23⅜	12⅝	—	—	3 lbs.	3.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Resin modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Double sided ⅜" resin
- Modesty has stiffener rail which comes with brackets that attach to the underside of the worksurface
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

TAPERED MODESTY PANEL
⅓ HEIGHT
RESIN


	GRADE 1							
NAC6012MPTA	\$ 929	⅜	59⅛	12⅝	—	—	5 lbs.	3.9
NAC5412MPTA	835	⅜	53⅛	12⅝	—	—	5 lbs.	3.8
NAC4812MPTA	741	⅜	47⅛	12⅝	—	—	4 lbs.	3.7
NAC4212MPTA	650	⅜	41¾	12⅝	—	—	4 lbs.	3.7
NAC3612MPTA	556	⅜	35¾	12⅝	—	—	4 lbs.	3.7
NAC3012MPTA	466	⅜	29¾	12⅝	—	—	3 lbs.	3.6
NAC2412MPTA	372	⅜	23⅜	12⅝	—	—	3 lbs.	3.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Resin modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Double sided ⅜" resin
- Modesty has stiffener rail which comes with brackets that attach to the underside of the worksurface
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

RECTANGULAR MODESTY PANEL
⅓ HEIGHT
METAL


NAC6012MP2M	\$ 929	⅜	59⅛	12⅝	—	—	10 lbs.	3.9
NAC5412MP2M	835	⅜	53⅛	12⅝	—	—	10 lbs.	3.8
NAC4812MP2M	741	⅜	47⅛	12⅝	—	—	8 lbs.	3.7
NAC4212MP2M	650	⅜	41¾	12⅝	—	—	8 lbs.	3.7
NAC3612MP2M	556	⅜	35¾	12⅝	—	—	8 lbs.	3.7
NAC3012MP2M	466	⅜	29¾	12⅝	—	—	6 lbs.	3.6
NAC2412MP2M	372	⅜	23⅜	12⅝	—	—	6 lbs.	3.6

- Specify Style E for embossed design
- Specify metal color: 423 Concrete, 462 Cinder, 463 Iron, 501 Platinum Metallic, 503 Satin Nickel Metallic and 405 Designer White
- Metal modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Modesty comes with brackets that attach to the underside of the worksurface
- Metal modesty has raised square embossed design (the raised design appears on the approach side of the modesty)
- Metal modesty is 16-gauge steel
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

GANGING BRACKET

NACGBT2	Table Ganging Bracket Kit	\$ 121	—	—	—	—	—	1 lbs.	0.1
---------	---------------------------	--------	---	---	---	---	---	--------	-----

- Quantity of 6 (set of 3 pairs) hook and loop "dog bone" shaped brackets
- All hardware included
- Available in black only
- Specify model number only