



# USG TRUE® WOOD LINEAR PLANKS

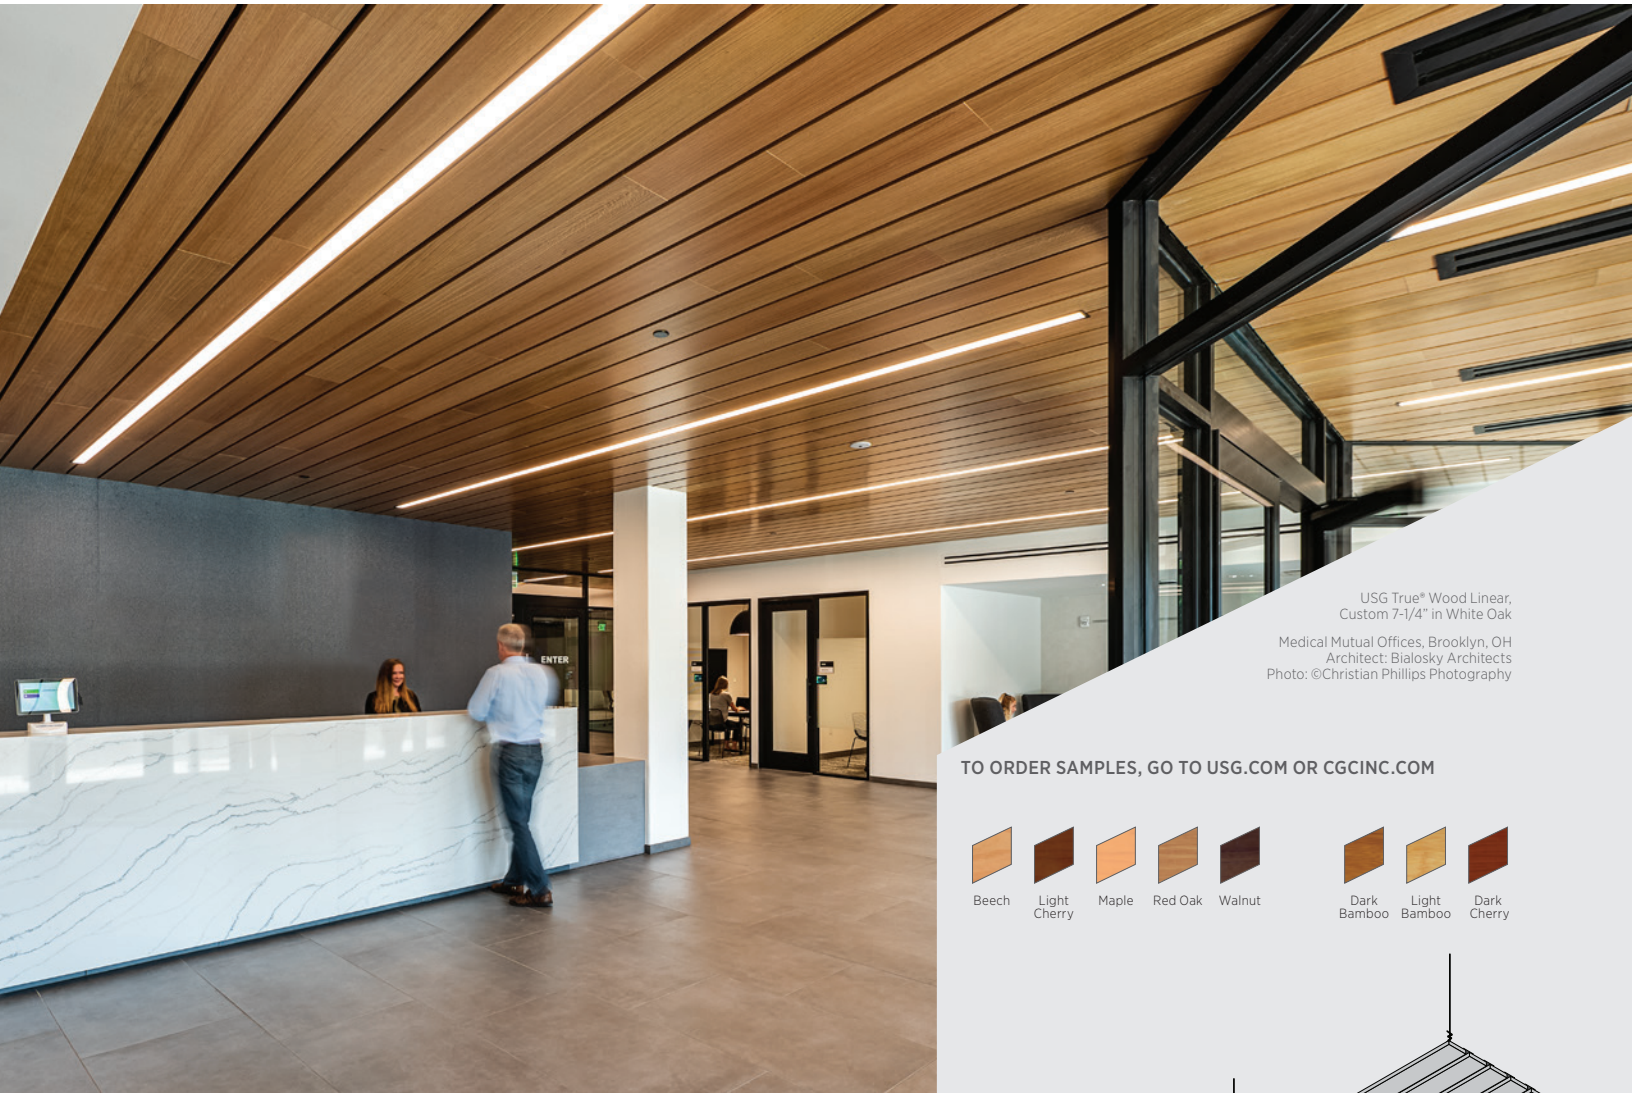

USG True® Wood Linear,  
Custom 7-1/4" in White Oak

Medical Mutual Offices, Brooklyn, OH  
Architect: Bialosky Architects  
Photo: ©Christian Phillips Photography

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)




## FEATURES AND BENEFITS

- The elegance, warmth and majesty of true wood.
- Natural wood veneers.
- Linear plank sizes: 4 1/2" x 8' (3 3/4" actual dim.), 6" x 8' (5 1/4" actual dim.)
- Acoustical with 3/4" reveal between panels
- FSC® certified.
- Class A fire rating.

## APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Wall Applications
- Sloped Ceilings
- Curved Ceilings
- New Construction or Renovation
- Concealed Grid

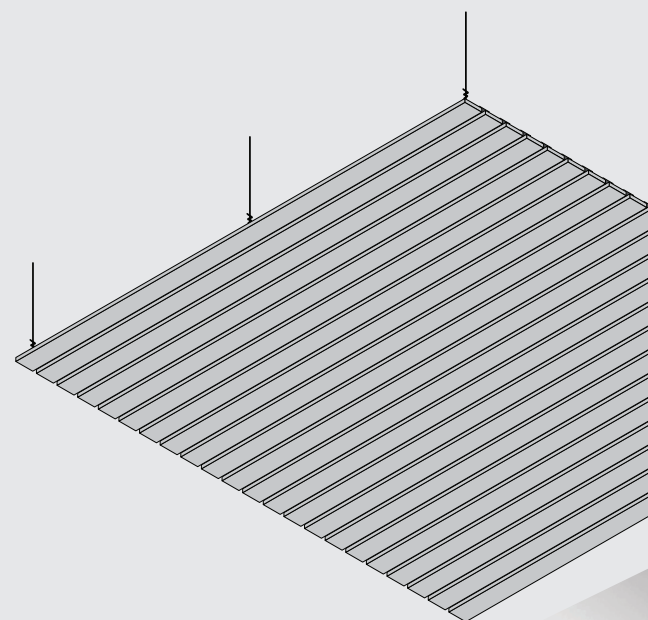

USG TRUE® WOOD LINEAR PLANKS

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



USG TRUE® WOOD  
LINEAR PLANKS

Linear Plank Size	Fire Rating	Grid Options	NRC	CAC
4-1/2" Module, 3-3/4" x 8' Plank with 3/4" black felt reveal	Class A	DWSS	0.40	—
6" Module, 5-1/4" x 8' Plank with 3/4" black felt reveal	Class A	DWSS	0.35	—


Linear Planks are screw-attached to heavy duty DWSS drywall grid. They have a black fabric backing that overlaps panel-to-panel to create a clean black look in the reveal.

TRIM OPTIONS


- 4" Nominal (3-3/4"x8')
- 6" Nominal (5-1/4"x8')

GRID PROFILE OPTIONS

USG DRYWALL SUSPENSION SYSTEM



ASSEMBLY

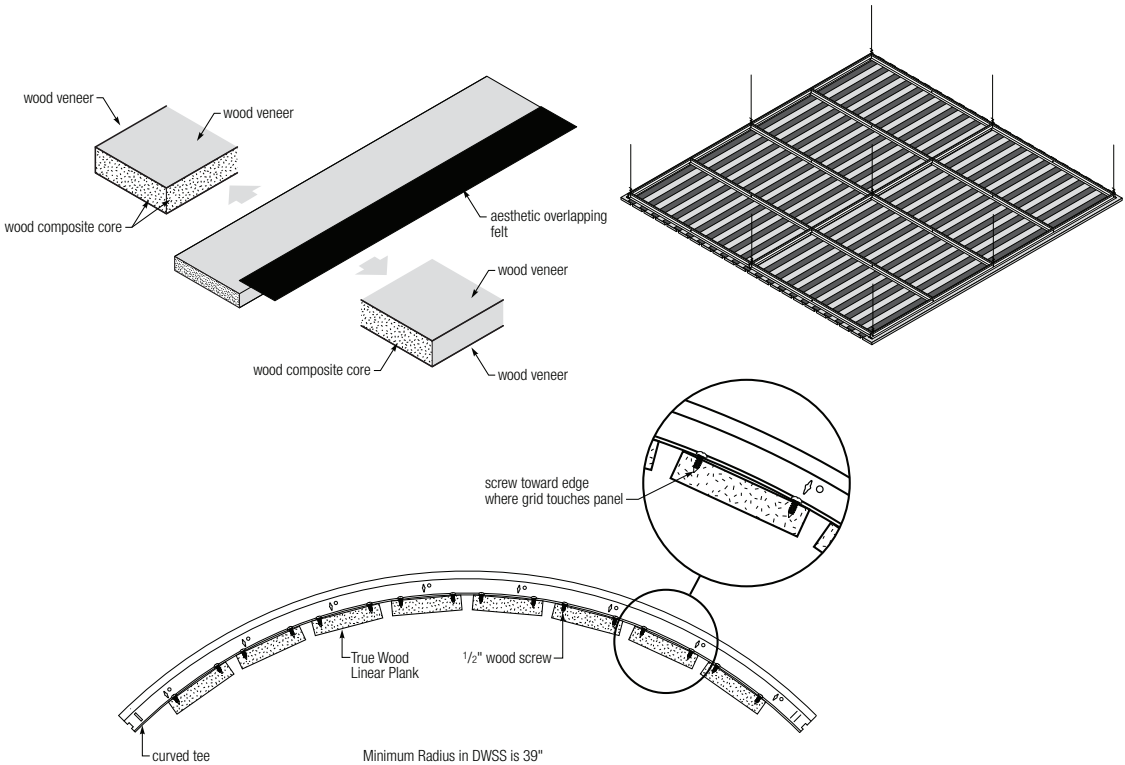

High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

PHYSICAL DATA

<b>Product literature</b> Data sheet: IC5409 Finishes sheet: IC5409 Installation Guide: IC561 Warranty: SC2102 Handling Guide: IC5449	<b>ASTM E84 and CAN/ULC S102 surface-burning characteristics</b> Class A Flame spread: 25 or less Smoke developed: 50 or less	<b>Material</b> No added urea-formaldehyde core, with face cut veneers.
<b>Online tools</b> usgdesignstudio.com or cgcdesignstudio.com	<b>ASTM E1264 classification</b> Composite—Class A Fire Performance ASHRAE Standard 62.1, 2013	<b>Notes</b> <ul style="list-style-type: none"><li>Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.</li><li>Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.</li><li>These representations should not be used to finalize color selection(s).</li><li>Building environmental conditions should be maintained in accordance with ASHRAE Standard 62.1, 2013.</li><li>Refer to <i>CISCA Wood Ceilings Technical Guidelines</i> for best practices on installing wood ceilings.</li></ul>
	<b>Weight</b> 3 lb./sq. ft.	

**Notice**  
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC5409/rev. 6-22  
© 2022 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.