



1" Pendant Mount Cylinder



Features

The FINCH family of cylinders with a 1" aperture, features exceptional output, flexibility, and a broad range of configurations to provide discreet, quality illumination, while integrating into the architecture.

The FINCH pendant mount cylinder with remote driver is available in lengths from 9" to 18", up to 1500 lm output and has a choice of beveled front door options for additional shielding or a glow lens for an extra flair. Use alone or in a composition to create a unique design.

Product Overview

Type:	Pendant Mount, Direct
Wattage:	6W, 8W, 10W, 12W, 15W, 17W, 20W
Color Temp:	2400K, 2700K, 3000K, 3500K, 4000K
CRI:	80+ & 90+ typ.
Dimming:	0-10V, DALI, TRIAC/ELV, Lutron EcoSystem

PROJECT:

TYPE:

Performance Data

Watts	Lumens	LPW	CCT	CRI
6	643	102.1	3000K	80+
8	787	93.7	3000K	80+
10	927	88.3	3000K	80+
12	1065	83.9	3000K	80+
15	1200	79.9	3000K	80+
17	1331	76.9	3000K	80+
20	1459	73.9	3000K	80+

Data is based on 20W, flood optic, standard bevel, 3000K, 80+ 120V IES file available on website. Consult ordering information and data for other wattages & beam spreads.

Electrical Data

	6W		8W		10W		12W	
	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps
120V	6.3	0.054	8.4	0.071	10.5	0.088	12.7	0.107
277V	6.7	0.034	8.6	0.038	10.7	0.044	12.8	0.051
	15W		17W		20W			
	Watts	Amps	Watts	Amps	Watts	Amps		
120V	14.9	0.125	17.3	0.144	19.7	0.164		
277V	15	0.058	17.3	0.065	19.6	0.073		

Electronic constant current LED driver



PROJECT:
TYPE:

To Order, please specify both the light fixture (Step 1) and remote driver (Step 2).

Fixture Example: FIN12-PM.309.WF.BT.GLD.DB.RC.C8.SOL

Remote Driver Example: FINPW.10.0-10V.MP

STEP 1: 1" Pendant Mount Cylinder Ordering Information

1	2	3	4	5	6	7	8	9
1	Model	2	Color Temp and CRI	3	Beam Spread	4	Body Finish	
	FIN9-PM 9"	30	3000K, 80+		SP spot 15°		WT white texture	○
	FIN12-PM 12"	35	3500K, 80+		FL flood 28°		BT black texture	●
	FIN18-PM 18"	40	4000K, 80+		WF wide flood 35°		SLV matte silver	●
		249	2400K, 90+		VWF very wide flood 50°		BRZ bronze	●
		279	2700K, 90+				DBZ dark bronze	●
		309	3000K, 90+				For custom RAL finish, consult factory	
		359	3500K, 90+					
		409	4000K, 90+					
5	Bevel Finish	6	Door Style	7	Mounting			
	MW matte white		SB standard bevel (1/4" recess)		MC mini canopy (Ø1-3/8")			
	MB matte black		DB deep bevel (5/8" recess)		C canopy (Ø5")			
	SLV matte silver		GLOW frosted glow lens (1/2" drop)		RC reduced canopy (Ø3-1/2")			
	BRZ bronze				CDC conduit canopy (Ø4-1/8")			
	DBZ dark bronze							
	GLD gold							
	For custom RAL finish, consult factory.							
	Omit from nomenclature when ordering							
	GLOW door style.							
8	Suspension	9	Accessories					
	<u>Cord</u> (cord is field cuttable)	<u>Stem</u> (stem is field cuttable)	SOL solite lens					
	C4 cord, 4'	RS3 rigid stem, 3'	HEX hexocell louver					
	C8 cord, 8'	SS3 swivel stem, 3'	LS linear spread lens					
	Cord suspension will be black for bronze or dark bronze finishes							
	Swivel Stem not available for use with MC mounting							

STEP 2: Remote Driver Ordering Information

Amerlux offers a mounting plate (MP) for each remote driver with accessories for mounting in enclosure by others, or a single remote box for one driver (RBX), or a single remote box that can fit two drivers (RBX2). Electrical Contractor (EC) is responsible for adherence to all local codes.

FINPW							
1	2	3	4				
1	Model	2	Wattage	3	Drivers/Controls	4	Driver Enclosure
	FINPW	6	6W (643 lm)		0-10V 0-10V dimming, 1%, 120/277VAC		MP mounting plate (1 driver)
		8	8W (787 lm)		DALI DALI dimming, 1%, 120/277VAC		RBX remote box (1 driver)
		10	10W (927 lm)		LE/TE TRIAC/ELV dimming, 5%, 120/277VAC		RBX2 remote box (2 drivers)
		12	12W (1065 lm)		HILUME-H-ECO Lutron LDE1 Hi-lume® 1% Soft-On/ Fade-to-Black, 120/277VAC (10W min)		Note: One wattage & dimming protocol per box.
		15	15W (1200 lm)				
		17	17W (1331 lm)				
		20	20W (1459 lm)				

For enclosure drawings & wiring schematics, see pages 7-9.

PROJECT:
TYPE:
Specifications
Application

Retail, commercial and hospitality ambient/task lighting

Construction

Extruded aluminum precision machined body, door & heatsink

Optical

TIR optics

Beam Spreads: Spot 15°, Flood 28°, Wide Flood 35°,
Very Wide Flood 50°

Linear Spread Lens (LS) recommended for use with Spot beam spread for maximum linear effect.

LED

Color Temp: 2400K, 2700K, 3000K, 3500K, 4000K

CRI: 80+ & 90+ typ.

R9 Values: 11 (83 CRI), 55 (92 CRI)

Binning: 3 MacAdam (SDCM)

Life: 50,000+ hrs, > 70% of initial lumens at 50,000 hrs

Electrical

This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Amerlux® recommends using additional surge protection with this unit (supplied by others), surge and over voltage damage is not covered under warranty.

Finish

Powder coat paint

Consult factory for custom finishes

Mounting

Pendant mount

Certifications

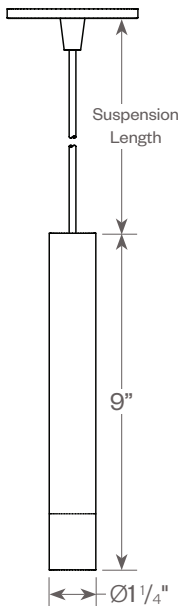
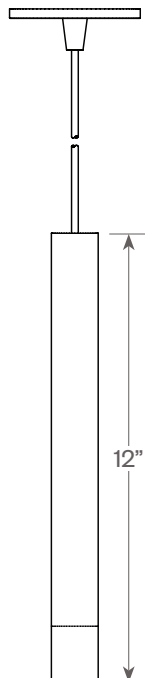
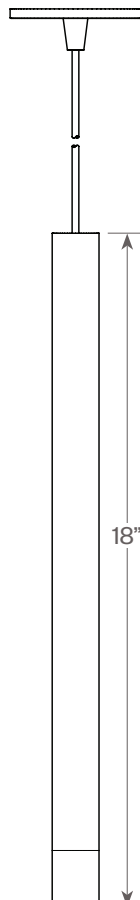
ETL listed


Indoor use only

Damp location


Warranty

5 year limited warranty

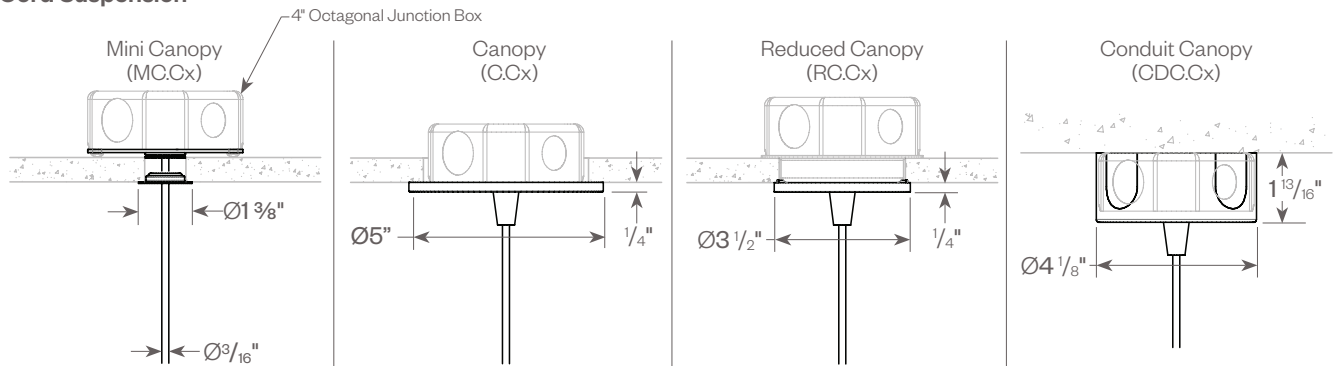
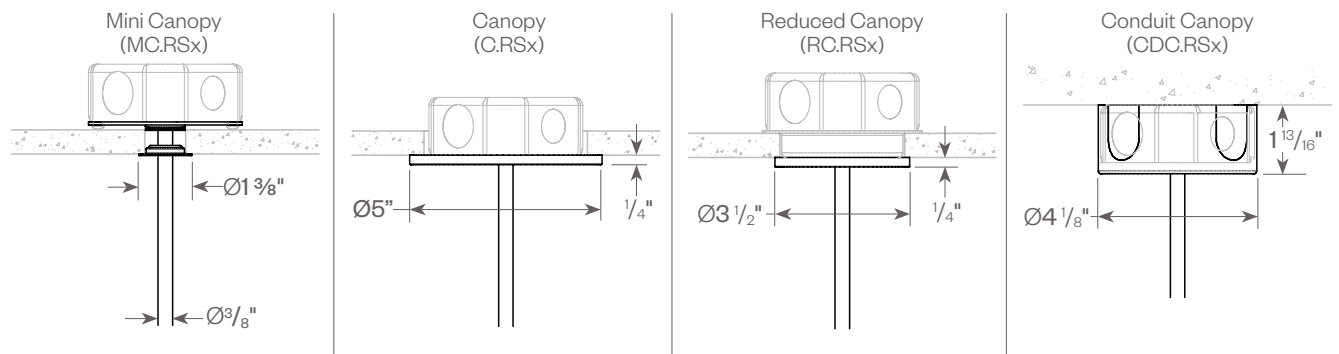
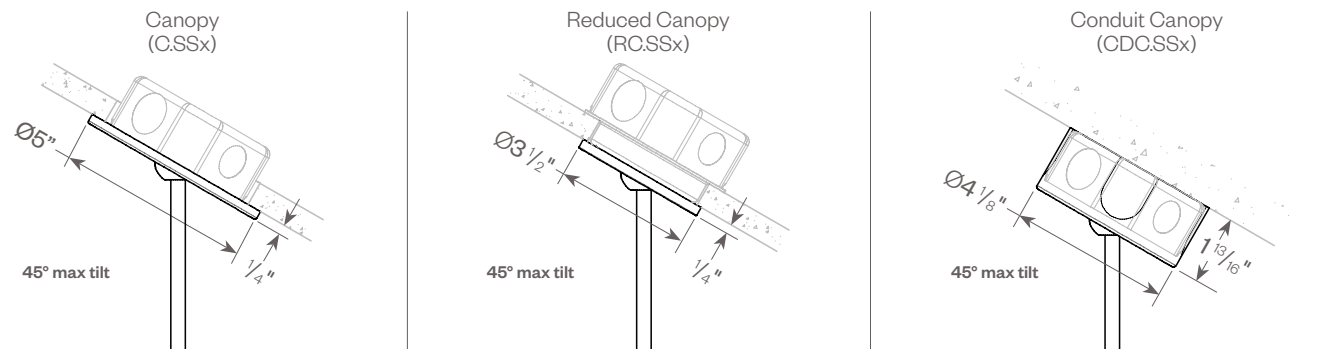
FIN9-PM

FIN12-PM

FIN18-PM


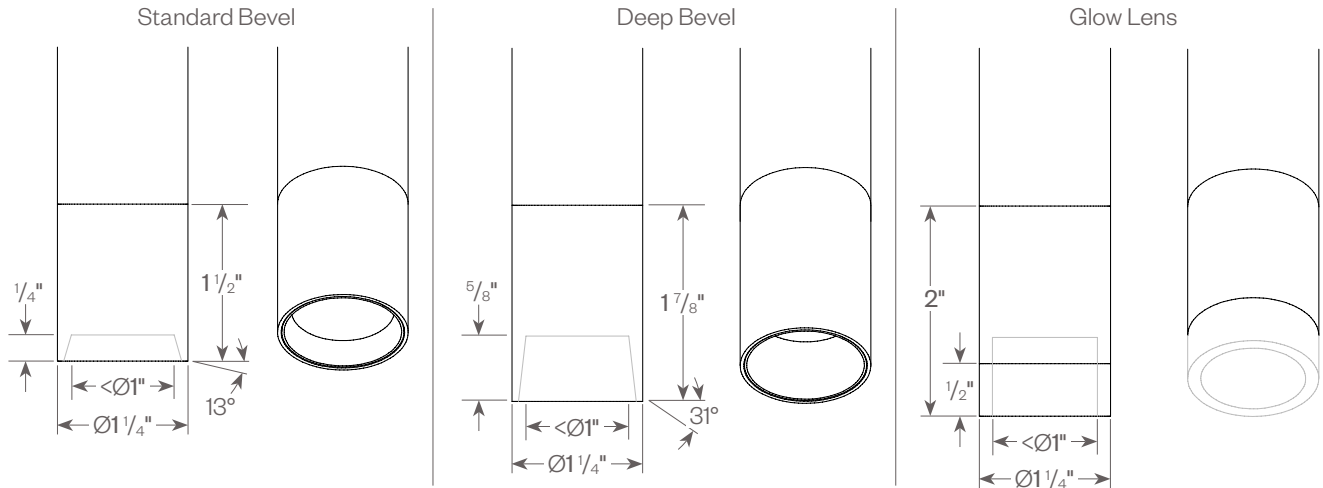
PROJECT:
TYPE:
Mounting Requirements


All Mounts Require 4" Octagonal Junction Box (by others)



Reduced Canopy (RC) Mounts also Require Raised Cover (by others) for 4" Octagonal Junction Box

Mounting/Suspension Options
Cord Suspension

Rigid Stem Suspension

Swivel Stem Suspension


PROJECT:
TYPE:
Door Styles

Finish Options

Powder coat paint.
 Consult factory for custom finishes.




Matte Black




Matte White



Matte Silver



Bronze



Dark Bronze



White Texture



Black Texture



Gold

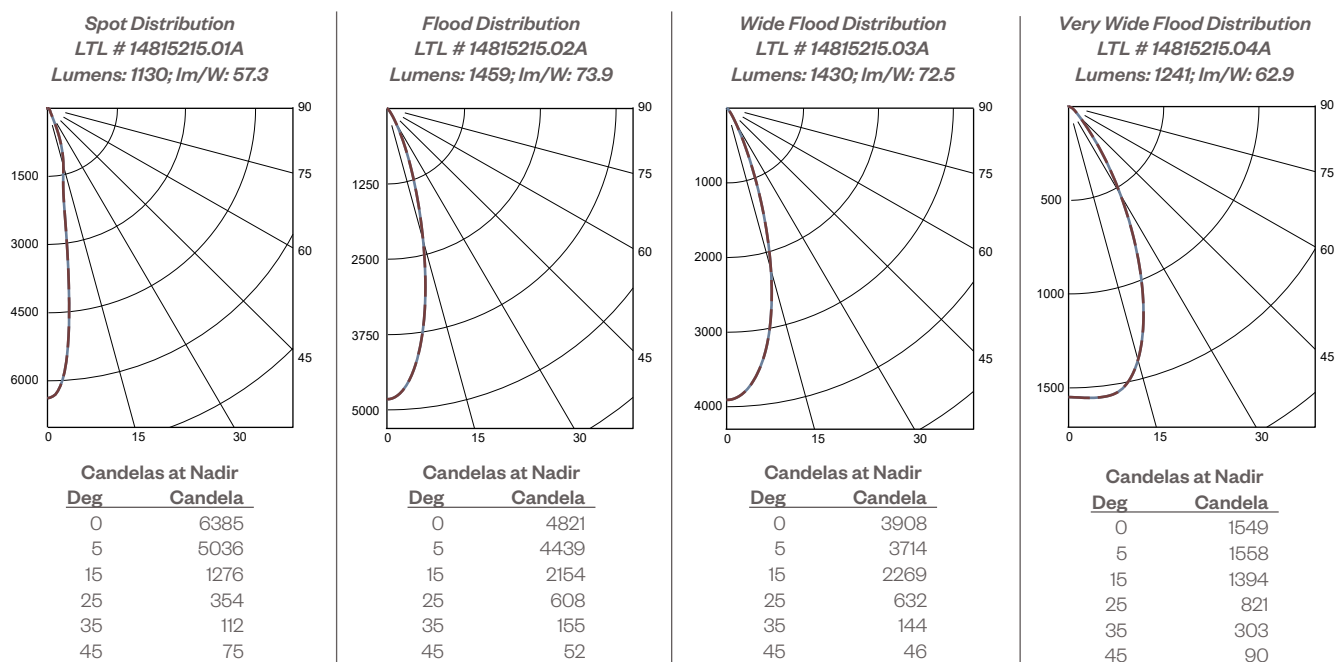
Available for Bevel Finish only

PROJECT:
TYPE:
Fixture Data
MULTIPLYING FACTORS:

Wattage:	6W	8W	10W	12W	15W	17W	20W
Factor:	0.44	0.54	0.64	0.73	0.82	0.91	1.0

CCT:	3000K, 80+	3500K, 80+	4000K, 80+	2400K, 90+	2700K, 90+	3000K, 90+	3500K, 90+	4000K, 90+
Factor:	1.0	1.04	1.06	0.76	0.83	0.88	0.92	0.93

Multiplying Factor is based on 20W, 3000K, 80+ 120V IES file on website.

20W, Standard Bevel, 3000K, 80+

Application Data:
Notes and Definitions:

Beam spread is to 50% center beam candlepower (CBCP).


D=Distance to floor or wall.

FC=Footcandles on floor or wall at center beam aiming location.

L=Effective Visual Beam length in feet (50% of maximum footcandle level).


W=Effective Visual Beam width in feet (50% of maximum footcandle level).

CB=Distance across or down to center beam location.



Spot


0° Aiming Angle
Horizontal
Footcandles



D	FC	L	W
5.0'	158	1.9	1.9
7.5'	91	2.5	2.5
10.0'	57	3.0	3.0
12.5'	38	3.5	3.5

Flood


0° Aiming Angle
Horizontal
Footcandles



D	FC	L	W
5.0'	178	2.6	2.6
7.5'	85	3.6	3.6
10.0'	49	4.7	4.7
12.5'	31	5.8	5.8

Wide Flood


0° Aiming Angle
Horizontal
Footcandles



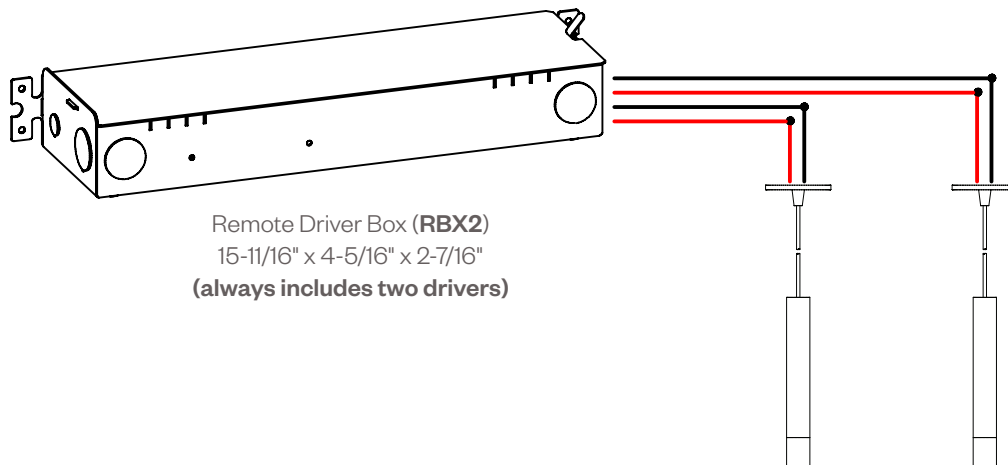
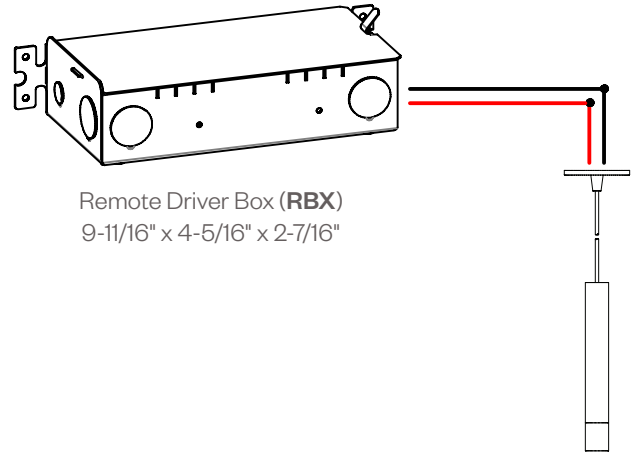
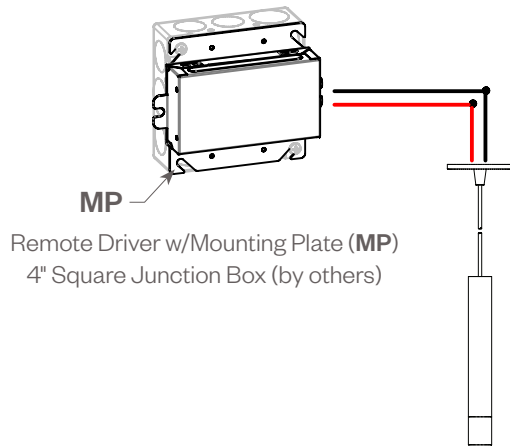
D	FC	L	W
5.0'	138	3.0	3.0
7.5'	66	4.3	4.3
10.0'	38	5.6	5.6
12.5'	25	7.0	7.0

Very Wide Flood

0° Aiming Angle
Horizontal
Footcandles



D	FC	L	W
5.0'	61	4.2	4.2
7.5'	27	6.3	6.3
10.0'	16	8.4	8.4
12.5'	10	10.6	10.6

PROJECT:
TYPE:
Power Supply Options for Remote Driver


Please see the example below when choosing the remote driver mounting or enclosure.

With 10 Finch Pendant Cylinders, would be: 10 FINPW-MP, or 10 FINPW-RBX1, or 5 FINPW-RBX2

Note: Maximum remote wiring distance is 100 linear feet of 18 AWG wire and 50 linear feet of 22 AWG wire.

PROJECT:
TYPE:
Dimming Compatibility

Amerlux® Finch fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

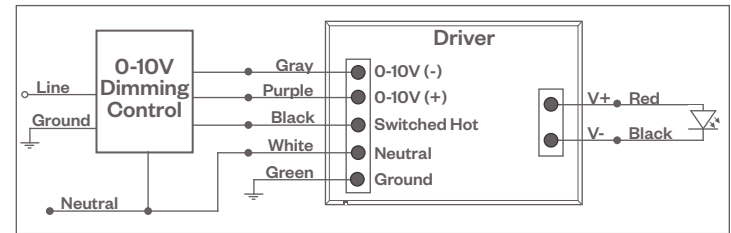
--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

0-10V - DIMMING

Integrates into a variety of building management and daylighting controls

Notes:

- 120VAC or 277VAC
- Dims down to 1% light output
- Requires interface to turn off power to driver
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

0-10V Wiring Diagram

Compatible Dimmers*:
Wall Box

Lutron "Diva" - DVSTV

Leviton Renoir II 0-10V

Central System

Lutron Grafik Eye with GRX-TVI Interface

DALI DIMMING

Digital control protocol allows individual fixture control

Notes:

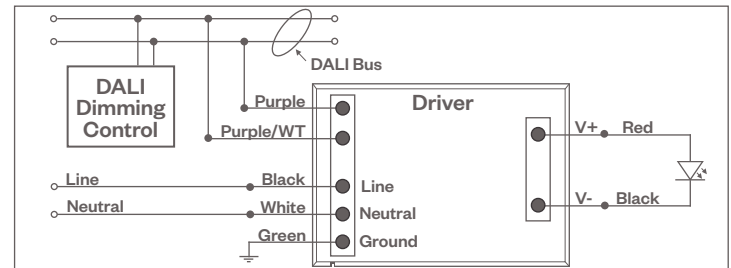
- 120VAC or 277VAC
- Dims down to 1% light output in most cases

Compatible Dimmers*:
Wall Box (3-Wire Fluorescent)

Leviton CD250 Controller

Central System

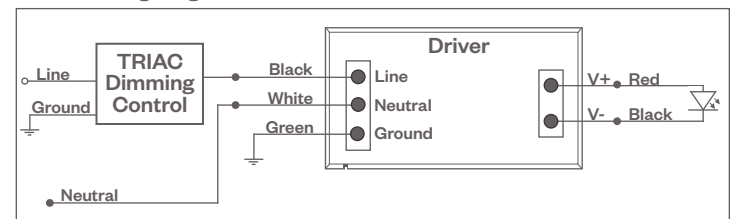
Dynalite
Fifth Light

DALI Wiring Diagram

TRIAC (Forward Phase) DIMMING (Standard)

Utilizes standard TRIAC dimmers that are in wide use in installations across the US. Best for retrofit applications where TRIAC dimmers are installed.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!
- Must meet dimmer Minimum Load Requirements per dimming manufacturer

TRIAC Wiring Diagram

Compatible Dimmers*:
Wall Box (TRIAC 120VAC)

Lutron "Diva"

Lutron "Nova-T"

Lutron "Maestro"

Lutron "Skylark"

Central System

Lutron "GP" Panel

Lutron Grafik Eye QS

Notes:

* Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer manufacturer installation instructions for 277VAC wiring diagrams.

† The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.

PROJECT:

TYPE:

Dimming Compatibility *(continued)*

Amerlux® Finch fixtures are compatible with all major dimming protocols prevalent in the United States. Please see below for general compatibilities and wiring diagrams. Amerlux recommends testing your unique dimming configuration as the exact full configuration (Dimmer, Fixture Quantity, Voltage, etc) may affect dimming performance.

--- NOTE: INFORMATION BELOW IS FOR WIRED DIMMERS ONLY. FOR WIRELESS DIMMERS, CONSULT FACTORY ---

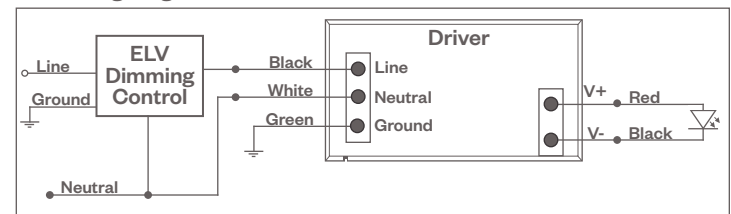
ELV - Electronic Low Voltage (Reverse Phase) DIMMING

Utilizes specialized "ELV" dimmers.

Notes:

- 120VAC or 277VAC*
- Dims down to 5% light output (most cases)
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!
- Must meet dimmer Minimum Load Requirements

ELV Wiring Diagram


Compatible Dimmers*:

Wall Box (ELV 120VAC)	Wall Box (ELV 277VAC)	Central System
Lutron "Diva"	Leviton Revoir II AWSMT-E	Lutron "GP" Panel with PHPM-PA 120/277VAC
Lutron "Nova-T"		Lutron Grafik Eye QS with PHPM-PA 120/277VAC
Lutron "Maestro"		
Lutron "Skylark"		
Leviton "Surslide"		
Leviton "Vizio"		

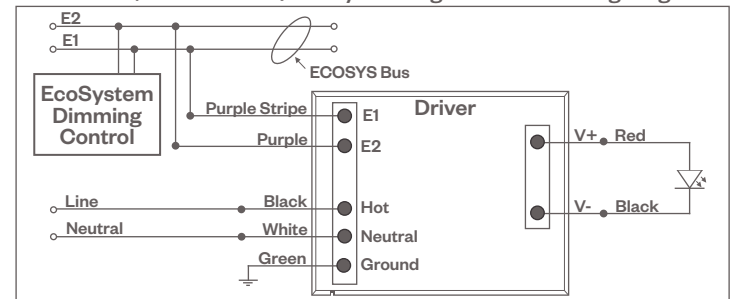
LUTRON LDE1 DIMMING

Integrates into Lutron EcoSystem building management

Notes:

- 120VAC or 277VAC*
- Dims down to 1% Soft-On/Fade-to-Black
- EcoSystem Control
- Consult Dimming manufacturer for installation instructions - DO NOT SHARE NEUTRALS!

Lutron LDE1 (HILUME-H-ECO) EcoSystem Digital Control Wiring Diagram


Compatible Dimmers*:

Lutron ECO System	Central System
Pow Pak Dimming Modules	Lutron EcoSystem compatible controls
Energi Savr Node	
Grafik Eye QS/Homeworks	
QS Control Unit	
Quantum Hub	
Homeworks QS/My Room	

Notes:

- * Driver is 277VAC dimmable with appropriate dimmer (by others). All provided wiring diagrams show 120VAC wiring colors and method. Please refer to 277VAC dimmer manufacturer installation instructions for 277VAC wiring diagrams.
- † The absence of a dimmer from the lists above does not imply incompatibility. Please consult factory for compatibility inquiries.