



CONSTRUCTIVE & DIMENSIONAL:

Application field:	Landscaped areas, Driveways, Pathways
Construction material:	Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Diameter:	165mm(6,49")
Height:	800mm(31,49")

ELECTRICAL:



Description and Model Code:	GH1371.CGXT300EN 1371.CGX.T	1 x 26 W LED 3000 K CRI>90 2967 lm
	GH1371.CGXT400EN 1371.CHX.T	1 x 26 W LED 4000 K CRI>90 3012 lm
	GH1371.ECXT300EN 1371.ECX.T	1 x 32 W LED 3000 K CRI>90 3725 lm
	GH1371.ECXT400EN 1371.EDX.T	1 x 32 W LED 4000 K CRI>90 3781 lm
	GH1371.FAXT300EN 1371.GNH.T	1 x 18 W LED 3000 K CRI>90 2172 lm
	GH1371.FAXT400EN 1371.GPX.TT	1 x 18 W LED 4000 K CRI>90 2205 lm
Operating Power	110-277 V / 50-60 Hz	
Number of heads	1	
Driver positioning	Integral	
Control gear type	Electronic	
Cable entry	Fixture supplied with pre-wired cable H05RN-F	
Emergency kit	Not available	

OPTICAL:


Beam type	Bollard [180° emission]
Beam angle [°]	180°
Light distribution	Symmetric
Beam directionability	Fixed
Diffuser material	Polycarbonate
Diffuser finish	Clear
Reflector material	Thermopolymer with high vacuum deposited aluminium



LIGHTING SOURCE for model GH1371.CGXT300EN 1371.CGX.T

Light source	LED
Power [W]	26 W
LED voltage range [V]	31.2-36.8V
Current	700 mA
ZVEI - Led Type	COB
Color temperature	3000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [lm]	2967 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C

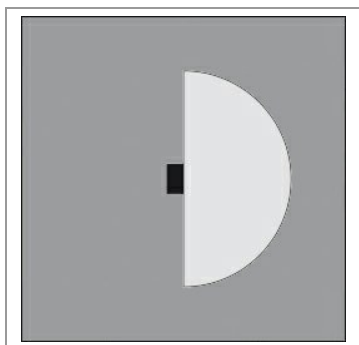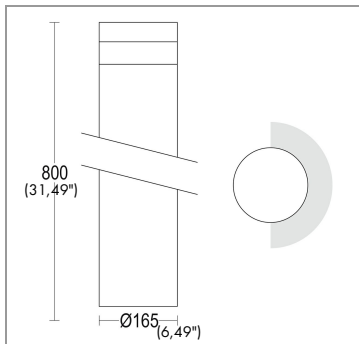

H(m)	φ(m)	Lux Medi
5	30.3	0
4	24.2	0
3	18.2	0
2	12.1	0
1	6.1	0



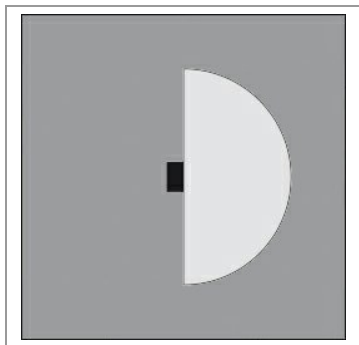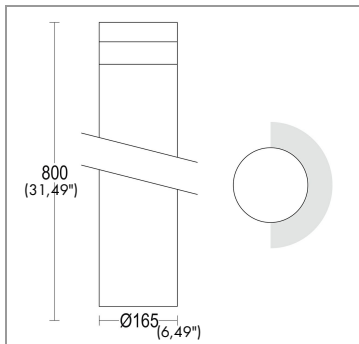

H(m)	φ(m)	Lux Medi
5	30.3	0
4	24.2	0
3	18.2	0
2	12.1	0
1	6.1	0



IP 65 IK 10

LIGHTING SOURCE for model GH1371.CGXT400EN 1371.CHX.T

Light source	LED
Power [W]	26 W
LED voltage range [V]	31.2-36.8V
Courrent	700 mA
ZVEI - Led Type	COB
Color temperature	4000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	3012 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C

LIGHTING SOURCE for model GH1371.ECXT300EN 1371.ECX.T

Light source	LED
Power [W]	32 W
LED voltage range [V]	31.2-36.8V
Courrent	900 mA
ZVEI - Led Type	COB
Color temperature	3000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	3725 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C

LIGHTING SOURCE for model GH1371.ECXT400EN 1371.EDX.T

Light source	LED
Power [W]	32 W
LED voltage range [V]	31.2-36.8V
Courrent	900 mA
ZVEI - Led Type	COB
Color temperature	4000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	3781 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C

LIGHTING SOURCE for model GH1371.FAXT300EN 1371.GNH.T


Light source	LED
Power [W]	18 W
LED voltage range [V]	31.2-36.8V
Courrent	500 mA
ZVEI - Led Type	COB
Color temperature	3000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	2172 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C



LIGHTING SOURCE formodel GH1371.FAXT400EN 1371.GPX.TT

Light source	LED
Power [W]	18 W
LED voltage range [V]	31.2-36.8V
Current	500 mA
ZVEI - Led Type	COB
Color temperature	4000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	2205 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C


ACCESSORIES:



IP 68 connector
for through wiring
AC279



IP 68 fast
connector Small
AC204



plated steel
anchorage
Maxitondo /
Maxiquadro
AC254

FINISH CODE:

.05 Dark grey (matt)

.19 Light Grey

CONSTRUCTIVE & DIMENSIONAL:

Application field:	Landscaped areas, Driveways, Pathways
Construction material:	Stainless steel AISI 316L, Extruded aluminum EN AW-6060 T5 high resistance to oxidation
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Diameter:	165mm(6,49")
Height:	800mm(31,49")

ELECTRICAL:



Description and Model Code:	GH1374.CGXT300EN 1374.CGX.T	1 x 26 W LED 3000 K CRI>90 2967 lm
	GH1374.CGXT400EN 1374.CHX.T	1 x 26 W LED 4000 K CRI>90 3012 lm
	GH1374.ECXT300EN 1374.ECX.T	1 x 32 W LED 3000 K CRI>90 3725 lm
	GH1374.ECXT400EN 1374.EDX.T	1 x 32 W LED 4000 K CRI>90 3781 lm
	GH1374.FAXT300EN 1374.GNZ.T	1 x 18 W LED 3000 K CRI>90 2172 lm
	GH1374.FAXT400EN 1374.GPX.T	1 x 18 W LED 4000 K CRI>90 2205 lm
Operating Power	110-277 V / 50-60 Hz	
Number of heads	1	
Driver positioning	Integral	
Control gear type	Electronic	
Cable entry	Fixture supplied with pre-wired cable H05RN-F	
Emergency kit	Not available	

OPTICAL:


Beam type	Bollard [360° emission]
Beam angle [°]	360°
Light distribution	Symmetric
Beam directionability	Fixed
Diffuser material	Polycarbonate
Diffuser finish	Clear
Reflector material	Thermopolymer with high vacuum deposited aluminium



LIGHTING SOURCE for model GH1374.CGXT300EN 1374.CGX.T

Light source	LED
Power [W]	26 W
LED voltage range [V]	31.2-36.8V
Current	700 mA
ZVEI - Led Type	COB
Color temperature	3000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [lm]	2967 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C

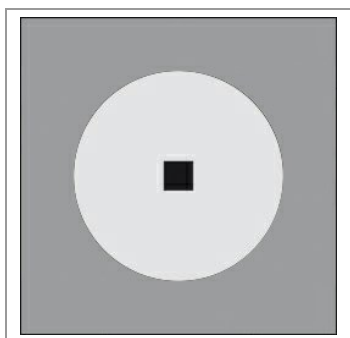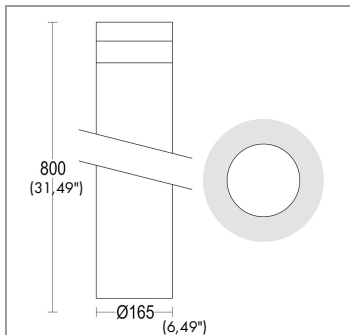

H(m)	φ(m)	Lux Medi
5	63.1	0
4	50.5	0
3	37.9	0
2	25.3	1
1	12.6	3



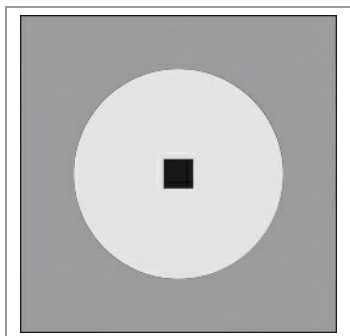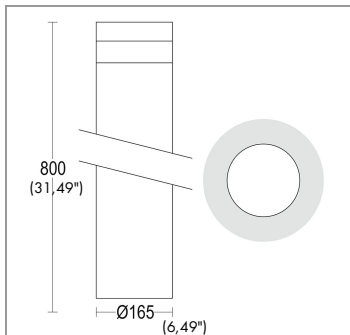

H(m)	φ(m)	Lux Medi
5	63.1	0
4	50.5	0
3	37.9	0
2	25.3	1
1	12.6	3



IP 65 IK 10

LIGHTING SOURCE formodel GH1374.CGXT400EN 1374.CHX.T

Light source	LED
Power [W]	26 W
LED voltage range [V]	31.2-36.8V
Courrent	700 mA
ZVEI - Led Type	COB
Color temperature	4000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	3012 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C

LIGHTING SOURCE formodel GH1374.ECXT300EN 1374.ECX.T

Light source	LED
Power [W]	32 W
LED voltage range [V]	31.2-36.8V
Courrent	900 mA
ZVEI - Led Type	COB
Color temperature	3000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	3725 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C

LIGHTING SOURCE formodel GH1374.ECXT400EN 1374.EDX.T

Light source	LED
Power [W]	32 W
LED voltage range [V]	31.2-36.8V
Courrent	900 mA
ZVEI - Led Type	COB
Color temperature	4000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	3781 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C

LIGHTING SOURCE formodel GH1374.FAXT300EN 1374.GNZ.T


Light source	LED
Power [W]	18 W
LED voltage range [V]	31.2-36.8V
Courrent	500 mA
ZVEI - Led Type	COB
Color temperature	3000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [Lm]	2172 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C



LIGHTING SOURCE formodel GH1374.FAXT400EN 1374.GPX.T

Light source	LED
Power [W]	18 W
LED voltage range [V]	31.2-36.8V
Current	500 mA
ZVEI - Led Type	COB
Color temperature	4000 K
Binning	Step MacAdam 3
Color rendering index	CRI>90
Nominal LED emission [lm]	2205 lm
Light source	Included
Ambient temperature operating range [°C]	-20 °C ÷ +35 °C


ACCESSORIES:



IP 68 connector
for through wiring
AC279



IP 68 fast
connector Small
AC204



plated steel
anchorage
Maxitondo /
Maxiquadro
AC254


FINISH CODE:

.05 Dark grey (matt)

.19 Light Grey



FINISH CODE:



.01 WHITE




.05 ANTHRACITE GREY



.19 LIGHT GREY




.15 STAINLESS STEEL




.02 BLACK



.32 OAK EFFECT



.45 RUST



.34 GLASS



.43 CONCRETE EFFECT