



CONSTRUCTIVE & DIMENSIONAL:

Application field: Walkways and driveways, Passageways, Cycle paths, Gardens Extruded
Construction material: aluminum EN AW-6063 T5 / die-casting alluminum EN-AB 44100

Diameter: 1.96" (5 cm)
Height : 31.5" (80 cm)

ELECTRICAL and LIGHTING SOURCE for MODEL:

GH1252.AHXA300EN GH1252.AHXA

Description: 1 x 6 W LED / 3000K / CRI>90 / 845 lm
Operating Power: 110-277 V / 50-60 Hz
Number of heads: 1
Number of Circuits: 1
Driver positioning: Remote
Control gear type: Electronic
Emergency kit: Not available
Light source: LED
Power: 6 W
LED voltage range: 18V
Courrent: 350 mA
ZVEI - Led Type: COB
Color temperature: 3000 K
Binning: Step MacAdam 3
Color rendering index: CRI>90
Nominal LED emission: 845 lm
Light source: Included
Ambient temperature operating range: -20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL:

GH1252.AHXA400EN

Description: 1 x 6 W LED / 4000K / CRI>90 / 877 lm
Operating Power: 110-277 V / 50-60 Hz
Number of heads: 1
Number of Circuits: 1
Driver positioning: Remote
Control gear type: Electronic
Emergency kit: Not available
Light source: LED
Power: 6 W
LED voltage range: 18V
Courrent: 350 mA
ZVEI - Led Type: COB
Color temperature: 4000 K
Binning: Step MacAdam 3
Color rendering index: CRI>90
Nominal LED emission: 877 lm
Light source: Included
Ambient temperature operating range: -20 °C ÷ +35 °C


OPTICAL:

Beam type: Bollard [180° emission]
Light distribution: Asymmetric
Beam directionability: Fixed

FINISH CODE:

.05 Dark grey (matt) .19 Light Grey

ACCESSORIES:






IP 68 connector
for through wiring
AC279



IP 68 fast
connector Small
AC204



Plated steel
anchorage code
Minizac
AC238

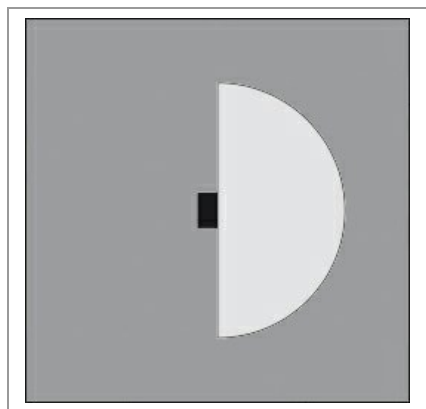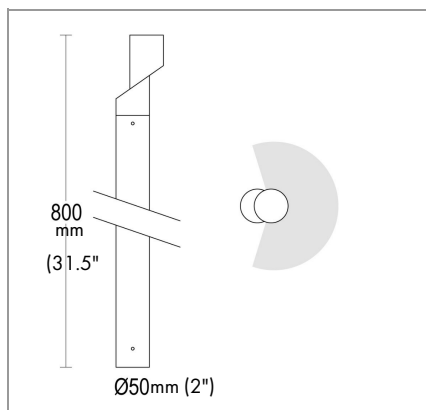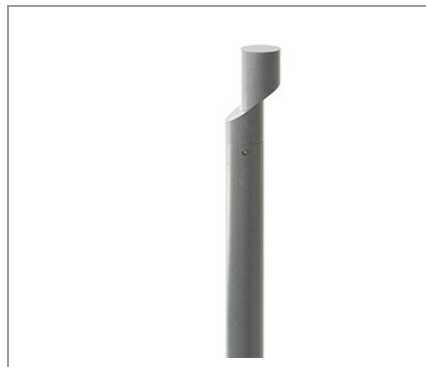

H(m)	φ(m)	Lux Medi
5	6.8	0
4	5.5	0
3	4.1	0
2	2.7	0
1	1.4	0



IP 65


sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



FINISH OPTIONS ON REQUEST:

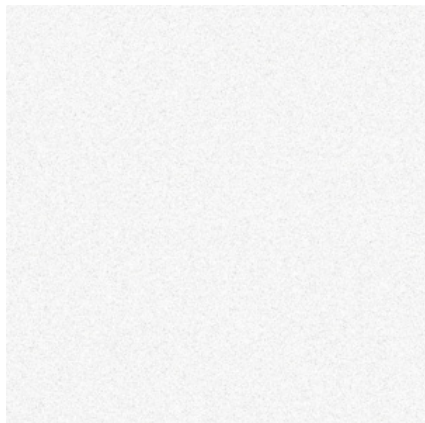

.01 WHITE




.05 ANTHRACITE GREY



.19 LIGHT GREY



.15 STAINLESS STEEL

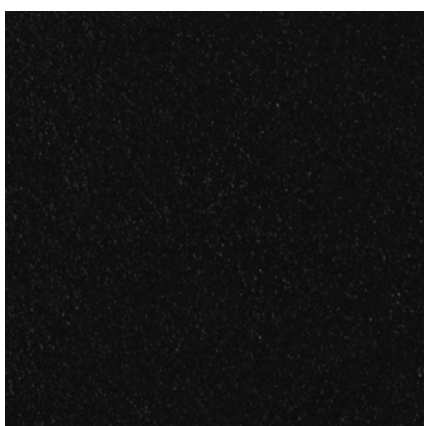

.02 BLACK




.32 OAK EFFECT



.45 RUST



.34 GLASS

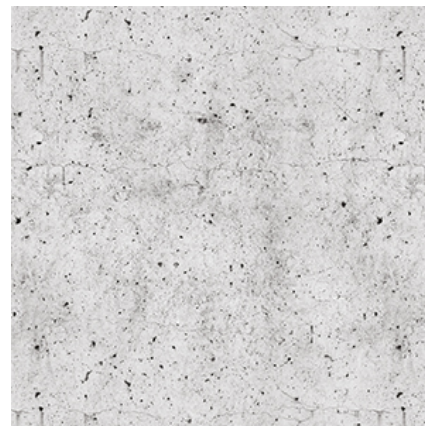

.43 CONCRETE EFFECT