


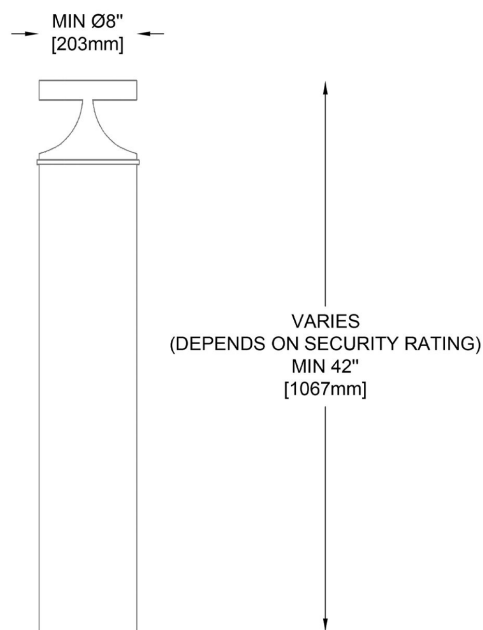

DELIA DOUBLE EMISSION BOLLARD

CODE: ART23(double)-KK-FF-QQ-RR-JJ-LL

CODE:

ART23

DIMENSIONS:

Height (KK): 42"/44"/46"/48" / 56" / 62" / CUS*

Diameter(FF): 8"/10"/12"(choose depending on a security rating needed*)

BOLLARD COVER MATERIAL:

Stainless steel

FINISHES(QQ):

- | | |
|----|--|
| 11 | 316 Stainless steel with a #4 swirl brushed stainless surface finish |
| 12 | Custom RAL |

Stainless powder coated standard colors:

- | | |
|-----|------------|
| 30. | Black |
| 33. | White |
| 36. | Dark Grey |
| 40. | Light Grey |

SECURITY RATING(RR):

Please Read our Crash Rating guidance

BDS-C40FB36-ST	ASTM C40 CRASH RATED FIXED BOLLARD
BDS-C40RB36-ST	ASTM C40 CRASH RATED REMOVABLE BOLLARD
BDS-M30-FB-ST	ASTM M30 CRASH RATED FIXED BOLLARD
BDS-M30-RB-ST	ASTM M30 CRASH RATED REMOVABLE BOLLARD
BDS-M30FB-SH	ASTM M30 CRASHED RATED SHALLOW BOLLARD
BDS-M30RB-SH	ASTM M30 CRASHED RATED SHALLOW BOLLARD
BDS-PU40FB36-ST	ASTM PU40 CRASH RATED FIXED BOLLARD
BDS-PU40RB36-ST	ASTM PU40 CRASH RATED REMOVABLE BOLLARD
BDS-H40FB-ST	ASTM H40 CRASH RATED FIXED BOLLARD
BDS-H40RB-ST	ASTM H40 CRASH RATED REMOVABLE BOLLARD
BDS-H30FB-ST	ASTM H30 CRASH RATED FIXED BOLLARD
BDS-H30RB-ST	ASTM H30 CRASH RATED REMOVABLE BOLLARD

COLOUR TEMPERATURE:

3000K

WATTAGE(JJ):

101. 2*5W
201. 2*10W

GENERAL CHARACTERISTICS:

Voltage:	110-277V
Source Type:	LED
Operating Temperature:	-22°F~122°F
IP Rating:	IP 65
CRI:	90
FLUX(LL):	A. 900lm B. 1800lm
Dimmable:	0-10V