


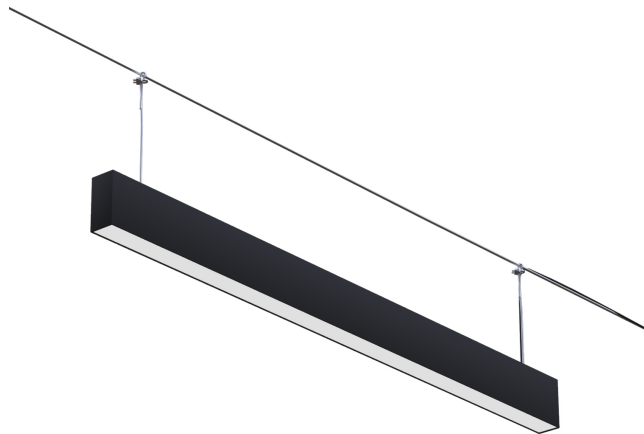

FRUIT LINE L 108

GENERAL INFORMATION:

FRUIT LINE collection is available in a variety of sizes and mount styles, direct light emission and hundreds of finishing options. Dimmable outdoor rated power supply and IP67 luminaire. Catenary cable and ceiling mounting options

CODE:

L 108

BODY:

Stainless steel linear design, showing no apparent fasteners from below. Innovative layered assembly allows lines of different finishes to be combined

OPTICS:

Machined, formed and welded satin PMMA circular integral diffuser Optimal light chamber design for dot-less uniform lighting High transmissivity (<90%) PMMA to maximize light output. Available with white LEDs in 2700K, 3000K, 3500K, 4000K color temperatures with smooth, dot free illumination, as well as RGB and RGBW.

VOLTAGE:

110-277V

LIGHTING:

LED

IP RATING:

IP 67

FINISHING:

Standard powder-coated painted finish options and faux wood painted options available.

WE WELCOME ALL CUSTOM ORDERS!
IES files upon Request

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



Wet Location

HOW TO ORDER:

SPECIFICATION CODE Example: L108-106-202-CSS-C8-K27-302-FR/60-WH

CODE.	1	2	3	4	5	6	7	8	9
-------	---	---	---	---	---	---	---	---	---

1 LIGHT DISTRIBUTION:

01. DIRECT

2 LINE LENGTH:

101.	24"	105.	56"	109.	84"
102.	36"	106.	60"	110.	96"
103.	42"	107.	72"	111.	120"
104.	48"	108.	78"	CUS.	Custom dimensions on request

3 SIDE PROFILE HEIGHT:

201.	1.5"	204.	3"	207.	5"
202.	2"	205.	3.5"	208.	6"
203.	2.5"	206.	4"	CUS.	Custom dimensions on request

4 PROFILE WITH:

201.	1.5"	204.	3"	207.	3.5"
202.	2"	205.	2.5"	208.	4"
				CUS.	Custom dimensions on request

5 LED CRI:

C8. CRI 80 C9. CRI 90

6 SPECIFY CCT :

K27.	2700K	K35.	3500K	KR.	RGB
K30.	3000K	K40.	4000K	QB.	RGBW



WE WELCOME ALL CUSTOM ORDERS!
IES files upon Request

sales@gordonbullard.com
www.bullardbollards.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA



BULLARD

BOLLARDS

FRUIT LINE

L 108

7

INSTALLATION OPTIONS:



SS

separate standard
suspension mount



CCW

catenary cable
mounting wall system



CCP

catenary cable
mounting pole system

8

DIMMING OPTION:

301.

Non-Dimmable

302.

0-10V

9

DIAMETER / WATTS / LUMEN:

FR/24 – 24"., 600 lumens, 15W

FR/36 – 36"., 1,280 lumens, 25W

FR/42 – 42"., 2,130 lumens, 45W

FR/48 – 48"., 3,833 lumens, 52W

FR/56 – 56"., 4,680 lumens, 60W

FR/60 – 60"., 5,416 lumens, 65W

FR/72 – 72"., 6,500 lumens, 78W

FR/78 – 78"., 6,889 lumens, 83W

FR/84 – 84"., 7,470 lumens, 90W

FR/96 – 96"., 8,666 lumens, 104W

FR/120 – 120"., 10,624 lumens, 128W

FR/ CUS* - custom lumen packages on request

10

FIXTURE FINISH:

STANDARD FINISHES

-WH

White

-DG

Dark Grey

-BK

Black

-LG

Light Grey

-SL

Stainless Steel

-XX

Custom, Specify in the box

FAUX-WOOD PAINTED FINISHES

-LW

Light wood

-DR

Dark wood

-BW

Brown wood



Wet Location

WE WELCOME ALL CUSTOM ORDERS!

IES files upon Request

sales@gordonbullard.com

www.bullardbollards.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Company 2023 All Rights Reserved

Updated 11/13/23