

GH1169.LVST300EC
GH1169.LVS.T

GH1169.LVFT400EC
1169.LZF.T

| H(m) | φ(m) | Lux Medi |
|------|------|----------|
| 5 | 1.6 | 107 |
| 4 | 1.3 | 168 |
| 3 | 1.0 | 298 |
| 2 | 0.6 | 671 |
| 1 | 0.3 | 2683 |

GH1169.AHST300EN
1169.AHS.T

| H(m) | φ(m) | Lux Medi |
|------|------|----------|
| 5 | 3.7 | 38 |
| 4 | 3.0 | 60 |
| 3 | 2.2 | 106 |
| 2 | 1.5 | 239 |
| 1 | 0.7 | 955 |

GH1169.AHST400EN
1169.ALS.T

| H(m) | φ(m) | Lux Medi |
|------|------|----------|
| 5 | 1.6 | 49 |
| 4 | 1.3 | 77 |
| 3 | 1.0 | 137 |
| 2 | 0.6 | 309 |
| 1 | 0.3 | 1235 |

| H(m) | φ(m) | Lux Medi |
|------|------|----------|
| 5 | 1.6 | 53 |
| 4 | 1.3 | 83 |
| 3 | 1.0 | 147 |
| 2 | 0.6 | 332 |
| 1 | 0.3 | 1327 |

CONSTRUCTIVE & DIMENSIONAL:

| | |
|--------------------|--------------------------------------------------------------------------------------------|
| Application field: | Facade, Columns, Walls, Covered entrances & walkways, Porch, balconies & terraces |
| External screws: | Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution |
| Length : | 80mm(3,14") |
| Width : | 80mm(3,14") |
| Height: | 100mm(3,93") |

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1169.LVST300EC GH1169.LVS.T

| | |
|--------------------------------------|-----------------------------------------------|
| Description: | 1 x 9 W LED 3000 K CRI>90 1173 lm |
| Operating Power: | 500 mA |
| Number of heads: | 1 |
| Number of circuits: | 1 |
| Control gear: | 500 mA not included |
| Driver positioning: | Remote |
| Control gear type: | Electronic |
| Cable entry: | Fixture supplied with pre-wired cable H05RN-F |
| Emergency kit: | Not available |
| Light source: | LED |
| Power: | 9W |
| LED voltage range: | 18V |
| Courrent: | 500 mA |
| ZVEI - Led Type: | COB |
| Color temperature: | 3000 K |
| Binning: | Step MacAdam 3 |
| Color rendering index: | CRI>90 |
| Nominal LED emission: | 1173 lm |
| Light source: | Included |
| Ambient temperature operating range: | - 20 °C ÷ +35 °C |

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1169.LVFT400EC 1169.LZF.T

| | |
|--------------------------------------|-----------------------------------------------|
| Description: | 1 x 9 W LED 4000 K CRI>90 1218 lm |
| Operating Power: | 500 mA |
| Number of heads: | 1 |
| Number of circuits: | 1 |
| Control gear: | 500 mA not included |
| Driver positioning: | Remote |
| Control gear type: | Electronic |
| Cable entry: | Fixture supplied with pre-wired cable H05RN-F |
| Emergency kit: | Not available |
| Light source: | LED |
| Power: | 9W |
| LED voltage range: | 18V |
| Courrent: | 500 mA |
| ZVEI - Led Type: | COB |
| Color temperature: | 4000 K |
| Binning: | Step MacAdam 3 |
| Color rendering index: | CRI>90 |
| Nominal LED emission: | 1218 lm |
| Light source: | Included |
| Ambient temperature operating range: | - 20 °C ÷ +35 °C |

ACCESSORIES FOR MODELS: GH1169.LVST300EC GH1169.LVS.T

and



GH1169.LVFT400EC
1169.LZF.T



Driver 22W
500mA IP20
AC206-500mA



Driver 14W
500mA IP67
AC206-IP67

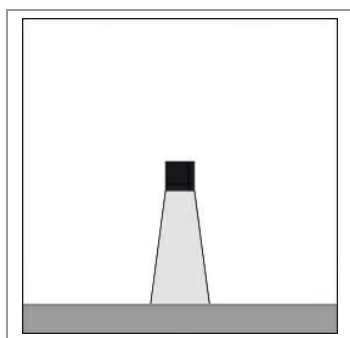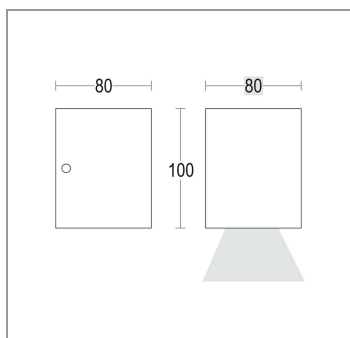

GH1169.LVST300EC
GH1169.LVS.T

GH1169.LVFT400EC
1169.LZF.T

| H(m) | φ(m) | Lux Medi |
|------|------|-------------|
| 5 | 1.6 | 107 |
| 4 | 1.3 | 168 |
| 3 | 1.0 | 298 |
| 2 | 0.6 | 671 |
| 1 | 0.3 | 2683 |

| H(m) | φ(m) | Lux Medi |
|------|------|-------------|
| 5 | 3.7 | 38 |
| 4 | 3.0 | 60 |
| 3 | 2.2 | 106 |
| 2 | 1.5 | 239 |
| 1 | 0.7 | 955 |

GH1169.AHST300EN
1169.AHS.T

GH1169.AHST400EN
1169.ALS.T

| H(m) | φ(m) | Lux Medi |
|------|------|-------------|
| 5 | 1.6 | 49 |
| 4 | 1.3 | 77 |
| 3 | 1.0 | 137 |
| 2 | 0.6 | 309 |
| 1 | 0.3 | 1235 |

| H(m) | φ(m) | Lux Medi |
|------|------|-------------|
| 5 | 1.6 | 53 |
| 4 | 1.3 | 83 |
| 3 | 1.0 | 147 |
| 2 | 0.6 | 332 |
| 1 | 0.3 | 1327 |

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1169.AHST300EN 1169.AHS.T

| | |
|--------------------------------------|-----------------------------------------------|
| Description: | 1 x 6 W LED 3000 K CRI>85 540 lm |
| Operating Power: | 110-277V / 50-60 Hz |
| Number of heads: | 1 |
| Driver positioning: | Integral |
| Control gear type: | Electronic |
| Cable entry: | Fixture supplied with pre-wired cable H05RN-F |
| Emergency kit: | Not available |
| Light source: | LED |
| Power: | 6 W |
| ZVEI - Led Type: | DOB |
| Color temperature: | 3000 K |
| Color rendering index: | CRI>85 |
| Nominal LED emission: | 540 lm |
| Light source: | Included |
| Ambient temperature operating range: | - 20 °C ÷ +35 °C |

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1169.AHST400EN 1169.ALS.T

| | |
|--------------------------------------|-----------------------------------------------|
| Description: | 1 x 6 W LED 4000 K CRI>85 580 lm |
| Operating Power: | 110-277V / 50-60 Hz |
| Number of heads: | 1 |
| Driver positioning: | Integral |
| Control gear type: | Electronic |
| Cable entry: | Fixture supplied with pre-wired cable H05RN-F |
| Emergency kit: | Not available |
| Light source: | LED |
| Power: | 6 W |
| ZVEI - Led Type: | DOB |
| Color temperature: | 4000 K |
| Color rendering index: | CRI>85 |
| Nominal LED emission: | 580 lm |
| Light source: | Included |
| Ambient temperature operating range: | - 20 °C ÷ +35 °C |

OPTICAL:

| | |
|------------------------|--------------------------------|
| Beam Type: | Wall-Effect 1 [11°-20°] narrow |
| Beam angle: | 18° |
| Light distribution: | Direct lighting |
| Beam directionability: | Fixed |
| Diffuser material: | Soda-lime tempered glass 5mm |
| Diffuser finish: | Clear |
| Reflector material: | PMMA lens |

FINISH CODE:

.05 Dark grey (matt)

.19 Light Grey

NOTE*:

Models: GH1169.LVST300EC and GH1169.LVFT400EC are dimmable upon request.
GH1169.LVS.T 1169.LZF.T

Models: GH1169.AHST300EN and GH1169.AHST400EN are not dimmable.
1169.AHS.T 1169.ALS.T