

GH1169.LVFT300EC
1169.LVF.T

GH1169.LVFT400EC
1169.LZF.T

H(m)	φ(m)	Lux Medi
5	3.7	37
4	3.0	57
3	2.2	102
2	1.5	230
1	0.7	919

GH1169.AHFT300EN
1169.AHF.T

H(m)	φ(m)	Lux Medi
5	3.7	38
4	3.0	60
3	2.2	106
2	1.5	239
1	0.7	955

GH1169.AHFT400EN
GH1169.AL.F.T

H(m)	φ(m)	Lux Medi
5	3.7	17
4	3.0	26
3	2.2	47
2	1.5	106
1	0.7	423

H(m)	φ(m)	Lux Medi
5	3.7	18
4	3.0	28
3	2.2	51
2	1.5	114
1	0.7	455

CONSTRUCTIVE & DIMENSIONAL:

Application field:	Facade, Columns, Walls, Covered entrances & walkways, Porch, balconies & terraces
External screws:	Stainless steel A4-70 treated with highly antioxidant water-repellent lubricating solution
Length :	80mm(3,14")
Width :	80mm(3,14")
Height:	100mm(3,93")

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1169.LVFT300EC 1169.LVF.T

Description:	1 x 9 W LED 3000 K CRI>90 1173 lm
Operating Power:	500 mA
Number of heads:	1
Number of circuits:	1
Control gear:	500 mA not included
Driver positioning:	Remote
Control gear type:	Electronic
Cable entry:	Fixture supplied with pre-wired cable H05RN-F
Emergency kit:	Not available
Light source:	LED
Power:	9W
LED voltage range:	18V
Courrent:	500 mA
ZVEI - Led Type:	COB
Color temperature:	3000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	1173 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1169.LVFT400EC 1169.LZF.T

Description:	1 x 9 W LED 4000 K CRI>90 1218 lm
Operating Power:	500 mA
Number of heads:	1
Number of circuits:	1
Control gear:	500 mA not included
Driver positioning:	Remote
Control gear type:	Electronic
Cable entry:	Fixture supplied with pre-wired cable H05RN-F
Emergency kit:	Not available
Light source:	LED
Power:	9W
LED voltage range:	18V
Courrent:	500 mA
ZVEI - Led Type:	COB
Color temperature:	4000 K
Binning:	Step MacAdam 3
Color rendering index:	CRI>90
Nominal LED emission:	1218 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

ACCESSORIES FOR MODELS:

GH1169.LVFT300EC
1169.LVF.T

and



GH1169.LVFT400EC
1169.LZF.T



Driver 22W
500mA IP20
AC206-500mA



Driver 14W
500mA IP67
AC206-IP67

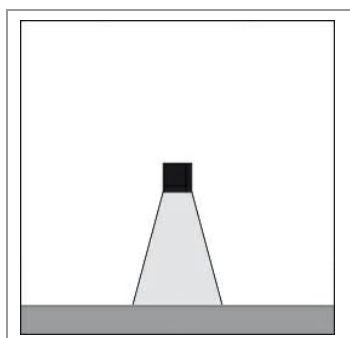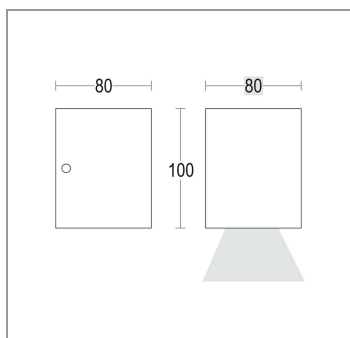

GH1169.LVFT300EC
1169.LVF.T

GH1169.LVFT400EC
1169.LZF.T

H(m)	φ(m)	Lux Medi
5	3.7	37
4	3.0	57
3	2.2	102
2	1.5	230
1	0.7	919

H(m)	φ(m)	Lux Medi
5	3.7	38
4	3.0	60
3	2.2	106
2	1.5	239
1	0.7	955

GH1169.AHFT300EN
1169.AHF.T

GH1169.AHFT400EN
GH1169.ALF.T

H(m)	φ(m)	Lux Medi
5	3.7	17
4	3.0	26
3	2.2	47
2	1.5	106
1	0.7	423

H(m)	φ(m)	Lux Medi
5	3.7	18
4	3.0	28
3	2.2	51
2	1.5	114
1	0.7	455

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1169.AHFT300EN 1169.AHF.T

Description:	1 x 6 W LED 3000 K CRI>85 540 lm
Operating Power:	110-277V / 50-60 Hz
Number of heads:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Fixture supplied with pre-wired cable H05RN-F
Emergency kit:	Not available
Light source:	LED
Power:	6 W
ZVEI - Led Type:	DOB
Color temperature:	3000 K
Color rendering index:	CRI>85
Nominal LED emission:	540 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

ELECTRICAL and LIGHTING SOURCE for MODEL: GH1169.AHFT400EN GH1169.ALF.T

Description:	1 x 6 W LED 4000 K CRI>85 580 lm
Operating Power:	110-277V / 50-60 Hz
Number of heads:	1
Driver positioning:	Integral
Control gear type:	Electronic
Cable entry:	Fixture supplied with pre-wired cable H05RN-F
Emergency kit:	Not available
Light source:	LED
Power:	6 W
ZVEI - Led Type:	DOB
Color temperature:	4000 K
Color rendering index:	CRI>85
Nominal LED emission:	580 lm
Light source:	Included
Ambient temperature operating range:	- 20 °C ÷ +35 °C

OPTICAL:

Beam Type:	Wall-Effect 1 [21°-40°] medium
Beam angle:	40°
Light distribution:	Direct lighting
Beam directionability:	Fixed
Diffuser material:	Soda-lime tempered glass 5mm
Diffuser finish:	Clear
Reflector material:	PMMA lens

FINISH CODE:

.05 Dark grey (matt)

.19 Light Grey

NOTE*:

Models: GH1169.LVFT300EC and GH1169.LVFT400EC are dimmable upon request.
1169.LVF.T 1169.LZF.T

Models: GH1169.AHFT300EN and GH1169.AHFT400EN are not dimmable.
1169.AHF.T GH1169.ALF.T