

Esyr Cob 110-277V 12,5W


Floodlights

Code: 3186

Application

Ceiling / wall / floor


- Adjustable floodlight IP66
- Aluminum alloy body with glass front protection
- Installation with bracket or on ground with steel picket
- Withdrawn non-dazzling optic
- Provided with 1m of 3x1 neoprene cable
- Power supply unit incorporated

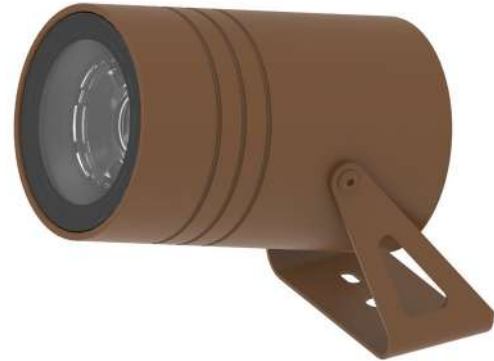

KELVIN	CRI	REAL OUTPUT
2700	90	~ 1080
3000	90	~ 1360
4000	80	~ 1380

 Code: **3186**


SHAPE	FINISH	COLOUR	OPTICALS
Round	White	4000 K	20°
	Grey	3000 K	50°
	Corten	2700 K	70°
			Diffused



Input: 110-277V

ACCESSORIES

- 30750001 Steel picket
- 307500012 Neoprene cable 3x1
- 307500005 IP68 connector
- 307500023 Non dazzling system

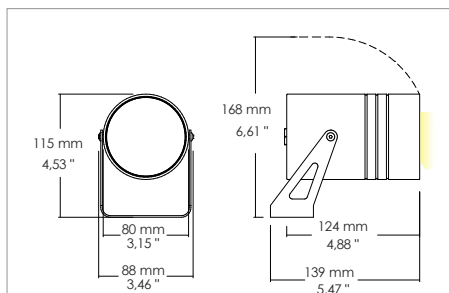

Mail: sales@gordonbullard.com

Web: www.bullardbollards.com

Tel: 1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA