

Assembly Instructions


All Terrain® Mobile Furniture

Fixed-Height and Pin-Height Adjustable Tables with Eight-Screw Base Attachment


April, 2002

KI
1330 Bellevue Street
P.O. Box 8100
Green Bay, Wisconsin 54308-8100
www.ki.com


TEL (920) 468-8100
FAX (920) 468-0280




ATSW45/, ATSW57/,
ATSW63/, ATSW69




ATRC2448/, ATRC2460/, ATRC2742/,
ATRC2748/, ATRC2760/




ATCC2754/, ATCC3054/




ATDU46/




ATRC3042/, ATRC3048/, ATRC3060




ATCC2448/, ATCC2748/



ATDU50/



ATSL2745/, ATSL3658/



ATEL2745/, ATEL3658/

Tools Required:

#2 Phillips screwdriver
 $\frac{3}{4}$ " open end wrench
(for tables with casters)

Hardware Included:

(8) $\frac{1}{4}$ -20 x $\frac{3}{4}$ " Phillips pan-head screws
with nylon patch
4 total of one of the following:
locking casters (46.5147)
non-locking casters (46.5146)
glides (10.3000.BLWH)

1. To avoid scratching the tabletop, place it face down on a soft protective material. Refer to the top and base packaging labels to identify the table model number. Identify applicable table illustration:
2. Unpackage appropriate table base and refer to the illustration above for proper base/leg orientation. Set the base in place on the underside of the worksurface aligning attachment holes with threaded inserts in the worksurface tops as shown.

Note: Front of tables are at the top of illustration.



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened and checked periodically after assembly. **Failure to assemble properly, or to secure parts may result in assembly failure and injury.** Illustrations and specifications are based on current product information at the time of this printing.

All Terrain® Mobile Furniture - Assembly Instructions

Fixed-Height and Pin-Height Adjustable Tables with Eight-Screw Base Attachment



Assemble units as described herein only. To do otherwise may result in instability. All screws, nuts and bolts must be tightened securely and must be checked periodically after assembly. Failure to assemble properly, or to secure parts may result in assembly failure and injury.

3. Secure the bases on each side using the screws provided (Figure 1).

4. Attach glides and/or casters to the bases. See illustration and follow the following guidelines below:

**For 4CW - 4 casters
(2 locking & 2 non-locking):**

Insert and tighten all four casters using $\frac{3}{4}$ " open-end wrench.

The two locking casters are to be toward the front edge of the table (Figure 2).

For 4GB - 4 glides:

Insert glides. To achieve the standard pin heights (and the same height as with casters) turn the glides in until $\frac{1}{2}$ " of the telescoping sleeve is exposed (Figure 2).

**For 4MW - 2 glides and
2 non-locking casters:**

Insert glides and casters as previously described. The glides should be positioned towards the front edge of the table (Figure 3).

5. For Pin-Height Adjustable Tables:
Check that both sides of the base are set to the desired table height. The pin should be in the center upright hole for standard 29" tabletop height. (Figure 4).

6. Carefully turn the table upright.
Check that the table is flat and level.
Adjust the glide heights to make minor adjustments.

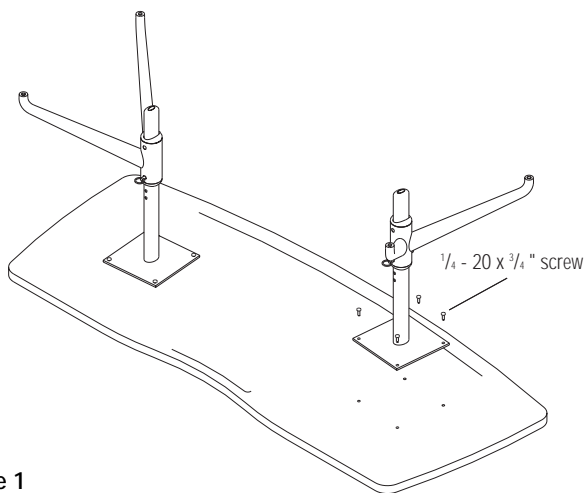


Figure 1

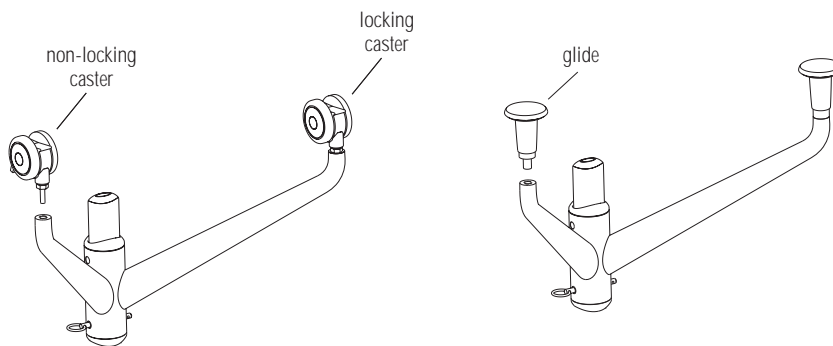


Figure 2

Figure 3

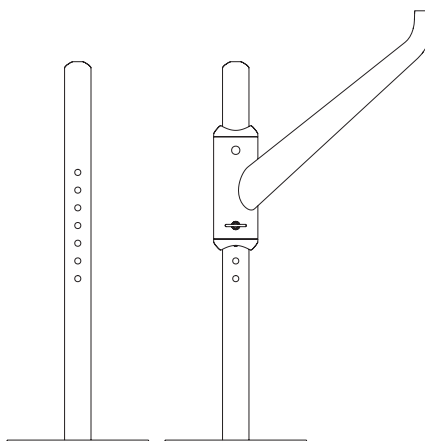


Figure 4