



# INTANDEM<sup>®</sup> TABLE SYSTEM

---

PRICE LIST

EFFECTIVE JULY 31, 2024  
800.424.2432



<b>InTandem® Table System</b>		
Technical Specifications		3
Product Color Options		7
Worksurfaces		8
Rectangular Beams		10
Corner Beams		14
Legs and Wheelchair Kit		16
Rectangular Privacy Screens		17
Stand Alone Privacy Screens		18
Corner Privacy Screens		19
Divider Screens		20
Rectangular Curved Privacy Screens		22
Stand Alone Curved Privacy Screen		23
Corner Curved Privacy Screen		24
Curved Divider Screens		25
<b>Electrical Components</b>		
Corded Power Modules		27
Electrical (10-Wire)		28
Pattern Single Circuit Power Modules		30
Pattern Single Circuit Accessories		31
Grommets		32
Accessories		33
<b>InTandem® Table System</b>		
CPU Clamps		34



PRODUCT SPECIFICATIONS ■  
InTandem® Table System

May 2024

TECHNICAL SPECIFICATIONS

The InTandem computer support table system consists of horizontal worksurfaces, and optional vertical privacy screens and dividers. Shared leg assemblies connect to the steel beam with plastic doors allowing access to power and data cabling from both the front and back side of the beam. The beam extends the entire length of the table to bring power and communications to each worksurface.

Worksurfaces

Horizontal worksurfaces constructed of 1 1/8" thick 45# density particleboard with .030" thick high-pressure laminate and .030" thick high-pressure backing sheet. The worksurfaces are available in rectangular, square corner, and transitional corner shapes. Overall thickness is 1 1/4". Worksurfaces are bolted to leg assemblies using 1/4 -20 Torx head (tamper-resistant) bolts through threaded steel inserts in the underside of the surface. Worksurfaces have standard 6 3/4" x 3 3/8" O.D. ABS grommets; two on 24"-72" rectangular, as well as square corner worksurfaces (located in the rear corners) and optional four grommets on 60", 66", and 72" worksurfaces (located one right and one left, and the remaining two centered). On the transitional corner worksurfaces, the grommet is located on the left and right rear side. Grommets have a flip-up receding door and are for use with corresponding cutouts to allow for retrofitting of the corresponding power module at a later date. Worksurfaces include a 14-gauge steel splice plate to mount to the underside of the user side of the worksurface to keep two adjacent surfaces level.

Square Corner Worksurfaces

Square corner worksurfaces are designed for use with matching depth adjacent worksurfaces. Tops are 1 1/4" solid core with high-pressure laminate surface. All four edges are matching flat PVC self-edging. Worksurfaces have two grommets positioned along the left and right corner. Power modules are not available on the square corner worksurface.

Transitional Corner Worksurfaces

Transitional corner worksurfaces have the same basic construction as the square corner worksurfaces, except the front edge (user side) is post-formed laminate. Transitional corner worksurfaces have two grommets with openings for wire management positioned along the left and right back corners.

Worksurface Edges

Three worksurface edge options are available: post formed laminate, urethane, and 74P (2 mm) edge.

Post Formed Laminate

The front edge is post-formed with an elliptical shape. The rear edge and two sides are covered with matching flat .024" PVC edge banding.

Urethane Edge

Worksurfaces have an elliptical front edge and the remaining edges 1/4" molded urethane.

74P (2 mm) Edge

Radius corners with comfort curve along user side.

Beams

The beam has lay-in access to data cables from the back side (non-user side) of the table and access to the power and data cables from the front (user side). Both doors can be opened at one time if necessary, without any adjustment or reconfiguration required. Both doors are constructed of .06" thick PVC dual-durometer extrusion and are joined by ultra-sonic welding and screwed to the communications beam. Doors have a continuous flexible PVC hinge allowing both doors to pivot at the bottom. The door allows all cords to be stored inside the beam and out of sight.



TECHNICAL SPECIFICATIONS

Beams (cont.)

The electrical trough on powered beams is constructed of 16-gauge formed steel finished in Flannel colored powder-coat paint. Each electrical trough has openings on the backside covered by a 16-gauge steel removable outlet cover. The outlet covers are removable for access to receptacles when using back-to-back power. The electrical trough is attached to the underside of the worksurface with 1/4 -20 Torx head screws. Electrical components for the 60", 66", and 72" powered beams come as one piece on standard beams or in two pieces on the quad beams.

Quad beams can be specified for 60", 66", and 72" sizes for applications when two users are sharing one worksurface length, or in certain T-configurations. Quad beams have four cutouts on the back (instructor) side of the beam, and four receptacle locations on each side of the beam in powered beam applications.

When Pattern electrical system is ordered, non-powered beams must be specified with each table.

When hardwired electrical system is ordered, the top raceway is covered by a 20-gauge formed steel cover with holes for simplex receptacles (single), thereby totally enclosing the 110 volt wiring.

The data trough is constructed of 16-gauge steel. The terminated end of the data cables (data jacks) can be snapped into the pre-punched holes in the data trough. Multiple data plates can also be snapped into the data trough. The customer is to provide data jacks and data plates. Data troughs are bolted to the legs by 1/4 -20 Torx head, tamper-resistant screws and support the bottom of the beam door.

Optionally, a data cover can be specified to cover the data trough and conceal the data wires. The data cover is constructed of 24-gauge steel.

ABS plastic beam end caps enclosing the wires are standard on every beam. Middle and corner middle beam assemblies will not include end caps.

Corner middle beams are specified for use with the same size corner worksurface. Beam sizes are available 24" x 24", 30" x 30", 36" x 36", and 42" x 42". Corner middle beams do not include end caps.

Support Legs

C-Legs


All "C" legs are available in three overall heights of 27", 29", and 38" (worksurface height). All "C" legs have vertical wire management capabilities. A reversible vertical wireway cover is standard on each leg. Steel trim with liquid-tight fittings are available for power infeeds at the bottom of any leg. All legs can be retrofitted in the field to accommodate a power infeed or data cabling infeed.

All "C" legs can be used as either an end leg or a shared leg. The "C" legs are used when connecting tables in a row. The vertical leg tube is 2" x 5", 14-gauge D-shaped steel tubing. The foot to which the leg tube is welded is made of 14-gauge formed steel. The nylon glide at the bottom of the toe casting can be adjusted vertically 1 1/4" with an open-faced wrench from the underside of the foot for worksurface leveling.

Corner Worksurface Support Leg

A square shaped leg for a transitional corner surface is made of 2" x 2", 14-gauge steel. The leg bolts to the front side of both beams at the corner. One leg is required per corner worksurface; available in two heights (27" and 29"). Wire management is not available on this leg. For wire management capabilities, a "C" leg will need to be specified.





TECHNICAL SPECIFICATIONS

Electrical Systems

810 10-Wire Electrical System

The US standard electrical system available on InTandem is an 810 10-wire electrical system (20 amps per circuit). Power is supplied through a 6-2-2 configuration with six hot wires, two shared oversized neutral wires and two ground wires (one isolated ground and one building ground). The 810 10-wire electrical system is UL Listed per the UL 1286 standard.

10-Wire Rigid Wireway

The UL listed 10-wire system consists of six conductors (12-gauge), two neutrals (10-gauge), and two grounds (12-gauge). The system provides six 20 amp, 120 volt capacity circuits. All receptacles are rated at 15 amps, 125 volt capacity. Connection diagrams are available.

The 10-wire rigid wireway is easily plugged into the rigid wireway of the adjacent table allowing reconfiguration of the tables without rewiring or the need to thread connectors through legs.

10-Wire Rigid Wireway For T-Shaped Configurations

10-wire rigid wireway of galvanized steel is available for 24", 30", and 36" deep worksurfaces when T-shaped or L-shaped table configurations are required.

10-Wire Rigid Wireway For Back-To-Back Configurations

10-wire rigid wireway of galvanized steel is available for use in back-to-back configurations. Rigid wireways are available for all table widths. (60", 66", and 72" widths require quad beams)

End-of-Run Beam - 10-Wire New York Power Infeed

The City of New York 10-wire power infeed is accomplished through the use of a power infeed table beam which is supplied with a service entry box. The box is sized to be a minimum of 2.25 cubic inches for each of the ten wires entering from source and leaving to modular pre-wired 10-wire electrical system. Includes steel trim plate with dual holes for electrical and data entry and six feet of liquid-tight flexible conduit .83" diameter.

10-Wire Base Power Infeed

The 10-wire base power infeed brings power from the building power source up to the beam electrical via the vertical wireway cover on the leg. The infeed is pre-wired for attachment to the 10-wire rigid wireway in the beam. Wiring connections to the building power source must be made by a certified electrician.

10-Wire Top Power Infeed

The 10-wire top power infeed brings power from the ceiling to the beam. The infeed includes a 10' aluminum pole with separate channels for power and data entry, pre-wired connectors, and flexible steel conduit for attaching to the 10-wire rigid wireway in the beam. Wiring connections to the building power source must be made by a certified electrician.

Hardwired Electrical System

Hardwired electrical components are intended for use in installations where hardwiring is required by local code (Chicago).

Hardwired Base Power Infeed

Hardwired base power infeed includes liquid-tight conduit or flexible steel conduit to bring power to the beam, but does not include any internal wiring (wiring to be field installed). Wiring connections to the building power source must be made by a certified electrician.

Hardwired Top Power Infeed

Hardwired top power infeed brings power from the ceiling to the beam. The infeed includes a 10' aluminum pole with separate channels for power and data entry, includes liquid-tight conduit or flexible steel conduit to bring power to the beam, but does not include any internal wiring (wiring to be field installed). Wiring connections to the building power source must be made by a certified electrician.

TECHNICAL SPECIFICATIONS

Electrical Systems (cont.)

Pattern Electrical System

The Pattern electrical system is ETL Listed, evaluated to safety standard UL 962A (USA) and CAN/CSA-C22.2 No. 308 (Canada). It allows for a maximum up to ten distribution blocks and up to 50' of power jumpers from the power infeed (in either direction), whichever comes first. Pattern allows up to eighteen power modules depending on table width, and connects to one 15-amp power supply cord (power infeed). Pattern is a non-sequential system and the infeed is compatible with ground fault interrupter (GFI/GFCI) outlets. Power modules for InTandem are specified separately.

Pattern Power Distribution Blocks

Pattern power distributions blocks are standalone connectors, each containing four port locations. Distribution blocks are included with appropriate power jumper and power infeed kits, so they do not need to be ordered separately. Distribution blocks bring the power infeed, power jumpers, and power modules together and allow power to be efficiently supplied to each table. Two distribution block types are included with the Pattern system, grey and white.

Pattern Table-to-Table Power Jumper Kits

Pattern table-to-table power jumper kits come with one grey distribution block and an appropriately sized power jumper. Jumpers are nonsequential and are keyed on each end to connect between distribution blocks. Table-to-table power jumper kits are ordered separately, according to layout configuration.

Pattern Power Infeed Kits

The Pattern power infeed kit must be ordered separately. Site configurations vary and will affect the number of power infeeds required. The number and size of tables, as well as the number of receptacles per table and amperage needs in each ganging configuration will determine the number of power infeed kits required at any given installation. Infeeds can be installed anywhere in the run.

Kit comes with one grey Pattern power distribution block, one 12" power jumper, one white Pattern power distribution block and Pattern power infeed cord. Power infeed consists of a 15-amp plug on one end of the 108" cord and a keyed connector at the opposite end of the cord. A connection quick-release tool is also included to assist with disconnecting connector ends from distribution blocks.


Power Modules

Dean® In-Surface Power Module

Dean in-surface power module consists of two simplex receptacle ports (rated at 15 amps/125 volts), one USB-A port and one USB-C port, 2 amps per port, and one data jack opening. The module can be modified to fit various brand jacks. Data tree ships with Dean in-surface power modules. Data connectors are not supplied with the module and are purchased by the customer. The Dean in-surface module is 8.12" long by 2.31" wide by 2.5" high and fits securely into a 8.03" x 1.94" cutout. Module is mechanically attached to the worksurface with screws from the underside. The module has a molded plastic faceplate with steel trim and an aluminum housing. Module comes standard with either 9' or 15' cord with a 3-prong plug, or a 40" cord with a Pattern™ connector. Dean power module is rated at 15 amps/125 volts. Dean in-surface power module with 3-prong plug is UL listed and Dean in-surface power module for Pattern is ETL listed.

Nacre® In-Surface Pop-Up Power Module

Nacre in-surface pop-up power module consists of two simplex receptacle ports (rated at 15 amps/125 volts), one USB-A port and one USB-C port, 2 amps per port, and one data jack opening. The module can be modified to fit various brand jacks. Data tree ships with Nacre power modules. Data connectors are not supplied with the module and are purchased by the customer. Nacre is 7.25" long by 3.31" wide by 2.92" high and fits securely into a 6.94" x 3" cutout with .38" radius corners. The module is made of molded plastic and is a pop-up design with a dampened spring-loaded mechanism to allow the unit to smoothly open for use and close smoothly when not in use. Modules come standard with either 9' or 15' cord with a 3-prong plug, or a 40" cord with a Pattern connector. Nacre power module is rated at 15 amps/125 volts. Nacre in-surface pop-up power module with 3-prong plug is UL listed and Nacre in-surface pop-up power module for Pattern is ETL listed.



TECHNICAL SPECIFICATIONS

Power Modules (cont.)

**Snap-In RPT Module with RPT Bracket**  
Snap-In RPT module is only available for use with Pattern™ electrical system. Snap-In module consists of two simplex receptacle ports (rated at 15 amps/125 volts). Snap-In RPT fits securely in user facing cutouts in corresponding RPT bracket, mounted to the front of the power beam. Modules come standard with a 40" cord with pattern connector, rated at 15 amps/125 volts and is ETL listed.

**Communications Circuitry**  
Connectors for phones, modems, printers and networks can be incorporated into the system, but must be ordered separately by the customer through a third party source. Communication wiring is completed in the field by the customer.

**Flip-Top Grommets for Dean & Nacre Tabletop cutouts**  
Flip-top grommets are surface-mounted covers, constructed of 18-gauge steel. Grommets have a flip-up receding door and are identical in cutout size to the Dean or Nacre in-surface power modules, which allows retrofitting corresponding power modules at a later date if desired. Grommet covers also allow power cables from tabletop devices to pass through to be plugged into powered beams or power modules under the worksurface. Grommets are finished with powder-coat paint available in all KI paint colors. The flip-up door is designed to allow cords to remain routed through the opening while it is closed and allows for more cord routing space when the flip-up door is open. Field installed. Dean & Nacre grommet covers must be ordered separately from the Dean & Nacre power modules, and cannot be installed in the same cutout.

Accessories

**Privacy Screens**  
The privacy screen is standard 3/4" thick core material. Both sides are laminated with .030" thick high-pressure laminate as standard. All edges are banded with PVC edging. Panels are bolted to 14-gauge steel brackets which are screwed to the underside of the worksurface with Torx head screws (tamper resistant). Privacy screens have a straight top edge available in three heights (11", 17", and 23"), and in lengths to match the worksurface widths from 24" to 72". The 60", 66", and 72" wide screens are made up of two equal size screens. The 23" high privacy screens are not available on 24" deep worksurfaces.

Stand-Alone privacy screens are available for use when divider screens are not attached. Stand-alone privacy screens are available in two heights (11" and 17"), and in widths same as above. Stand-alone privacy screens attach to the underside of rectangular worksurfaces with 11-gauge steel brackets.

**Divider Screens**  
Divider screens are standard 3/4" thick core material. Both sides are laminated with .030" thick high-pressure laminate as standard. All edges are banded with PVC edging. Dividers are screwed to steel brackets which attach with barrel bolts at the intersection of privacy screens and are bolted to the underside of the worksurface with 1/4"-20 Torx head screws (tamper resistant). Dividers are available in three heights (11", 17", and 23") with a curved top and three widths to match the worksurface depths (24", 30", and 36"). The 23" high dividers are not available on 24" deep worksurfaces. Dividers are available only in conjunction with privacy screens.

**CPU Sling**  
The CPU sling straps have positive locking strap clamps that keep the CPU firmly in place. The CPU sling mounts below the worksurface and provides 5 1/2" of travel and 359° swivel for ease of accessibility. Front and rear bumpers prevent over travel. The mounting bracket is 18" deep by 5 3/8" wide. The CPU sling is available in black finish only. The maximum weight capacity is 75 pounds and accommodates CPUs with maximum circumference of 65". The mounting bracket serves as a template showing hole locations. Assembly instructions are included with each unit. CPU Slings are not recommended on 24" deep worksurfaces.

TECHNICAL SPECIFICATIONS

Accessories

**Fully Adjustable Keyboard Tray**  
The fully adjustable keyboard tray attaches to the underside of the rectangular and transitional corner worksurfaces. It features a 5 1/2" vertical adjustment, 359° swivel and a tilt range of 10° positive and 15° negative. The mounting plate is 16" deep allowing for 11 3/4" travel. The keyboard tray retracts to store below the worksurface. The non-skid surface accommodates keyboards up to 9" by 22" and is available in all four trim colors.

**Fully Adjustable Keyboard Tray with Mouse Tray**  
The fully adjustable keyboard tray with mouse tray attaches to the underside of the rectangular and transitional corner worksurfaces. It features a 5 1/2" vertical adjustment, 359° swivel and a tilt range of 10° positive and 15° negative. The mounting plate is 16" deep allowing for 11 3/4" travel. The keyboard tray slides back to store below the worksurface. The non-skid surface accommodates keyboards up to 9" by 21 1/4" and the mouse tray extends 9 1/2" to the left or right. Available in black only.

**Sliding Keyboard Drawer With Mouse Tray**  
The keyboard drawer with mouse surface is the same construction as the keyboard drawer with the addition of a non-handed mouse tray of molded plastic. The keyboard tray with non-handed sliding mouse tray is molded plastic with non-skid surface and molded palm rest. Keyboard tray measures 21 1/4" wide by 11" deep. The mouse tray measures 9" wide by 9" deep. Available in black only.


**Wheelchair Accessible Kit**  
The wheelchair accessible kit is made of 11-gauge steel and designed for easy retrofit of existing stations. The kit is available in widths of 36" through 72" and in two heights for 27" and 29" legs to make the overall surface height 32". The wheelchair kit comes standard to fit both the 30" and 36" deep worksurfaces. The 36" wide wheelchair kit does not meet ADA guidelines. Available in Flannel color only.

**Compliance**  
The InTandem table is a UL Listed Office Furnishing per standard UL 1286 and Powered Furniture per standard UL 962. The freestanding frames with casters are not included in the Listing.

**Frame Colors**  
Legs and beam doors are available in four standard KI colors: BL (Black), GR (Blue Grey), WG (Warm Grey), SA (Sand), CG (Cool Grey), MY (Misty Brown) and SX (Starlight Silver). Privacy screen brackets, divider brackets, and interior beam components available in Flannel color only.


**Note:** Frame colors have been expanded. See Product Color Options in the InTandem pricelist for surface material options.

Laminate choices consist of KI standard laminates.



DIMENSIONS

Power Pole Dimensions

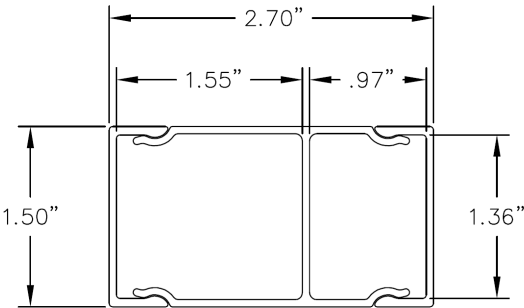



Surface Finish--Laminate			EY	Light Tone	ELG	Warm Grey	WG
Beigewood	LBZ	Espresso Metallic	EX	Mardi Gras	EMG	Electrical Top Infeeds	
Belair	LBQ	Everglade Shade	EV	Misty Brown	EMY		
Biltmore Cherry	LBT	Flannel	FN	Monticello Maple	EMT		BL
Black	LBK	Glitz Metallic	GZ	Multiplex	EMB		GR
Brighton Walnut	LBW	Hazy Jade	HJ	Nemo	ENE		ZM
Canyon Zephyr	LCA	Honey Bee	HY	Nordic	END		CY
Castle Oak	LCO	Light Tone	LG	Pinnacle Walnut	EPW		CM
Casual Linen	LCU	Mardi Gras	MG	Poppy Red	EPR		CG
Cherry Storm	LCX	Misty Brown	MY	Purple Haze	EPH		CO
Classic Linen	LCI	Nemo	NE	Rainforest	ERQ		EY
Cloud Zephyr	LCL	Nordic	ND	River Cherry	ERY		EX
Cocobala	LCC	Purple Haze	PH	Rubber Ducky	ERK		EV
Crisp Linen	LRI	Rainforest	RQ	Sand	ESA		FN
Desert Zephyr	LDZ	Raw Jasper	RJ	Sky Blue	ESK		GZ
Designer White	LDR	Rubber Ducky	RK	Sterling Ash	EAZ		HJ
Dove Grey	LDG	Sand	SA	Surf's Up	ESP		HY
Flax Linen	LXF	Starlight Silver Metallic	SX	Tarragon	ETQ		LG
Florence Walnut	LFC	Surf's Up	SP	Twilight Shadow	ETI		MG
Forged Steel	LQL	Tarragon	TQ	Ultra Blue	EUB		MY
Friston Ash	LFH	Twilight Shadow	TI	Warm Grey	EWG		NE
Frosty White	LFW	Ultra Blue	UB	Windsor Mahogany	EWY		ND
Graphite Nebula	LGN	Warm Grey	WG	Zesty Lime	EZL		PH
Grey	LGE	Zesty Lime	ZL	Edge Color for ME Edge			RQ
High Rise	LHE	Paint Color - Beams		Black	EBL		RJ
Hollyberry	LHY			Blue Grey	EGR		RK
Island	LID		BL	Cool Grey	ECG		SA
Italian Silver Ash	LIT		GR	Flannel	EFN		SX
Kensington Maple	LKM		CG	Misty Brown	EMY		SP
Lapis Blue	LLB		MY	Sand	ESA		TQ
Markerboard White	LMK		SA	Warm Grey	ESG		TI
Misted Zephyr	LMR		SX	No edge color selectin for the Postformed (PL) edge.	EWG		UB
Monticello Maple	LMT		WG				WG
North Sea	LNA			Dean, Nacre Power Module Color			ZL
Ocean	LON	Edge Color for 74P Edge		Black	EBZ	BL	
Pearl Bisque	LPB			Cool Grey	EBQ	CG	
Pinnacle Walnut	LPW			Cottonwood	EBT	CO	
Pressed Linen	LPR			Warm Grey	EBL	WG	
River Cherry	LRY			Snap-in RPT color is always Black			
Satin Stainless	LSS			Metal Grommet Color			
Shadow Zephyr	LSR			Black	ECY	BL	
Silicon evolv	LSV			Blue Grey	ECX	GR	
Sterling Ash	LAZ			Bronze Metallic	ECC	ZM	
Tailored Linen	LTL			Champagne Metallic	ECG	CM	
Titanium evolv	LTV			Cool Grey	EDR	CG	
White Nebula	LWL			Cottonwood	EEY	CO	
White Sand	LWN			Flannel	EEV	FN	
Windsor Mahogany	LWY			Misty Brown	EFN	MY	
Paint Color - Legs, Wireway Cover				Starlight Silver Metallic	EFC	SX	
Black	BL			Warm Grey	EFH	WG	
Blue Grey	GR			Electrical Base Infeed			
Bronze Metallic	ZM			Black	EHJ	BL	
Cayenne	CY			Blue Grey	EHY	GR	
Champagne Metallic	CM			Sand	EIT	SA	
Cool Grey	CG				EKM		
Cottonwood	CO						






Finish Cards

View color swatches for items listed within this document.

<u>Paints</u>	<u>Wood/Veneer</u>	<u>Molded Edges</u>	<u>Hard Plastics</u>
<u>Plastics/Poly</u>	<u>Laminates</u>	<u>Edge Styles</u>	<u>Glass</u>

Certain options referenced may not be available on GSA Schedule.



		MODEL NUMBER									
		Basic Model	Edge Style	Top Power Feed	Cutout Style	Surface Finish	Edge Color	Approx. Packaged Weight	 74P Edge (74P)	 Postformed Edge (PL)	 Urethane Edge (ME)
 ITWS	<b>MODEL</b>	<b>D x W</b>									
	<b>Rectangular-Two Cutouts</b>	24 x 24"	ITWS2424	<input type="checkbox"/>		NCS	<input type="checkbox"/>	22.0#	\$ 359	\$ 384	N/A
	• 1-1/4" solid core top with laminate surface	24 x 30"	ITWS2430	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	26.0#	372	396	N/A
	• Power modules, grommets, and electrical components specified separately	24 x 36"	ITWS2436	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	31.0#	402	428	550
	• Legs are attached to the worksurface through threaded steel inserts	24 x 42"	ITWS2442	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	36.0#	438	464	591
	• Grommet/module cutouts not available on 24"W worksurfaces	24 x 48"	ITWS2448	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	41.0#	449	476	611
	• Beams and legs must be specified separately	24 x 54"	ITWS2454	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	46.0#	548	573	N/A
		24 x 60"	ITWS2460	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	51.0#	597	619	688
		24 x 66"	ITWS2466	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	56.0#	602	627	730
		24 x 72"	ITWS2472	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	61.0#	611	637	767
		30 x 24"	ITWS3024	<input type="checkbox"/>	NCS	<input type="checkbox"/>	<input type="checkbox"/>	26.0#	372	396	N/A
		30 x 30"	ITWS3030	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	32.0#	389	411	N/A
		30 x 36"	ITWS3036	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	38.0#	418	441	602
		30 x 42"	ITWS3042	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	40.0#	470	492	646
		30 x 48"	ITWS3048	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	50.0#	481	507	668
		30 x 54"	ITWS3054	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	57.0#	575	600	N/A
		30 x 60"	ITWS3060	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	63.0#	610	634	754
		30 x 66"	ITWS3066	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	70.0#	627	649	N/A
		30 x 72"	ITWS3072	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	75.0#	629	652	846
 ITWS	<b>Rectangular-Four Cutouts</b>	24 x 60"	ITWQ2460	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	51.0#	\$ 620	\$ 645	\$ 688
	• 1-1/4" solid core top with laminate surface	24 x 66"	ITWQ2466	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	56.0#	627	649	730
	• Power modules, grommets, and electrical components specified separately	24 x 72"	ITWQ2472	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	61.0#	628	651	793
	• Legs are attached to the worksurface through threaded steel inserts	30 x 60"	ITWQ3060	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	63.0#	637	661	754
	• Grommet/module cutouts not available on 24"W worksurfaces	30 x 66"	ITWQ3066	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	70.0#	646	672	N/A
	• Beams and legs must be specified separately	30 x 72"	ITWQ3072	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	75.0#	658	679	864
			<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>			

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See "How To Build a Model Number".
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.

**B** Select edge style.

74P

- 74P edge

PL

- Postformed edge

ME

- Urethane edge
- C** Select top power feed cutout.

N

- No power

L

- Left power

R

- Right power
- D** Select grommet/module cutout style.

NCS

- No cutout

CSD

- Cutout for Dean

CSA

- Cutout for Nacre

No cutout option for 24"W tables.
- E** Select surface finish.

Refer to the **Product Color Options** page in this price list.

Surface finish offerings are based on edge style selections.
- F** Select edge color.

Refer to the **Product Color Options** page in this price list.

Edge color offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code  
Nevamar - LN/supplier's color pattern code  
Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.

Contact KI.

SPECIAL SERVICES

Special Carton Marking





With specially marked information      N/C

**Shipping**

Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER									
		Basic Model	Edge Style	Top Power Feed	Cutout Style	Surface Finish	Edge Color	Approx. Packaged Weight			
 ITWS	<b>MODEL</b>										
	<b>D x W</b>										
	<b>Corner Square-Two Cutouts</b>										
	• 1-1/4" solid core top with laminate surface	ITSC2424	□□□	□	□□□	□□□	□□□	22.0#	\$ 534	\$ 557	
	• One support leg required per corner surface to be ordered separately	ITSC3030	□□□	□	□□□	□□□	□□□	32.0#	602	627	
	• Power modules, grommets, and electrical components specified separately										
	• Corner surfaces are not available with urethane edge										
	• Square corners are not available with powered beams										
	• Square corner surfaces have all four edges covered with matching flat .024" edge banding										
 ITWS	<b>Corner Transitional-Two Cutouts</b>										
	• 1-1/4" solid core top with laminate surface	ITTC2436	□□□	□	□□□	□□□	□□□	45.0#	\$ 973	\$ 998	
	• One support leg required per corner surface to be ordered separately	ITTC2442	□□□	□	□□□	□□□	□□□	62.0#	1159	1182	
	• Power modules, grommets, and electrical components specified separately	ITTC3042	□□□	□	□□□	□□□	□□□	62.0#	1338	1364	
	• Corner surfaces are not available with urethane edge										
	• Transitional corner surfaces have edges on side and rear covered with matching flat .024" edge banding										
		<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>				

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See "How To Build a Model Number".
- Any special service required.

Note:

- The □ indicates that a choice is required.
- The absence of the □ indicates that no choice is required.
- Alpha-numeric characters in place of □ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select edge style.
- 74P - 74P edge  
PL - Postformed edge
- C** Select top power feed cutout.
- N - No power  
L - Left power  
R - Right power
- D** Select grommet/module cutout style.
- CSD - Cutout for Dean  
CSA - Cutout for Nacre
- E** Select surface finish.
- Refer to the **Product Color Options** page in this price list.
- Surface finish offerings are based on edge style selections.
- F** Select edge color.
- Refer to the **Product Color Options** page in this

price list.

Edge color offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime.

To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code  
Nevamar - LN/supplier's color pattern code  
Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.

Contact KI.

SPECIAL SERVICES

Special Carton Marking



With specially marked information      N/C

**Shipping**

Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



				MODEL NUMBER					
				Basic Model	Beam Color				
MODEL				Features	W	Approx. Packaged Weight	Delivered Pricing		
 ITSB	<b>Rectangular Beam - 10-Wire (T6) - Without Data Cover (ND)</b> <ul style="list-style-type: none"><li>Includes beam end caps</li><li>Data jacks/connectors, connection plates and wiring are not included. Beams are pre-punched to accept most data plates.</li><li>Duplex receptacles, infeeds and connectors must be ordered separately (see Electrical section)</li></ul>			24"	ITSB24/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	7.0#	\$	434
				30"	ITSB30/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	8.0#		471
				36"	ITSB36/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	9.0#		541
				42"	ITSB42/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	11.0#		585
				48"	ITSB48/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	12.0#		629
				54"	ITSB54/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	14.0#		662
				60"	ITSB60/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	18.0#		916
				66"	ITSB66/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	21.0#		966
				72"	ITSB72/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	23.0#		1037
				Quad 60"	ITSQ60/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	19.0#		1191
				Quad 66"	ITSQ66/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	22.0#		1244
				Quad 72"	ITSQ72/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	24.0#		1298
 ITSB	<b>Rectangular Beam - Hardwire (HC) - Without Data Cover (ND)</b> <ul style="list-style-type: none"><li>Includes beam end caps</li><li>Hardwire beams include simplex receptacles</li><li>Must specify hardwire infeed separately</li><li>Electrician to supply wires and connectors</li></ul>			24"	ITSB24/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	5.0#	\$	402
				30"	ITSB30/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	6.0#		461
				36"	ITSB36/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	7.0#		483
				42"	ITSB42/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	9.0#		546
				48"	ITSB48/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	10.0#		606
				54"	ITSB54/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	12.0#		637
				60"	ITSB60/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	13.0#		731
				66"	ITSB66/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	15.0#		784
				72"	ITSB72/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	19.0#		852

A

B

HOW TO ORDER

- Indicate the following information on order form:
- Quantity of each item.
  - Model number, including options. See “How To Build a Model Number”.
  - Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select beam color.  
Refer to the **Product Color Options** page in this price list.

Beam Receptacle Requirements

	10-Wire	Hardwire
Beam Length	Duplex on front of beam	Simplex on front of beam
24"	1	2
30"	1	2
36"	2	4
42"	2	4
48"	2	4
54"	2	4
60"	2¼	8
66"	2¼	8
72"	2¼	8

SPECIAL SERVICES



Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



			MODEL NUMBER				
			Basic Model	Beam Color			
MODEL	Features	W			Approx. Packaged Weight	Delivered Pricing	
 ITSB	<b>Rectangular Beam - No Power (NN) - Without Data Cover (ND)</b> <ul style="list-style-type: none"><li>Includes beam end caps</li><li>Data jacks/connectors, connection plates and wiring are not included. Beams are pre-punched to accept most data plates.</li></ul>	24"	ITSB24/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	3.0#	\$ 313	
		30"	ITSB30/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	4.0#	330	
		36"	ITSB36/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	5.0#	346	
		42"	ITSB42/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	7.0#	388	
		48"	ITSB48/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	8.0#	421	
		54"	ITSB54/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	10.0#	437	
		60"	ITSB60/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	13.0#	469	
		66"	ITSB66/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	13.0#	505	
		72"	ITSB72/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	23.0#	563	
		Quad 60"	ITSQ60/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	19.0#	528	
		Quad 66"	ITSQ66/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	22.0#	563	
		Quad 72"	ITSQ72/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	24.0#	626	
 ITSB	<b>Rectangular Beam - New York Infeed (NY) - Without Data Cover (ND)</b> <ul style="list-style-type: none"><li>Includes beam end caps</li><li>For NY infeed, left or right is determined by placement of the infeed leg when seated at the table</li><li>NY beam is 10-wire beam infeed for use in New York City by the Bureau of Electrical Control Advisory Board. Includes connection box, flexible conduit and all fittings necessary to connect to building power source. Does not include infeed wiring.</li></ul>	Left 36"	ITSB36/NYLT6/ND	<input type="checkbox"/> <input type="checkbox"/>	11.0#	\$ 1116	
		Right 36"	ITSB36/NYRT6/ND	<input type="checkbox"/> <input type="checkbox"/>	11.0#	1116	
		Left 42"	ITSB42/NYLT6/ND	<input type="checkbox"/> <input type="checkbox"/>	13.0#	1231	
		Right 42"	ITSB42/NYRT6/ND	<input type="checkbox"/> <input type="checkbox"/>	13.0#	1231	
		Left 48"	ITSB48/NYLT6/ND	<input type="checkbox"/> <input type="checkbox"/>	14.0#	1259	
		Right 48"	ITSB48/NYRT6/ND	<input type="checkbox"/> <input type="checkbox"/>	14.0#	1259	
		Left 54"	ITSB54/NYLT6/ND	<input type="checkbox"/> <input type="checkbox"/>	16.0#	1296	
		Right 54"	ITSB54/NYRT6/ND	<input type="checkbox"/> <input type="checkbox"/>	16.0#	1296	
		Left 60"	ITSB60/NYLT6/ND	<input type="checkbox"/> <input type="checkbox"/>	20.0#	1329	
		Right 60"	ITSB60/NYRT6/ND	<input type="checkbox"/> <input type="checkbox"/>	20.0#	1329	
		Left 66"	ITSB66/NYLT6/ND	<input type="checkbox"/> <input type="checkbox"/>	23.0#	1371	
		Right 66"	ITSB66/NYRT6/ND	<input type="checkbox"/> <input type="checkbox"/>	23.0#	1371	
		Left 72"	ITSB72/NYLT6/ND	<input type="checkbox"/> <input type="checkbox"/>	25.0#	1440	
		Right 72"	ITSB72/NYRT6/ND	<input type="checkbox"/> <input type="checkbox"/>	25.0#	1440	

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See "How To Build a Model Number".
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A

Select basic model.
- B

Select beam color.  
Refer to the **Product Color Options** page in this price list.

Beam Receptacle Requirements

	New York 10-Wire
Beam Length	Duplex Receptacles
36"	1
42"	1
48"	1
54"	2
60"	2
66"	2
72"	4

When back-to-back electrical is utilized with the New York 10-Wire System, one additional receptacle can be added to each size beam length for the back (instructor) side of the beam.

SPECIAL SERVICES



Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



				MODEL NUMBER			
MODEL		Features	W	Basic Model	Beam Color	Approx. Packaged Weight	Delivered Pricing
 data cover  ITSB	<b>Rectangular Beam - 10-Wire (T6) - With Data Cover (DC)</b> <ul style="list-style-type: none"><li>Includes beam end caps</li><li>Data jacks/connectors, connection plates and wiring are not included. Beams are pre-punched to accept most data plates</li><li>Duplex receptacles, infeeds and connectors must be ordered separately (see Electrical section)</li><li>Data covers conceal data wires in trough</li></ul>	24"	ITSB24/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	7.0#	\$ 494	
		30"	ITSB30/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	8.0#	538	
		36"	ITSB36/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	9.0#	619	
		42"	ITSB42/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	11.0#	675	
		48"	ITSB48/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	12.0#	721	
		54"	ITSB54/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	14.0#	758	
		60"	ITSB60/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	18.0#	1052	
		66"	ITSB66/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	21.0#	1123	
		72"	ITSB72/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	23.0#	1194	
		Quad 60"	ITSQ60/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	19.0#	1329	
		Quad 66"	ITSQ66/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	22.0#	1403	
		Quad 72"	ITSQ72/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	24.0#	1455	
 data cover  ITSB	<b>Rectangular Beam - Hardwire (HC) - With Data Cover (DC)</b> <ul style="list-style-type: none"><li>Includes beam end caps</li><li>Hardwire beams include simplex receptacles</li><li>Must specify hardwire infeed separately</li><li>Electrician to supply wires and connectors</li><li>Data covers conceal data wires in trough</li></ul>	24"	ITSB24/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	5.0#	\$ 469	
		30"	ITSB30/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	6.0#	525	
		36"	ITSB36/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	7.0#	565	
		42"	ITSB42/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	9.0#	634	
		48"	ITSB48/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	10.0#	697	
		54"	ITSB54/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	12.0#	735	
		60"	ITSB60/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	13.0#	871	
		66"	ITSB66/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	15.0#	939	
		72"	ITSB72/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	19.0#	1008	

A

B

A

B

HOW TO ORDER

- Indicate the following information on order form:
- Quantity of each item.
  - Model number, including options. See “How To Build a Model Number”.
  - Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select beam color.  
Refer to the **Product Color Options** page in this price list.

Beam Receptacle Requirements

	10-Wire	Hardwire
Beam Length	Duplex on front of beam	Simplex on front of beam
24"	1	2
30"	1	2
36"	2	4
42"	2	4
48"	2	4
54"	2	4
60"	2¼	8
66"	2¼	8
72"	2¼	8

SPECIAL SERVICES



Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



			MODEL NUMBER				
MODEL			Basic Model	Beam Color	Approx. Packaged Weight		Delivered Pricing
 ITSB	<b>Rectangular Beam - No Power (NN) - With Data Cover (DC)</b> <ul style="list-style-type: none"><li>Includes beam end caps</li><li>Data jacks/connectors, connection plates and wiring are not included. Beams are pre-punched to accept most data plates.</li><li>Data covers conceal data wires in trough</li></ul>	24"	ITSB24/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	3.0#		\$ 373
		30"	ITSB30/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	4.0#		396
		36"	ITSB36/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	5.0#		429
		42"	ITSB42/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	7.0#		477
		48"	ITSB48/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	8.0#		509
		54"	ITSB54/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	10.0#		539
		60"	ITSB60/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	13.0#		605
		66"	ITSB66/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	13.0#		661
		72"	ITSB72/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	23.0#		724
		Quad 60"	ITSQ60/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	19.0#		667
		Quad 66"	ITSQ66/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	22.0#		721
		Quad 72"	ITSQ72/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	24.0#		784
 ITSB	<b>Rectangular Beam - New York Infeed (NY) - With Data Cover (DC)</b> <ul style="list-style-type: none"><li>Includes beam end caps</li><li>For NY infeed, left or right is determined by placement of the infeed leg when seated at the table</li><li>NY beam is 10-wire beam infeed for use in New York City by the Bureau of Electrical Control Advisory Board. Includes connection box to connect to building power source. Does not include infeed wiring.</li></ul>	Left 36"	ITSB36/NYLT6/DC	<input type="checkbox"/> <input type="checkbox"/>	11.0#		\$ 1196
		Right 36"	ITSB36/NYRT6/DC	<input type="checkbox"/> <input type="checkbox"/>	11.0#		1196
		Left 42"	ITSB42/NYLT6/DC	<input type="checkbox"/> <input type="checkbox"/>	13.0#		1315
		Right 42"	ITSB42/NYRT6/DC	<input type="checkbox"/> <input type="checkbox"/>	13.0#		1315
		Left 48"	ITSB48/NYLT6/DC	<input type="checkbox"/> <input type="checkbox"/>	14.0#		1355
		Right 48"	ITSB48/NYRT6/DC	<input type="checkbox"/> <input type="checkbox"/>	14.0#		1355
		Left 54"	ITSB54/NYLT6/DC	<input type="checkbox"/> <input type="checkbox"/>	16.0#		1397
		Right 54"	ITSB54/NYRT6/DC	<input type="checkbox"/> <input type="checkbox"/>	16.0#		1397
		Left 60"	ITSB60/NYLT6/DC	<input type="checkbox"/> <input type="checkbox"/>	20.0#		1464
		Right 60"	ITSB60/NYRT6/DC	<input type="checkbox"/> <input type="checkbox"/>	20.0#		1464
		Left 66"	ITSB66/NYLT6/DC	<input type="checkbox"/> <input type="checkbox"/>	23.0#		1527
		Right 66"	ITSB66/NYRT6/DC	<input type="checkbox"/> <input type="checkbox"/>	23.0#		1527
		Left 72"	ITSB72/NYLT6/DC	<input type="checkbox"/> <input type="checkbox"/>	25.0#		1602
		Right 72"	ITSB72/NYRT6/DC	<input type="checkbox"/> <input type="checkbox"/>	25.0#		1602

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A

Select basic model.
- B

Select beam color.  
Refer to the **Product Color Options** page in this price list.

Beam Receptacle Requirements

	New York 10-Wire
Beam Length	Duplex Receptacles
36"	1
42"	1
48"	1
54"	2
60"	2
66"	2
72"	4

When back-to-back electrical is utilized with the New York 10-Wire System, one additional receptacle can be added to each size beam length for the back (instructor) side of the beam.

SPECIAL SERVICES




Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER				
		Basic Model	Beam Color			
MODEL		W			Approx. Packaged Weight	Delivered Pricing
 ITCB	<b>Corner Beam - 10-Wire (T6) - Without Data Cover (ND)</b> <ul style="list-style-type: none"><li>Does not include beam end caps</li><li>Data jacks/connectors, connection plates and wiring are not included. Beams are pre-punched to accept most data plates.</li><li>Support legs are required for corner beams and must be ordered separately.</li><li>Duplex receptacles, infeeds and connectors must be ordered separately (See Electrical section)</li><li>Corner beams with 10-wire electrical include a pass through cable on the right side. This eliminates the need for a worksurface to worksurface connector on the right.</li></ul>	24"	ITCB24/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	17.0#	\$ 1532
		30"	ITCB30/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	20.0#	1602
		36"	ITCB36/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	23.0#	1752
		42"	ITCB42/T6/ND	<input type="checkbox"/> <input type="checkbox"/>	26.0#	1832
 ITCB	<b>Corner Beam - Hardwire (HC) - Without Data Cover (ND)</b> <ul style="list-style-type: none"><li>Does not include beam end caps</li><li>Hardwire beams include simplex receptacles</li><li>Support legs are required for corner beams and must be ordered separately</li><li>Must specify hardwire infeed separately</li><li>Electrician to supply wires and connectors</li></ul>	24"	ITCB24/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	13.0#	\$ 1454
		30"	ITCB30/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	16.0#	1520
		36"	ITCB36/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	19.0#	1663
		42"	ITCB42/HC/ND	<input type="checkbox"/> <input type="checkbox"/>	22.0#	1740
 ITCB	<b>Corner Beam - No Power (NN) - Without Data Cover (ND)</b> <ul style="list-style-type: none"><li>Does not include beam end caps.</li><li>Support legs are required for corner beams and must be ordered separately</li></ul>	24"	ITCB24/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	9.0#	\$ 1044
		30"	ITCB30/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	12.0#	1092
		36"	ITCB36/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	15.0#	1215
		42"	ITCB42/NN/ND	<input type="checkbox"/> <input type="checkbox"/>	18.0#	1306

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select beam color.  
Refer to the **Product Color Options** page in this price list.

Beam Receptacle Requirements

	10-Wire	Hardwire
Beam Length	Duplex on front of beam	Simplex on front of beam
24"	0	0
30"	1	2
36"	1	2
42"	2	4

**Note:**  
24" corner beams for both 10-Wire and Hardwire power include power pass through only.

SPECIAL SERVICES




Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER				
		Basic Model	Beam Color			
MODEL		W		Approx. Packaged Weight	Delivered Pricing	
 ITCB	Corner Beam - 10-Wire (T6) - With Data Cover (DC)	24"	ITCB24/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	17.0#	\$ 1741
	<ul style="list-style-type: none"><li>Does not include beam end caps</li><li>Data jacks/connectors, connection plates and wiring are not included. Beams are pre-punched to accept most data plates</li><li>Support legs are required for corner beams and must be ordered separately</li><li>Duplex receptacles, infeeds and connectors must be ordered separately</li><li>Corner beams with 10-wire electrical include a pass through cable on the right side. This eliminates the need for a worksurface to worksurface connector on the right</li><li>Data covers conceal data wires in trough</li></ul>	30"	ITCB30/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	20.0#	1822
		36"	ITCB36/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	23.0#	1994
		42"	ITCB42/T6/DC	<input type="checkbox"/> <input type="checkbox"/>	26.0#	2094
 ITCB	Corner Beam - Hardwire (HC) - With Data Cover (DC)	24"	ITCB24/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	13.0#	\$ 1660
	<ul style="list-style-type: none"><li>Does not include beam end caps</li><li>Hardwire beams include simplex receptacles</li><li>Must specify hardwire infeed separately</li><li>Electrician to supply wires and connectors</li><li>Data covers conceal data wires in trough</li><li>Support legs are required for corner beams and must be ordered separately</li></ul>	30"	ITCB30/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	16.0#	1730
		36"	ITCB36/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	19.0#	1897
		42"	ITCB42/HC/DC	<input type="checkbox"/> <input type="checkbox"/>	22.0#	1988
 ITCB	Corner Beam - No Power (NN) - With Data Cover (DC)	24"	ITCB24/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	9.0#	\$ 1194
	<ul style="list-style-type: none"><li>Does not include beam end caps</li><li>Support legs are required for corner beams and must be ordered separately</li><li>Data covers conceal data wires in trough</li></ul>	30"	ITCB30/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	12.0#	1246
		36"	ITCB36/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	15.0#	1387
		42"	ITCB42/NN/DC	<input type="checkbox"/> <input type="checkbox"/>	18.0#	1489

A

B

A

B

HOW TO ORDER

- Indicate the following information on order form:
- Quantity of each item.
  - Model number, including options. See “How To Build a Model Number”.
  - Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A Select basic model.
- B Select beam color.  
Refer to the **Product Color Options** page in this price list.

Beam Receptacle Requirements

	10-Wire	Hardwire
Beam Length	Duplex on front of beam	Simplex on front of beam
24"	0	0
30"	1	2
36"	1	2
42"	2	4

**Note:**  
24" corner beams for both 10-Wire and Hardwire power include power pass through only.

SPECIAL SERVICES

Special Carton Marking




With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



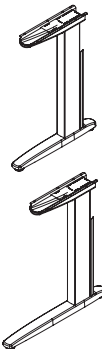

		MODEL NUMBER				
		Basic Model	Leg Color			
MODEL	D x H			Approx. Packaged Weight	Delivered Pricing	
 ITCL	<b>"C" Leg</b> <ul style="list-style-type: none"><li>• Legs will accept power infeed or data infeed, not both</li><li>• 1/2" vertical glide adjustment</li><li>• Only one leg is included in a kit</li><li>• Leg may be used in end or shared location</li></ul>	24 x 27"	ITCL2427	<input type="checkbox"/>	15.0#	\$ 277
		24 x 29"	ITCL2429	<input type="checkbox"/>	16.0#	283
		24 x 38"	ITCL2438	<input type="checkbox"/>	21.0#	313
		30 x 27"	ITCL3027	<input type="checkbox"/>	19.0#	293
		30 x 29"	ITCL3029	<input type="checkbox"/>	20.0#	314
		30 x 38"	ITCL3038	<input type="checkbox"/>	26.0#	332
 ITCL	<b>Corner Support Leg</b> <ul style="list-style-type: none"><li>• One corner support leg required per corner worksurface</li><li>• Wire management is not available on corner support legs</li><li>• 1/2" vertical glide adjustment</li></ul>	27"	ITCS27	<input type="checkbox"/>	12.0#	\$ 163
		29"	ITCS29	<input type="checkbox"/>	14.0#	176
 HRDPT	<b>Wheelchair Accessible Kit</b> <ul style="list-style-type: none"><li>• Available in Flannel only</li><li>• Specify table width and existing leg height</li><li>• Kit raises the worksurface by 3"</li><li>• Wheelchair kits for 42" wide tables can only be used when at least one of the legs of the ADA table are in the shared position (one leg shared with an adjoining table)</li><li>• All sizes of kits accommodate one wheelchair only (based on current ADA clearance guidelines)</li></ul>	42 x 29"	ITWK.4229		24.0#	\$ 507
		48 x 29"	ITWK.4829		26.0#	519
		54 x 29"	ITWK.5429		28.0#	529
		60 x 29"	ITWK.6029		30.0#	538
		66 x 29"	ITWK.6629		32.0#	551
		72 x 29"	ITWK.7229		34.0#	573

A

B

A

B

HOW TO ORDER

Indicate the following information on order form:

1. Quantity of each item.
2. Model number, including options. See "How To Build a Model Number".
3. Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select leg color.  
Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES




Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



					MODEL NUMBER			
			Basic Model	Surface Finish				
MODEL			Features	H x W	Approx. Packaged Weight		Delivered Pricing	
 ITPS	<b>Rectangular Privacy Screens - 11" Height</b>			11 x 24"	ITPS1124	□□□	11.0#	\$ 246
	• Privacy screen brackets and hardware supplied in Flannel only			11 x 30"	ITPS1130	□□□	13.0#	266
	• 60", 66", and 72" screens are made up of 2 screens			11 x 36"	ITPS1136	□□□	14.0#	288
	• Screen is laminate with matching edge band			11 x 42"	ITPS1142	□□□	16.0#	324
	• Intended for use with Divder Screens			11 x 48"	ITPS1148	□□□	17.0#	328
				11 x 54"	ITPS1154	□□□	19.0#	364
				(2 pcs) 11 x 60"	ITPS1160	□□□	23.0#	495
				(2 pcs) 11 x 66"	ITPS1166	□□□	25.0#	541
				(2 pcs) 11 x 72"	ITPS1172	□□□	26.0#	544
	 ITPS	<b>Rectangular Privacy Screens - 17" Height</b>			17 x 24"	ITPS1724	□□□	14.0#
• Privacy screen brackets and hardware supplied in Flannel only			17 x 30"	ITPS1730	□□□	17.0#	296	
• 60", 66", and 72" screens are made up of 2 screens			17 x 36"	ITPS1736	□□□	20.0#	324	
• Screen is laminate with matching edge band			17 x 42"	ITPS1742	□□□	23.0#	366	
• Intended for use with Divder Screens			17 x 48"	ITPS1748	□□□	26.0#	372	
			17 x 54"	ITPS1754	□□□	29.0#	418	
			(2 pcs) 17 x 60"	ITPS1760	□□□	32.0#	557	
			(2 pcs) 17 x 66"	ITPS1766	□□□	36.0#	606	
			(2 pcs) 17 x 72"	ITPS1772	□□□	38.0#	610	
 ITPS		<b>Rectangular Privacy Screens - 23" Height</b>			23 x 24"	ITPS2324	□□□	18.0#
	• Privacy screen brackets and hardware supplied in Flannel only			23 x 30"	ITPS2330	□□□	22.0#	324
	• 60", 66", and 72" screens are made up of 2 screens			23 x 36"	ITPS2336	□□□	26.0#	351
	• 23" height privacy screens are not available on 24" deep worksurfaces			23 x 42"	ITPS2342	□□□	30.0#	401
	• Screen is laminate with matching edge band			23 x 48"	ITPS2348	□□□	34.0#	408
	• Intended for use with Divder Screens			23 x 54"	ITPS2354	□□□	38.0#	461
				(2 pcs) 23 x 60"	ITPS2360	□□□	42.0#	606
				(2 pcs) 23 x 66"	ITPS2366	□□□	47.0#	667
				(2 pcs) 23 x 72"	ITPS2372	□□□	49.0#	668

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See "How To Build a Model Number".
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A

Select basic model.
- B

Select surface finish.  
Refer to the **Product Color Options** page in this price list.  
Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**  
Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code  
Nevamar - LN/supplier's color pattern code  
Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.  
Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.  
Contact KI.

SPECIAL SERVICES



Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



				MODEL NUMBER			
				Basic Model	Surface Finish	Approx. Packaged Weight	Delivered Pricing
 ITPS	<b>Rectangular Stand Alone Privacy Screens - 11" Height</b> <ul style="list-style-type: none"><li>Stand Alone screens are positioned along the back side of the table (length). No divider screens attached</li><li>Privacy screen brackets and hardware supplied in Flannel only</li><li>60", 66", and 72" screens are made up of 2 screens</li><li>Screen is laminate with matching edge band</li></ul>		11 x 24"	ITPSA1124	□□□	11.0#	\$ 254
			11 x 30"	ITPSA1130	□□□	13.0#	277
			11 x 36"	ITPSA1136	□□□	14.0#	301
			11 x 42"	ITPSA1142	□□□	16.0#	331
			11 x 48"	ITPSA1148	□□□	17.0#	333
			11 x 54"	ITPSA1154	□□□	19.0#	372
		(2 pcs)	11 x 60"	ITPSA1160	□□□	23.0#	509
		(2 pcs)	11 x 66"	ITPSA1166	□□□	25.0#	548
		(2 pcs)	11 x 72"	ITPSA1172	□□□	26.0#	550
 ITPS	<b>Rectangular Stand Alone Privacy Screens - 17" Height</b> <ul style="list-style-type: none"><li>Stand Alone screens are positioned along the back side of the table (length). No divider screens attached</li><li>Privacy screen brackets and hardware supplied in Flannel only</li><li>60", 66", and 72" screens are made up of 2 screens</li><li>Stand Alone privacy screens are not available in 23" height</li><li>Screen is laminate with matching edge band</li></ul>		17 x 24"	ITPSA1724	□□□	14.0#	\$ 284
			17 x 30"	ITPSA1730	□□□	17.0#	308
			17 x 36"	ITPSA1736	□□□	20.0#	331
			17 x 42"	ITPSA1742	□□□	23.0#	375
			17 x 48"	ITPSA1748	□□□	26.0#	384
			17 x 54"	ITPSA1754	□□□	29.0#	428
		(2 pcs)	17 x 60"	ITPSA1760	□□□	32.0#	572
		(2 pcs)	17 x 66"	ITPSA1766	□□□	36.0#	617
		(2 pcs)	17 x 72"	ITPSA1772	□□□	38.0#	619
				<b>A</b>	<b>B</b>		

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See "How To Build a Model Number".
- Any special service required.

Note:

- The □ indicates that a choice is required.
- The absence of the □ indicates that no choice is required.
- Alpha-numeric characters in place of □ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select surface finish.  
Refer to the **Product Color Options** page in this price list.  
Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**  
Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code  
Nevamar - LN/supplier's color pattern code  
Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.  
Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.  
Contact KI.

SPECIAL SERVICES




Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER			
		Basic Model	Surface Finish		
MODEL	H x W			Approx. Packaged Weight	Delivered Pricing
 ITPS	<b>Corner Privacy Screens - 11” Height</b> <ul style="list-style-type: none"><li>Privacy screen brackets and hardware supplied in Flannel only</li><li>Screen is laminate with matching edge band</li></ul>	11 x 24”	ITCP1124	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	20.0# \$ 495
		11 x 30”	ITCP1130	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	510
		11 x 36”	ITCP1136	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	539
		11 x 42”	ITCP1142	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	611
 ITPS	<b>Corner Privacy Screens - 17” Height</b> <ul style="list-style-type: none"><li>Privacy screen brackets and hardware supplied in Flannel only</li><li>Screen is laminate with matching edge band</li></ul>	17 x 24”	ITCP1724	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	\$ 550
		17 x 30”	ITCP1730	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	577
		17 x 36”	ITCP1736	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	614
		17 x 42”	ITCP1742	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	712
 ITPS	<b>Corner Privacy Screens - 23” Height</b> <ul style="list-style-type: none"><li>Privacy screen brackets and hardware supplied in Flannel only</li><li>23” height privacy screens are not available on 24” deep worksurfaces</li><li>Screen is laminate with matching edge band</li></ul>	23 x 30”	ITCP2330	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	\$ 660
		23 x 36”	ITCP2336	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	699
		23 x 42”	ITCP2342	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	812

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A Select basic model.
- B Select surface finish.  
Refer to the **Product Color Options** page in this price list.  
Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**  
Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier’s color/pattern code:

Formica - LF/supplier’s color pattern code  
Nevamar - LN/supplier’s color pattern code  
Wilsonart - LW/supplier’s color pattern code

KI’s standard finish is the supplier’s recommended finish for that color/pattern.  
Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.  
Contact KI.

SPECIAL SERVICES




Special Carton Marking

With specially marked information N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



			MODEL NUMBER			
			Basic Model	Surface Finish	Approx. Packaged Weight	Delivered Pricing
MODEL	H x W					
	<b>End Divider Screens - 11” Height</b>	11 x 24”	ITDV1124/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0#	\$ 275
	• Divider screen brackets and hardware supplied in Flannel only	11 x 30”	ITDV1130/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	13.0#	303
	• Must be used in conjunction with privacy screen					
	• Screen is laminate with matching edge band					
ITDV						
	<b>End Divider Screens - 17” Height</b>	17 x 24”	ITDV1724/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	14.0#	\$ 295
	• Divider screen brackets and hardware supplied in Flannel only	17 x 30”	ITDV1730/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	17.0#	330
	• Must be used in conjunction with privacy screen					
	• Screen is laminate with matching edge band					
ITDV						
	<b>End Divider Screens - 23” Height</b>	23 x 30”	ITDV2330/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	22.0#	\$ 359
	• Divider screen brackets and hardware supplied in Flannel only					
	• Must be used in conjunction with privacy screen					
	• 23” height divider screens are not available on 24” deep worksurfaces					
	• Screen is laminate with matching edge band					
ITDV						

A

B

HOW TO ORDER

Indicate the following information on order form:

1. Quantity of each item.
2. Model number, including options. See “How To Build a Model Number”.
3. Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A**Select basic model.
- B**Select surface finish.  
Refer to the **Product Color Options** page in this price list.  
Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**  
Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier’s color/pattern code:

Formica - LF/supplier’s color pattern code  
Nevamar - LN/supplier’s color pattern code  
Wilsonart - LW/supplier’s color pattern code

KI’s standard finish is the supplier’s recommended finish for that color/pattern.  
Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.  
Contact KI.

SPECIAL SERVICES




Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER				
MODEL		H x W	Basic Model	Surface Finish	Approx. Packaged Weight	Delivered Pricing
 ITDV	<b>Middle Divider Screens - 11” Height</b>	11 x 24”	ITDV1124/M74P	□□□	11.0#	\$ 293
	• Divider screen brackets and hardware supplied in Flannel only	11 x 24”	ITDV1124/MME	□□□	11.0#	293
	• Must be used in conjunction with privacy screen	11 x 24”	ITDV1124/MPL	□□□	11.0#	293
	• Screen is laminate with matching edge band	11 x 30”	ITDV1130/M74P	□□□	13.0#	321
	• M74P for use with 74P edge worksurfaces	11 x 30”	ITDV1130/MME	□□□	13.0#	321
	• MME for use with urethane edge work-surfaces (shown)	11 x 30”	ITDV1130/MPL	□□□	13.0#	321
	• MPL for use with post-formed laminate edge worksurfaces					
 ITDV	<b>Middle Divider Screens - 17” Height</b>	17 x 24”	ITDV1724/M74P	□□□	14.0#	\$ 314
	• Divider screen brackets and hardware supplied in Flannel only	17 x 24”	ITDV1724/MME	□□□	14.0#	314
	• Must be used in conjunction with privacy screen	17 x 24”	ITDV1724/MPL	□□□	14.0#	314
	• Screen is laminate with matching edge band	17 x 30”	ITDV1730/M74P	□□□	17.0#	351
	• M74P for use with 74P edge worksurfaces	17 x 30”	ITDV1730/MME	□□□	17.0#	351
	• MME for use with urethane edge work-surfaces (shown)	17 x 30”	ITDV1730/MPL	□□□	17.0#	351
	• MPL for use with post-formed laminate edge worksurfaces					
 ITDV	<b>Middle Divider Screens - 23” Height</b>	23 x 30”	ITDV2330/M74P	□□□	22.0#	\$ 375
	• Divider screen brackets and hardware supplied in Flannel only	23 x 30”	ITDV2330/MME	□□□	22.0#	375
	• Must be used in conjunction with privacy screen	23 x 30”	ITDV2330/MPL	□□□	22.0#	375
	• 23” height divider screens are not available on 24” deep worksurfaces					
	• Screen is laminate with matching edge band					
	• M74P for use with 74P edge worksurfaces					
	• MME for use with urethane edge work-surfaces (shown)					
	• MPL for use with post-formed laminate edge worksurfaces					

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A

Select basic model.
- B

Select surface finish.  
Refer to the **Product Color Options** page in this price list.  
Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**  
Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier’s color/pattern code:

Formica - LF/supplier’s color pattern code  
Nevamar - LN/supplier’s color pattern code  
Wilsonart - LW/supplier’s color pattern code

KI’s standard finish is the supplier’s recommended finish for that color/pattern.  
Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.  
Contact KI.

SPECIAL SERVICES



Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



				MODEL NUMBER			
				Basic Model	Surface Finish		
MODEL Features W						Approx. Packaged Weight	Delivered Pricing
 ITPC	<b>Rectangular Curved Privacy Screens - 9" Height</b> <ul style="list-style-type: none"><li>Curved top edge is 9" high at ends, 11" high in middle</li><li>3/4" thick core material</li><li>Mounted to brackets which bolt to beam</li><li>60", 66", and 72" screens consist of two screens</li><li>Screen is laminate with matching edge band</li><li>Intended for use with Divder Screens</li></ul>	24"	ITPSC924	□□□	9.0#	\$	397
		30"	ITPSC930	□□□	11.0#		414
		36"	ITPSC936	□□□	12.0#		433
		42"	ITPSC942	□□□	14.0#		494
		48"	ITPSC948	□□□	15.0#		559
		54"	ITPSC954	□□□	17.0#		565
		(2 pcs) 60"	ITPSC960	□□□	21.0#		802
		(2 pcs) 66"	ITPSC966	□□□	23.0#		846
		(2 pcs) 72"	ITPSC972	□□□	24.0#		864
 ITPC	<b>Rectangular Curved Privacy Screens - 15" Height</b> <ul style="list-style-type: none"><li>Curved top edge is 15" high at ends, 17" high in middle</li><li>3/4" thick core material</li><li>Mounted to brackets which bolt to beam</li><li>60", 66", and 72" screens consist of two screens</li><li>Screen is laminate with matching edge band</li><li>Intended for use with Divder Screens</li></ul>	24"	ITPSC1524	□□□	12.0#	\$	411
		30"	ITPSC1530	□□□	15.0#		429
		36"	ITPSC1536	□□□	18.0#		455
		42"	ITPSC1542	□□□	21.0#		528
		48"	ITPSC1548	□□□	24.0#		603
		54"	ITPSC1554	□□□	27.0#		614
		(2 pcs) 60"	ITPSC1560	□□□	30.0#		820
		(2 pcs) 66"	ITPSC1566	□□□	33.0#		877
		(2 pcs) 72"	ITPSC1572	□□□	36.0#		913

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See "How To Build a Model Number".
- Any special service required.

Note:

- The □ indicates that a choice is required.
- The absence of the □ indicates that no choice is required.
- Alpha-numeric characters in place of □ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select surface finish. Refer to the **Product Color Options** page in this price list. Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**  
Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code  
Nevamar - LN/supplier's color pattern code  
Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.  
Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.  
Contact KI.

SPECIAL SERVICES

Special Carton Marking



With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.





				MODEL NUMBER			
				Basic Model	Surface Finish		
MODEL Features W						Approx. Packaged Weight	Delivered Pricing
 ITPC	<b>Rectangular Stand Alone Curved Privacy Screens - 9" Height</b> <ul style="list-style-type: none"><li>Stand Alone screens are positioned along the back side of the table (length). No divider screens attached</li><li>Curved top edge is 9" high at ends, 11" high in middle</li><li>3/4" thick core material</li><li>60", 66", and 72" screens consist of two screens</li><li>Screen is laminate with matching edge band</li></ul>	24"	ITPSAC924	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	9.0#	\$	397
		30"	ITPSAC930	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0#		414
		36"	ITPSAC936	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	12.0#		433
		42"	ITPSAC942	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	14.0#		494
		48"	ITPSAC948	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	15.0#		559
		54"	ITPSAC954	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	17.0#		565
		(2 pcs) 60"	ITPSAC960	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	21.0#		802
		(2 pcs) 66"	ITPSAC966	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	23.0#		846
		(2 pcs) 72"	ITPSAC972	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	24.0#		864
 ITPC	<b>Rectangular Stand Alone Curved Privacy Screens - 15" Height</b> <ul style="list-style-type: none"><li>Stand Alone screens are positioned along the back side of the table (length). No divider screens attached</li><li>Curved top edge is 15" high at ends, 17" high in middle</li><li>3/4" thick core material</li><li>60", 66", and 72" screens consist of two screens</li><li>Screen is laminate with matching edge band</li></ul>	24"	ITPSAC1524	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	12.0#	\$	411
		30"	ITPSAC1530	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	15.0#		429
		36"	ITPSAC1536	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	18.0#		455
		42"	ITPSAC1542	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	21.0#		528
		48"	ITPSAC1548	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	24.0#		603
		54"	ITPSAC1554	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	27.0#		614
		(2 pcs) 60"	ITPSAC1560	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	30.0#		820
		(2 pcs) 66"	ITPSAC1566	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	33.0#		877
		(2 pcs) 72"	ITPSAC1572	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	36.0#		913

A

B

HOW TO ORDER

Indicate the following information on order form:  
1. Quantity of each item.  
2. Model number, including options. See "How To Build a Model Number".  
3. Any special service required.

Note: • The ☐ indicates that a choice is required.  
• The absence of the ☐ indicates that no choice is required.  
• Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A**Select basic model.
- B**Select surface finish.  
Refer to the **Product Color Options** page in this price list.  
Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**  
Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code  
Nevamar - LN/supplier's color pattern code  
Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.  
Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.  
Contact KI.

SPECIAL SERVICES



Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



			MODEL NUMBER			
			Basic Model	Surface Finish		
MODEL			W		Approx. Packaged Weight	Delivered Pricing
 ITPC	<b>Corner Curved Privacy Screens - 9" Height</b> <ul style="list-style-type: none"><li>• Curved top edge is 9" high at ends, 11" high in middle</li><li>• 3/4" thick core material</li><li>• Mounted to brackets which bolt to beam</li><li>• Screen is laminate with matching edge band</li></ul>	24"	ITPCC924	□□□	20.0#	\$ 802
		30"	ITPCC930	□□□	20.0#	822
		36"	ITPCC936	□□□	20.0#	864
		42"	ITPCC942	□□□	20.0#	985
 ITPC	<b>Corner Curved Privacy Screens - 15" Height</b> <ul style="list-style-type: none"><li>• Curved top edge is 15" high at ends, 17" high in middle</li><li>• 3/4" thick core material</li><li>• Mounted to brackets which bolt to beam</li><li>• Screen is laminate with matching edge band</li></ul>	24"	ITPCC1524	□□□	26.0#	\$ 820
		30"	ITPCC1530	□□□	26.0#	852
		36"	ITPCC1536	□□□	26.0#	913
		42"	ITPCC1542	□□□	26.0#	1057
			<b>A</b>	<b>B</b>		

HOW TO ORDER

Indicate the following information on order form:

1. Quantity of each item.
2. Model number, including options. See "How To Build a Model Number".
3. Any special service required.

Note:

- The □ indicates that a choice is required.
- The absence of the □ indicates that no choice is required.
- Alpha-numeric characters in place of □ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select surface finish.
- Refer to the **Product Color Options** page in this price list.
- Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code  
Nevamar - LN/supplier's color pattern code  
Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.

Contact KI.

SPECIAL SERVICES

Special Carton Marking



With specially marked information      N/C

**Shipping**

Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER				
		Basic Model	Surface Finish			
MODEL		D		Approx. Packaged Weight	Delivered Pricing	
 ITDC	<b>End Curved Divider Screens - 9" Height</b>	24"	ITDC924/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0#	\$ 356
	<ul style="list-style-type: none"><li>Curved top edge is 9" high at ends, 11" high in middle</li><li>3/4" thick core material</li><li>Mounted to bracket which bolts to underside of worksurface</li><li>Must be used in conjunction with privacy screens</li><li>Screen is laminate with matching edge band</li></ul>	30"	ITDC930/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0#	370
 ITDC	<b>End Curved Divider Screens - 15" Height</b>	24"	ITDC1524/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0#	\$ 396
	<ul style="list-style-type: none"><li>Curved top edge is 15" high at ends, 17" high in middle</li><li>3/4" thick core material</li><li>Mounted to bracket which bolts to underside of worksurface</li><li>Must be used in conjunction with privacy screens</li><li>Screen is laminate with matching edge band</li></ul>	30"	ITDC1530/E	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0#	415
			<b>A</b>	<b>B</b>		

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See "How To Build a Model Number".
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select surface finish.
- Refer to the **Product Color Options** page in this price list.
- Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code  
Nevamar - LN/supplier's color pattern code  
Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.

Contact KI.

SPECIAL SERVICES

Special Carton Marking



With specially marked information      N/C

**Shipping**

Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER			
		Basic Model	Surface Finish		
MODEL		D		Approx. Packaged Weight	Delivered Pricing
 ITDC	<b>Middle Curved Divider Screens - 9” Height</b> <ul style="list-style-type: none"><li>• Curved top edge is 9” high at ends, 11” high in middle</li><li>• 3/4” thick core material</li><li>• Mounted to bracket which bolts to underside of worksurface</li><li>• Must be used in conjunction with privacy screens</li><li>• Screen is laminate with matching edge band</li></ul>	24”	ITDC924/M74P	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# \$ 397
		24”	ITDC924/MME	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 397
		24”	ITDC924/MPL	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 397
		30”	ITDC930/M74P	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 414
		30”	ITDC930/MME	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 414
		30”	ITDC930/MPL	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 414
 ITDC	<b>Middle Curved Divider Screens - 15” Height</b> <ul style="list-style-type: none"><li>• Curved top edge is 15” high at ends, 17” high in middle</li><li>• 3/4” thick core material</li><li>• Mounted to bracket which bolts to underside of worksurface</li><li>• Must be used in conjunction with privacy screens</li><li>• Screen is laminate with matching edge band</li></ul>	24”	ITDC1524/M74P	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# \$ 411
		24”	ITDC1524/MME	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 411
		24”	ITDC1524/MPL	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 411
		30”	ITDC1530/M74P	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 429
		30”	ITDC1530/MME	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 429
		30”	ITDC1530/MPL	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	11.0# 429
					</

HOW TO ORDER

Indicate the following information on order form:

1. Quantity of each item.
2. Model number, including options. See “How To Build a Model Number”.
3. Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select surface finish.
- Refer to the **Product Color Options** page in this price list.
- Surface finish offerings are based on edge style selections.

FINISH INFORMATION

**Additional Laminate Offering**

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier’s color/pattern code:

Formica - LF/supplier’s color pattern code  
Nevamar - LN/supplier’s color pattern code  
Wilsonart - LW/supplier’s color pattern code

KI’s standard finish is the supplier’s recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an up-charge and additional leadtime.

Contact KI.

SPECIAL SERVICES

Special Carton Marking



With specially marked information      N/C

**Shipping**

Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



			MODEL NUMBER				
			Basic Model	Module Color			
MODEL			Features	L	Approx. Packaged Weight	Delivered Pricing	
  HRDPT	<b>Dean In-surface Power Module (Corded)</b> <ul style="list-style-type: none"><li>Provides two 3-prong receptacles, one USB-A, one USB-C charging port and data tree</li><li>Two strain-relief clips included for wire management</li><li>Cord terminates in a 3-prong plug</li><li>15A approved</li><li>UL listed</li><li>For use in Dean In-surface cutout (7.81"x1.93")</li></ul>	36" Cord	MOD.MD1.36	<input type="checkbox"/> <input type="checkbox"/>	1.0#	\$	309
		108" Cord	MOD.MD1.108	<input type="checkbox"/> <input type="checkbox"/>	1.0#		319
		180" Cord	MOD.MD1.180	<input type="checkbox"/> <input type="checkbox"/>	1.0#		329
  HRDPT	<b>Nacre Pop-up Power Module (Corded)</b> <ul style="list-style-type: none"><li>Provides two 3-prong receptacles, one USB-A, one USB-C charging port and data tree</li><li>Two strain-relief clips included for wire management</li><li>Cord terminates in a 3-prong plug</li><li>15A approved</li><li>UL listed</li><li>For use in Nacre Pop-up cutout (6.94"x3")</li></ul>	36" Cord	MOD.MA1.36	<input type="checkbox"/> <input type="checkbox"/>	1.0#	\$	375
		108" Cord	MOD.MA1.108	<input type="checkbox"/> <input type="checkbox"/>	1.0#		385
		180" Cord	MOD.MA1.180	<input type="checkbox"/> <input type="checkbox"/>	1.0#		395
			<b>A</b>	<b>B</b>			

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select module color.  
Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES






Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 85.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER			
		Basic Model	Paint Color		
MODEL	H			Approx. Packaged Weight	Delivered Pricing
	<b>Base Infeed 10-Wire</b> <ul style="list-style-type: none"><li>Provides power from fixed floor or wall sources to table power distribution system</li><li>105” infeed length</li><li>Designed to pass through the standard Intandem leg cover</li></ul>	PTFF	<input type="checkbox"/> <input type="checkbox"/>	5.0#	\$ 197
HRDPT					
	<b>Base Infeed Hardwire Kit</b> <ul style="list-style-type: none"><li>Provides conduit from fixed floor or wall sources to table power distribution system. Customer to provide wiring</li><li>Select height to match leg height; ie, 27”, 29” or 38”</li></ul>	27” ITHK.27	<input type="checkbox"/> <input type="checkbox"/>	4.0#	\$ 137
		29” ITHK.29	<input type="checkbox"/> <input type="checkbox"/>	4.0#	137
		38” ITHK.38	<input type="checkbox"/> <input type="checkbox"/>	5.0#	147
HRDPT					
	<b>Top Infeed 10-Wire</b> <ul style="list-style-type: none"><li>Provides power from ceiling source to table distribution system</li><li>Includes 10’ long aluminum pole with separate channel for electrical and data entry and prewired harness</li></ul>	PCOF.T6	<input type="checkbox"/> <input type="checkbox"/>	15.0#	\$ 748
HRDPT					
	<b>Top Infeed Hardwire Kit</b> <ul style="list-style-type: none"><li>Provides channel from ceiling source to table distribution system</li><li>Includes 10’ long aluminum pole with separate channel for electrical and data entry. Customer to provide wiring.</li></ul>	PCHKO	<input type="checkbox"/> <input type="checkbox"/>	12.0#	\$ 241
HRDPT					
	<b>Vertical Wireway Cover</b> <ul style="list-style-type: none"><li>Optional wireway cover that provides greater turn radius for infeed conduit</li><li>For 29” leg only</li></ul>	ITELW29	<input type="checkbox"/> <input type="checkbox"/>	1.0#	\$ 44
HRDPT					
		<b>A</b>	<b>B</b>		

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A**Select basic model.
- B**Select paint color.  
Refer to the **Product Color Options** page in this price list.

INFORMATION

**Base Infeed (10-Wire)**  
Two 90° connectors. Flexible steel conduit with ten 12-gauge conductors in the leg. Includes steel trim plate with dual holes for electrical and data entry and six feet of liquid-tight flexible conduit .8315 diameter.

**Floor Infeed Hardwire Kit**  
Three 90° connectors. Flexible steel conduit in the leg. Includes steel trim plate with dual holes for electrical and data entry and six feet of liquid-tight flexible conduit .8315 diameter.

**Top Infeed 10-Wire**  
Aluminum pole is 10ft. in length. Flexible steel conduit with ten 12-gauge conductors. Includes ceiling trim plate.

**Top Infeed Hardwire Kit**  
Aluminum pole is 10ft. in length. Includes ceiling trim plate.

SPECIAL SERVICES






Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



			MODEL NUMBER			
			Basic Model			
MODEL	Features	L		Approx. Packaged Weight	Delivered Pricing	
 HRDPT	<b>Table-to-Table 10-Wire Jumper</b>	23"	48.0268.23	2.0#	\$	128
	• Connects the 10-wire power system of two adjoining tables					
 HRDPT	<b>T-Shaped Configuration 10-Wire Jumper</b>	24"	ITTT6.24	4.0#	\$	202
	• Provides continuous power from table-to-table for T-shaped table configurations	30"	ITTT6.30	5.0#		211
	• Select size according to table depth	36"	ITTT6.36	6.0#		231
 HRDPT	<b>Back-to-Back 10-Wire Jumper</b>	30"	ITBBT6.30	5.0#	\$	211
	• Provides continuous power from table-to-table for back-to-back config	36"	ITBBT6.36	6.0#		235
	• For 36"-54" wide tables: Select size matching table width	42"	ITBBT6.42	6.0#		258
	• For 60"-72" wide tables:	48"	ITBBT6.48	7.0#		283
	60" & 66"W use ITBBT6.30	54"	ITBBT6.54	7.0#		316
	72"W use ITBBT6.36					
	• 60, 66, 72"W tables in back-to-back config require use of quad beams on both tables.					
 HRDPT	<b>Back-to-Back Ganging Kit</b>		46.5003	1.0#	\$	6
	• Ganger kits must be specified for back-to-back configurations					
	• Two kits are required per set of tables to be ganged					
 HRDPT	<b>15-Amp Duplex Receptacle 10-Wire/6-2-2</b>	Circuit 1	47.0706.1.BL	1.0#	\$	32
	• Attaches to wireways of 10 wire powered tables	Circuit 2	47.0706.2.BL	1.0#		32
	• Some circuits are isolated ground	Circuit 3	47.0706.3.BL	1.0#		32
	circuits (622 - 4,5, & 6), Isolated ground	Circuit 4	47.0706.4I.BL	1.0#		32
	receptacles are identified by an orange	Circuit 5	47.0706.5I.BL	1.0#		32
	triangle	Circuit 6	47.0706.6I.BL	1.0#		32

A

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See "How To Build a Model Number".
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES

Special Carton Marking



With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.





			MODEL NUMBER				
			Basic Model	Module Color			
  HRDPT	<b>Dean In-surface Power Module (Pattern)</b> <ul style="list-style-type: none"><li>Provides two 3-prong receptacles, one USB-A, one USB-C charging port and data tree</li><li>Pattern Infeed, jumpers, and gangers ordered separately</li><li>Wire management not included</li><li>15A approved</li><li>ETL listed</li></ul>	40” Cord	MOD.PMD1.40	<input type="checkbox"/> <input type="checkbox"/>	1.0#	\$	397
  HRDPT	<b>Nacre Pop-up Power Module (Pattern)</b> <ul style="list-style-type: none"><li>Provides two 3-prong receptacles, one USB-A, one USB-C charging port and data tree</li><li>Pattern Infeed, jumpers, and gangers ordered separately</li><li>Wire management not included</li><li>15A approved</li><li>ETL listed</li></ul>	40” Cord	MOD.PMA1.40	<input type="checkbox"/> <input type="checkbox"/>	1.0#	\$	565
HRDPT	<b>Snap-in RPT Module w/Attachment Bracket (Pattern)</b> <ul style="list-style-type: none"><li>Provides two 3-prong receptacles</li><li>Module installs within beam</li><li>Pattern infeed, jumpers, and gangers ordered separately</li><li>Black only</li><li>15A approved</li><li>ETL listed</li></ul>	40” Cord	MOD.PS1.40.IT		1.0#	\$	144

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select module color.  
Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES


Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 85.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER			
		Basic Model			
MODEL	Features		Approx. Packaged Weight	Delivered Pricing	
HRDPT	<b>Pattern Infeed</b> <ul style="list-style-type: none"><li>• 108” cord plugs into standard 15 amp outlet</li><li>• Kit includes Pattern infeed, grey power distribution block, 12” Pattern jumper and white power distribution block</li><li>• Can be installed anywhere in the run (middle or end)</li><li>• Jumper length cannot exceed 600” or 50’ per infeed</li><li>• 90 degree angled plug</li><li>• Includes one Pattern quick release tool</li><li>• Does not include vertical wire management</li><li>• ETL listed</li></ul>	IFPAT	0.0#	\$	305
HRDPT	<b>Pattern Jumper</b> <ul style="list-style-type: none"><li>• Each jumper kit includes jumper and grey power distribution block</li><li>• Review product Planning Guide for table-to-table jumper length guidance.</li><li>• ETL listed</li></ul>	12” JPPAT.12	1.0#	\$	70
		53” JPPAT.53	1.0#		109
		75” JPPAT.75	1.0#		115
  HRDPT	<b>Pattern Quick Release Tool</b> <ul style="list-style-type: none"><li>• Snaps onto Pattern plugs to make disconnecting Pattern connections easier</li><li>• Can be moved to multiple connections</li><li>• Stores snapped onto one connection for easy access</li></ul>	BE04878.BL	0.0#	\$	3

A

HOW TO ORDER

Indicate the following information on order form:

1. Quantity of each item.
2. Model number, including options. See “How To Build a Model Number”.
3. Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES



Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 85.

Specifications and prices are subject to change without prior notice.



MODEL		MODEL NUMBER		Approx. Packaged Weight	Delivered Pricing
		Basic Model	Grommet Color		
  HRDPT	<b>Metal Grommet Kit for Dean</b> • Fits within 7.81” x 1.93” Dean cutout	GRM.GD1	<input type="checkbox"/> <input type="checkbox"/>	1.0#	\$ 80
  HRDPT	<b>Metal Grommet Kit for Nacre</b> • Fits within 6.94” x 3” Nacre cutout	GRM.GA1	<input type="checkbox"/> <input type="checkbox"/>	1.0#	\$ 80

A

B

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select grommet color.  
Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES




Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 85.

Specifications and prices are subject to change without prior notice.



MODEL	MODEL NUMBER		
	Basic Model	Approx. Packaged Weight	Delivered Pricing
 <b>Hardwire Back-to-Back Electrical Receptacle</b>	IHB.RECP	0.2#	\$ 57
HRDPT			
 <b>Electrical Strip</b> <ul style="list-style-type: none"><li>Surge protected, six outlet, 110 volt electrical strip with 6' long cord to lay in beam</li></ul>	PC.OSWS	3.0#	\$ 188
HRDPT			
 <b>8-Wire to 10-Wire Adaptor</b> <ul style="list-style-type: none"><li>20" long</li></ul>	47.0568.20	1.0#	\$ 190
HRDPT			

A

HOW TO ORDER

Indicate the following information on order form:

- Quantity of each item.
- Model number, including options. See “How To Build a Model Number”.
- Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES



Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



		MODEL NUMBER			
		Basic Model	Paint Color		
MODEL				Approx. Packaged Weight	Delivered Pricing
	<b>CPU Clamp - Large</b> <ul style="list-style-type: none"><li>• For 30" deep worksurfaces only</li><li>• Accommodates single or double CPUs with combined widths of 5.5" to 9"</li></ul>	INTCPULG	<input type="checkbox"/> <input type="checkbox"/>	15.0#	\$ 228
HRDPT					
	<b>CPU Clamp - Small</b> <ul style="list-style-type: none"><li>• For 24" and 30" deep worksurfaces</li><li>• Accommodates single or double CPU widths of 3.8" to 5.8"</li></ul>	INTCPUSM	<input type="checkbox"/> <input type="checkbox"/>	10.0#	\$ 180
HRDPT					
		<b>A</b>	<b>B</b>		

HOW TO ORDER

Indicate the following information on order form:

1. Quantity of each item.
2. Model number, including options. See "How To Build a Model Number".
3. Any special service required.

Note:

- The ☐ indicates that a choice is required.
- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of ☐ indicate that no other alternatives are available.

HOW TO BUILD A MODEL NUMBER

- A** Select basic model.
- B** Select paint color.  
Refer to the **Product Color Options** page in this price list.

SPECIAL SERVICES

Special Carton Marking

With specially marked information      N/C

**Shipping**  
Ships **knocked down, FOB Bonduel, WI 54107, freight prepaid.** Freight class 70.

Specifications and prices are subject to change without prior notice.



1330 BELLEVUE STREET  
GREEN BAY, WI 54302  
800.424.2432 / KI.COM

KI is a trusted expert for furniture and wall systems around the globe.  
USA | CANADA | MEXICO | UK | EUROPE | ASIA | MIDDLE EAST  
© 2023 Krueger International, Inc. All Rights Reserved.