

# RAB



## The SHARK is more powerful than ever!

Selectable wattage and CCT maximize versatility.


### Now with field adjustability.

The SHARK is still available in 3 sizes but now includes three selectable wattages and color temperatures, giving you 9 SKUs in one great washdown!



### Low maintenance


SHARK is ideal for tunnels, stairwells, and other hard-to-reach areas where revamping is difficult and costly.

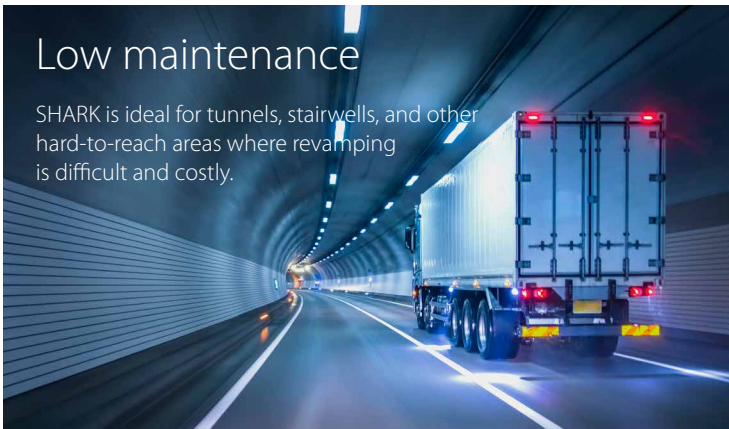

### Lightcloud® Blue enabled.

Available with factory-installed Lightcloud Blue compatibility, for use with our wireless, Bluetooth mesh control system.

Lightcloud®

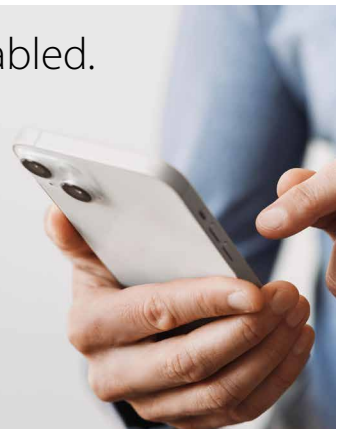



\*Please visit [rablighting.com](http://rablighting.com) to see which models have DLC or DLC Premium listing.



5-YEAR, NO  
COMPROMISE  
WARRANTY


RAB's Warranty is  
subject to all terms  
and conditions found at  
[rablighting.com/warranty](http://rablighting.com/warranty)

## Versatile options.


All models come standard with surface-mount brackets and V-hooks for chain mounting. Accessory mounting kits are also available with tamperproof clips, or for angled surface or junction box mounting.



Chain-mounted  
brackets (*standard*)



Surface mount  
(*standard*)



6ft cord comes standard on  
8ft models. Available as an  
option on 4ft and 2ft models.

## Impact-resistant construction

SHARK was designed for heavy-impact applications.



Durable, 5VA  
polycarbonate housing



Toolless entry



Tether connection  
for easy wiring



Diffuse  
polycarbonate lens

## Mounting



Junction Box  
Mounting Bracket  
**JBShark-G2**  
(For 2' and 4' models:  
contains 2 brackets)

**JBShark8-G2**  
(For 8' models: contains 2  
brackets)



45° Angle, Surface-Mount Bracket  
**ANGShark-G2**  
(For 2' and 4' models:  
contains 2 brackets)

**ANGShark8-G2**  
(For 8' models:  
contains 4 brackets)



Tamperproof Kit  
**TPKShark-G2**  
(For 2' and 4' models:  
contains 4 brackets)

**TPKShark8-G2**  
(For 8' models:  
contains 8 brackets)



Sensor Remote Control  
**MSR1**  
(For PIR and MVS sensor models)

## Ordering Matrix

Product Family	Size/Wattages	Mounting	Color Temperature	Finish	Voltage	Options
SHARK						
2	2' (25/20/15W)	Blank Metal Bracket with hooks	Blank 3500/4000/5000K	Blank White	Blank 120-277V 0-10V Dimming /480 480V 0-10V Dimming	Blank No option
2M	2' (25/20/15W) Marine Listed					/E Battery Backup
4	4' (50/40/30W)					/LC Lightcloud Controller
4M	4' (50/40/30W) Marine List					/MVS Microwave Occupancy Sensor
8	8' (100/80/60W)					/PIR Passive Infrared Occupancy Sensor
8M	8' (100/80/60W) Marine Listed					/LCBS Lightcloud Blue PIR Sensor
						/LCBS/MVS Lightcloud Blue MVS Sensor
						/MVS/E Microwave Occupancy Sensor /Battery Backup
						/PIR/E Passive Infrared Occupancy Sensor /Battery Backup
						/LCBS/E Lightcloud Blue PIR Sensor /Battery Backup
						/LCBS/MVS/E Lightcloud Blue MVS Sensor /Battery Backup