


COOPERATIVE
URBAN CONCRETE

STONESOURCE

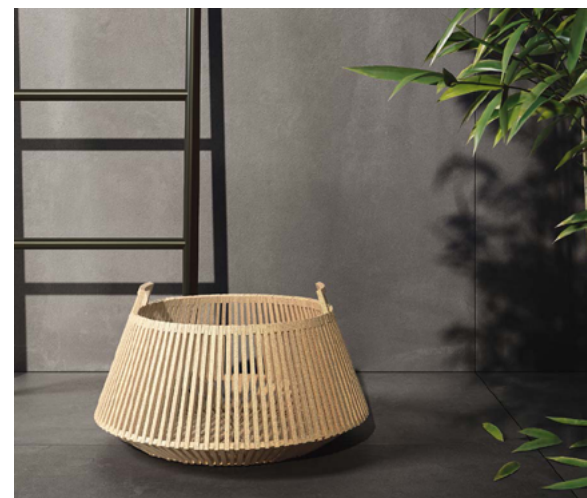

COOPERATIVE URBAN CONCRETE

An embodiment of a new design philosophy and its unique concept of space and residential design.

All this is expressed in a product that represents a harmonious synthesis of industrial precision and craftsman-like care, solidity and lightness, carefully researched functionality and aesthetic inspiration.

Gracefully minimalist 4 colors, various formats and surfaces and a range of decorations.

Thanks to its vision of elegant compositional spirituality as the key to true satisfaction, Cooperative Urban Concrete puts our relationship with the space around us at the center of everything.

COOPERATIVE URBAN CONCRETE

White



Avorio



Noce



Taupe



COOPERATIVE URBAN CONCRETE

Camargue




Silver



Dark Grey



Black

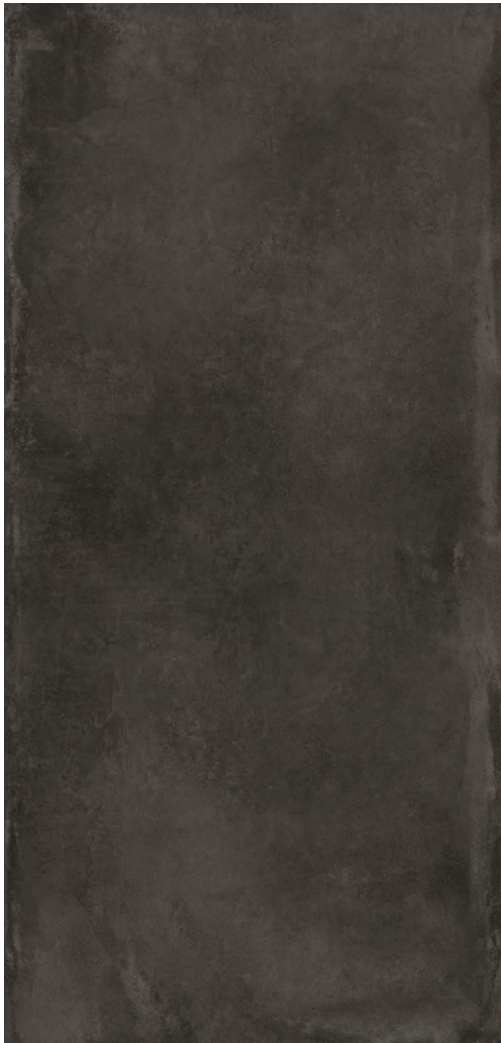



Inside
Avorio 48"x48" Rectified
Outside
Noce 48"x48" Rectified

Floor
Taupe 48"x48" Rectified





Floor
Silver 48"x48" Rectified
Wall
Silver 24"x48" Rectified



Floor
White 24"x48" Rectified



Floor
Dark Grey 48"x48" Rectified
Wall
Dark Grey 48"x110" Rectified


White

Colored Body Porcelain Tile

See page 17 for 2cm Paver availability.



48"x110" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural

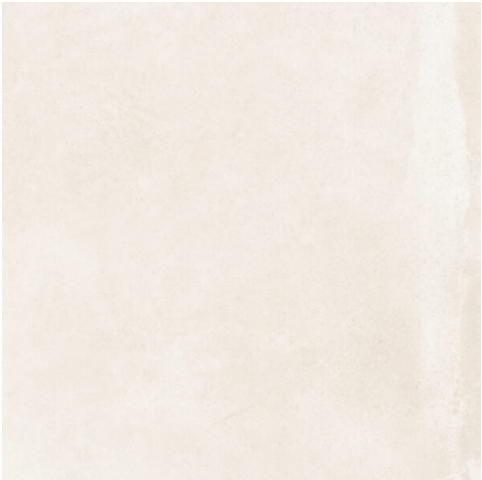

48"x48" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural



48"x48" Rectified
Thickness: 10mm
Finish: Natural



24"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x24" Rectified
Thickness: 10mm
Finish: Natural



12"x24" Rectified
Thickness: 10mm
Finish: Natural



Mosaic 12"x12" Rectified
Thickness: 10mm
Finish: Natural



Bullnose 3"x24" Rectified
Thickness: 10mm
Finish: Natural

Avorio

Colored Body Porcelain Tile

See page 17 for 2cm Paver availability.



48"x110" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural



48"x48" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural




48"x48" Rectified
Thickness: 10mm
Finish: Natural



24"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x24" Rectified
Thickness: 10mm
Finish: Natural



12"x24" Rectified
Thickness: 10mm
Finish: Natural



Mosaic 12"x12" Rectified
Thickness: 10mm
Finish: Natural



Bullnose 3"x24" Rectified
Thickness: 10mm
Finish: Natural

Noce

Colored Body Porcelain Tile

See page 17 for 2cm Paver availability.



48"x110" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural



48"x48" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural




48"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x24" Rectified
Thickness: 10mm
Finish: Natural



12"x24" Rectified
Thickness: 10mm
Finish: Natural



Mosaic 12"x12" Rectified
Thickness: 10mm
Finish: Natural



Bullnose 3"x24" Rectified
Thickness: 10mm
Finish: Natural

Taupe

Colored Body Porcelain Tile

See page 17 for 2cm Paver availability.



48"x110" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural



48"x48" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural




48"x48" Rectified
Thickness: 10mm
Finish: Natural



24"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x24" Rectified
Thickness: 10mm
Finish: Natural



12"x24" Rectified
Thickness: 10mm
Finish: Natural



Mosaic 12"x12" Rectified
Thickness: 10mm
Finish: Natural



Bullnose 3"x24" Rectified
Thickness: 10mm
Finish: Natural

Carmargue

Colored Body Porcelain Tile

See page 17 for 2cm Paver availability.



48"x110" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural



48"x48" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural




48"x48" Rectified
Thickness: 10mm
Finish: Natural



24"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x24" Rectified
Thickness: 10mm
Finish: Natural



12"x24" Rectified
Thickness: 10mm
Finish: Natural



Mosaic 12"x12" Rectified
Thickness: 10mm
Finish: Natural



Bullnose 3"x24" Rectified
Thickness: 10mm
Finish: Natural

Silver

Colored Body Porcelain Tile

See page 17 for 2cm Paver availability.



48"x110" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural



48"x48" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural




48"x48" Rectified
Thickness: 10mm
Finish: Natural



24"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x24" Rectified
Thickness: 10mm
Finish: Natural



12"x24" Rectified
Thickness: 10mm
Finish: Natural



Mosaic 12"x12" Rectified
Thickness: 10mm
Finish: Natural



Bullnose 3"x24" Rectified
Thickness: 10mm
Finish: Natural

Dark Grey

Colored Body Porcelain Tile

See page 17 for 2cm Paver availability.



48"x110" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural



48"x48" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural




48"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x24" Rectified
Thickness: 10mm
Finish: Natural



12"x24" Rectified
Thickness: 10mm
Finish: Natural



Mosaic 12"x12" Rectified
Thickness: 10mm
Finish: Natural



Bullnose 3"x24" Rectified
Thickness: 10mm
Finish: Natural


Black

Colored Body Porcelain Tile

See page 17 for 2cm Paver availability.



48"x110" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural

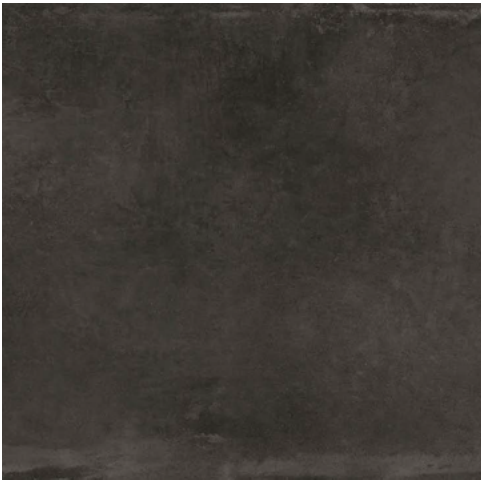

48"x48" Rectified Porcelain Slabs
Thickness: 6.5mm
Finish: Natural




48"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x48" Rectified
Thickness: 10mm
Finish: Natural




24"x24" Rectified
Thickness: 10mm
Finish: Natural



12"x24" Rectified
Thickness: 10mm
Finish: Natural



Mosaic 12"x12" Rectified
Thickness: 10mm
Finish: Natural



Bullnose 3"x24" Rectified
Thickness: 10mm
Finish: Natural

2cm Pavers

36"x36" Rectified

Thickness: 20mm - Finish: Anti-Slip/Grip



White



Avorio



Noce




Taupe




Camargue



Silver

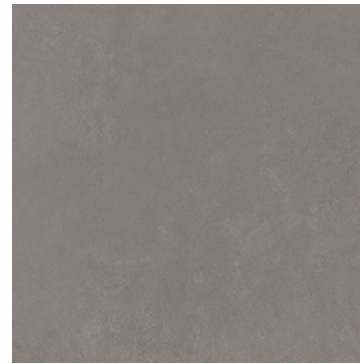

Dark Grey

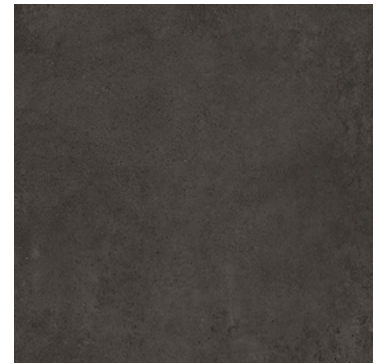

Black

TECHNICAL CHARACTERISTICS CLASSIFICATION IN ACCORDANCE WITH CEN EN 14411 GROUP BIA (ISO 13006) - APPENDIX G (E ≤ 0.5%)

TECHNICAL FEATURE - STONEWARE	TEST METHODS	REQUIREMENTS IN ACCORDANCE TO THE STANDARDS	COLORED BODY PORCELAIN TILE	
			NATURAL	
Dimensions and appearance	ISO 10545-2	Prospect G.1	Compliant	
Water absorption	ISO 10545-3	≤ 0.5%	≤ 0.10%	
Flexural resistance (R)	ISO 10545-4	Min. 35 N/mm ²	> 45 N/mm ²	
Breaking strength		Thickness: < 7.5mm S ≥ 700N Thickness: ≥ 7.5mm S ≥ 1300N	S ≥ 1300N	
Deep abrasion resistance	ISO 10545-6	Max 175 mm ³	< 140 mm ³	
Resistance to surface abrasion	ISO 10545-7	Class 0-5		
Linear expansion thermic coefficient (α)	ISO 10545-8	Available method	≤ 7 x 10 ⁻⁶ °C ⁻¹	
Resistance to sudden temperature changes	ISO 10545-9	Available method	Resistant	
Frost resistance	ISO 10545-12	Upon request	Resistant	
Resistance to household chemicals and swimming pools' water cleansers	ISO 10545-13	CLASS B MIN.	A	
Resistance to acids and alkalis at low concentration	ISO 10545-13	From LA, LB TO LC	LA	
Resistance to acids and alkalis at high concentration	ISO 10545-13	Available method	Available method	
Stain resistance	ISO 10545-14	Available method	5	
Slip Values				
D.C.O.F.	ANSI A137.1 2012 BOT 3000	> 0.42 Wet	Natural ≥ 0.42 Wet	Anti-Slip/Grip ≥ 0.42 Wet
Slip Resistance	DIN-51130 (R)			



STONESOURCE