

PALERMO
LOFT WOOD

STONESOURCE





ACACIA NATURAL 9"x36" RECTIFIED



OLMO NATURAL 9"x36" RECTIFIED



OLMO NATURAL 6"x36" RECTIFIED



CIPRESSO NATURAL 9"x36" & 6"x36" RECTIFIED



CIPRESSO NATURAL 6"x36" RECTIFIED



ULIVO NATURAL 6"x36" RECTIFIED



ULIVO NATURAL 9"x36" & 6"x36" RECTIFIED



ULIVO GRIP 18"x36" RECTIFIED



CARPINO VELVET NATURAL 9"x36" RECTIFIED



LARICE NATURAL 9"x36" RECTIFIED

PALERMO LOFT WOOD

TIGLIO



6"x36" Natural Rectified



9"x36" Natural Rectified



Velvet 9"x36" Natural Rectified

ACACIA



6"x36" Natural Rectified



9"x36" Natural Rectified



Velvet 9"x36" Natural Rectified



18"x36" Grip Rectified

OLMO



6"x36" Natural Rectified



9"x36" Natural Rectified



Velvet 9"x36" Natural Rectified

CIPRESSO



6"x36" Natural Rectified



9"x36" Natural Rectified



Velvet 9"x36" Natural Rectified



18"x36" Grip Rectified

SERAYA



6"x36" Natural Rectified



9"x36" Natural Rectified



Velvet 9"x36" Natural Rectified

ULIVO



6"x36" Natural Rectified



9"x36" Natural Rectified



Velvet 9"x36" Natural Rectified



18"x36" Grip Rectified

CARPINO



6"x36" Natural Rectified



9"x36" Natural Rectified



Velvet 9"x36" Natural Rectified



18"x36" Grip Rectified

LARICE



6"x36" Natural Rectified



9"x36" Natural Rectified



Velvet 9"x36" Natural Rectified

PALERMO LOFT WOOD

MAIOLICA



Cotto
6"x6" Natural Rectified




Grigio
6"x6" Natural Rectified



Blu
6"x6" Natural Rectified

SPECIAL PIECES

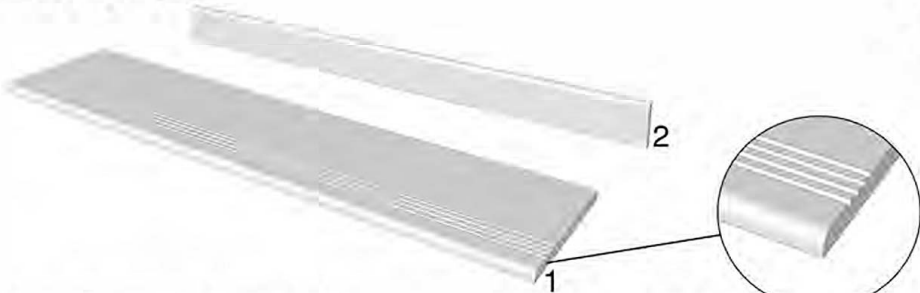

1 - Step Tread 9"x36" Natural Rectified
Tiglio - Acacia - Olmo - Cipresso - Seraya - Ulivo
Carpino - Larice

2 - Bullnose 3"x36" Natural Rectified
Tiglio - Acacia - Olmo - Cipresso - Seraya - Ulivo
Carpino - Larice



1 - L-Shaped Piece 13"x36"x2" Grip Rectified
Acacia - Cipresso - Ulivo - Carpino

2 - Step 18"x36" Grip Rectified
Acacia - Cipresso - Ulivo - Carpino

PACKAGING

Size	pz. pcs/box	mq sqm/box	kg/box	scat box/pallet	mq sqm/pallet	kg/pallet	size/pallet
9"x36"	4	0,810	20,00	72	58,32	1440	100x120x80
6"x36"	6	0,810	20,00	64	51,84	1280	100x120x73
18"x36" Grip (20mm)	2	0,810	35,00	24	19,44	840	120x94x60
3"x36" Bullnose	8	0,504 ml 7,20	13,00	48	-	-	-
9"x36" Step Tread	4	0,810	20,00	72	-	-	-
18"x36" Step (20mm)	2	0,810	35,00	24	-	-	-
L-Shaped Piece 13"x36"x2" (20mm)	2	0,54	24,00	24	-	-	-
6"x6" Maiolica	6	0,135	3,40	55	-	-	-

TECHNICAL FEATURES

Classificazione secondo norme CEN/ISO gruppo B1a EN 14411 - Iso 13006 - Classification in accordance with CEN/ISO standards B1a EN 14411 - Iso 13006
Klassifizierung gemäß CEN/ISO-Normen Gruppe B1a EN 14411 - Iso 13006 - Classification selon les normes CEN/ISO groupe B1a EN 14411 - Iso 13006

Caratteristica Tecnica Technical Characteristic Technische Data Caractéristique Technique	Norma Norm Norme	Valore prescritto Value required Normvorgabe Valeur prescrite	Valore medio Mean value Mittelwert Valeur moyenne	USA Tests	Valore medio Mean value Mittelwert Valeur moyenne
 Spessore e larghezza I edge and width / Länge und Breite Spessore Thickness / Stärke / Épaisseur	ISO 10545 2	±0,5% (±2,00 mm)	Conforme In accordance Entspr. Conforme	ASTM C-499 ASTM C-495 ASTM C-592	In accordance
 Rettilineità Straightness / Geradeheit / Rectitude, etc. others		±0,5% (±0,3 mm)			
 Orizzontalità Horizontal / Horizontal / Horizontale		±0,5% (±1,5 mm)			
 Piattità Flatness / Platten / Platitude		±0,5% (±2,00 mm)			
 Absorbimento % d'acqua Water absorption Wasseraufnahme % Absorption d'eau %	ISO 10545 3	≤0,5%	Conforme In accordance Entspr. Conforme	ASTM C-373	In accordance
 Resistenza alla trazione Tensile strength Zugfestigkeit Résistance à la traction	ISO 10545 4	≥36N/mm²	Conforme In accordance Entspr. Conforme	ASTM C-648 250 LBS/sq. ft. min.	In accordance
 Resistenza termica Thermal shock resistance Temperaturwechselbeständigkeit Résistance aux chocs de température	EN 10545 8	Secondo i dati del costruttore According to customer's specifications Laut Angaben des Herstellers Selon les éléments du constructeur	≥ 7x10 ⁻⁴ C ⁻¹		
 Resistenza agli urti Impact shock resistance Stoßbelastungsbeständigkeit Résistance aux chocs de choc	ISO 10545 9	Resistente Resistant Stoß Demande	Resistente Resistant Stoßbelastung Résistance		
 Resistenza al gelo Frost resistance Frostbeständigkeit Résistance au gel	ISO 10545 12	Resistente Resistant Frost Demande	Resistente Resistant Frostbeständigkeit Résistance	ASTM C-1066	In accordance
 Resistenza all'attacco chimico Resistance to chemical attack Beständigkeit gegen Chemikalien Résistance à l'attaque chimique	ISO 10545 13	Secondo i dati del costruttore According to customer's specifications Laut Angaben des Herstellers Selon les éléments du constructeur	Resistente Resistant Chemikalien Résistance	ASTM C-650	In accordance
 Resistenza dei corpi alla luce Colour resistance to light Farbveränderung Résistance des couleurs à la lumière	DIN 51084	Nessuna alterazione No alteration Keine Verfärbung Aucune altération	Conforme In accordance Entspr. Conforme		
 Resistenza alle macchie Stain resistance Fleckbeständigkeit Résistance aux taches	EN 10545 14	« Classe 3 lowest of stain resistance Test method provided multipoint method Méthode à trois points Méthode à trois points »	Conforme In accordance Entspr. Conforme		
 Resistenza allo scalfiamento Scratch resistance Rauheitsverstand Résistance au griffement	DIN 51130 *	9 ± 1 N x13	NA1 VELVET R10	ASTM C-1525 * COF a 0.6 Dry a 0.42 Wet	NA1 VELVET D 0.62-W 0.61
	DIN 51057 *	A,B,C	NA1 VELVET 20M		D 0.35-W 0.70
			NA1 VELVET A+B+C		0.58
			NA1 VELVET A+B+C		0.72
 Resistenza all'usura	BS EN 7596-2*	> 36 Dry > 36 Wet	NA1 VELVET 20M		

